



Admiral Radio

T1075

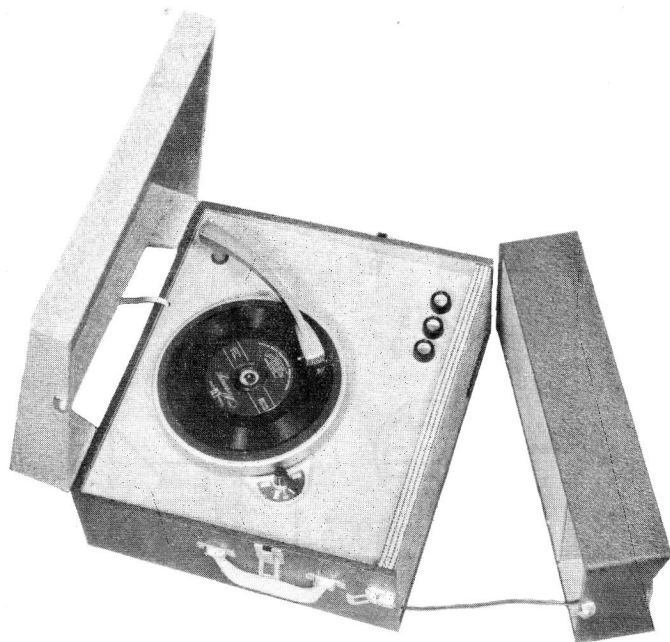

PS2B1X

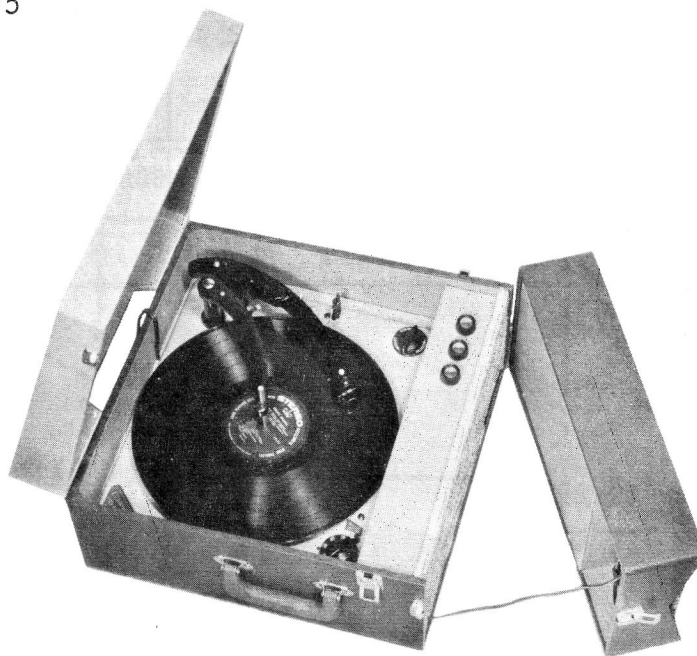

PS3B1X

RESISTORS

R1	Volume Control 2 meg.ohm.....	C591
R2	470K ohm $\frac{1}{2}$ W 10%.....	60B8-474
R3	3.3K ohm $\frac{1}{2}$ W 10%.....	60B8-332
R4	3.3K ohm $\frac{1}{2}$ W 10%.....	60B8-332
R5	470K ohm $\frac{1}{2}$ W 10%.....	60B8-474
R6	1.5 meg.ohm Bass-Treble Control....	C592
R7	1 meg.ohm Balance Control.....	C593
R8	150 ohm $\frac{1}{2}$ W 10%.....	60B8-151
R9	150 ohm $\frac{1}{2}$ W 10%.....	60B8-151
R10	4.7K ohm 1W 10%.....	60B14-472
R11	47 ohm 1W 10%.....	60B14-470
R12	47 ohm 1W 10%.....	60B14-470

CAPACITORS

C1	.022 mfd. 400V.....	64B8-30
C2	.047 mfd. 600V.....	64B8-9
C3	.022 mfd. 400V.....	64B8-30
C4	.0022 mfd. 600V.....	64B8-17
C5	.0022 mfd. 600V.....	64B8-17
C6	.022 mfd. 600V.....	64B9-11
C7	.022 mfd. 600V.....	64B9-11
C8A	.80 mfd. 150V Electrolytic.....	C574
C8B	.80 mfd. 150V Electrolytic.....	C574
C9	.047 mfd. 600V.....	64B8-9

MISCELLANEOUS PARTS

Cabinet Complete PS2B1X.....	35P136
Cabinet Complete PS3B1X.....	35P137
Record Changer PS3B1X.....	9400L1-2
Stereophonic Cartridge PS3B1X.....	409C34-1
Admiral Monogram.....	26 x 58-2
Carrying Handle.....	37L24-1
Lid Catch.....	37K14-1
Lid Hinge.....	37K18-1
Stud.....	27K4-1
Speaker 6" x 4" Oval.....	C545
Knobs.....	C557
A.C. Line Cord.....	89W1-6
Output Transformer.....	C595
Selenium Rectifiers.....	C576
Turntable PS2B1X.....	S18784A
Turntable Clip PS2B1X.....	17276C
Motor PS2B1X.....	HPO56071
Speed Selector Knob PS2B1X.....	18758A
Tone Arm PS2B1X.....	DF58
Cartridge PS2B1X.....	10T1S
Arm Rest PS2B1X.....	C559
Dial Plate PS2B1X.....	18744A
Speed Card PS2B1X.....	18750A
Needle Twin Sapphire Dual Tip PS3B1X.....	98C95-1
Needle Diamond Sapphire Dual Tip PS3B1X.....	98C95-2
Grille Cloth.....	36M7-7
Speaker Compt. Hinge.....	37K25-1

