

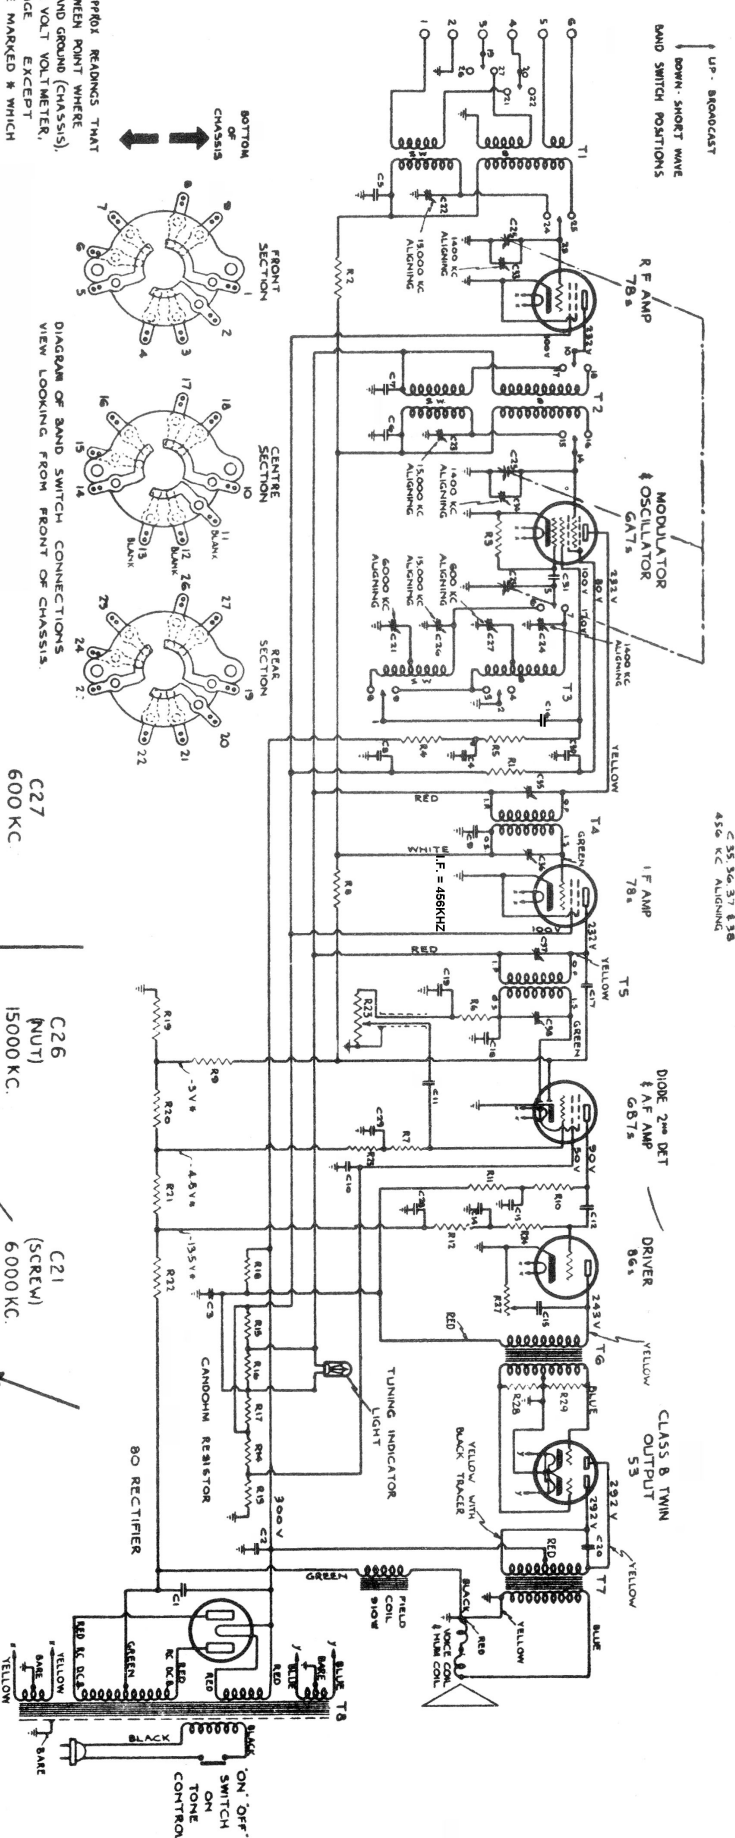


ITEM	CAPACITY
C1	8 MFD
C2	100,000
C3	100,000
C4	100,000
C5	100,000
C6	100,000
C7	100,000
C8	100,000
C9	100,000
C10	100,000
C11	100,000
C12	100,000
C13	100,000
C14	100,000
C15	100,000
C16	100,000
C17	100,000
C18	100,000
C19	100,000
C20	100,000
C21	100,000
C22	100,000
C23	100,000
C24	100,000
C25	100,000
C26	100,000
C27	100,000
C28	100,000
C29	100,000
C30	100,000
C31	100,000
C32	100,000
C33	100,000
C34	100,000
C35	100,000
C36	100,000
C37	100,000
C38	100,000
C39	100,000
C40	100,000

VOLTAGES SHOWN ARE APPROX. READINGS THAT SHOULD BE OBTAINED BETWEEN POINT WHERE VOLTAGE IS INDICATED AND GROUND (CHASSIS), WITH A 100 OHMS PER VOLT VOLTMETER, USING 300 VOLT RANGE, EXCEPT VOLTAGES THAT ARE MARKED * WHICH CANNOT BE MEASURED WITH ORDINARY VOLTMETER

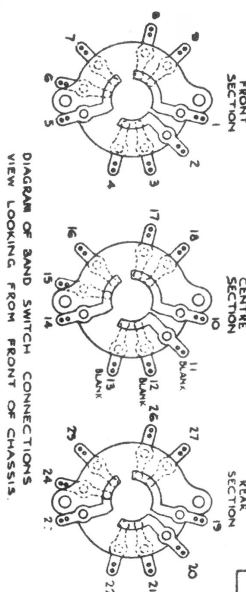

ITEM	RESISTANCE
R1	500 OHMS
R2	500 OHMS
R3	500 OHMS
R4	500 OHMS
R5	500 OHMS
R6	500 OHMS
R7	500 OHMS
R8	500 OHMS
R9	500 OHMS
R10	500 OHMS
R11	500 OHMS
R12	500 OHMS
R13	500 OHMS
R14	500 OHMS
R15	500 OHMS
R16	500 OHMS
R17	500 OHMS
R18	500 OHMS
R19	500 OHMS
R20	500 OHMS
R21	500 OHMS
R22	500 OHMS
R23	500 OHMS
R24	500 OHMS
R25	500 OHMS
R26	500 OHMS
R27	500 OHMS
R28	500 OHMS
R29	500 OHMS
R30	500 OHMS

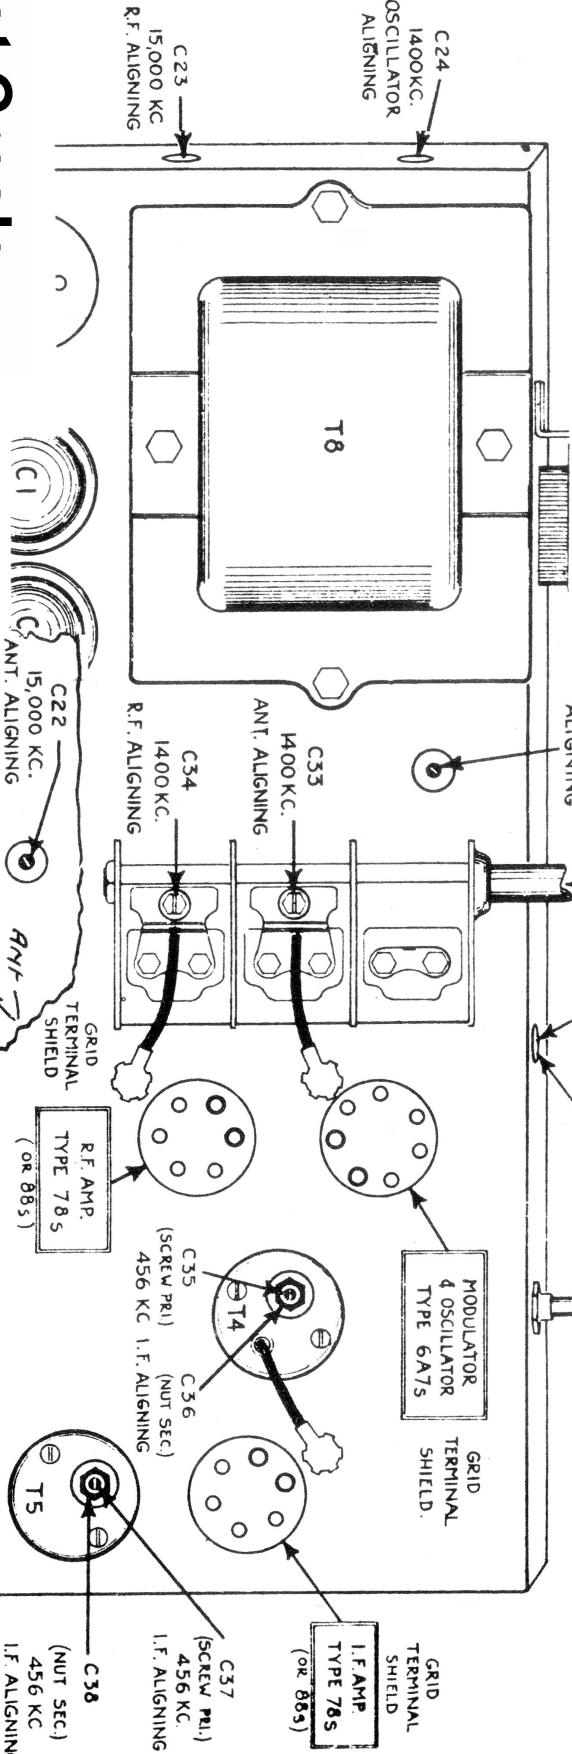

DeForest Crosley Models 1721 Explorer Models 1722 Navigator