


Model 1921 1934-35 I.F. 456 Kc.

VOLTAGES SHOWN ARE APPROX. READINGS THAT SHOULD BE OBTAINED BETWEEN POINT WHERE VOLTAGE IS INDICATED AND GROUND (CHASSIS), WITH A 1000 OHMS PER VOLT VOLTMETER, USING 500 VOLT RANGE EXCEPT VOLTAGES THAT ARE MARKED * WHICH CANNOT BE MEASURED WITH AN ORDINARY VOLTMETER

C37, C38, C39, C40, C41 & C42 ARE 456 KC. I.F. ALIGNING CONDENSERS.


ITEM	CAPACITY
C-1	5 MFD
C-2	5
C-3	5
C-4	5
C-5	5
C-6	5
C-7	5
C-8	5
C-9	5
C-10	5
C-11	5
C-12	5
C-13	5
C-14	5
C-15	5
C-16	5
C-17	5
C-18	5
C-19	5
C-20	5
C-21	5
C-22	5
C-23	5
C-24	5
C-25	5
C-26	5
C-27	5
C-28	5
C-29	5
C-30	5
C-31	5
C-32	5
C-33	5
C-34	5
C-35	5
C-36	5
C-37	5
C-38	5
C-39	5
C-40	5
C-41	5
C-42	5

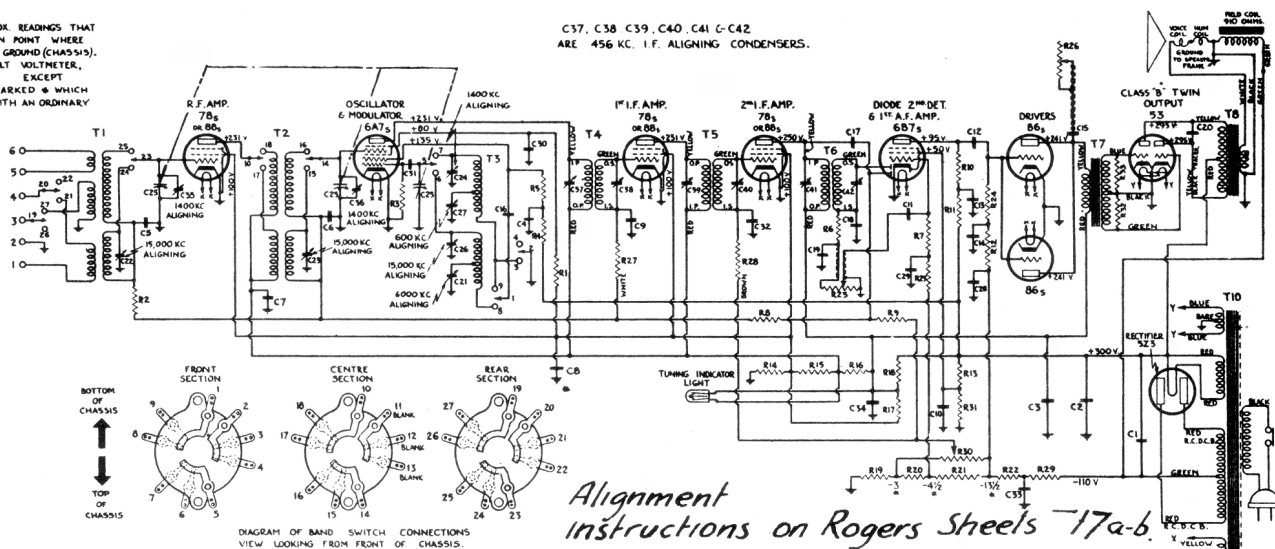


Alignment instructions on Rogers Sheets 17a-b.

THE "AMBASSADOR" MODEL

ITEM	RESISTANCE
R-1	1,000 OHMS
R-2	50,000
R-3	50,000
R-4	20,000
R-5	50,000
R-6	100,000
R-7	500,000
R-8	500,000
R-9	500,000
R-10	150,000
R-11	100,000
R-12	500,000
R-13	250,000
R-14	4,500
R-15	13,000
R-16	3,400
R-17	4,500
R-18	700
R-19	15,000
R-20	15,000
R-21	15,000
R-22	15,000
R-23	300,000
R-24	150,000
R-25	500,000
R-26	50,000
R-27	100,000
R-28	100,000
R-29	100,000
R-30	105,000
R-31	50,000
R-32	5,000
R-33	5,000

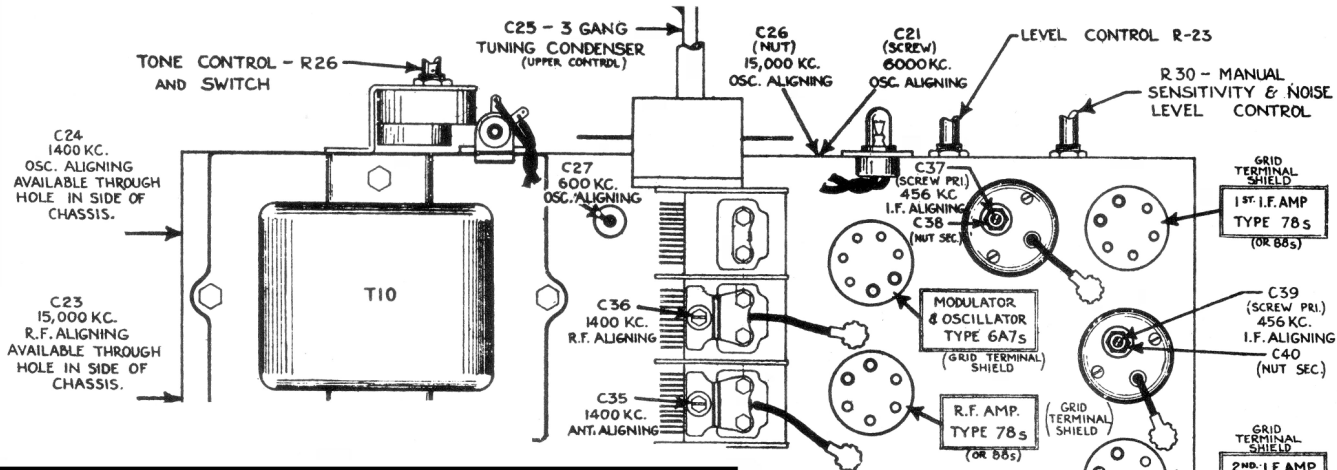

THE "WORLD-WIDE" MODEL—CIRCUIT ON SHEET 26

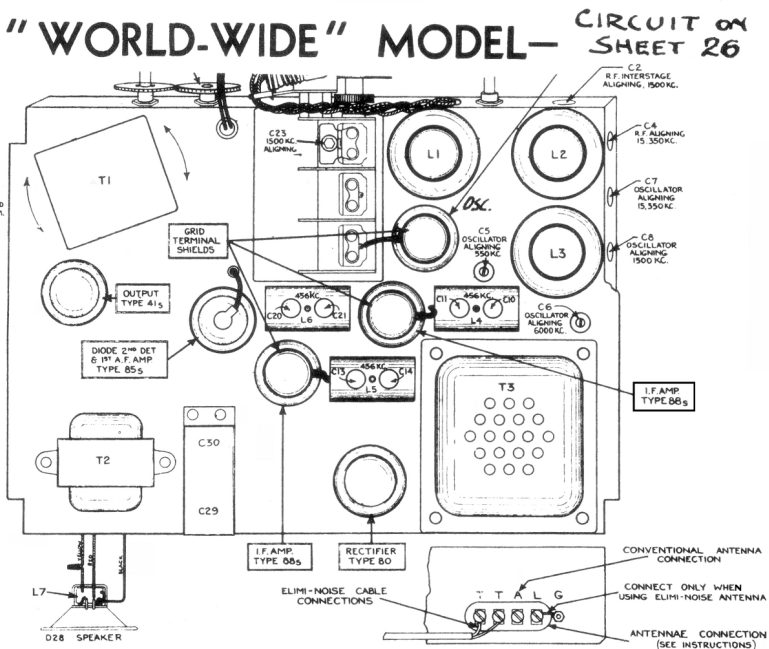

see Rogers Sheets 17a-b

DATA SHEET

PRINTED IN CANADA

DeForest Crosley-29
CO. LTD.