



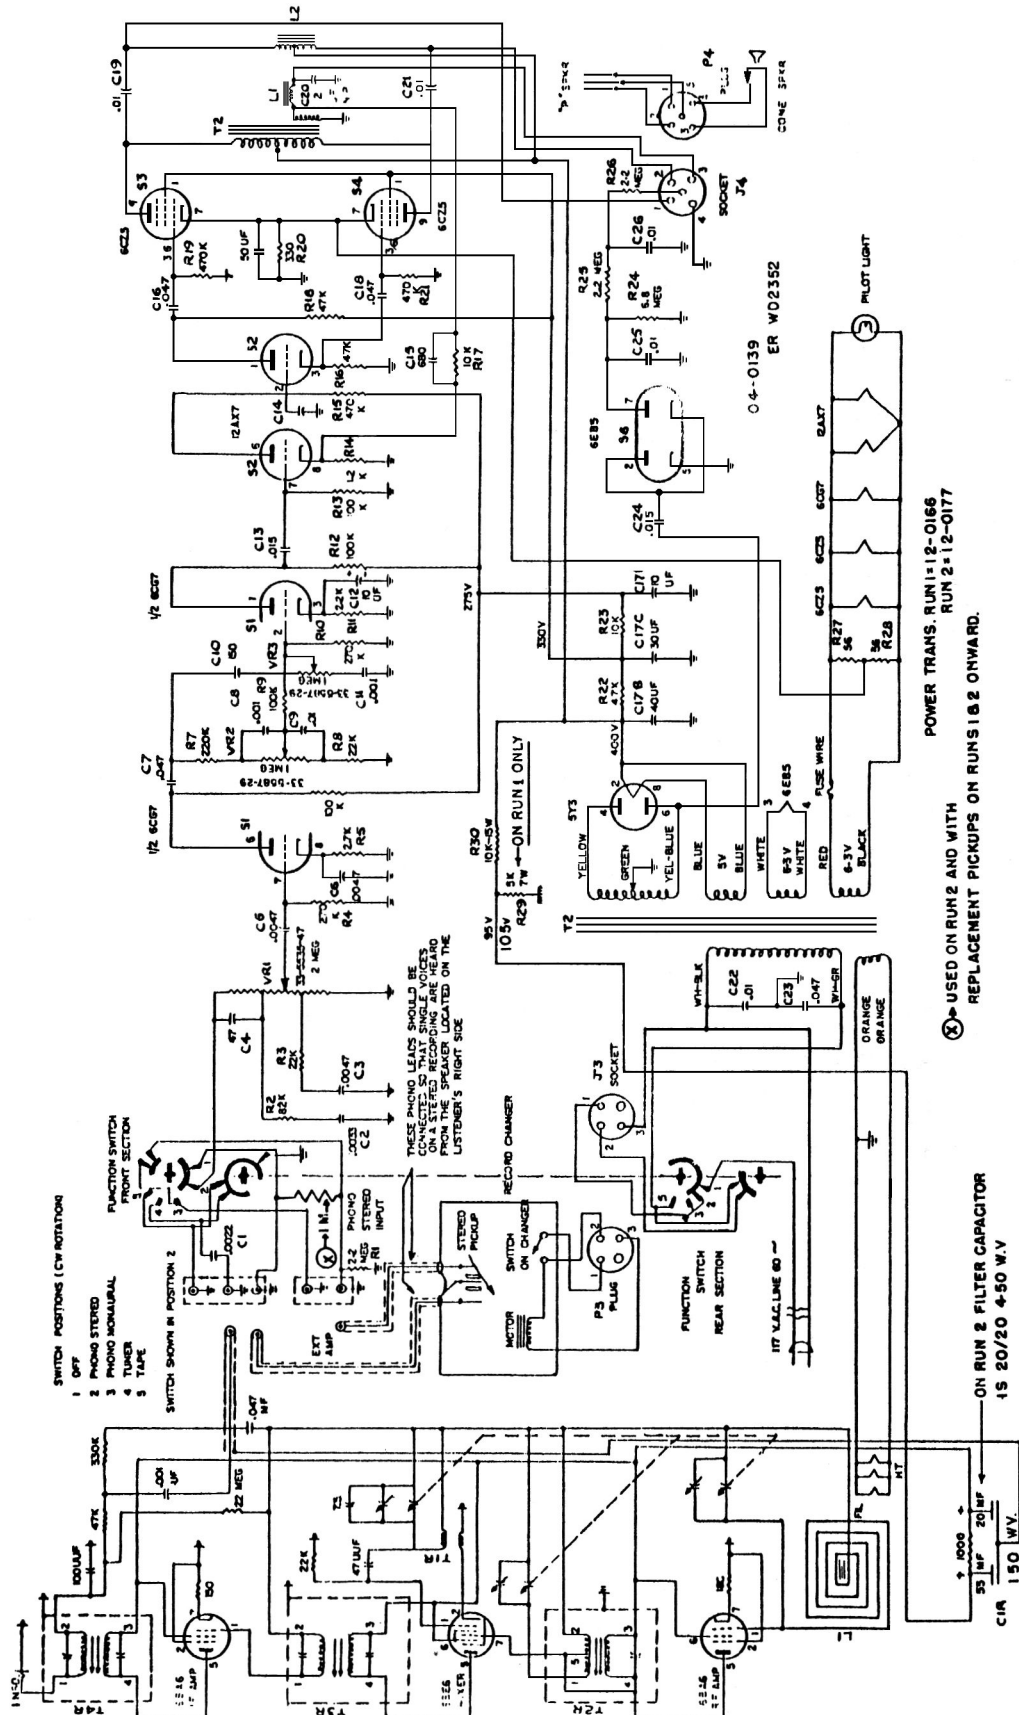

External Stereo amplifier

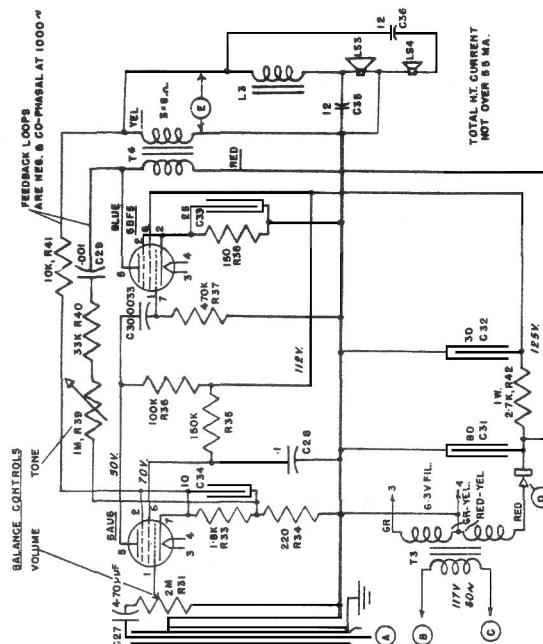

CAPACITANCE IN MFD; RESISTANCE IN OHMS EXCEPT AS NOTED.

A-CONNECT TO INPUT JACK 'O' ON MAIN AMPLIFIER CHASSIS.

3—SPICE-IN WITH LEAD TO No. 2 PIN OF CHANGER POWER PLUG 'P3' SEE MAIN AND SCHEMATIC 04-0150


C-SPLICE-IN WITH LEAD TO No. 3 PIN OF CHANGER POWER PLUG'P3'

D-SILICON RECTIFIER PHILCO PART 34-8048-1. DO NOT SUBSTITUTE.
-CONNECT THESE LEADS VIA 'EXT GDS' JACK IN MAIN CONSOLE BACK COVER

E-CONNECT THESE LEADS VIA 'EXT.SPRK' JACK IN MAIN CONSOLE BACK COVER.

T3 - PT. 12-0194	T4 - PT. 12-0193-1	L3 - PT. 32-8774.
------------------	--------------------	-------------------

ELECTROLYTIC CAN CONTAINS C31, C32 & C33 (PT. No. 10-0086)

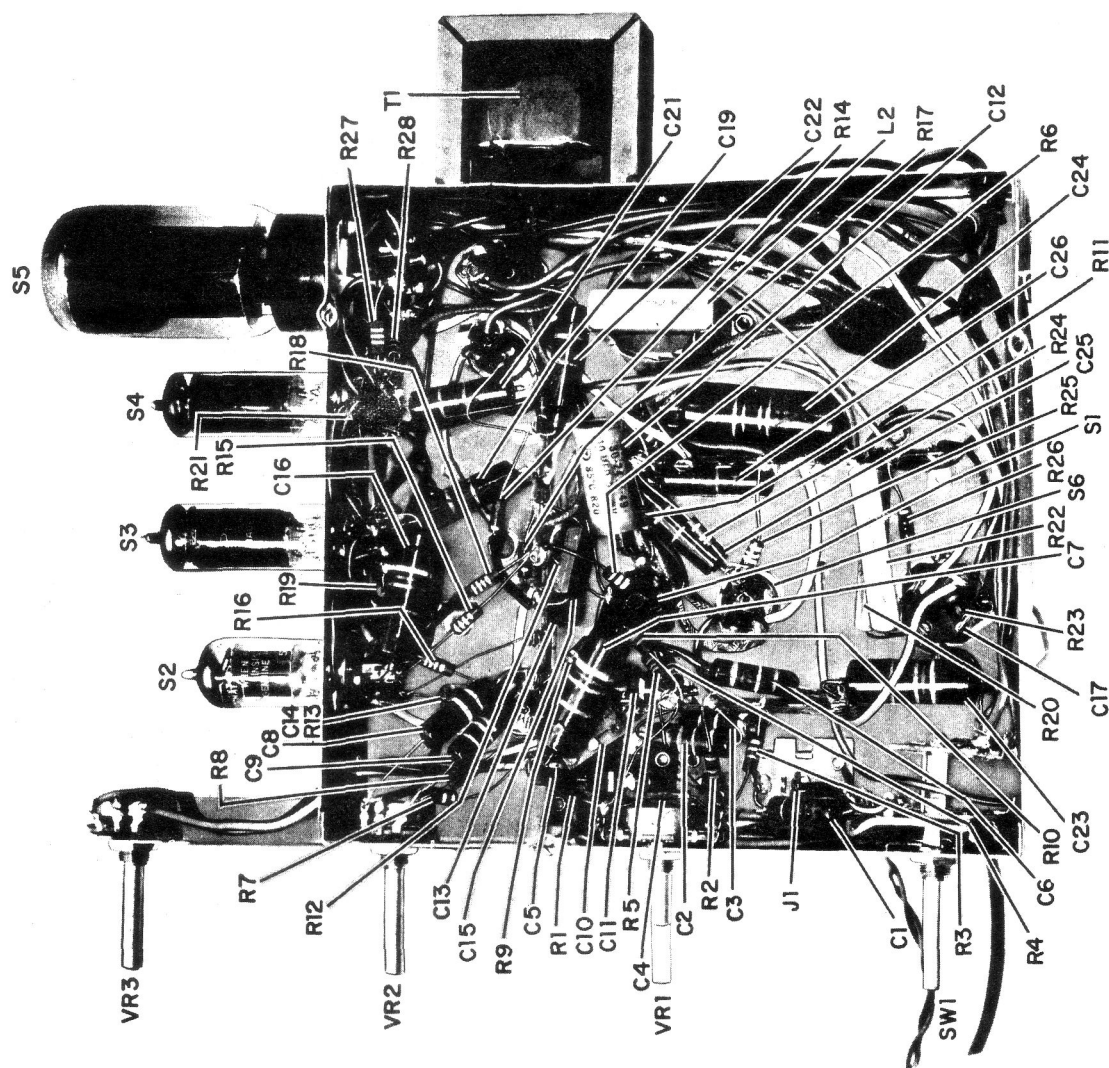

Amplifier, bottom view