


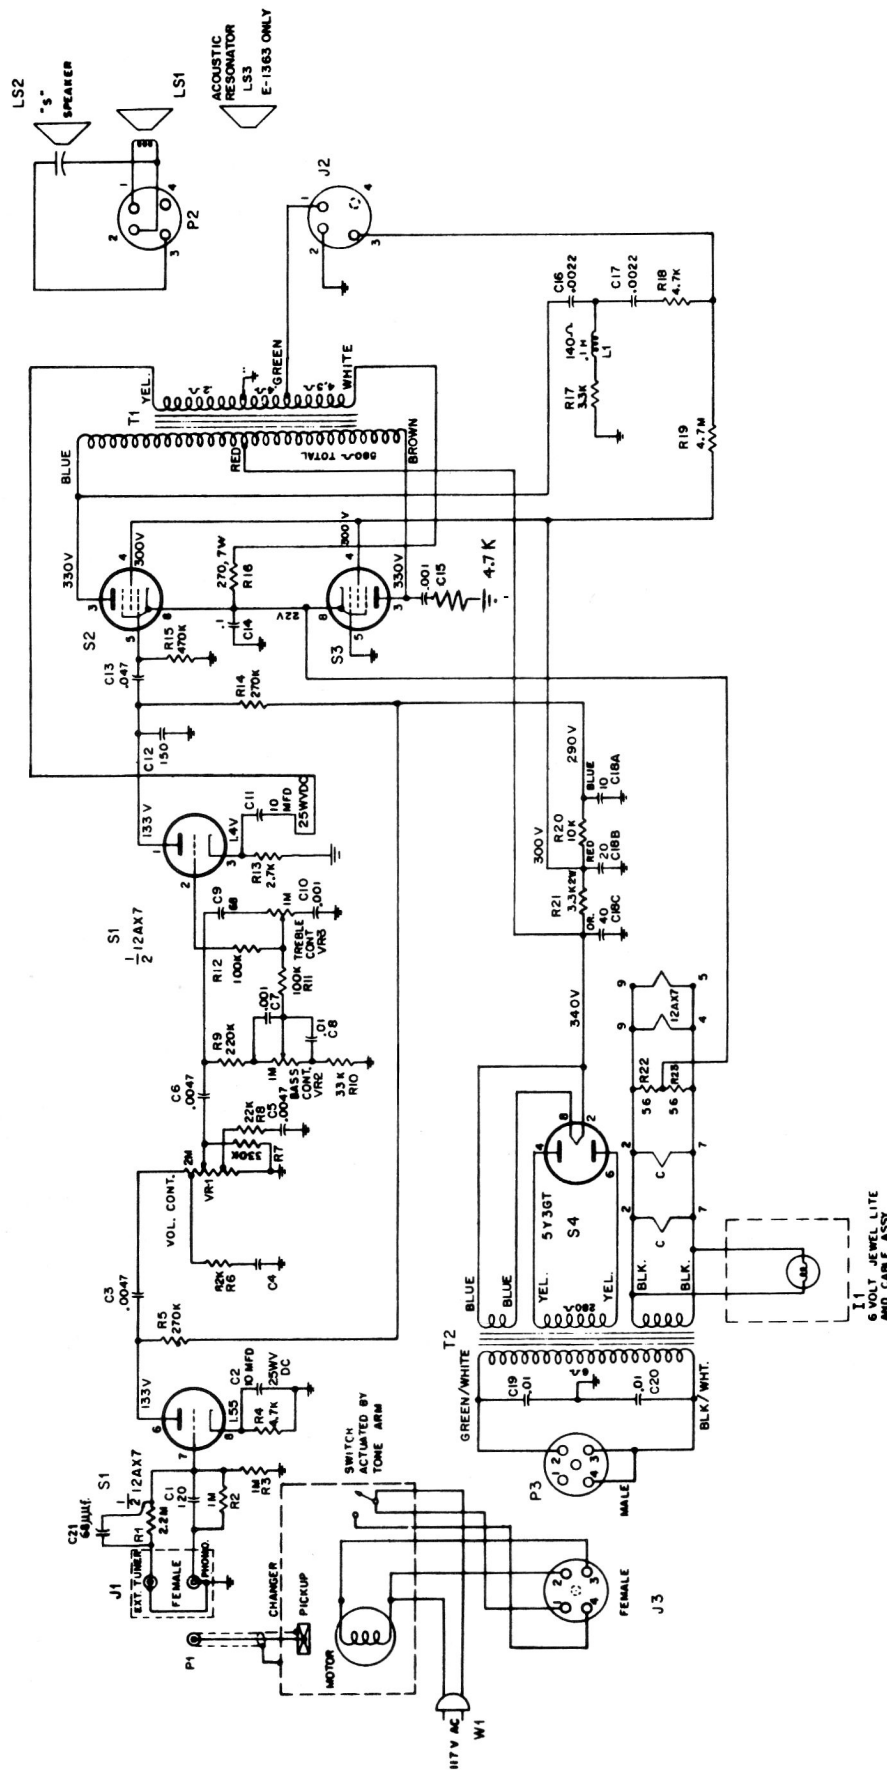


Schematic Diagram for Models 773 and 775

**CRITICAL LEAD DRESS**


When performing service do not disturb or alter the placement of components or the routing of leads.

Avoid placing components or leads near R16, the 270 ohm, 7 watt, wire wound output cathode resistor

or R21, the 3300 ohms, 2 watt B+ filter resistor. Both of these units operate at a high temperature and may damage any part in contact with them.

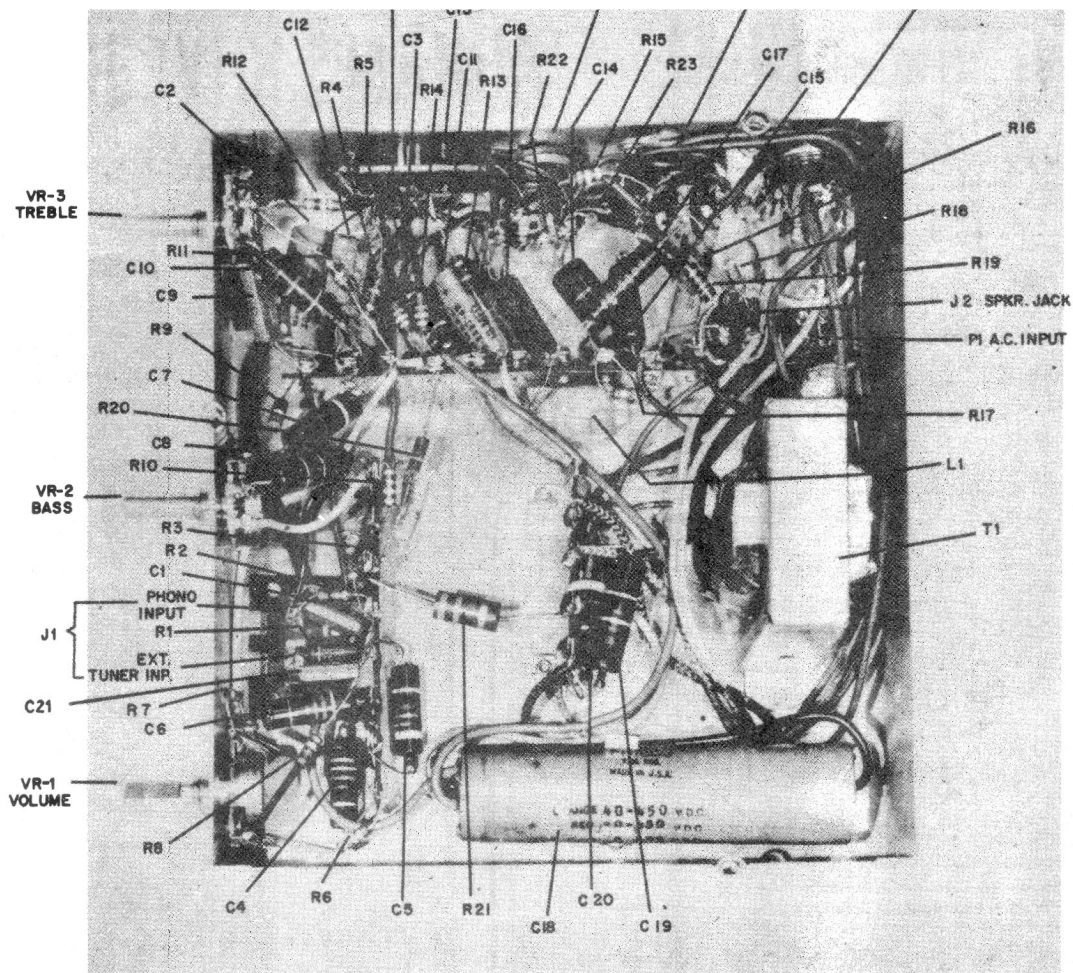

Base View — Models 773 and 775

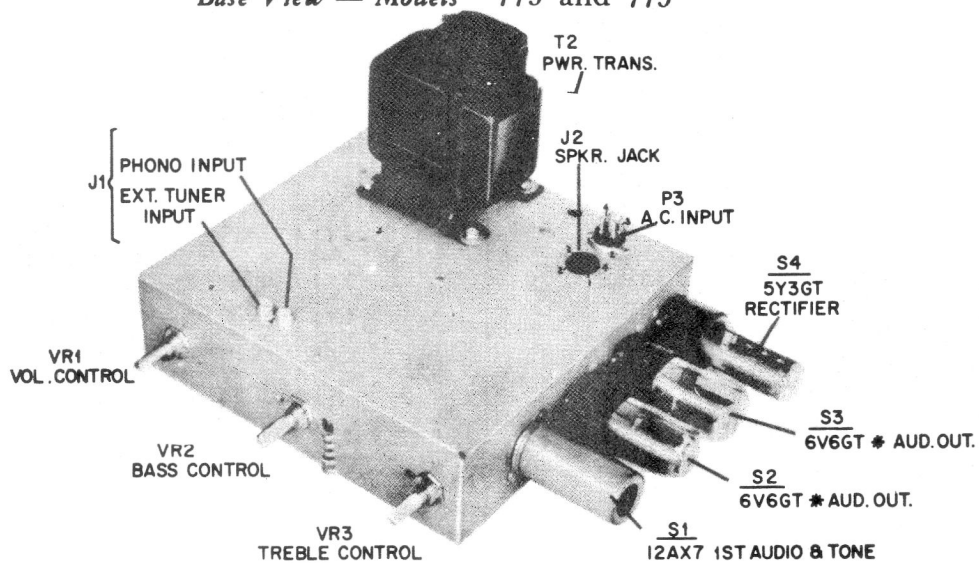

\* IN MODEL E-1363, S2 & S3 ARE 6K6GT's

Top View — 773 and 775