


Model 15K-1 A.C. Receiver

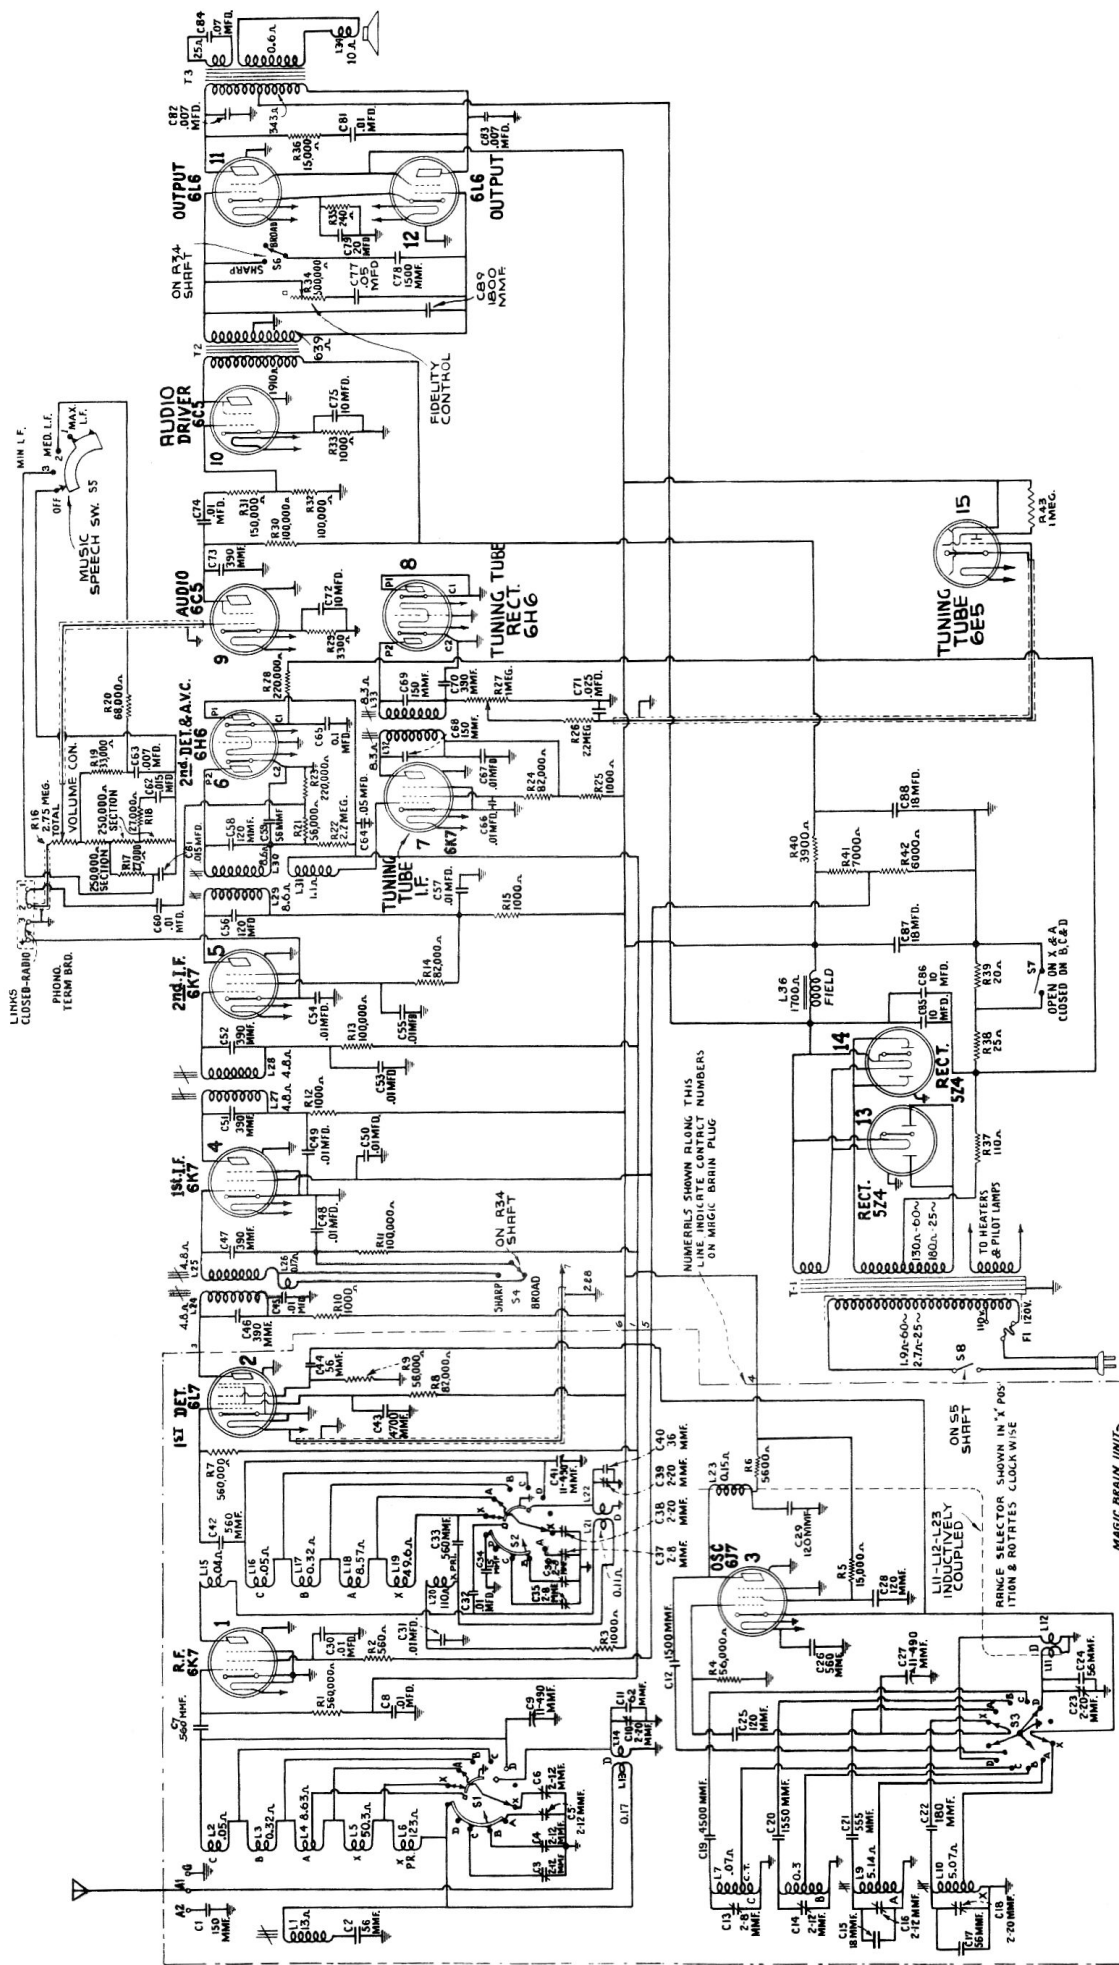

ALIGNMENT PROCEDURE

R.F., Det. & Osc. (X)	400 K.C.
R.F. & Det. (A)	1700 K.C.
R.F., Det. & Osc. (B)	6,000 K.C.
R.F., Det. & Osc. (C)	18,000 K.C.
Oscillator (A)	600 K.C., 1700 K.C.
Intermediate Frequency	460 K.C.

Intermediate Frequency Peak all R.F. stages.

Note:—Band (D) is untuned. Alignment is obtained by dressing coil bus leads in relation to the circuit components.