


Model D22-1 RCA Victrola

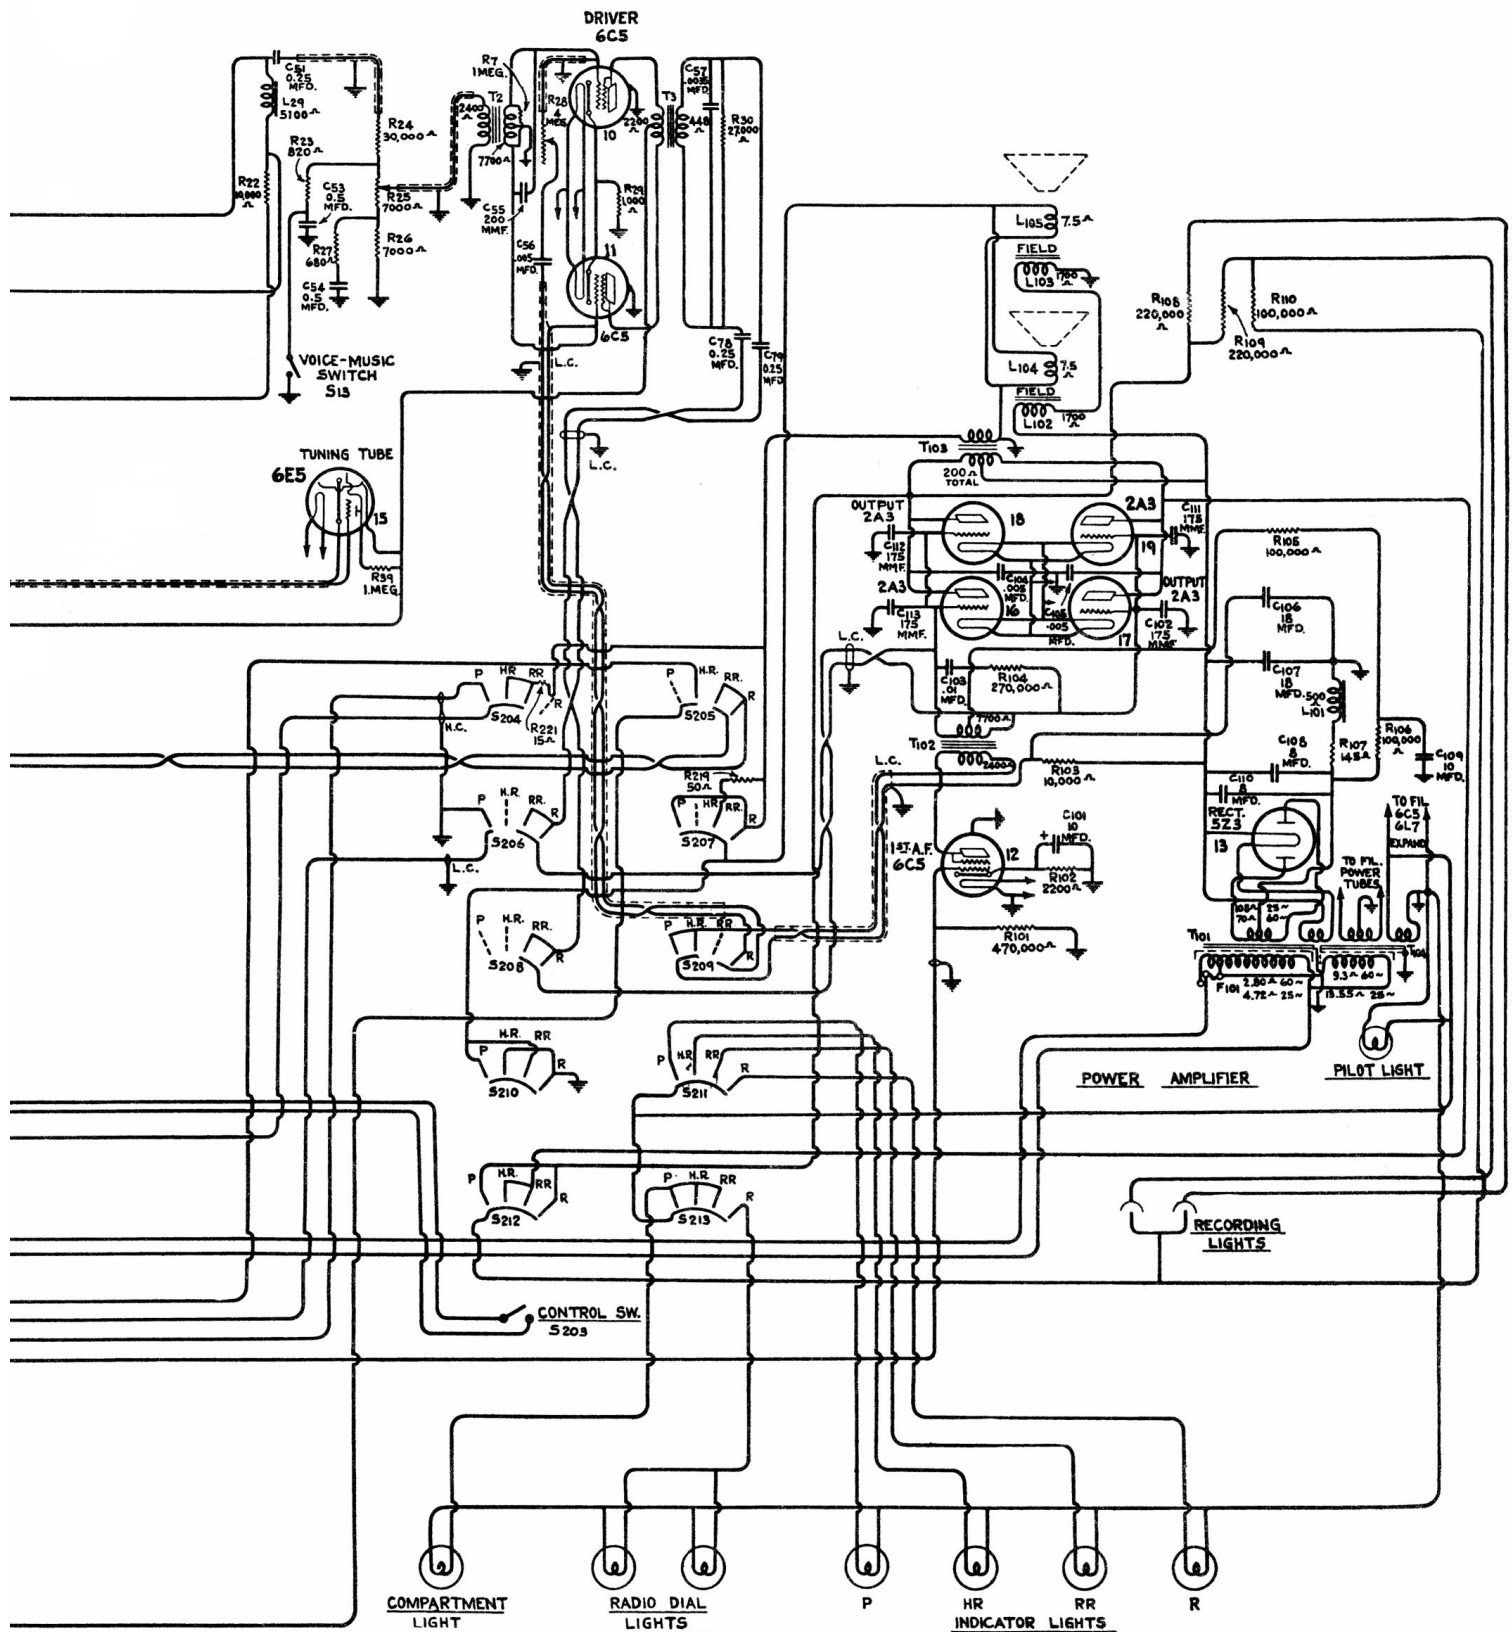

ALIGNMENT PROCEDURE

R.F., Det. & Osc. (X) 400 K.C.
 R.F. & Det. (A) 1700 K.C.
 R.F., Det. & Osc. (B) 6.000 K.C.
 R.F., Det. & Osc. (C) 18.000 K.C.
 Oscillator (A) 600 K.C., 1700 K.C.
 Intermediate Frequency 460 K.C.
 Peak all R.F. stages.

Note:—Band (D) is untuned. Alignment is obtained by dressing coil bus leads in relation to the circuit components.