




"HIS MASTER'S VOICE"


All parts subject to change or withdrawal without notice.

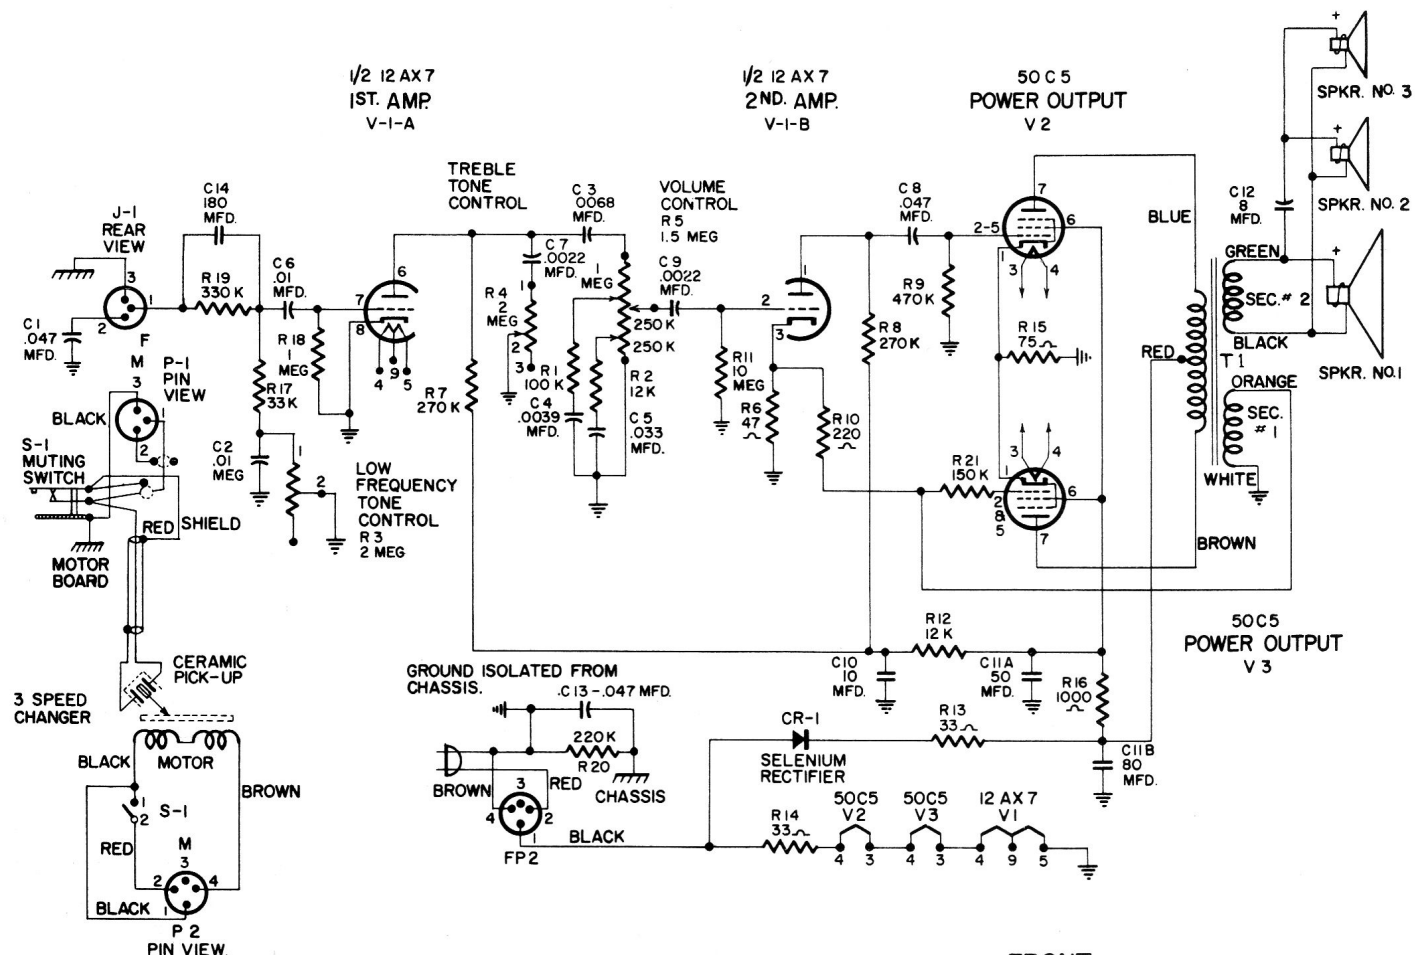


NOTE—The "ON-OFF" switch is part of the record changer. The record changer must be ON for power to be applied to amplifier.

CRITICAL LEAD DRESS

1. Dress all heater leads and power cord close to chassis and away from 12AX7 tube socket and phono input jack to maintain low hum level.
2. Dress record changer power cable and pickup cable as far apart as possible to minimize hum pickup.

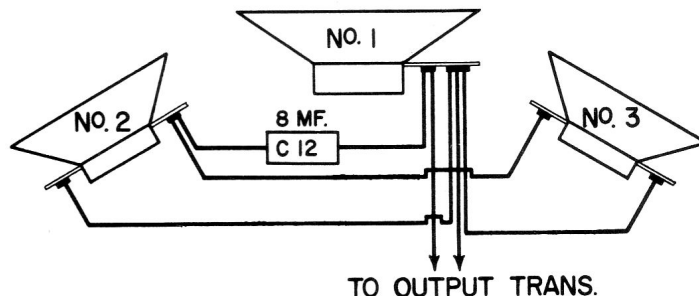

Speaker Connections

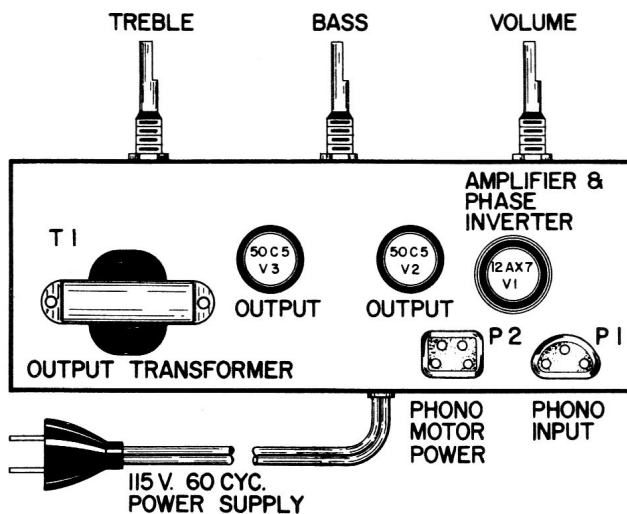

Chassis Top View