




MODULATOR
& OSCILLATOR

1ST I.F. AMP 2ND I.F. AMP.

DIODE &
AUDIO AMP. A.F. DRIVER OUTPUT

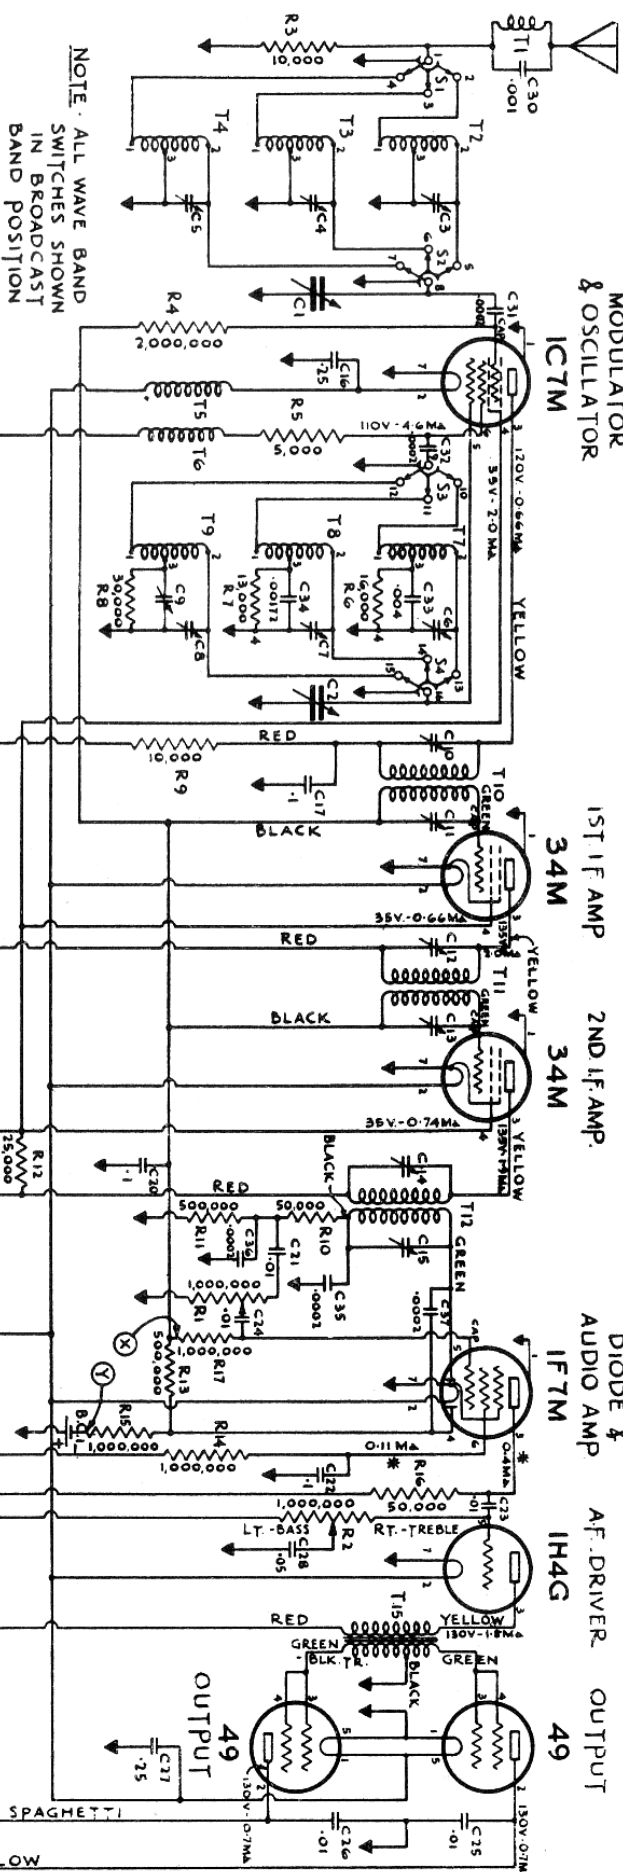

NOTE - ALL WAVE BAND SWITCHES SHOWN IN BROADCAST BAND POSITION

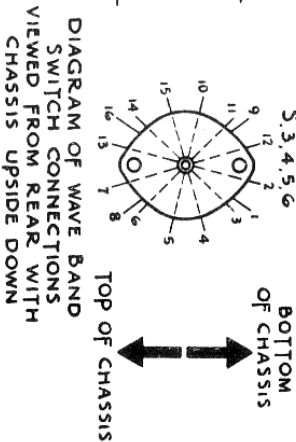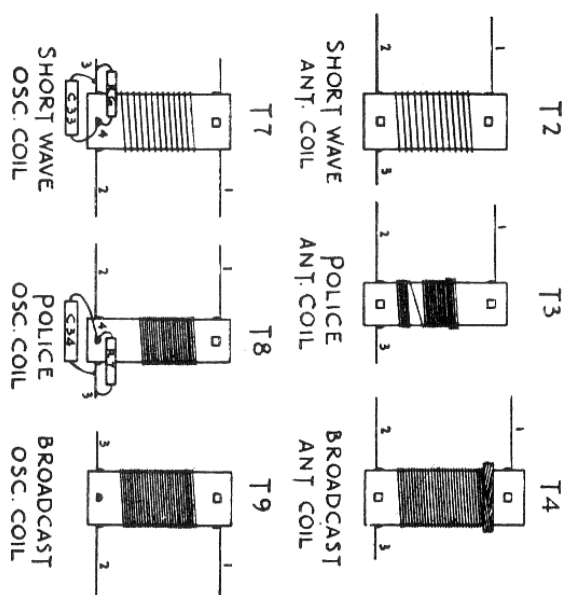


* VALUES OF RESISTANCE IN CIRCUIT DO NOT PERMIT OF ACCURATE VOLTAGE CHECK. USE PLATE CURRENT AS INDICATION OF PRESENCE OF CORRECT GRID AND PLATE VOLTAGE.

VOLTAGE READINGS ARE BETWEEN POINTS SHOWN & CHASSIS (GROUND) UNLESS OTHERWISE INDICATED.

Rogers 12-79 & 12-74 - Majestic 774 & 779

De Forest "Acadia" & "Fort Garry"

RCC- Rogers Majestic Data Sheet 25 (Upper) - 1937-38

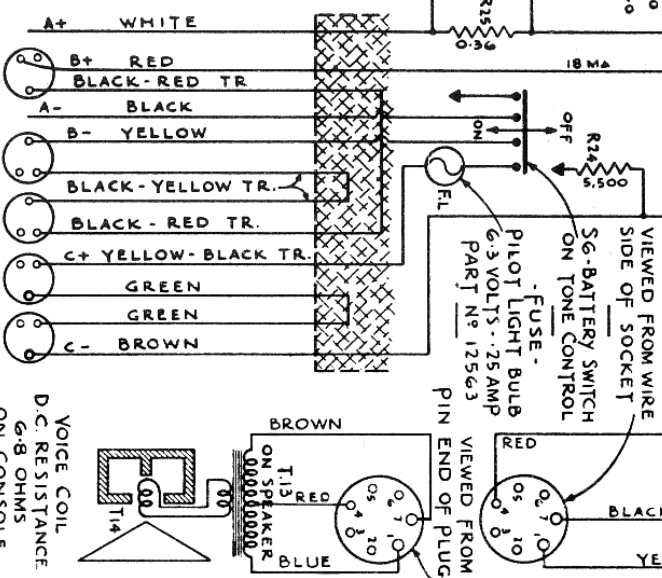

VOICE COIL
D.C. RESISTANCE
6.8 OHMS
ON CONSOLE
3.05 OHMS
ON MANTEL.

VIEWED FROM WIRE
END OF PLUG

TO INCREASE OUTPUT AT EXPENSE OF BATTERY DRAIN CUT THE WIRE AT THE POINT MARKED "X" AND RECONNECT R17 TO THE POINT MARKED "Y".

