


BM-246

SERVICE MANUAL

*US Model
Canadian Model*

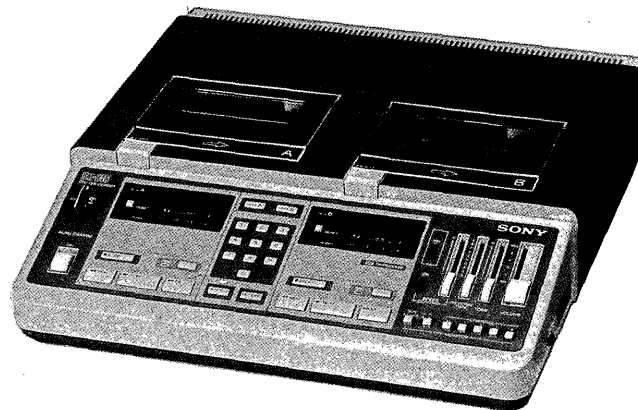

SPECIFICATIONS

Recording system	4-track, 4-channel monaural, one-way
Fast winding time	Approx. 2 min. 20 sec. with Sony C-90 cassette
Frequency response	200–6,000 Hz (2.4 cm/sec) 200–4,000 Hz (1.2 cm/sec)
Tape speed	2.4 cm/sec. ($1\frac{5}{16}$ ips) and 1.2 cm/sec. ($1\frac{1}{32}$ ips)
Playback speed control range	Approx. +50% to -10% of normal speed at 2.4 cm/sec and 1.2 cm/sec.
Speaker	Approx. 7.7 cm ($3\frac{1}{16}$ inches) dia.
Power output	800 mW (at 10% harmonic distortion)
Inputs	Four microphone inputs (type XLR-3) Sensitivity 0.2 mV (-72 dB) for low impedance microphone
Outputs	Earphone jack (mini jack) for 8-ohm earphone Public address connector (phone jack) for 10-kilohm amplifier Display connector for external digital counter display
Other connectors	Control unit connector for the optional RDI-246 telephone interface unit Transcribing connector for the optional FS-75 foot control unit Recording remote control connector for the optional RM-45A remote control unit
Power requirements	120 V AC, 60 Hz
Current drain	350 mA
Dimensions	Approx. 351×86.5×342 mm (w/h/d) ($13\frac{7}{8} \times 3\frac{1}{2} \times 13\frac{1}{2}$ inches)
Weight	Approx. 5.72 kg (12 lb 10 oz) including projecting parts and controls
Accessories supplied	Cassette (2) Security key (2)

Model Name Using Similar Mechanism	DECK A: BM-147
	DECK B: BM-147
Tape Transport Mechanism Type	DECK A: MB-246A-57
	DECK B: MB-246B-57

CONFER-CORDER
SONY®



FEATURES

Specially designed for recording courtroom proceedings, conferences or meetings.

Dual-deck confer-corder

With the AUTO CHANGE switch ON, long uninterrupted recording is possible. Before the end of tape on deck A (B), recording on deck B (A) starts automatically.

With the AUTO CHANGE switch OFF, both decks A and B can be operated simultaneously or separately.

4-track, 4-channel recording system

Eight microphone inputs into four channels can be recorded simultaneously. (The sound input from two microphones is mixed and recorded on one channel.) Any channel or all can be selected for monitoring.

Search functions

A particular recorded segment of the tape can be quickly located and the end of the last recorded segment on the tape can easily be located.

Fail-safe warning system

Alarm sound and indication on the counter display prevent recording errors.

Recorded cassette protection

Built-in circuitry makes it impossible to record over a recorded segment on the cassette.

Digital tape counter and alarm indicator

The tape position (4-digit readout 0000 to 9999) cassette number (1, 2, 3, etc.) during continuous recording and alarm indication appear for easy reference.

Transcribing capability

With the use of the optional FS-75 foot control unit, deck B can be used for transcribing.

Recording of telephone calls

With the use of the optional RDI-246 telephone interface, up to four telephone lines can be connected for long uninterrupted recording of calls.

Public address and display jacks

A PA (public address) jack and DISPLAY connector (for optional remote display) are provided.

Security key lock

A security key locks the cassette holders of both decks A and B.

TABLE OF CONTENTS

<u>Section</u>	<u>Title</u>	<u>Page</u>
	Specifications	1
	Features	2
	Servicing Note	3
SECTION 1. GENERAL		4
1-1.	Location and Function of Controls	4
1-2.	Recording	5
1-3.	Tape Playback	6
1-4.	Public Address	6
1-5.	Search Function	7
1-6.	Information Display	7
1-7.	Alarm System	7
1-8.	Transcribing	8
1-9.	Telephone Recording	8

<u>Section</u>	<u>Title</u>	<u>Page</u>
SECTION 2. OUTLINE		9
2-1.	IC901 (μ PD75108CW-151) Pin Functions	9
2-2.	IC901 (μ PD75108CW-151) Output Port and Mode	11
2-3.	Serial Signal	13
2-4.	Communication with RDI-246	14
2-5.	Fluorescent Display Drive (Dynamic) ..	15
2-6.	Detectors of Take-up Reel and Supply Reel Signals	16
2-7.	On the Key Matrix	17
SECTION 3. DISASSEMBLY		18
SECTION 4. MECHANICAL ADJUSTMENT ..		20
4-1.	Torque Measurement	20
4-2.	Tape Path Adjustment	20
4-3.	Pinch Roller Pressure Measurement ...	20
4-4.	Rotor Thrust Adjustment	20
4-5.	Forward-Solenoid Position Adjustment .	21
4-6.	F/R (Fast-Forward/Rewind) Solenoid Position Adjustment	21
SECTION 5. ELECTRICAL ADJUSTMENT ..		22
5-1.	Tape Speed Adjustment	22
5-2.	Motor Output Level Adjustment	22
5-3.	Record/Playback Head Azimuth Adjustment	23
5-4.	Monitor Head Azimuth Adjustment ...	23
5-5.	Tape Monitor Level Adjustment	24
5-6.	Frequency Response Check and Record Bias Adjustment	24
5-7.	Record Inhibit Azimuth Adjustment ...	25
SECTION 6. DIAGRAMS		26
6-1.	Circuit Boards Location	26
6-2.	Block Diagram	27
6-3.	Printed Wiring Boards (1) Servo Control Section	30
6-4.	Schematic Diagram (1) Servo Control Section	33
6-5.	Semiconductors Lead Layouts	39
6-6.	Printed Wiring Boards (2) Audio Section	41
6-7.	Schematic Diagram Audio Section	43
SECTION 7. EXPLODED VIEWS		47
SECTION 8. ELECTRICAL PARTS LIST ...		52

SAFETY CHECK-OUT

After correcting the original service problem, perform the following safety check before releasing the set to the customer:

Check the antenna terminals, metal trim, "metallized" knobs, screws, and all other exposed metal parts for AC leakage. Check leakage as described below.

LEAKAGE TEST

The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 0.5 mA (500 microamperes). Leakage current can be measured by any one of three methods.

1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufacturers' instructions to use these instruments.
2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.

3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The "limit" indication is 0.75 V, so analog meters must have an accurate low-voltage scale. The Simpson 250 and Sanwa SH-63Trd are examples of a passive VOM that is suitable. Nearly all battery operated digital multimeters that have a 2 V AC range are suitable. (See Fig. A)

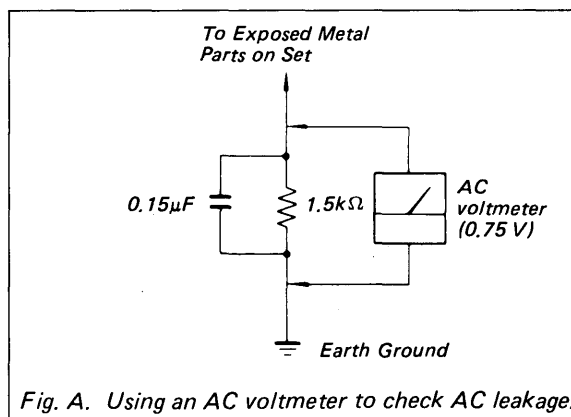


Fig. A. Using an AC voltmeter to check AC leakage.

SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY MARK  OR DOTTED LINE WITH MARK  ON THE SCHEMATIC DIAGRAMS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY.

ATTENTION AU COMPOSANT AYANT RAPPORT À LA SÉCURITÉ!

LES COMPOSANTS IDENTIFIÉS PAR UNE MARQUE  SUR LES DIAGRAMMES SCHÉMATIQUES ET LA LISTE DES PIÈCES SONT CRITIQUES POUR LA SÉCURITÉ DE FONCTIONNEMENT. NE REMPLACER CES COMPOSANTS QUE PAR DES PIÈCES SONY DONT LES NUMÉROS SONT DONNÉS DANS CE MANUEL OU DANS LES SUPPLÉMENTS PUBLIÉS PAR SONY.


Caution for Repair

1. Unless AC cord is plugged to power outlet and standby key switch turned to on mode, the cassette holder will not open.
2. This unit provides no eraser. Also, the unit provides protector for double recording: when it detects a recorded section on a tape, the mechanism shuts off and makes an alarm sound. Be sure to use an unrecorded tape.
3. Standby key switch does not turn power off. And unplug AC cord from power outlet to turn power off.

SECTION 1 GENERAL

1-1. LOCATION AND FUNCTION OF CONTROLS

FRONT PANEL SIDE

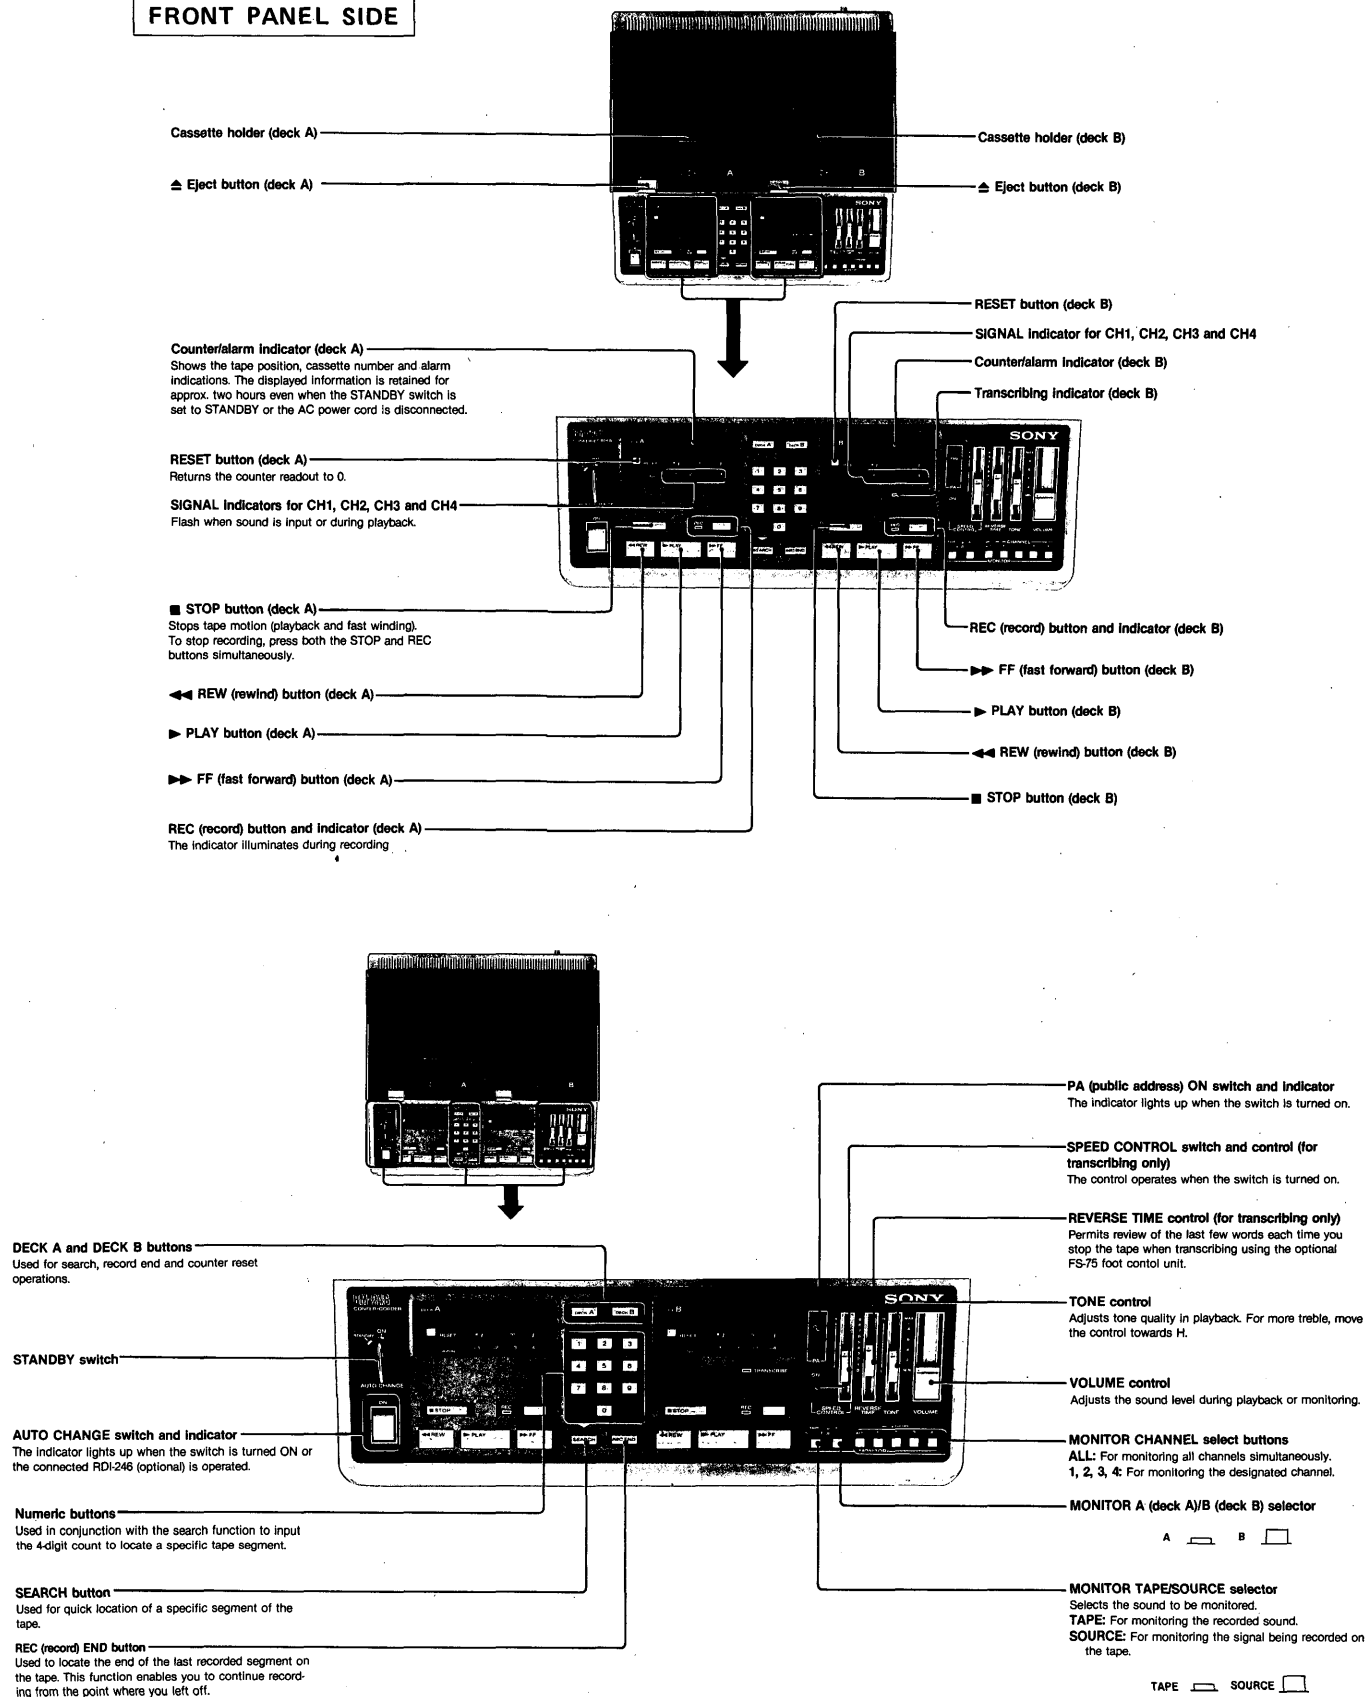


REAR PANEL SIDE

Microphone connectors (Canon XLR-331 type)
Accept microphones with XLR-312C type connector.

PA (public address) Jack (phone jack)
Accepts the system to be connected to a public address system.

DISPLAY connector
Used for connection of an external counter unit.

CONTROL UNIT connector
Accepts the optional RDI-246 telephone interface.

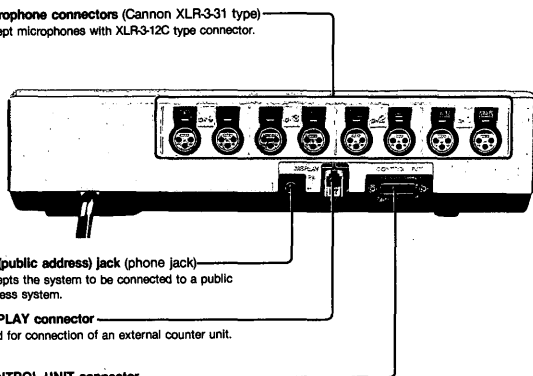


LEFT PANEL SIDE

REMOTE Jack
For connecting the optional RM-45A remote control unit. This enables remote start and stop of the tape on the deck which is in the record mode. For details, refer to the instruction manual of the RM-45A.

EARPHONE Jack
Used for monitoring or listening in private.


TAPE SPEED selector
1.2cm: 180 minutes of recording is possible with a DC-90 cassette.
2.4cm: 90 minutes of recording is possible with a DC-90 cassette.
For playback, set this selector to the same position as was used when the cassette was recorded.

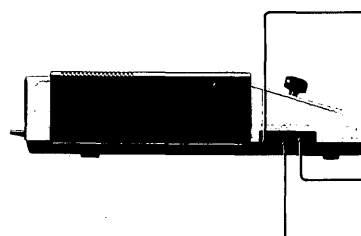

RIGHT PANEL SIDE

Connector for FS-75 foot control unit
Accepts the optional FS-75 foot control unit for transcribing.


TRANSCRIBE switch (for deck B only)
Activates the transcribing mode when the optional FS-75 foot control unit is connected.

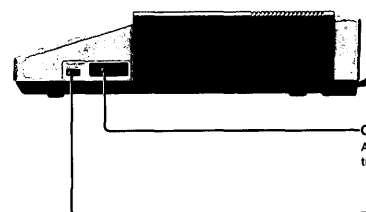


1-2. RECORDING

Connection

Up to eight microphones can be connected.

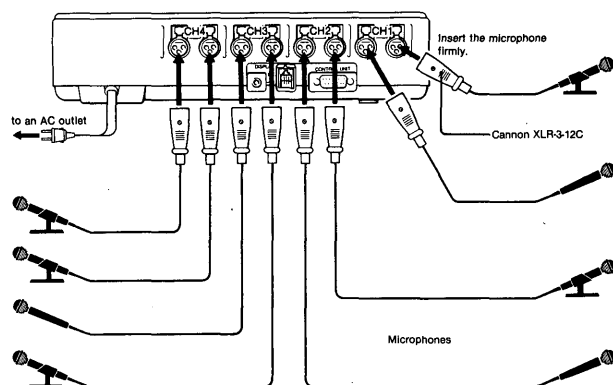

To Continuously Record from Deck A to B or Vice Versa—Continuous Recording

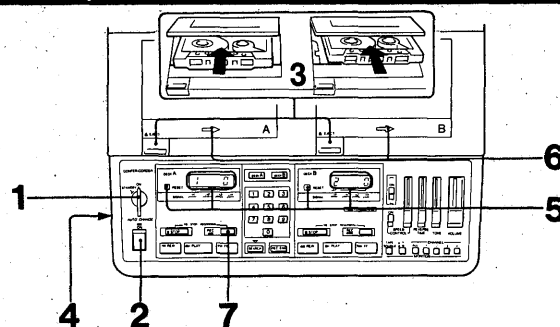

- 1 Insert the supplied security key and set it to ON.
- 2 Turn AUTO CHANGE ON.
- 3 Press Δ EJECT of both decks A and B and insert blank cassettes into the cassette holders.
- 4 Set TAPE SPEED.
- 5 Press RESET of both decks A and B. Cassette number and 0 (zero) for tape position appear on the counter.
- 6 Close the lid of both decks.
- 7 Press REC of deck A. Recording starts.

Approx. three minutes before the end of tape (when the tape approaches the end of tape)
The other deck starts recording automatically.

To stop recording
Press $\blacksquare$ STOP and REC simultaneously.

For relay recording of more than three cassettes successively
Change the cassette in one deck while recording with the other. Endless recording can be done in this way.

Deck A and B can independently be operated
Tape playback and fast winding tape operations can be performed on one deck while recording on the other.

Cassette number is displayed
The leftmost digit of the counter indicates the cassette number when the AUTO CHANGE switch is turned ON. Cassette number increases each time the Δ EJECT button is pressed.

A Long time recording is possible
Recording time is prolonged corresponding to the setting of the TAPE SPEED selector and the cassette to be used.


Monitoring while recording
Insert an earphone into the EARPHONE Jack.

MONITOR TAPE/SOURCE selector		Sound to be monitored.
TAPE		Recorded sound
SOURCE		Sound being recorded

Microphone input sound can also be monitored through the connected PA (public address) system if one is connected to this unit.

SIGNAL Indicators
Blink when sound from a microphone is input.

To Record on a Deck—Single Recording

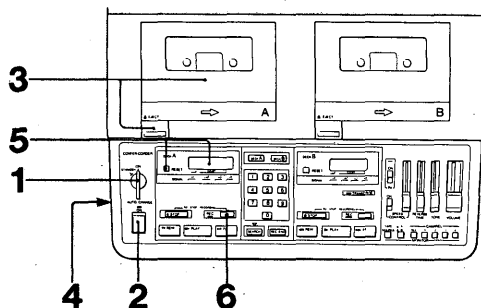


- 1 Insert the supplied security key and set the key to ON.
- 2 Turn AUTO CHANGE off.
- 3 Press Δ EJECT of either deck A or B and insert a blank cassette into the cassette holder. Close the lid.
- 4 Set TAPE SPEED.
- 5 Press RESET to set the counter to 0.
- 6 Press REC.

To stop recording
Press ■ STOP and REC simultaneously.

To Record on Both Decks A and B Simultaneously—Dual Recording


Deck A and B can record the same input source simultaneously.

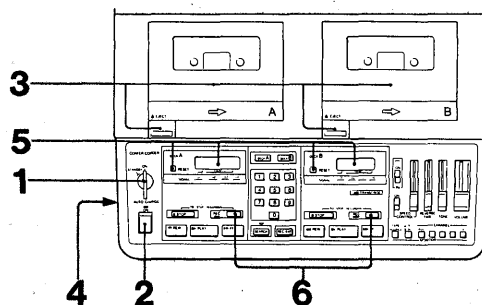

- 1 Insert the supplied security key and set the key to ON.
- 2 Turn AUTO CHANGE off.
- 3 Press Δ EJECT of both decks A and B and insert blank cassettes into the cassette holders. Close the lids.
- 4 Set TAPE SPEED.
- 5 Press RESET of both decks to set the counters to 0.
- 6 Press REC of both decks.

To stop recording
Press ■ STOP and REC simultaneously.

1-3. TAPE PLAYBACK

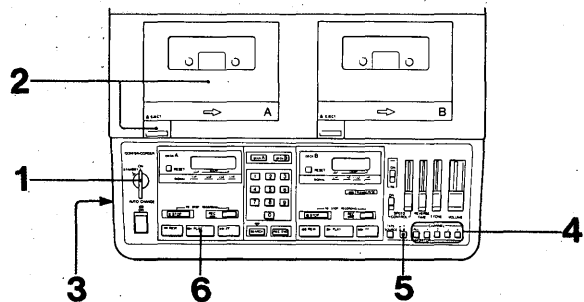

- 1 Insert the supplied security key and set the key to ON.
- 2 Press Δ EJECT and insert a recorded cassette into the cassette holder (deck A or B). Close the lid.
- 3 Set TAPE SPEED to the same position as that used for recording.
- 4 Depress the desired MONITOR CHANNEL.
- 5 Set MONITOR A/B to the desired position.
- 6 Press ► PLAY.


To stop playback
Press ■ STOP.

For personal listening
Connect an earphone to the EARPHONE jack.

Sound adjustment
Adjust volume and tone with the VOLUME and TONE controls.

1-4. PUBLIC ADDRESS

Connection

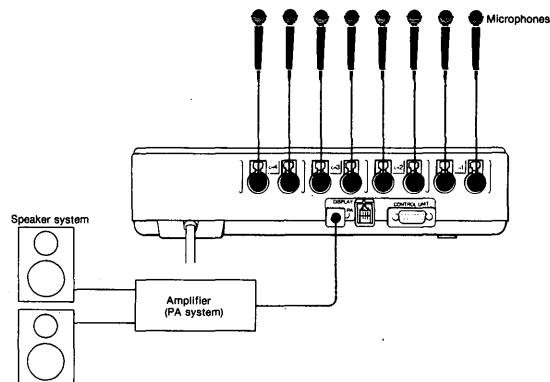

Operation

- 1 Turn ON PA.
- 2 Turn on the connected PA system.
- 3 Proceed with the operation steps described in "Tape Playback" to monitor during playback.
Proceed with the operation steps described in "Recording" to monitor during recording.

Sound adjustment
Adjust the volume and tone with VOLUME and TONE.


While recording
Input to a microphone in a courtroom, conference or meeting can be amplified.

Microphone testing
It can be performed through the connected PA system while stopping the tape motion.

1-5. SEARCH FUNCTION

To Quickly Locate a Specific Segment of Tape


You can quickly locate a specific segment of the tape when the counter readout has been memorized.

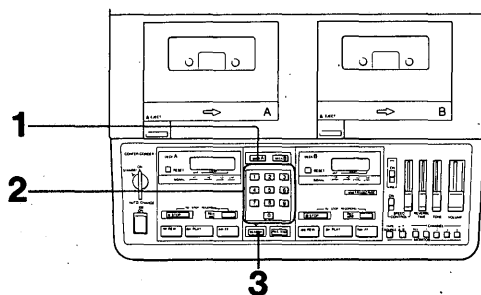

- 1 Press DECK A (or DECK B).**
The counter readout flickers.
- 2 Press the numeric buttons** to set the counter readout to the specific tape segment you wish to find.
- 3 Press SEARCH.**
Tape is wound quickly to locate the specific tape segment.

To Quickly Find the Recording End

You can easily find the end of the last recorded segment on the tape.

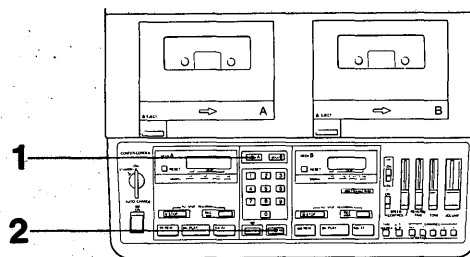

- 1 Press DECK A (or DECK B).**
The counter readout flickers.
- 2 Press REC END.**
The tape will stop automatically at the count number which corresponds to the end of the recording.

The counter readout flickers
While searching for the specific segment.
To stop the search operation, press the DECK button again.
Flickering stops.

1-6. INFORMATION DISPLAY

AUTO CHANGE OFF	
To select the deck	
To reset the counter readout	
For search operation	
For record-end operation	
For random resetting	
AUTO CHANGE ON	
To change the cassette number	

1-7. ALARM SYSTEM


An alarm sounds and indication appears on the display.

Alarm system	Situation	To release alarm system
 CAS	A tape operation button is pressed when no cassette is placed in the cassette compartment.	- Release the tape operation button. - Insert a cassette.
 CAS or End	REC button is pressed when no cassette in the cassette compartment. (During single or continuous recording)	Press ■ STOP or ▲ EJECT.
 End	Broken tape (while recording) End of tape	Press ■ STOP or ▲ EJECT.
 Blinks	Approx. three minutes before the end of tape (while recording)	Alarm sound stops at the end of tape.
 Err	Record on the pre-recorded portion	Press ■ STOP or ▲ EJECT.


1-8. TRANSCRIBING

The deck B can be used as a transcriber by connecting the optional FS-75 foot control unit.

Connection

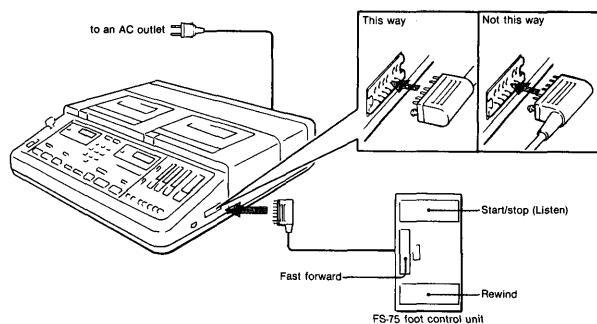

Operation

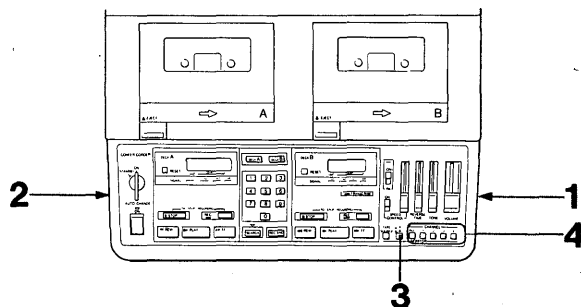

1 Set TRANSCRIBE to ON.

2 Set TAPE SPEED to the same position as that used for recording.

3 Keep MONITOR A/B released (B).

4 Depress the desired MONITOR CHANNEL.

To control transcribing speed

Transcribing speed can be controlled.

- 1 Turn ON the SPEED CONTROL switch.
- 2 Set the SPEED CONTROL to your preference.
To increase playback speed, move the control toward +.
To decrease the speed, move the control toward -.

To obtain the original speed

Turn off SPEED CONTROL.

Each time you resume listening

The last few words can be reviewed. When the REVERSE TIME control is moved upwards, the last portion of the tape will be reviewed by using the start/stop function of the FS-75.

At + position, the BM-246 stops to review about the last six seconds.

At - position, this unit stops without reviewing. Set the control so that it clicks into position.

Notes


- REVERSE TIME and SPEED CONTROL are operative only when the optional FS-75 foot control unit is connected.
- When the TRANSCRIBE switch is turned on, deck A is inoperative.

1-9. TELEPHONE RECORDING

Telephone calls from up to four telephone lines can be recorded on this unit by using the optional RDI-246 telephone interface.

When the RDI-246 is connected, a long uninterrupted recording (continuous recording) can be made.

Connection

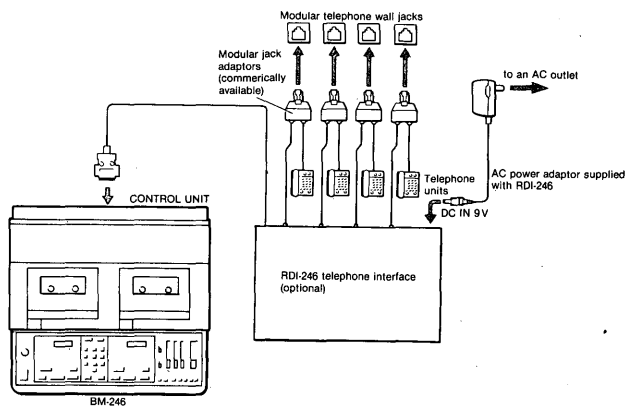


Operation

Recording procedures are the same as that described in "To Continuously Record from Deck A to B or Vice Versa" on page 5. In this case, recording takes place regardless of the setting of AUTO CHANGE.

You can remotely control the BM-246 by using the optional RM-45A remote control unit.

Remote control operation is performed when the BM-246 is set in record mode.

Connection



Operation

Press REC.

Then, start/stop operation can be performed on the RM-45A remote control unit.

SECTION 2

OUTLINE

2-1. IC901 (μ PD75108CW-151) pin Functions

Pin No.	NAMING	SYMBOL	PORT NAME	PORT	I/O	FUNCTION
1	REC-INHI-B-IN	INHI-B	PORT 1	P13	I	INHIBIT-B signal input. "L": STOP.
2	REC-INHI-A-IN	INHI-A		P12	I	INHIBIT-A signal input. "L": STOP.
3	S-REEL-B-IN	SBI		P11	I	B deck S REEL drive signal input.
4	S-REEL-A-IN	SAI		P10	I	A deck S REEL drive signal input.
5	FS IN	FSI	PTH0	PTH03	I	FORWARD SPACE signal input. "L": actuate.
6	BS IN	BSI		PTH02	I	BACK SPACE signal input. "L": actuate.
7	F-LIS IN	LISI		PTH01	I	FOOT-LIS signal input. "L": actuate.
8	OPEN	M5V		PTH00	—	Not used.
9	T-REEL-A-IN	TAI	TI	TI0	I	A deck T REEL drive signal input.
10	T-REEL-B-IN	TBI		TI1	I	B deck T REEL drive signal input.
11	PG-FR-A	PGFR-A	PORT 2	P23	O	A deck PG (FF) output "L": actuate.
12	PG-FWD-A	PGF-A		P22	O	A deck PG (FWD) output. "L": actuate.
13	REC-A-CNT	REC-A		P21	O	A deck REC control output. "H": REC AMP MUTE, "L": REC AMP ON.
14	PG-FR-B	PGFR-B		P20	O	B deck PG (FF) output. "L": actuate.
15	REMOTE IN	RMTI	PORT 0	P03	I	REMOTE signal input. "H": stop, "L": actuate.
16	SERIAL OUT	DATA		P02	O	SERIAL DATA signal output. RDC $\times$ 4, TRANSCRIBE LED (D945), RELAY output $\times$ 2, ALARM "L": actuate. (See waveform on page 13.)
17	SERIAL CLOCK	SCK		P01	O	SERIAL CLOCK signal output. (See waveform on page 13)
18	STBY IN	STBY		P00	I	Detects power supply +12V. "L": Operation mode, "H": STANDBY mode.
19	PG-FWD-B	PGF-B	PORT 12	P123	O	B deck PG (FWD) output "L": actuate.
20	REC-B-CNT	REC-B		P122	O	B deck REC control output. "H": REC AMP MUTE, "L": REC AMP ON.
21	PB-A-CNT	PB-A		P121	O	A deck PB control output. "H": PB AMP MUTE, "L": PB AMP ON.
22	LED (REC-A)	LED RA		P120	O	A deck REC LED (D918) drive output. "L": actuate.
23	LED (AUTO)	LED RL	PORT 13	P133	O	AUTO CHANGE LED (D916) drive output. "L": actuate.
24	TEL DATA	T DATA1		P132	O	T DATA signal output to RDI-246. (See waveform on page 14).
25	PB-B-CNT	PB-B		P131	O	B deck PB control output. "H": PB AMP MUTE, "L": PB AMP ON.
26	LED (REC-B)	LED RB		P130	O	B deck REC LED (D917) drive output. "L": actuate.
27	TEL-REC-IN	TEL 1	PORT 14	P143	I	RDI-246 TEL-REC signal input. (See waveform on page 14.)
28	KSCAN IN 2	SCAN 2		P142	I	Key scan input. "H": actuate. (See a table on page 17.)
29	KSCAN IN 1	SCAN 1		P141	I	
30	KSCAN IN 0	SCAN 0		P140	I	
31	NC	M5V	—	—	—	Not connected.
32	VDD	M5V	—	—	—	+5V power supply.
33	SPD-CONTROL	VS1	PORT 3	P33	O	Regular speed/speed change switch. "H": speed change, "L": regular speed.
34	A OFF-B	A OFF B		P32	O	B deck AUTO OFF signal output. "H": STOP, "L": ON.
35	RVS-B	RVS-B		P31	O	B deck REVERSE signal output. "H": REVERSE (Same as FF), "L": FORWARD. (Same as FWD, REW).
36	1.2/2.4-B	SPD-B		P30	O	B deck tape speed switch. "H": 1.2cm/s, "L": 2.4cm/s.
37	1.2/2.4-A	SPD-A	PORT 4	P43	O	A deck tape speed switch. "H": 1.2cm/s, "L": 2.4cm/s.
38	DISP Bg	Bg 1		P42	O	B deck display segment output. "H": actuate.
39	DISP Bf	Bf 1		P41	O	
40	DISP Be	Be 1		P40	O	

Pin No.	NAMING	SYMBOL	PORT NAME	PORT	I/O	FUNCTION
41	DISP Bd	Bd 1	PORT 3 ↑ ↓	P53	O	B deck display segment output. "H": actuate.
42	DISP Bc	Bc 1		P52	O	
43	DISP Bb	Bb 1		P51	O	
44	DISP Ba	Ba 1		P50	O	
45	RESET	RESET	—	—	I	Microcomputer HARD RESET signal input.
46	X1	X1	—	—	—	Clock osillator terminal. (4.19 MHz)
47	X2	X2	—	—	—	
48	STAND-BY-SW IN	PSW	PORT 6 ↑ ↓	P63	I	STANDBY switch (S935) detect input. "H": STANDBY switch off, "L": STANDBY switch on.
49	A OFF-A	A OFF-A		P62	O	A deck AUTO OFF signal output. "H": STOP, "L": ON.
50	RVS-A	RVS-A		P61	O	A deck REVERSE signal output. "H": REVERSE (Same as FF), "L": FORWARD (Same as FWD, REW).
51	DISP D0	D0-1		P60	O	Display digit output (1 figure). "H": actuate.
52	DISP D1	D1-1	PORT 7 ↑ ↓	P73	O	Display digit output (10 figures). "H": actuate.
53	DISP D2	D2-1		P72	O	Display digit output (100 figures). "H": actuate.
54	DISP D3	D3-1		P71	O	Display digit output (1000 figures). "H": actuate.
55	DISP D4	D4-1		P70	O	Display digit output (10000 figures). "H": actuate.
56	SERIAL LATCH	LAT	PORT 8 ↑ ↓	P83	O	SERIAL LATCH signal output. "L": actuate. (See waveform on page 13).
57	DISP Ag	Ag 1		P82	O	A deck display segment output. "H": actuate.
58	DISP Af	Af 1		P81	O	
59	DISP Ae	Ae 1		P80	O	
60	DISP Ad	Ad 1	PORT 9 ↑ ↓	P93	O	A deck display segment output. "H": actuate.
61	DISP Ac	Ac 1		P92	O	
62	DISP Ab	Ab 1		P91	O	
63	DISP Aa	Aa 1		P90	O	
64	VSS	GND	—	—	—	Ground terminal.

2.2. IC901 (μ PD75108CW-151) Output Port and Mode

A DECK								
Port	Pin No.	Function	STOP	REC	PLAY	FF	REW	AUTO OFF (note 1)
P20	14	PG (FF) B	—					
P21	13	REC CONTROL A	H	L	H	H	H	H
P22	12	PG (FWD) A	H	L	L	H	H	H
P23	11	PG (FF) A	H	H	H	L	L	H
P30	36	1.2/2.4 B	—					
P31	35	REVERSE B	—					
P32	34	AUTO OFF B	—					
P33	33	REGULAR SPEED /SPEED CHANGE	—					
P43	37	1.2/2.4 A	(note 2)	(note 2)	(note 2)	L	L	(note 2)
P61	50	REVERSE A	L	L	L	H	L	L
P62	49	AUTO OFF A	L	L	L	L	L	H (MOTOR STOP)
P120	22	LED (REC) A	H (note 3)	L (note 4)	H	H	H	H (note 3)
P121	21	PB CONTROL A	H	H	L	H	H	H
P122	20	REC CONTROL B	—					
P123	19	PG (FWD) B	—					
P130	26	LED (REC) B	—					
P131	25	PB CONTROL B	—					
P01	17	SERIAL CLOCK	—					
P02	16	SERIAL DATA	H (note 5)	L (note 6)	H (note 5)	H (note 5)	H (note 5)	H (note 5)
P83	56	SERIAL LATCH	—					
P132	24	RDI-246 SERIAL DATA	—					

(note 1) When STOP mode stays more than 3 minutes it goes to AUTO OFF.

(note 2) SPEED switch (S101) switches 1.2/2.4 cm/s.


(note 3) When RDI-246 is connected, TELEPHONE STANDBY: "L", REMOTE STOP: "H"/"L" and LED blinks.

(note 4) PRE-END alarm: "H"/"L", and LED blinks.

(note 5) SERIAL 0 bit: "H".

(note 6) SERIAL 0 bit: "L".

P02 SERIAL output

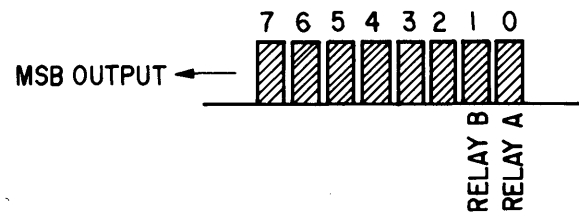

B DECK								
Port	Pin No.	Function	STOP	REC	PLAY FOOT LIS	FF FS	REW PR BS	AUTO OFF (note 1)
P20	14	PG (FF) B	H	H	H	L	H	H
P21	13	REC CONTROL A	—					
P22	12	PG (FWD) A	—					
P23	11	PG (FF) A	—					
P30	36	1.2/2.4 B	(note 2)	(note 2)	(note 2)	L	L (note 7)	(note 2)
P31	35	REVERSE B	L	L	L	H	L	L
P32	34	AUTO OFF B	L	L	L	L	L	H (MOTOR) STOP
P33	33	REGULAR SPEED /CHANGE SPEED	L	L	(note 8)	L	L	L
P43	37	1.2/2.4 A	—					
P61	50	REVERSE A	—					
P62	49	AUTO OFF A	—					
P120	22	LED REC A	—					
P121	21	PB CONTROL A	—					
P122	20	REC CONTROL B	H	L	H	H	H	H
P123	19	PG (FWD) B	H	L	L	H	H	H
P130	26	LED (REC) B	H (note 3)	L (note 4)	H	H	H	H (note 3)
P131	25	PB CONTROL B	H	H	L	H	H	H
P01	17	SERIAL CLOCK	—					
P02	16	SERIAL DATA	(note 10)	(note 9)	(note 10)	(note 10)	(note 10)	(note 10)
P83	56	SERIAL LATCH	—					
P132	24	RDI-246 SERIAL DATA	—					

(note 1-6) See note on page 11.

(note 7) REW, BACK SPACE: Stays "L", PARTIAL REVERSE: Same as note 2.

(note 8) TRANSCRIBE (S934 ON) PLAY: Normally "L", FOOT LIS: "H".


(note 9) SERIAL 1 bit: "L".

(note 10) SERIAL 1 bit: "H".

2-3. SERIAL SIGNAL

IC901 Pin (17) (SERIAL CLOCK), Pin (16) (SERIAL DATA), Pin (56) (SERIAL LATCH) only serial signals to port extension IC μ PD4094BC (IC128).

Each waveform timing is shown below.

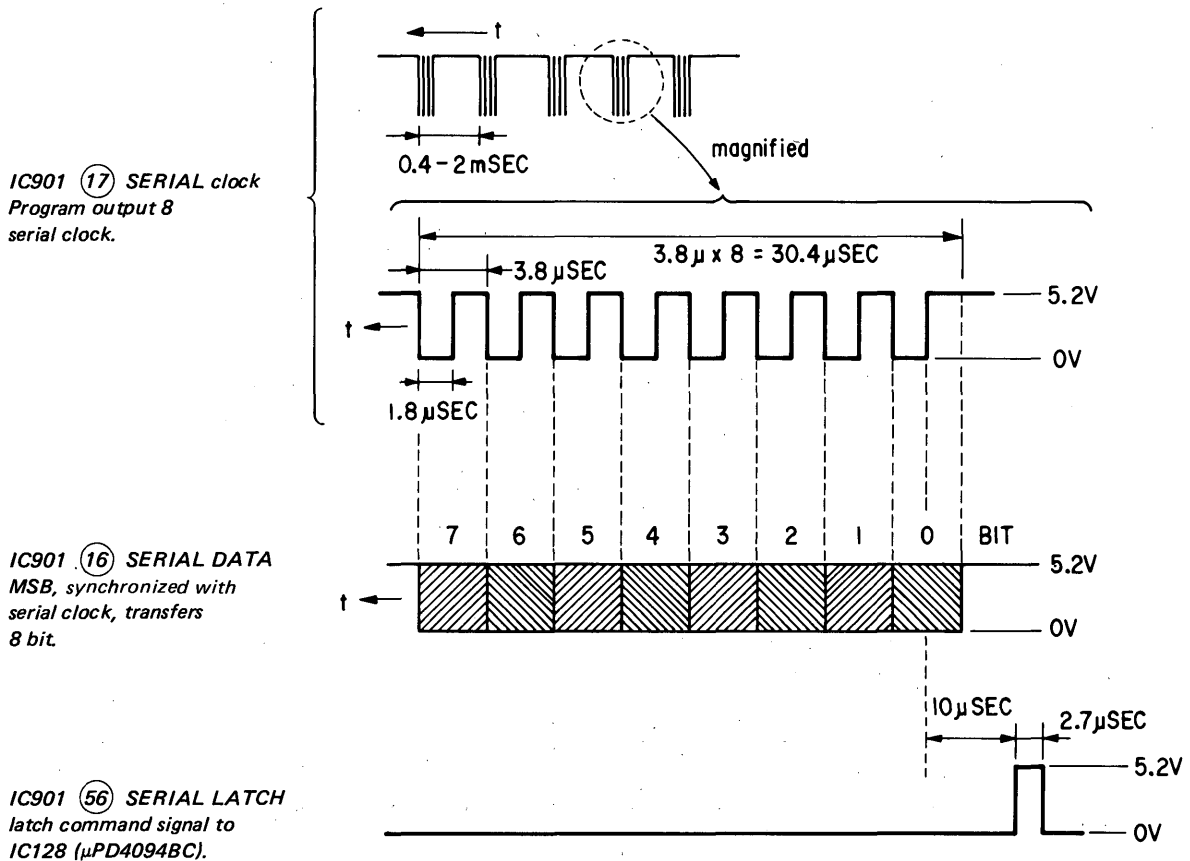

• SERIAL DATA


Bit	Naming	IC128 Output Port	Function	IC901 (16) pin	
				H	L
0	RELAY A	pin (4)	DECK A Relay, Bias drive.	OFF	RELAY ON
1	RELAY B	pin (5)	DECK B Relay, Bias drive	OFF	RELAY ON
2	ALARM	pin (6)	IC127 Alarm circuit drive.	OFF	ON
3	TRANSCRIBE LED	pin (7)	D945 drive.	ON	OFF
4	RDC RESET	pin (14)	External counter for RDC-146 reset.	RESET ON	—
5	RDC CLOCK	pin (13)	External counter for RDC-146 count pulse.	NORMAL	CLOCK OUTPUT
6	RDC U/D	pin (12)	External counter for RDC-146 count pulse.	DOWN	UP
7	RDC D	pin (11)	External counter for RDC-146 tape number increment.	INCREMENT	NORMAL

2-4. COMMUNICATION WITH RDI-246

(1) TEL REC input signal (IC901 pin (27)).

TEL REC signal is an input signal from RDI-246 to the unit, which controls REC/STOP of the unit.


• Signal waveform (IC901 pin (27))

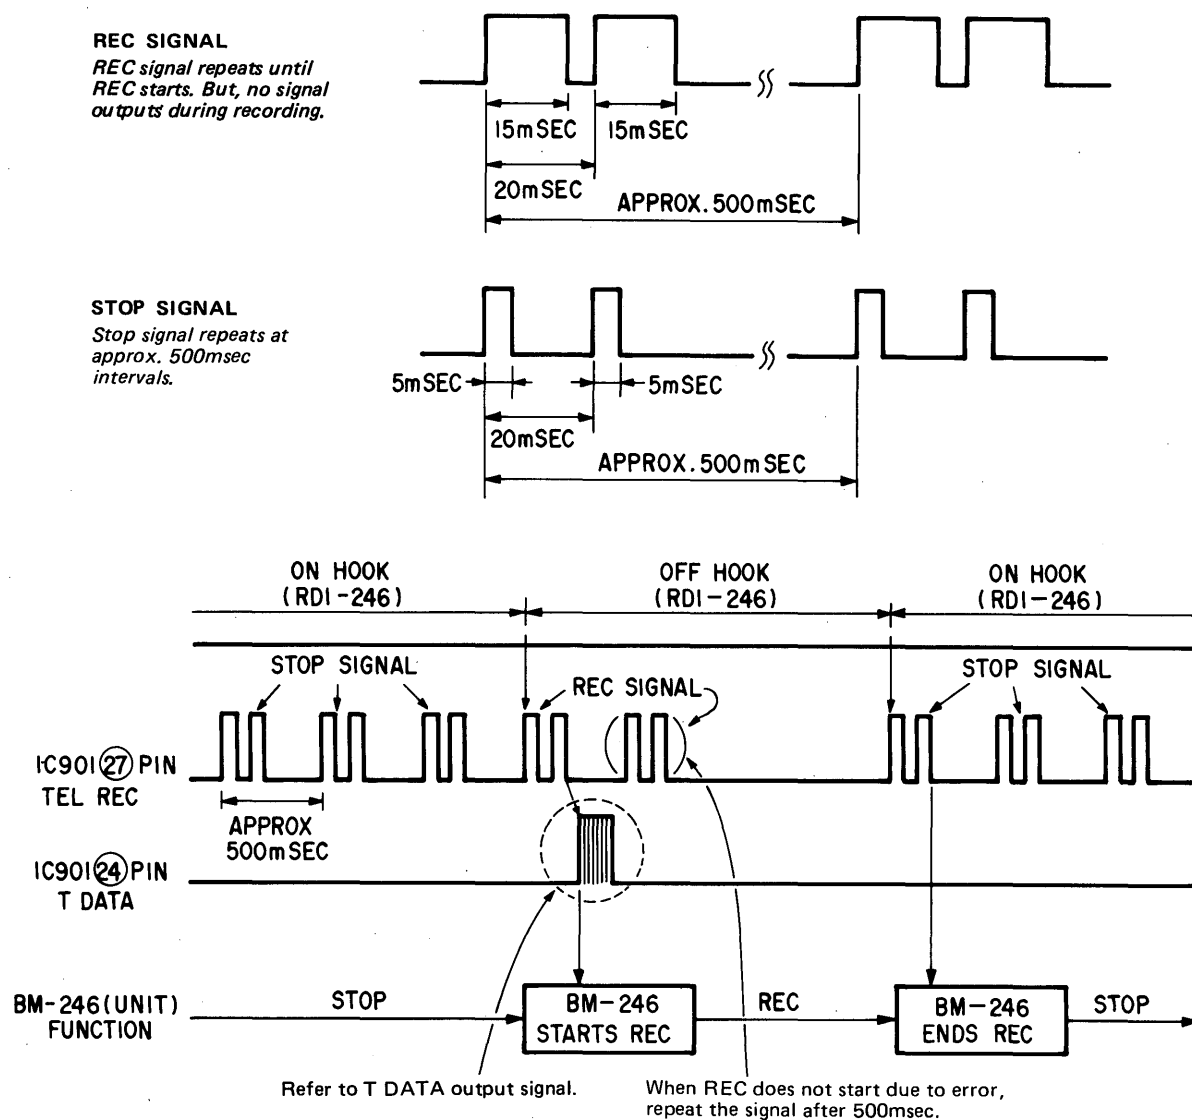


(2) T DATA output signal (IC901 pin (24))

T DATA signal is an output signal from the unit to RDI-246. When the unit goes to REC mode, it sends deck counter value and deck A/B to RDI-246.

• Signal waveform (IC901 pin (24))

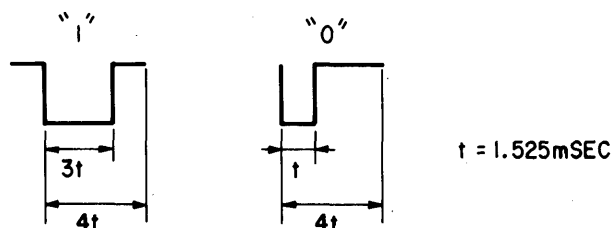


• DATA Format

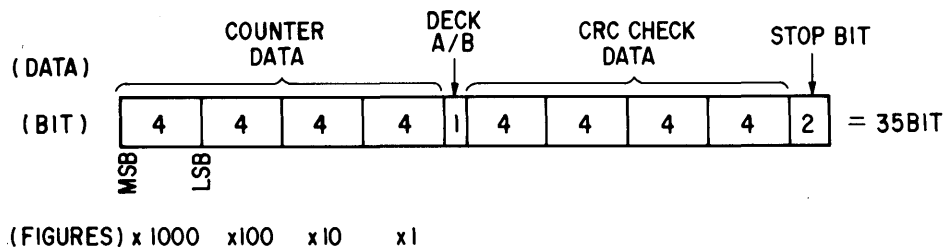

2.5. FLUORESCENT DISPLAY DRIVE (Dynamic)

SEGMENTS


	IC901 Pin No.						
A deck LED	63	62	61	60	59	58	57
B deck LED	44	43	42	41	40	39	38
Segment	a	b	c	d	e	f	g



GRIDS

	10000 Figures	1000 Figures	100 Figures	10 Figures	1 Figures
Grid	G4	G3	G2	G1	G0
IC901 Pin No.	55	54	53	52	51

Relationship of Grid-drive Signals

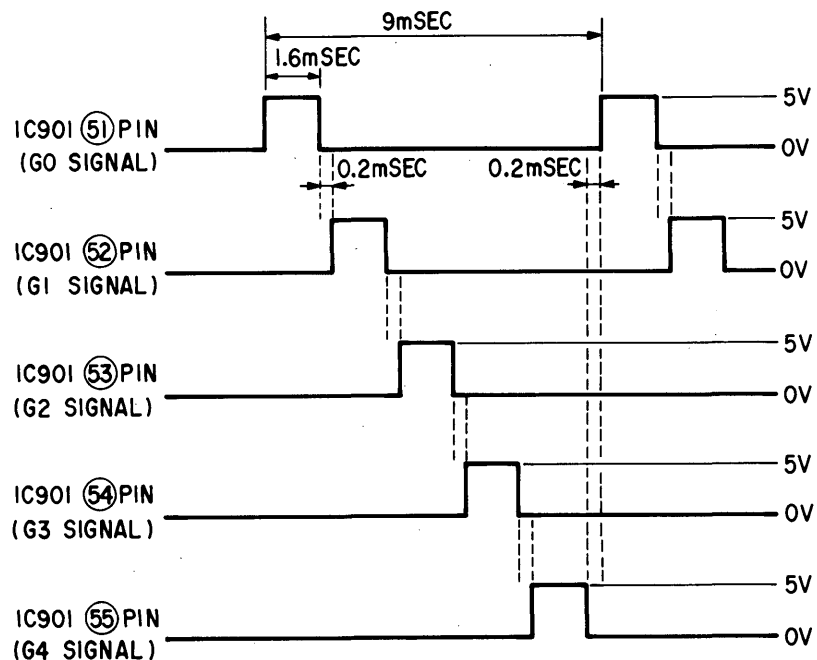

2-6. DETECTIONS OF TAKE-UP REEL AND SUPPLY REEL SIGNALS

IC901 (9) pin (A deck), (10) pin (B deck)


... TAKE-UP-REEL

IC901 (4) pin (A deck), (3) pin (B deck)


... SUPPLY REEL

• Forward

Take-up reel signal at start of tape and supply reel signal at end of tape, C-90.




Supply reel signal at start of tape and take-up reel signal at end of tape, C-90.



Repetition rate changes according to tape position.

• Fast-forward and Rewind

Take-up reel signal at start of tape and supply reel signal at end of tape, C-90.



Supply reel signal at start of tape and take-up reel signal at end of tape, C-90.



Repetition rate changes according to tape position.

Partial-reverse Amount Control-signal Inputs

Scan input IC901 (28) pin	REVERSE TIME (Digital) Switch S933	Position of S933									
		0	1	2	3	4	5	6	7	8	9
PR0	pin 1	H	L	H	L	H	L	H	L	H	L
PR1	pin 2	H	H	L	L	H	H	L	L	H	H
PR2	pin 3	H	H	H	H	L	L	L	L	H	H
PR3	pin 4	H	H	H	H	H	H	H	H	L	L

2-7. ON THE KEY MATRIX

On the key matrix table.

The key matrix of this set is configured as shown below.

KEY SCAN OUTPUT (COMMON PORT)			63 pin P90	62 pin P91	61 pin P92	60 pin P93	59 pin P80	58 pin P81	57 pin P82		
			PORT 9						PORT 8		
			A deck segment								
			a	b	c	d	e	f	g		
30 pin P140		PORT 14	KS0	STOP A	REW A	CASSETTE EMPTY A	AUTO CHANGE SW	1	4		
29 pin P141			KS1	FF A	REC A	REST A	TRANS- CRIBE SW	2	5		
28 pin P142			KS2	PLAY A	PR0	DECK SW A	PR1	3	6		

KEY SCAN OUTPUT (COMMON PORT) KEY SCAN INPUT			④④ pin P50	④③ pin P51	④② pin P52	④① pin P53	④① pin P40	③⑨ pin P41	③⑧ pin P42		
			PORT 5				PORT 4				
			B deck segment								
			a	b	c	d	e	f	g		
③① pin P140	PORT 14	KS0	STOP B	REW B	CASSETTE EMPTY B		7	0	OPEN		
②⑨ pin P141		KS1	FF B	REC B	RESET B		8	SEARCH	1.2/2.4 SW		
②⑧ pin P142		KS2	PLAY B	PR2	DECK SW B		9	REC END	PR3		

- Scan Direction

Deck A
d→c→b→a→f→e


Deck B
c→d→a→g→f→e

- RR0 – PR3 detects S933 (PARTIAL-REVERSE)

- "H": actuate

	"H"	"L"
1.2/2.4	1.2	2.4
REMOTE	actuate	STOP
CASSETTE EMPTY	NO cassette	Cassette loaded


- Alternately check PORT 9, 8 and 5, 4

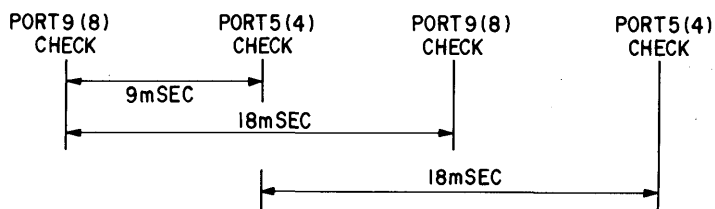


SECTION 3 DISASSEMBLY

Note: Follow the disassembly procedure in the numerical order given.


VERTICAL ADJUSTMENT COVER

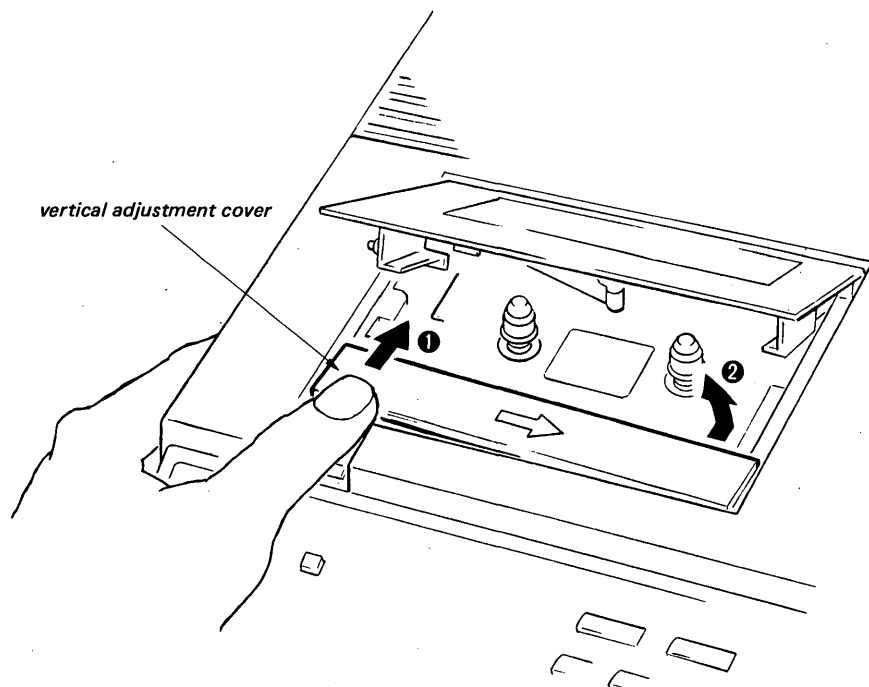


CONTROL BOARD

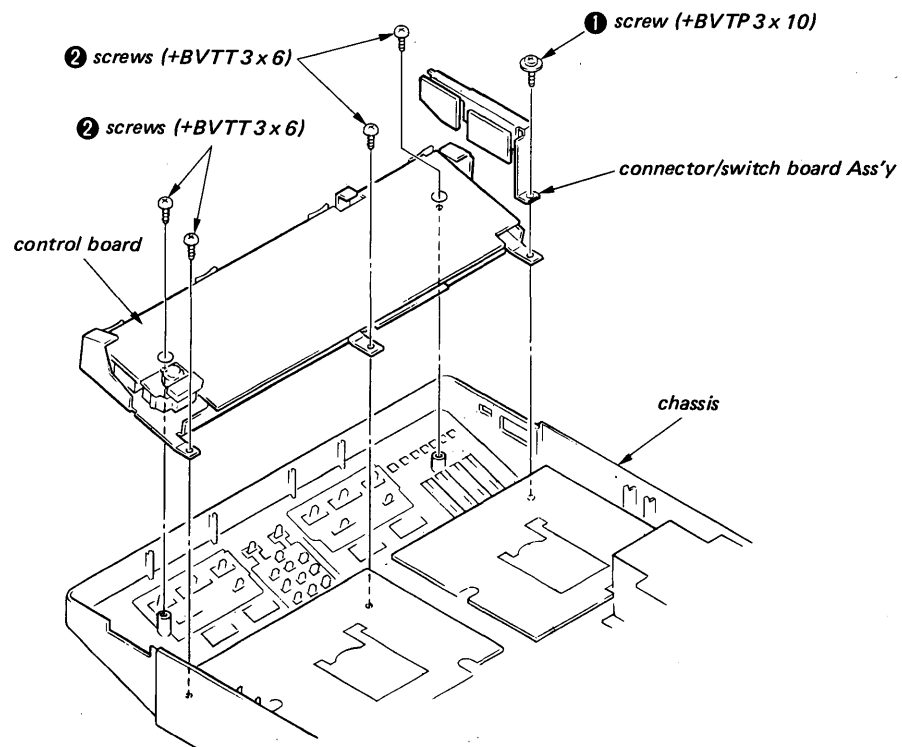

SERVO BOARD

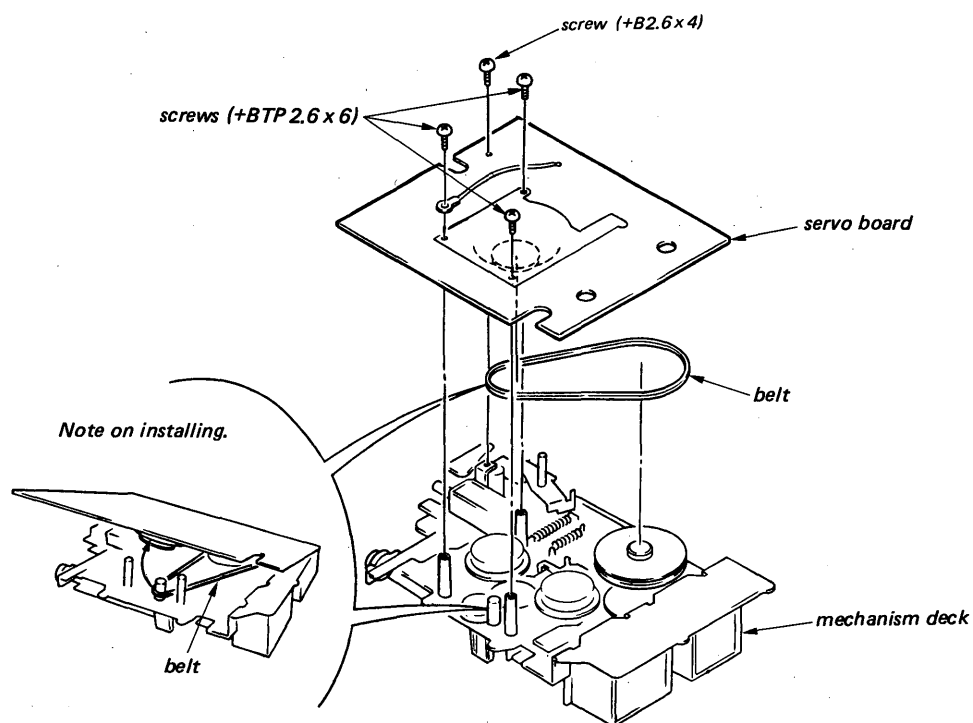

HEAD

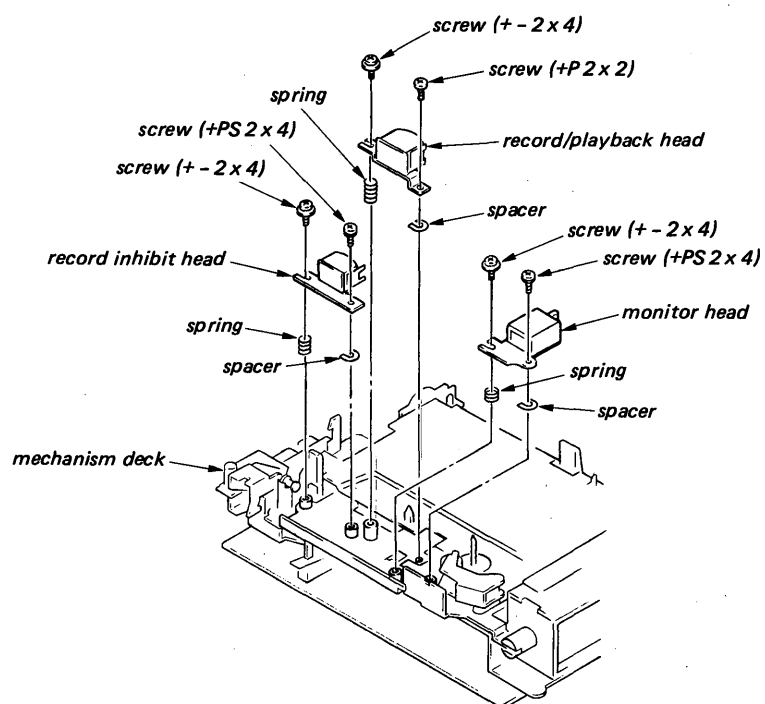

SECTION 4

MECHANICAL ADJUSTMENTS

PRECAUTION

- Clean the following parts with a denatured-alcohol-moistened swab:

record/playback head	Pinch roller
monitor head	rubber belts
record inhibit head	idlers
capstan	
- Demagnetize the record/playback head, monitor head and record inhibit head with a head demagnetizer.
- Do not use a magnetized screwdriver for the adjustments.
- After the adjustments, apply suitable locking compound to the parts adjusted.
- The adjustments should be performed with the rated power supply voltage unless otherwise noted.

4.1. TORQUE MEASUREMENT DECK A/DECK B

Torque	Torque meter	Meter reading
FWD	CQ-102C	28 to 40 g·cm (0.39 to 0.56 oz·inch)
FWD Back tension	CQ-102C	1.5 to 4.5 g·cm (0.02 to 0.06 oz·inch)
FF, REW	CQ-201B	70 to 190 g·cm (0.98 to 2.66 oz·inch)


Tape Tension Measurement

Mode	Tension meter	Meter reading
FWD	CQ-403A	more than 100 g (more than 1.4 oz·inch)

4.2. TAPE PATH ADJUSTMENT DECK A/DECK B

Procedure:

- Insert the mirror cassette (CQ-009 or CQ-012C).
- Set TAPE SPEED switch to 2.4 cm.
- In playback mode and viewing from the front, adjust the head heights to eliminate tape curl and tape twist at portions of arrows.
- Make sure of head azimuth adjustments in electrical adjustments section.

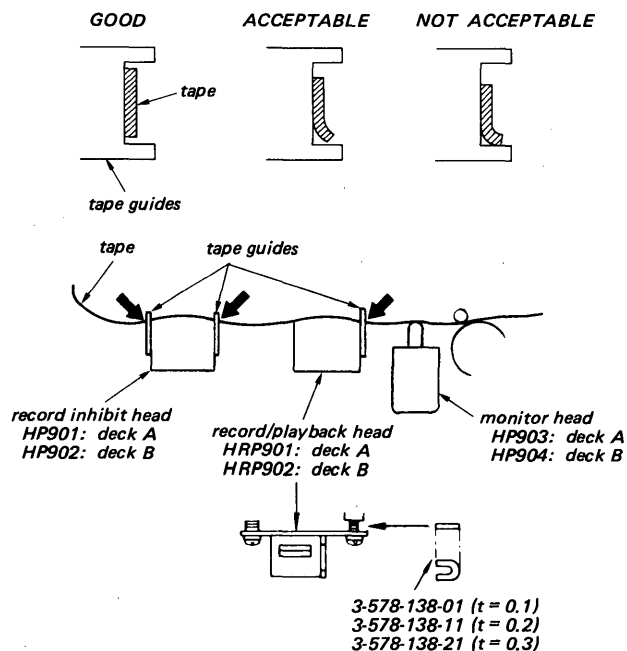


Shim, head height adjustment

4.3. PINCH ROLLER PRESSURE MEASUREMENT

DECK A/DECK B

— Playback Mode —

- Slowly return the pinch roller and read the tension gauge just when the pinch roller starts rotating.

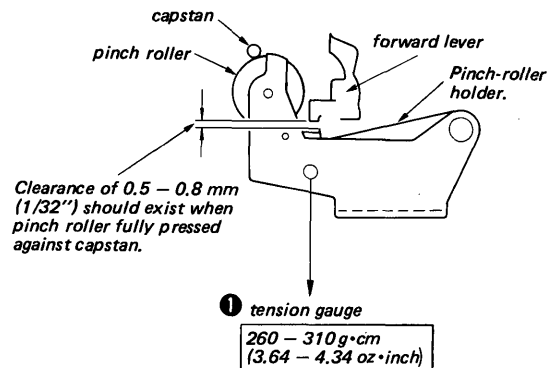


4.4. ROTOR THRUST ADJUSTMENT

DECK A/ DECK B






— Stop Mode —

Adjust thrust screw so that the specified clearance is obtained.

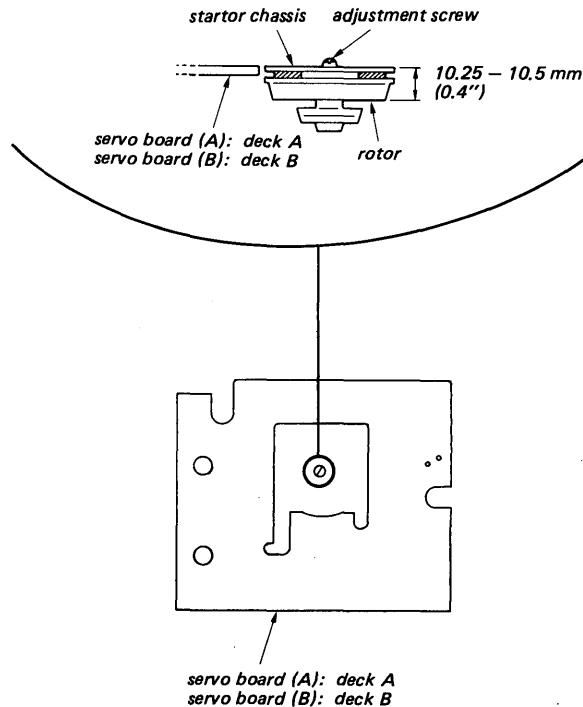

4-5. FORWARD-SOLENOID POSITION ADJUSTMENT**DECK A/ DECK B****Procedure:**

1. Unplug CNJ603 (DECK A), CNJ703 (DECK B) for PM603 (DECK A), PM703 (DECK B) at servo board (A) and (B).
2. Apply 17V dc voltage to solenoid terminals. Red lead is positive side.
3. Loosen adjustment screws.
4. Move solenoid and tighten adjustment screws retaining the position of S cam as shown in Fig. A.
5. Plug CNJ603 (DECK A), CNJ703 (DECK B) to servo board (A) and (B) put the unit in playback mode. At this time, clearance should exist between forward level and pinch lever as illustrated.
6. After adjustment, apply suitable locking compound to adjustment screws.

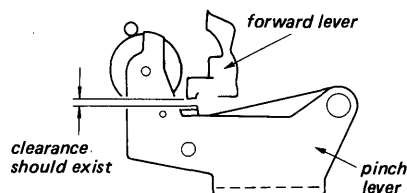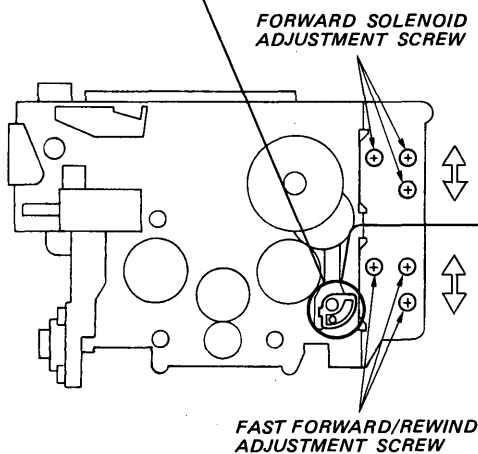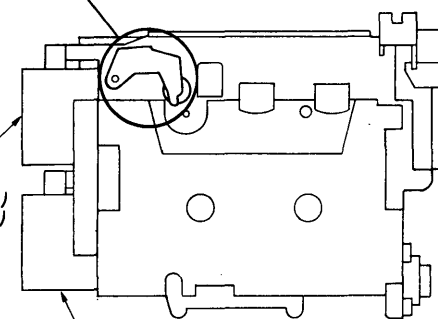**Fig. A Solenoid attracted****Fig. B Solenoid attracted**PM603 (DECK A)
PM703 (DECK B)PM602 (DECK A)
PM702 (DECK B)

SECTION 5


ELECTRICAL ADJUSTMENTS

- The adjustments should be performed in the order given in this service manual. (As a general rule, playback circuit adjustment should be completed before performing recording circuit adjustment.)
- Switches and controls should be set as follows unless otherwise specified.

STANDBY/ON	ON
AUTO CHANGE	OFF
TAPE SPEED	2.4 cm
PA	OFF
TRANSCRIBE	OFF
SPEED CONTROL	OFF
TAPE/SOURCE	SOURCE
CHANNEL SELECT	CH2
tone	MAX
VOLUME	Mechanical mid
- Standard Record:

Deliver the standard input signal level to the input jack and control the attenuator to obtain the standard output signal level.

Mode: record

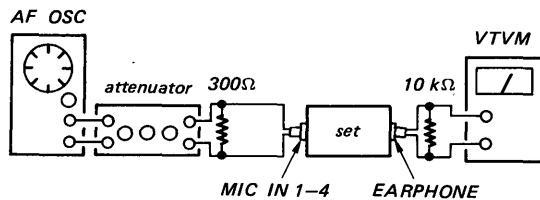

Standard Input Level

	MIC IN 1-4
source impedance	300Ω
input level	0.775 mV (-60 dB)

Standard Output Level

	Speaker	Earphone
load impedance	8Ω	10kΩ
output level	0.775 V (0 dB)	0.775 V (0 dB)


5-1. TAPE SPEED ADJUSTMENT DECK A/DECK B

Setting:

CHANNEL SELECT switch: CH2
 TRANSCRIBE switch: OFF
 SPEED CONTROL switch: OFF

Procedure:


Mode: playback

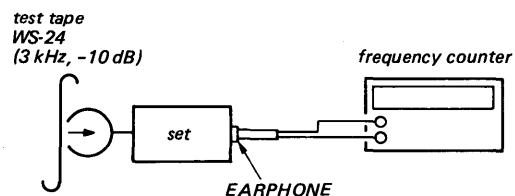

- TAPE SPEED switch: 2.4 cm
 Adjust RV603 (DECK A), RV703 (DECK B) so that the reading on frequency counter is $3,000 \pm 8$ Hz.

- TAPE SPEED switch: 1.2 cm
 Adjust RV604 (DECK A), RV704 (DECK B) so that the reading on frequency counter is $1,500 \pm 4$ Hz.
- DECK B ONLY
 TRANSCRIBE switch: ON
 SPEED CONTROL switch: ON
 SPEED CONTROL knob: MAX
 TAPE SPEED switch: 2.4 cm
 Confirm that the reading on frequency counter is $4,500 - 5,400$ Hz.
- DECK B ONLY
 SPEED CONTROL knob: MIN
 TAPE SPEED switch: 1.2 cm
 Adjust RV702 so that the reading on frequency counter is $1,275 \pm 8$ Hz.

Adjustment Location:

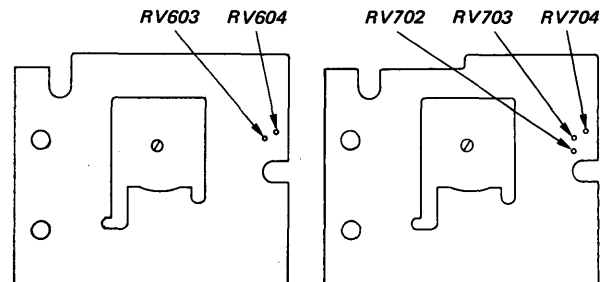

SERVO BOARD (A)
(DECK A side)

SERVO BOARD (B)
(DECK B side)

5-2. MOTOR OUTPUT LEVEL ADJUSTMENT


DECK A/DECK B

Setting:

TAPE SPEED switch: 2.4 cm


Procedure:

Mode: playback

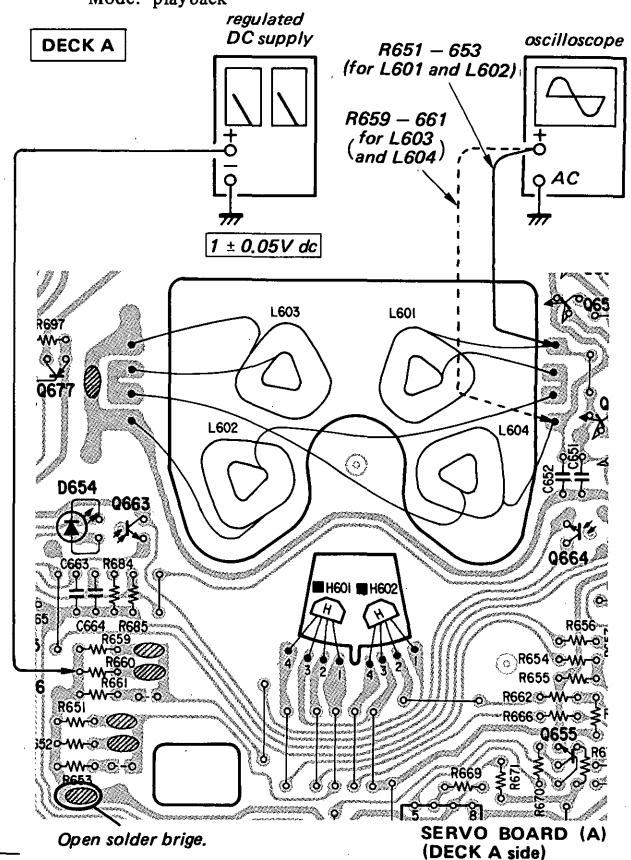

3. Set VOLUME control to obtain a 0.25 V(-10dB) VTVM reading.
4. Set MONITOR switch to TAPE.
5. Adjust adjustment screw to obtain a maximum VTVM reading.
Set adjustment screw while adjusting in the clockwise direction.
6. Set MONITOR CHANNEL SELECT switch to CH4 and make sure the maximum output at CH4. Level difference between channels land 4 should be within 1 dB.
7. Fix adjustment screw with locking compound after adjustment.

Adjustment Location:

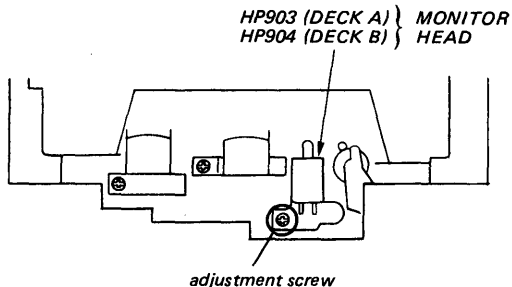


5-5. TAPE MONITOR LEVEL ADJUSTMENT

DECK A/DECK B

Setting:


Mode: record/simultaneous monitoring
TAPE SPEED switch: 2.4 cm and 1.2 cm
Channels: All

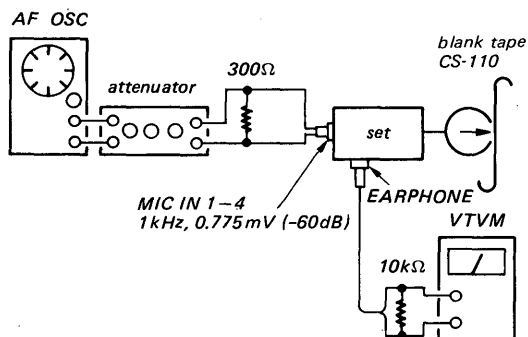

Procedure:

1. Set MONITOR switch to SOURCE.
2. Adjust VOLUME control to obtain a 0.775V (0 dB) at EARPHONE output.
3. Set MONITOR switch to TAPE.
4. Adjust EARPHONE output level by opening/bridging adjustment patterns to obtain a 0.775 V (0 dB) output, or within 0 ± 3 dB from SOURCE.
5. Make sure of above outputs for both TAPE SPEEDS.

Adjustment Location: AUDIO BOARD

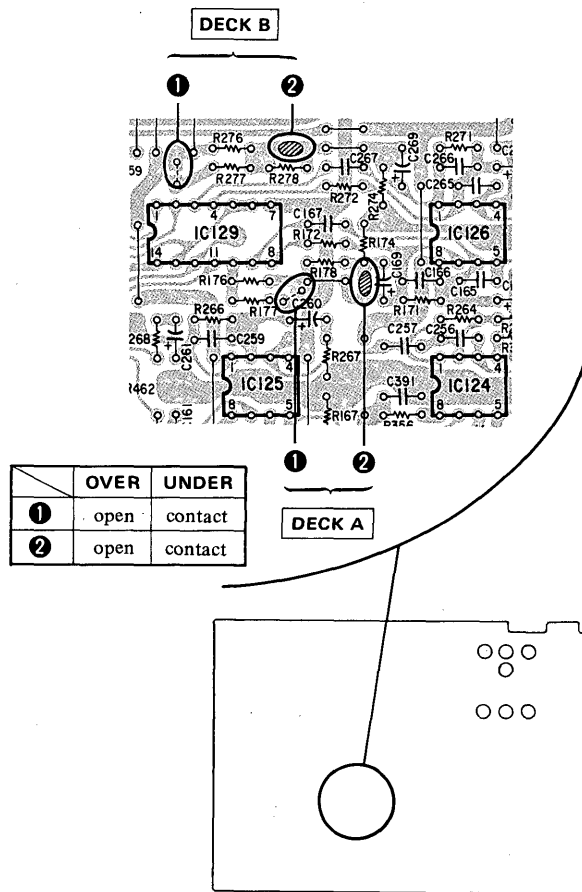

5-6. FREQUENCY RESPONSE CHECK AND RECORD BIAS ADJUSTMENT


DECK A/DECK B

Setting:


TONE control: max. H
TAPE SPEED switch: 2.4 cm

Procedure:

1. Mode: record

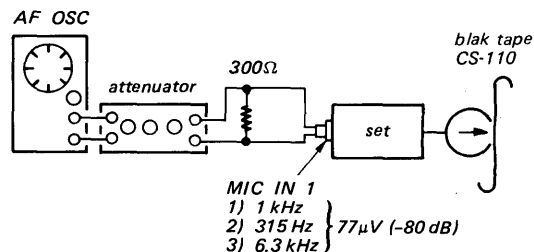


2. Mode: playback

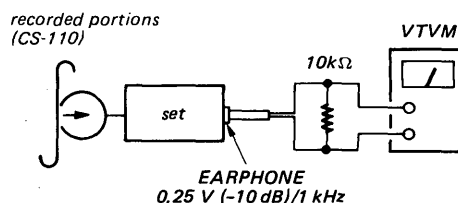


SECTION 6 DIAGRAMS

6-1. CIRCUIT BOARDS LOCATION

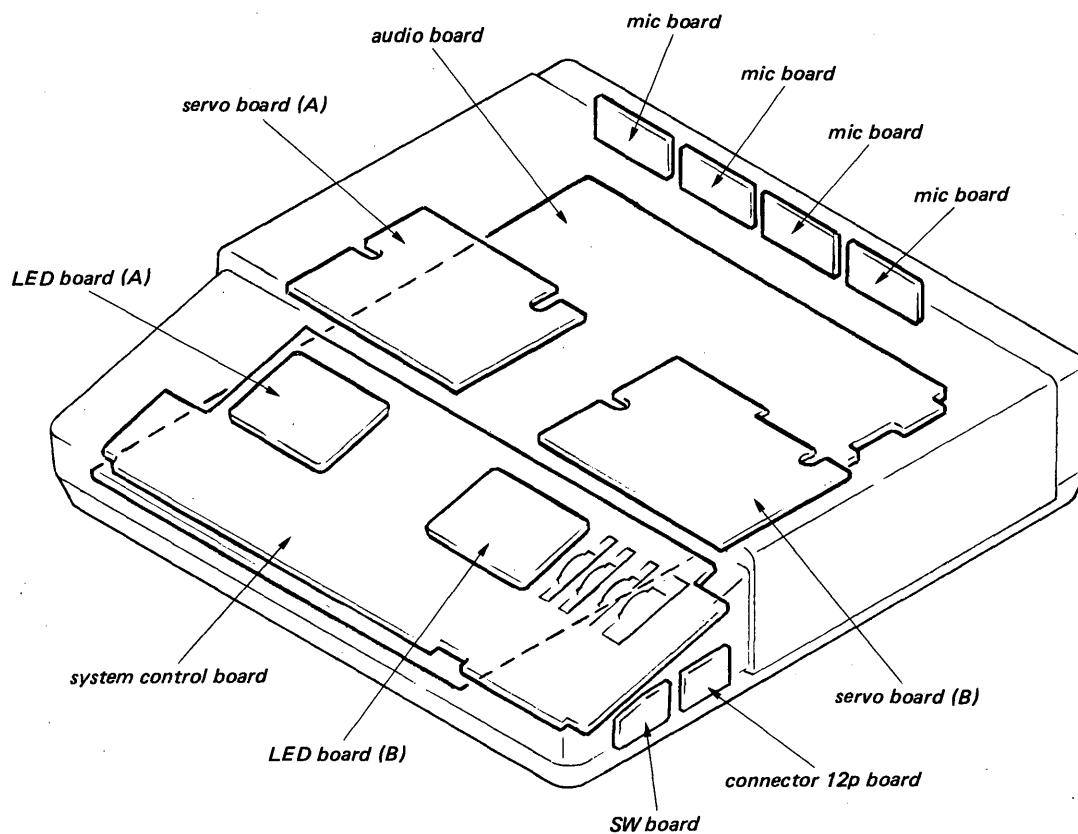

6-2. BLOCK DIAGRAM

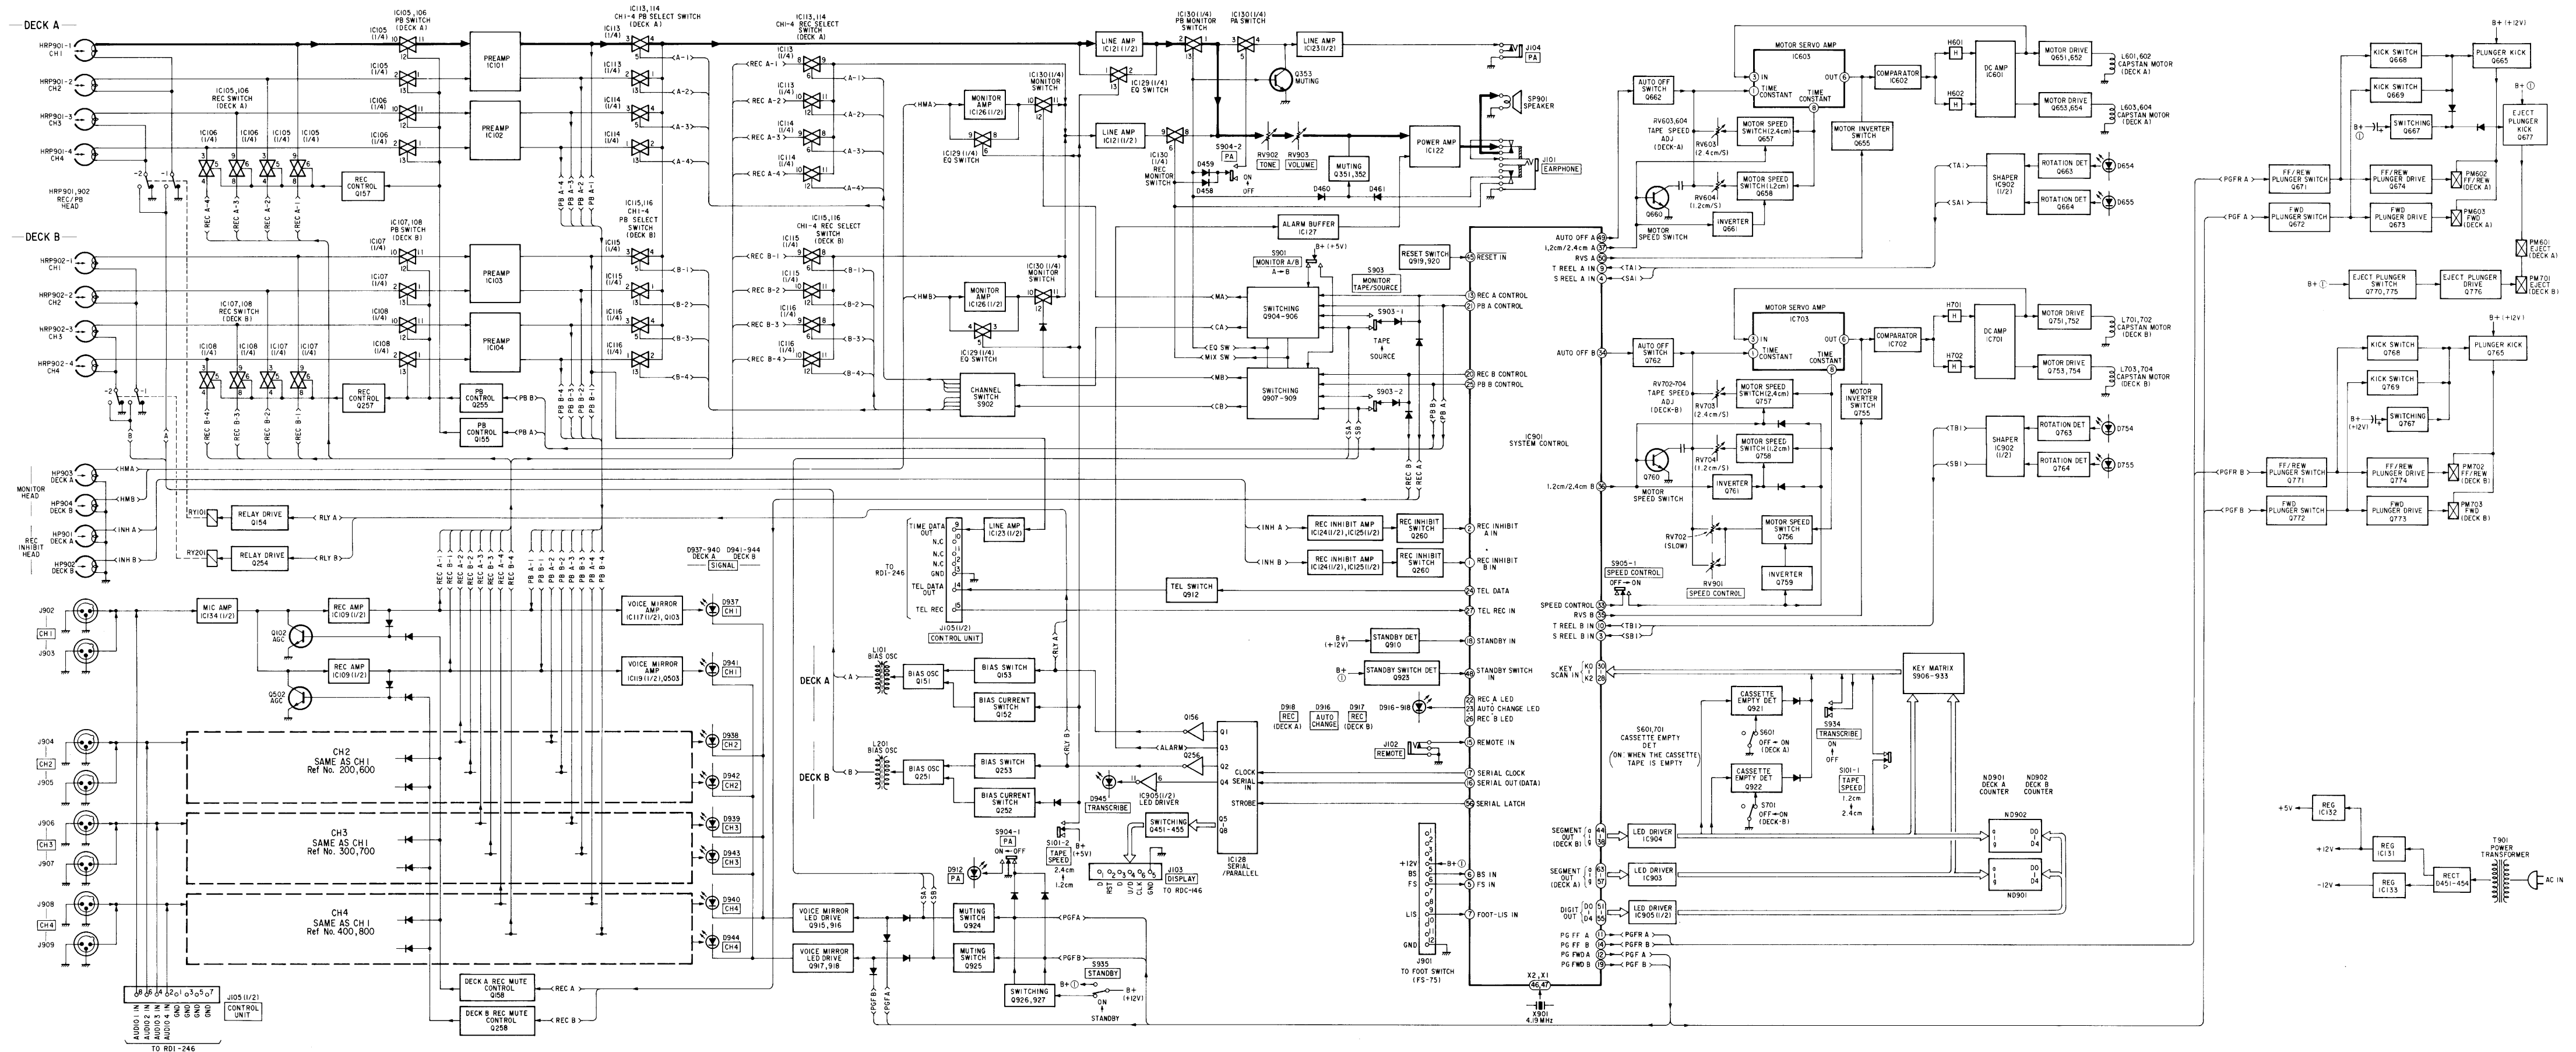

6-3. PRINTED WIRING BOARDS (1) — Conductor Side —

- See page 26 for circuit boards location.
- See page 39 for semiconductors lead layouts.

—SERVO CONTROL SECTION—


—SERVO CONTROL SECTION—

• Semiconductor Location


Ref. No.	Location	Ref. No.	Location	Ref. No.	Location
D651	E-20	D931	I-7	Q667	E-16
D654	O-17	D932	G-7	Q668	E-16
D655	C-20	D933	H-7	Q669	E-16
D656	E-17	D934	J-7	Q671	F-17
D658	F-17	D935	H-3	Q672	F-17
D659	C-16	D936	F-8	Q673	C-16
D660	B-16	D937	C-6	Q674	C-16
D661	B-16	D938	C-5	Q677	B-17
D662	A-19	D939	C-5	Q751	H-20
D663	B-16	D940	C-4	Q752	H-20
D664	D-16	D941	C-2	Q753	G-20
D665	A-18	D942	C-2	Q754	G-19
D666	D-17	D943	C-2	Q755	J-20
D751	J-20	D944	C-1	Q756	G-21
D752	G-20	D945	C-2	Q757	G-20
D753	G-21	D947	I-4	Q758	G-20
D754	H-17	D949	I-1	Q759	G-20
D755	H-20	D950	I-4	Q760	F-20
D756	J-17	D951	J-5	Q761	G-20
D757	J-17	D952	H-1	Q762	J-20
D758	K-16	D953	H-5	Q763	H-17
D759	I-16			Q764	H-20
D760	G-16	H601	D-18	Q765	I-17
D761	G-16	H602	D-19	Q767	I-16
D762	F-19	H701	I-18	Q768	J-16
D763	G-16	H702	I-19	Q769	J-16
D901	J-1			Q770	G-17
D902	I-1	ND901	B-5	Q771	J-17
D903	I-1	ND902	B-2	Q772	J-17
D904	I-1			Q773	H-16
D905	I-2	IC601	D-20	Q774	H-16
D906	J-1	IC602	E-19	Q775	G-17
D907	J-2	IC603	F-20	Q776	G-17
D908	J-3	IC701	I-20	Q904	I-3
D909	J-2	IC702	J-19	Q905	I-2
D910	J-4	IC703	K-20	Q906	I-2
D911	J-4	IC901	H-10	Q907	I-3
D912	F-3	IC902	H-6	Q908	I-2
D913	G-4	IC903	G-11	Q909	I-2
D914	G-5	IC904	G-10	Q910	J-12
D916	H-13	IC905	G-11	Q912	J-5
D917	I-5			Q915	G-5
D918	I-11	O651	C-20	Q916	G-4
D919	G-9	O652	C-20	Q917	G-5
D920	H-9	O653	B-20	Q918	G-5
D921	H-8	O654	B-20	Q919	H-12
D922	J-10	O655	D-20	Q920	H-12
D923	J-11	O657	B-20	Q921	F-10
D924	J-9	O658	B-21	Q922	F-9
D925	H-7	O660	A-20	Q923	J-12
D926	F-12	O661	B-20	Q924	G-4
D927	J-13	O662	F-21	Q925	H-4
D928	F-12	O663	C-17	Q926	H-4
D929	G-8	O664	C-20	Q927	H-4
D930	H-8	O665	D-17		


Note.

- Color code or sleeving over the end of the jacket.



- ○ : parts extracted from the component side.
- ● : parts extracted from the conductor side.
- ■ : parts mounted on the conductor side.
- ⊗ : Through hole.
- ▨ : Pattern on the side which is seen.
- ▩ : Pattern of the rear side.
- [WHT] : Connector color.

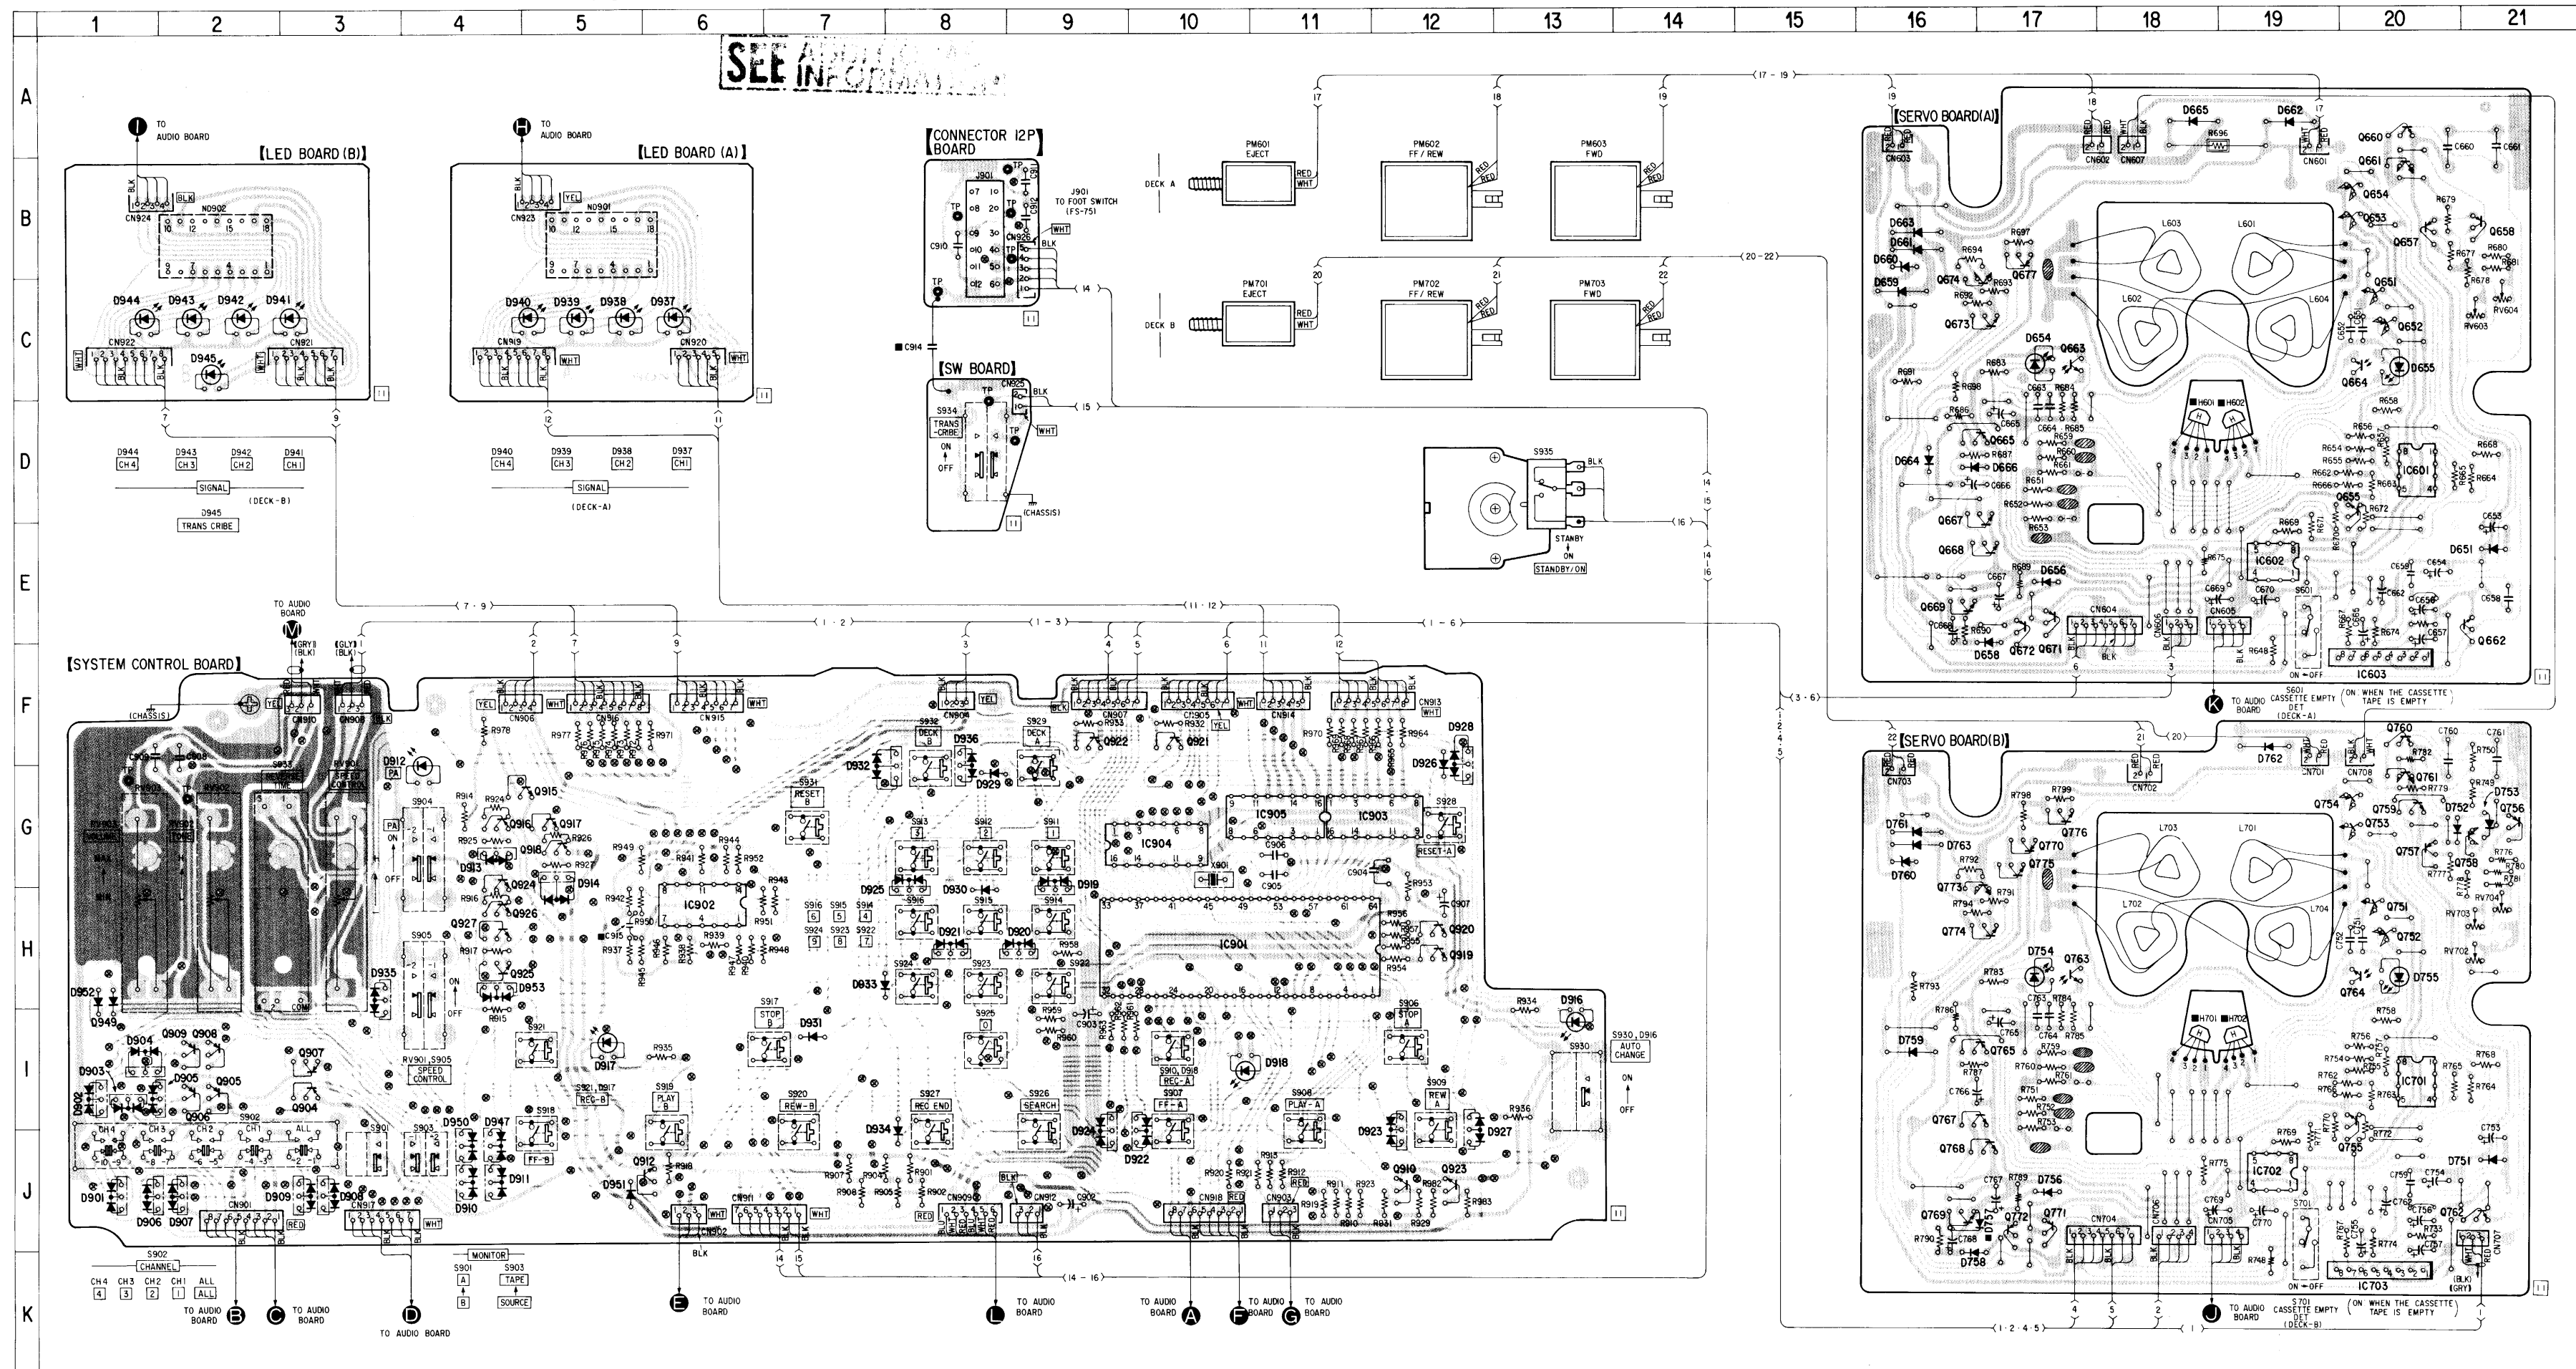

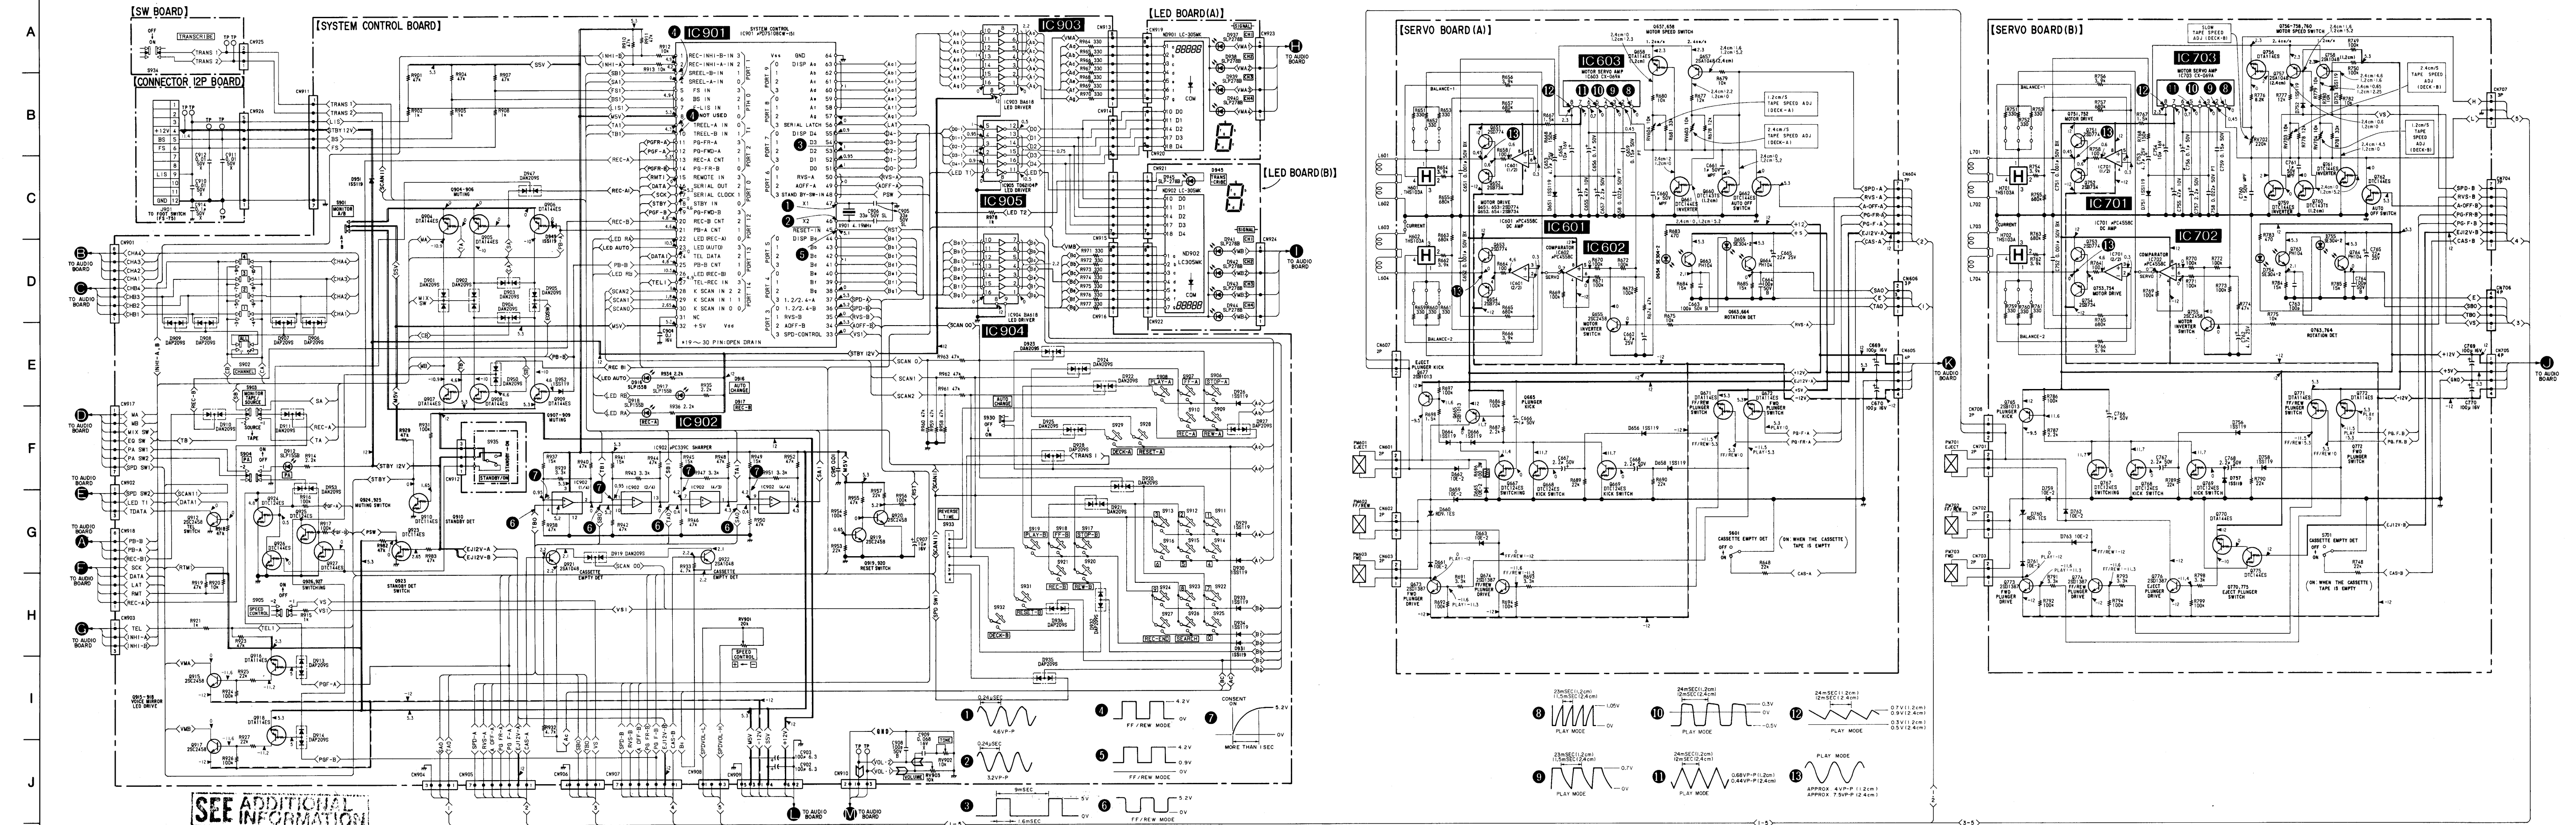


- Note:
- All capacitors are in μF unless otherwise noted. pF: μF 50WV or less are not indicated except for electrolytics and tantalums.
 - All resistors are in Ω and $1/4W$ or less unless otherwise specified.
 - : nonflammable resistor.
 - : B+ bus.
 - : adjustment for repair.
 - : adjustment for repair.
 - Voltage and waveforms are dc with respect to ground under no-signal conditions.
 - no mark: STOP mode.
 - Voltages are taken with a VOM (50 k Ω/V). Voltage variations may be noted due to normal production tolerances.
 - Waveforms are taken with an oscilloscope. Voltage variations may be noted due to normal production tolerances.
 - Signal path.
 - : PB (DECK A)

*See page 38 for switches note.

IC BLOCK DIAGRAM

IC603, 703 CX-069A

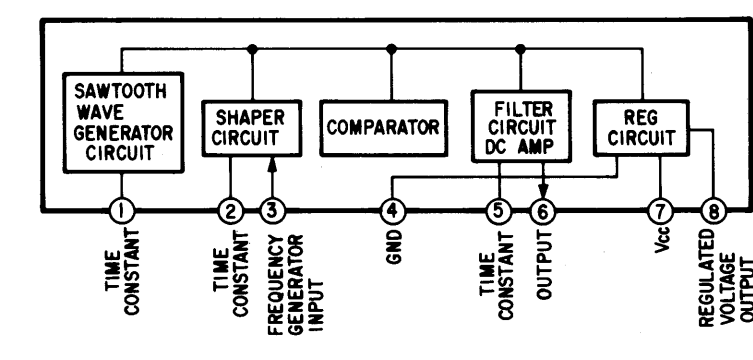






















SEE ADDITIONAL
INFORMATION

SEE ADDITIONAL
INFORMATION

• Switches note (SERVO CONTROL SECTION)

Ref. No.	Switch	Position
S601	CASSETTE EMPTY DET (DECK A)	ON
S701	CASSETTE EMPTY DET (DECK B)	ON
S901	MONITOR A/B	B
S902-1, -2	CHANNEL ALL	OFF
S902-3, -4	CHANNEL 1	OFF
S902-5, -6	CHANNEL 2	OFF
S902-7, -8	CHANNEL 3	OFF
S902-9, -10	CHANNEL 4	OFF
S903	MONITOR TAPE/SOURCE	SOURCE
S904	PA	OFF
S905	SPEED CONTROL	OFF
S906	STOP-A	OFF
S907	FF-A	OFF
S908	PLAY-A	OFF
S909	REW-A	OFF
S910	REC-A	OFF
S911	1	OFF
S912	2	OFF
S913	3	OFF
S914	4	OFF
S915	5	OFF
S916	6	OFF
S917	STOP-B	OFF
S918	FF-B	OFF
S919	PLAY-B	OFF
S920	REW-B	OFF
S921	REC-B	OFF
S922	7	OFF
S923	8	OFF
S924	9	OFF
S925	0	OFF
S926	SEARCH	OFF
S927	REC END	OFF
S928	RESET-A	OFF
S929	DECK-A	OFF
S930	AUTO CHANGE	OFF
S931	RESET-B	OFF
S932	DECK-B	OFF
S933	REVERSE TIME	—
S934	TRANSCRIBE	OFF
S935	STANDBY/ON	STANDBY

6-5. SEMICONDUCTORS LEAD LAYOUTS

NJM4560D-D μPC393C μPC4558C 	μPC575C2 	μPC339C μPD4066BC 	BA618 MSM4094RS TD62104P 	μPD75108CW-151 	CX-069A 
TA78L006AP 	NJM7812B 	μPC7912H 	2SB1013 2SD1387 2SD1388 	2SB740 	DTA114ES DTA144ES DTC114ES DTC124ES DTC143TS DTC144ES 2SC634SP 2SD1012 
2SD774 	PH104 	2SA1175 	RD9.1ES-B 1SS119 	10E2 	THS103A 
DAP209S 	DAN209S 	SLP162B 	SE304-2K 	SLP278B 	LC-305MK 


SEE ADDITIONAL
INFORMATION

● Semiconductor Location

Ref. No.	Location	Ref. No.	Location	Ref. No.	Location
D101	K-14	D601	H-14	IC132	D-13
D102	K-14	D602	H-14	IC133	C-13
D103	K-13	D603	H-13	IC134	I-14
D104	I-5	D604	C-4	IC135	H-14
D105	I-4	D605	D-4		
D151	J-11	D701	G-14	Q102	J-14
D152	I-10	D702	G-14	Q103	J-5
D153	G-5	D703	G-13	Q151	I-11
D154	G-6	D704	B-5	Q152	J-11
D201	I-13	D705	C-4	Q153	J-11
D202	I-13	D801	F-14	Q154	J-10
D203	I-13	D802	F-14	Q155	H-10
D204	I-4	D803	F-12	Q156	I-11
D205	I-4	D804	B-4	Q157	H-10
D251	D-11	D805	B-5	Q158	H-11
D252	B-10			Q160	G-5
D253	G-6	IC101	J-8	Q202	I-14
D254	G-5	IC102	I-8	Q203	I-5
D256	D-6	IC103	C-8	Q251	C-11
D301	H-13	IC104	B-8	Q252	D-11
D302	H-13	IC105	J-10	Q253	C-10
D303	H-13	IC106	I-10	Q254	C-10
D304	H-5	IC107	C-10	Q255	D-9
D305	H-4	IC108	B-10	Q256	E-10
D351	E-5	IC109	J-13	Q257	C-10
D352	B-3	IC110	I-13	Q258	H-11
D353	B-3	IC111	H-13	Q260	F-5
D401	G-13	IC112	F-13	Q302	H-14
D402	G-13	IC113	I-7	Q303	H-5
D403	G-13	IC114	H-7	Q351	E-12
D404	H-4	IC115	C-7	Q352	E-12
D405	G-5	IC116	B-7	Q353	B-3
D451	B-15	IC117	I-5	Q402	G-14
D452	B-15	IC118	H-5	Q403	G-5
D453	B-15	IC119	D-5	Q451	F-15
D454	B-15	IC120	B-5	Q452	F-16
D455	D-13	IC121	F-6	Q453	F-16
D456	D-13	IC122	E-13	Q454	G-15
D458	F-4	IC123	D-9	Q455	F-15
D459	F-4	IC124	H-9	Q502	J-14
D460	F-5	IC125	H-8	Q503	D-5
D461	F-5	IC126	G-9	Q602	H-14
D501	J-14	IC127	E-6	Q603	C-5
D502	J-14	IC128	D-4	Q702	G-14
D503	J-13	IC129	G-7	Q703	C-5
D504	D-5	IC130	D-7	Q802	F-14
D505	D-4	IC131	C-15	Q803	B-5

Note.


- Color code or sleeving over the end of the jacket.



- : parts extracted from the component side.
- : parts extracted from the conductor side.
- : indicates side identified with part number.
- : Pattern on the side which is seen.
- WHT : Connector color.

6-6. PRINTED WIRING BOARDS (2) — Conductor Side —

See page 26 for circuit boards location.

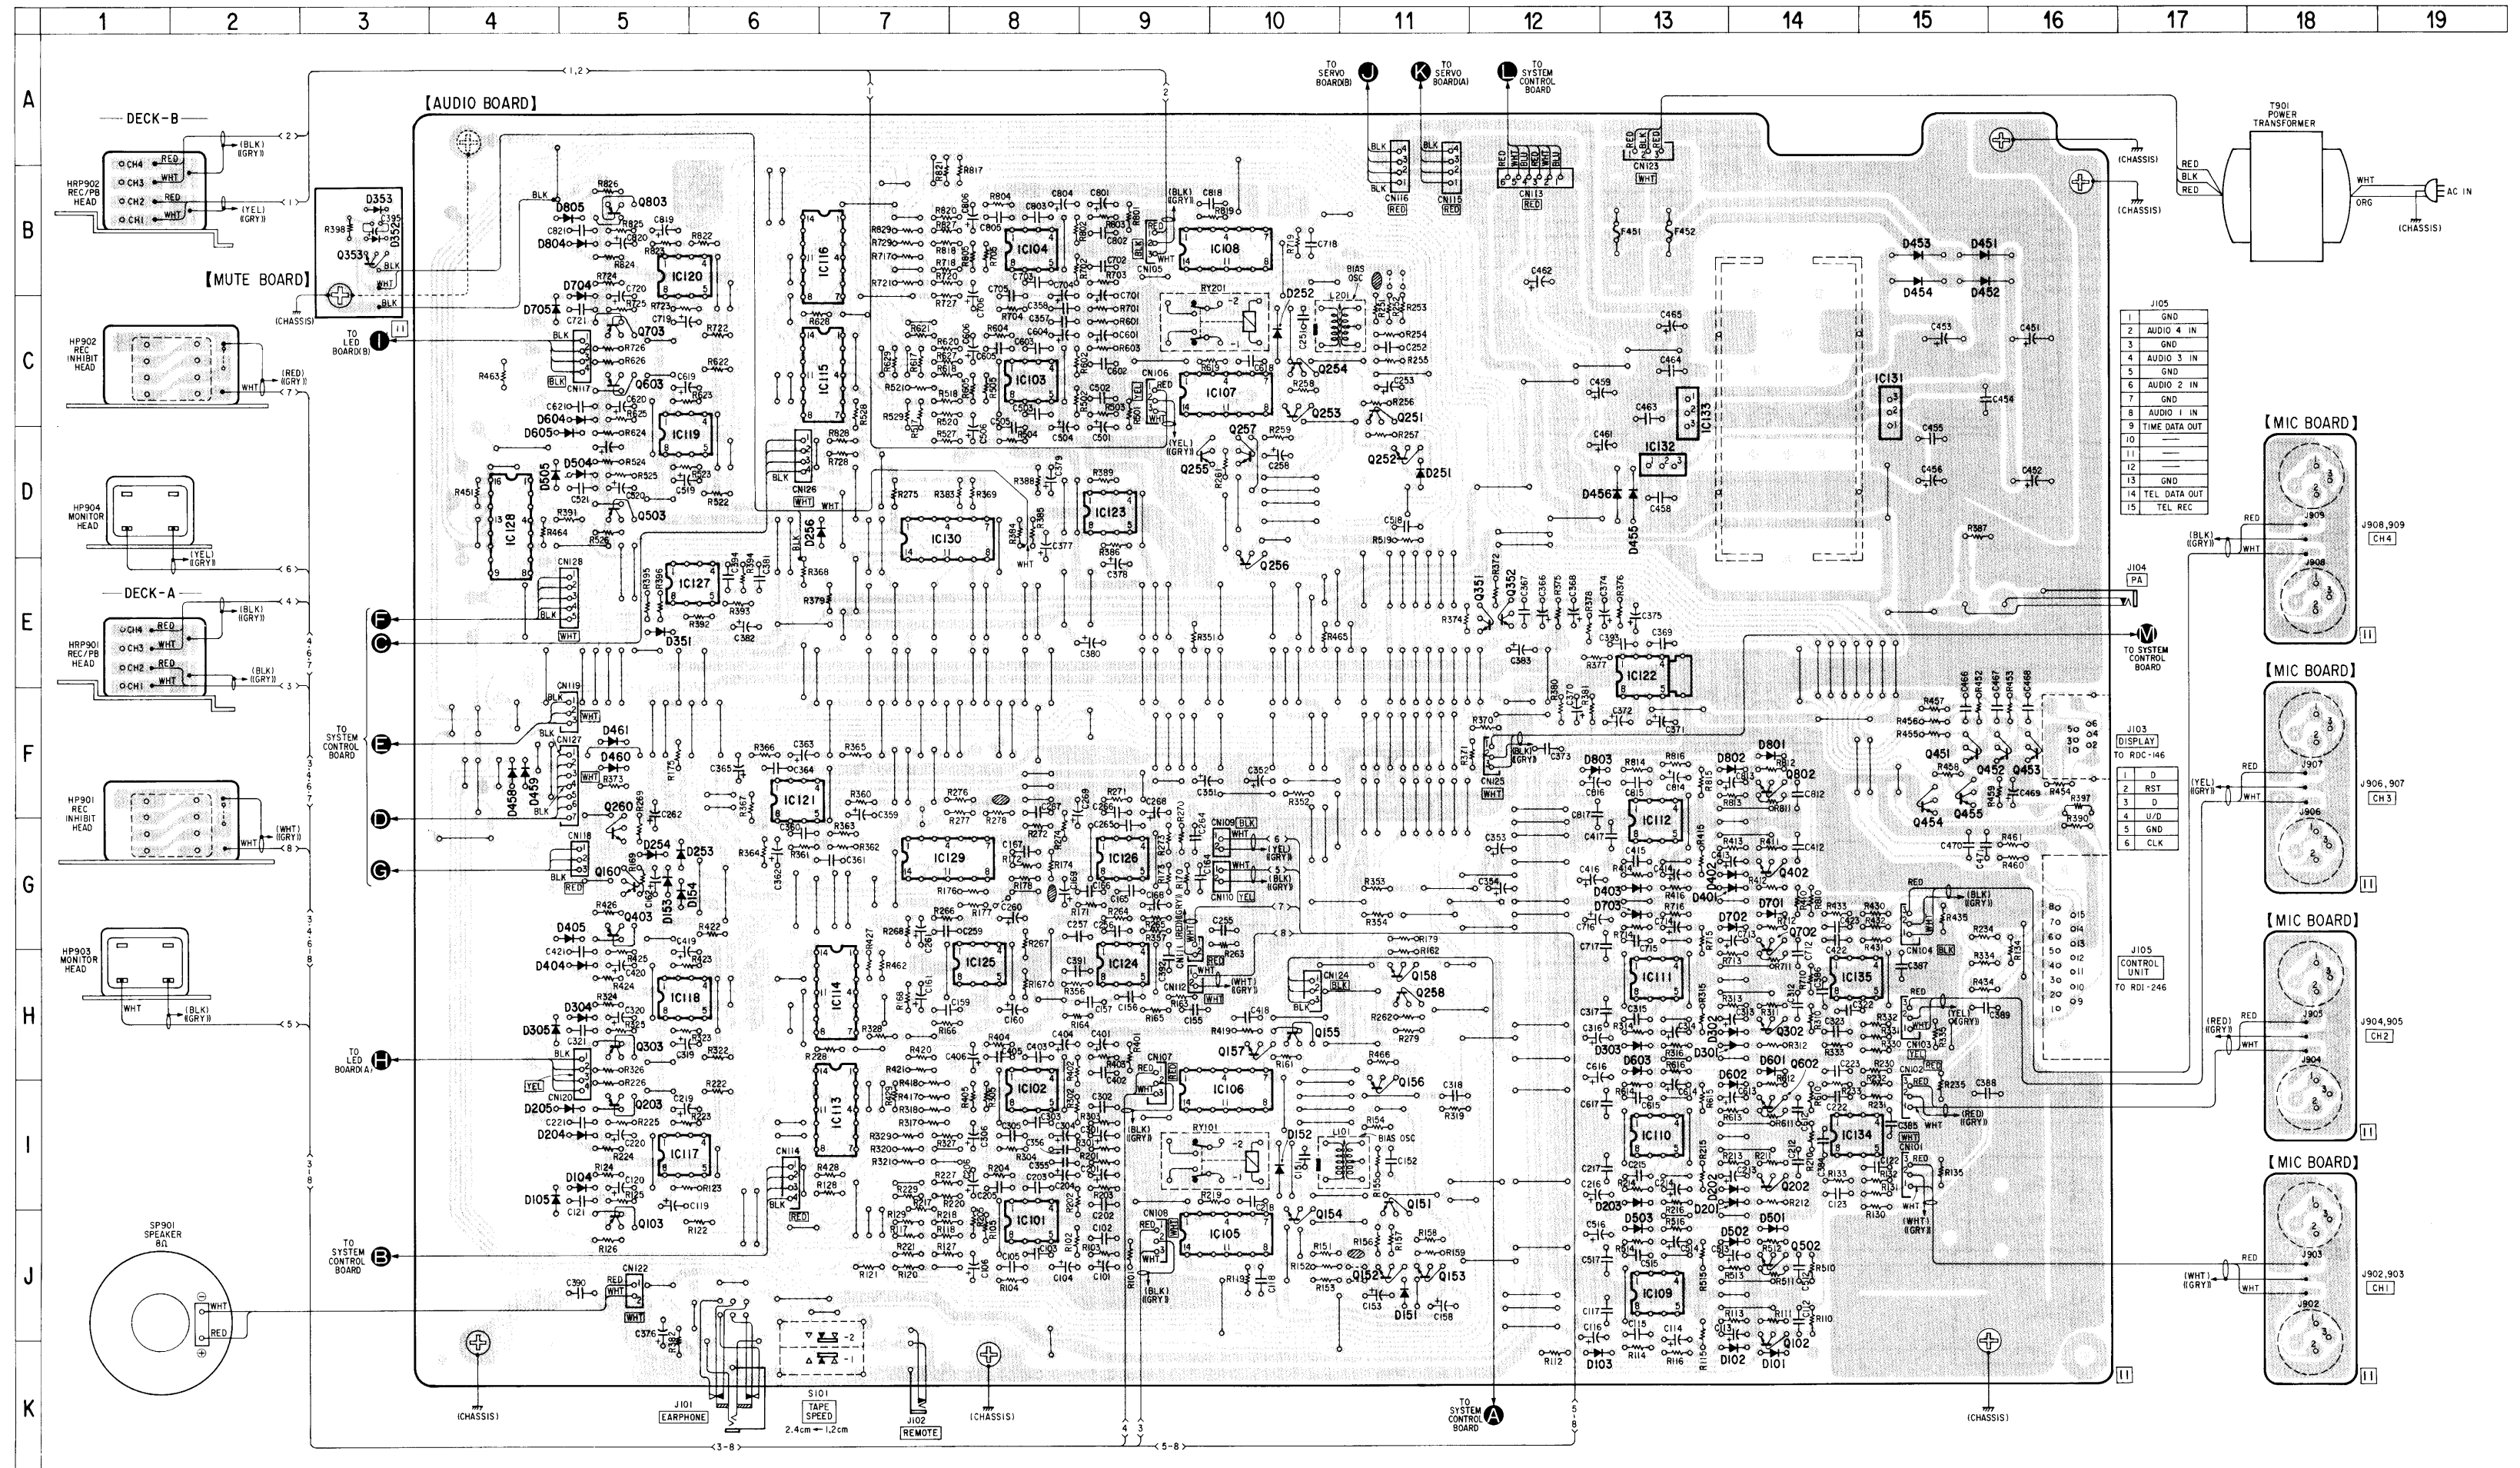

— AUDIO SECTION —


BM-246

BM-246

— AUDIO SECTION —

SEE ADDITIONAL
INFORMATION

6-7. SCHEMATIC DIAGRAM (2)
• See page 46 for note.

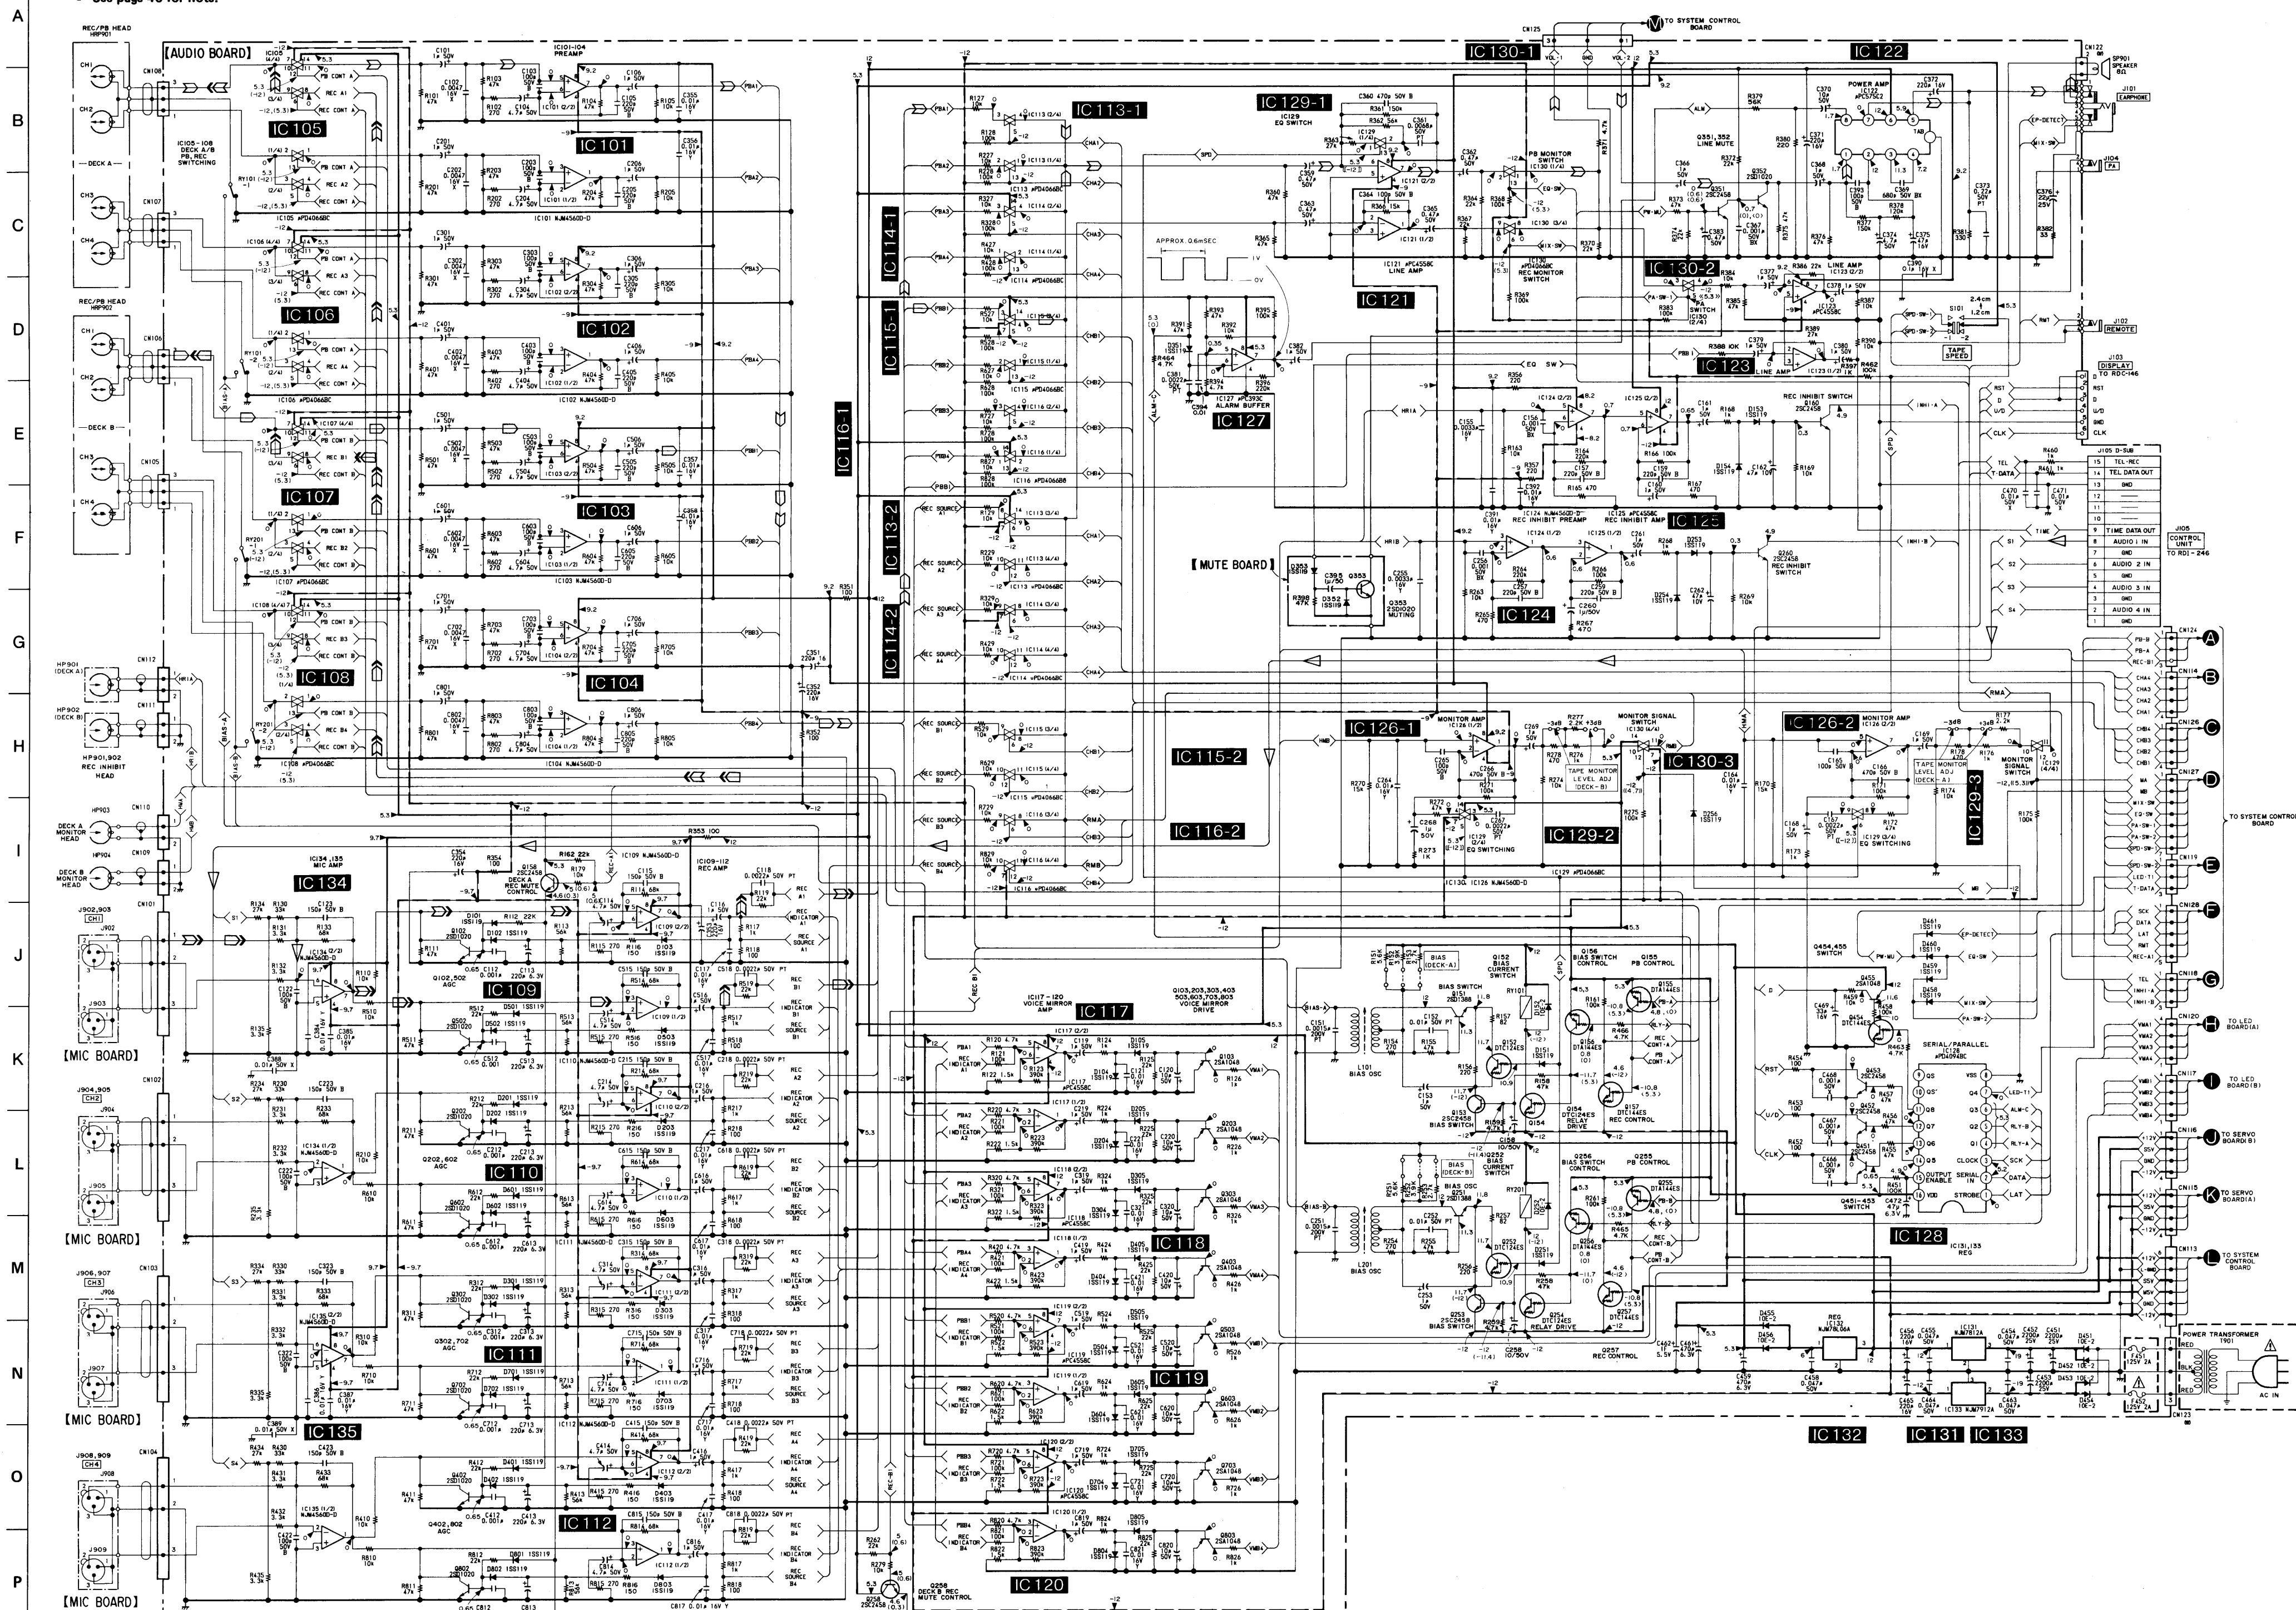

Note:

- All capacitors are in μF unless otherwise noted. pF: $\mu\mu\text{F}$ 50WV or less are not indicated except for electrolytics and tantalums.
- All resistors are in Ω and $\frac{1}{4}\text{W}$ or less unless otherwise specified.
-  : B+ bus.
-  : B- bus.
-  : adjustment for repair.
- Voltage and waveforms are dc with respect to ground under no-signal conditions.
no mark: STOP mode (2.4 cm/s)
() : REC (()) : REC TAPE MONITOR
< > : PB << >> : PA ON
[] : ALARM [[]] : 1.2 cm/s
- Voltages are taken with a VOM (50 k Ω /V).
Voltage variations may be noted due to normal production tolerances.
- Waveforms are taken with a oscilloscope.
Voltage variations may be noted due to normal production tolerances.
- Signal path.
 : PB (DECK A) (CHANNEL 1)
 : REC (DECK A) (CHANNEL 1)
 : PB (DECK B) (CHANNEL 1)
 : REC (DECK B) (CHANNEL 1)
 : PX (From RDI-246)
- Switches:

Ref. No.	Switch	Position
S101	TAPE SPEED	1.2 cm

Note: The components identified by mark  or dotted line with mark  are critical for safety. Replace only with part number specified.	Note: Les composants identifiés par une marque  sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.
--	--

SECTION 7

EXPLODED VIEWS

NOTE:

- The mechanical parts with no reference number in the exploded views are not supplied.
- The construction parts of an assembled part are indicated with a collation number in the remark column.
- Items marked "★" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

- Due to standardization, parts with part number suffix -XX and -X may be different from the parts specified in the components used on the set.

- Color Indication of Appearance Parts
Example:


(RED) ... KNOB, BALANCE (WHITE)

↑
Cabinet's Color

↑
Parts' Color

The components identified by mark  or dotted line with mark  are critical for safety. Replace only with part number specified.


Les composants identifiés par une marque  sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

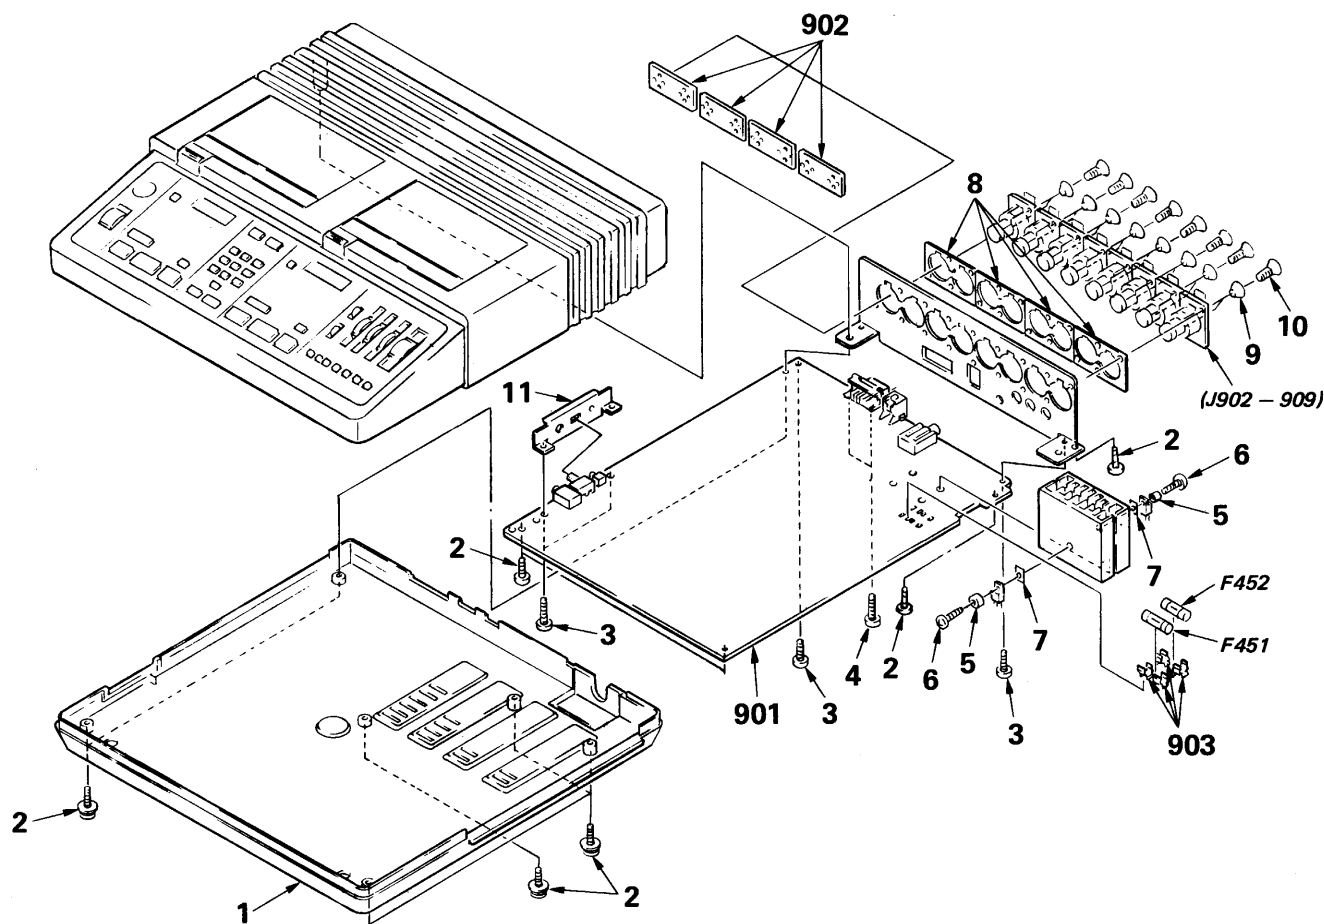

No.	Part No.	Description	Remarks	No.	Part No.	Description	Remarks
1	X-3315-024-1	CABINET (REAR) ASSY		901	*A-3089-334-A	MOUNTED PCB, AUDIO	
2	7-682-649-09	SCREW +PSW 3X10		902	*1-625-939-11	PC BOARD, MIC	
3	7-682-147-01	SCREW +BVT 3X6 (S)		903	*1-533-189-11	HOLDER, FUSE	
4	7-682-548-04	SCREW +B 3X8					
				F451	A.1-532-743-11	FUSE, GLASS TUBE (2A)	
5	2-832-007-00	BUSHING (K), INSULATING		F452	A.1-532-743-11	FUSE, GLASS TUBE (2A)	
6	7-628-254-20	SCREW +PS 2.6X8					
7	4-875-726-00	SHEET, INSULATING		J902	1-562-299-21	CONNECTOR (RECEPTACLE)(MIC CH1)	
8	3-345-438-01	SHEET, INSULATING		J903	1-562-299-21	CONNECTOR (RECEPTACLE)(MIC CH1)	
				J904	1-562-299-21	CONNECTOR (RECEPTACLE)(MIC CH2)	
9	3-345-437-01	BUSHING, INSULATING		J905	1-562-299-21	CONNECTOR (RECEPTACLE)(MIC CH2)	
10	7-621-559-42	SCREW *K 2.6X6					
11	*3-345-433-01	PLATE, JACK		J906	1-562-299-21	CONNECTOR (RECEPTACLE)(MIC CH3)	
				J907	1-562-299-21	CONNECTOR (RECEPTACLE)(MIC CH3)	
				J908	1-562-299-21	CONNECTOR (RECEPTACLE)(MIC CH4)	
				J909	1-562-299-21	CONNECTOR (RECEPTACLE)(MIC CH4)	


SEE ADDITIONAL
INFORMATION

7-2.

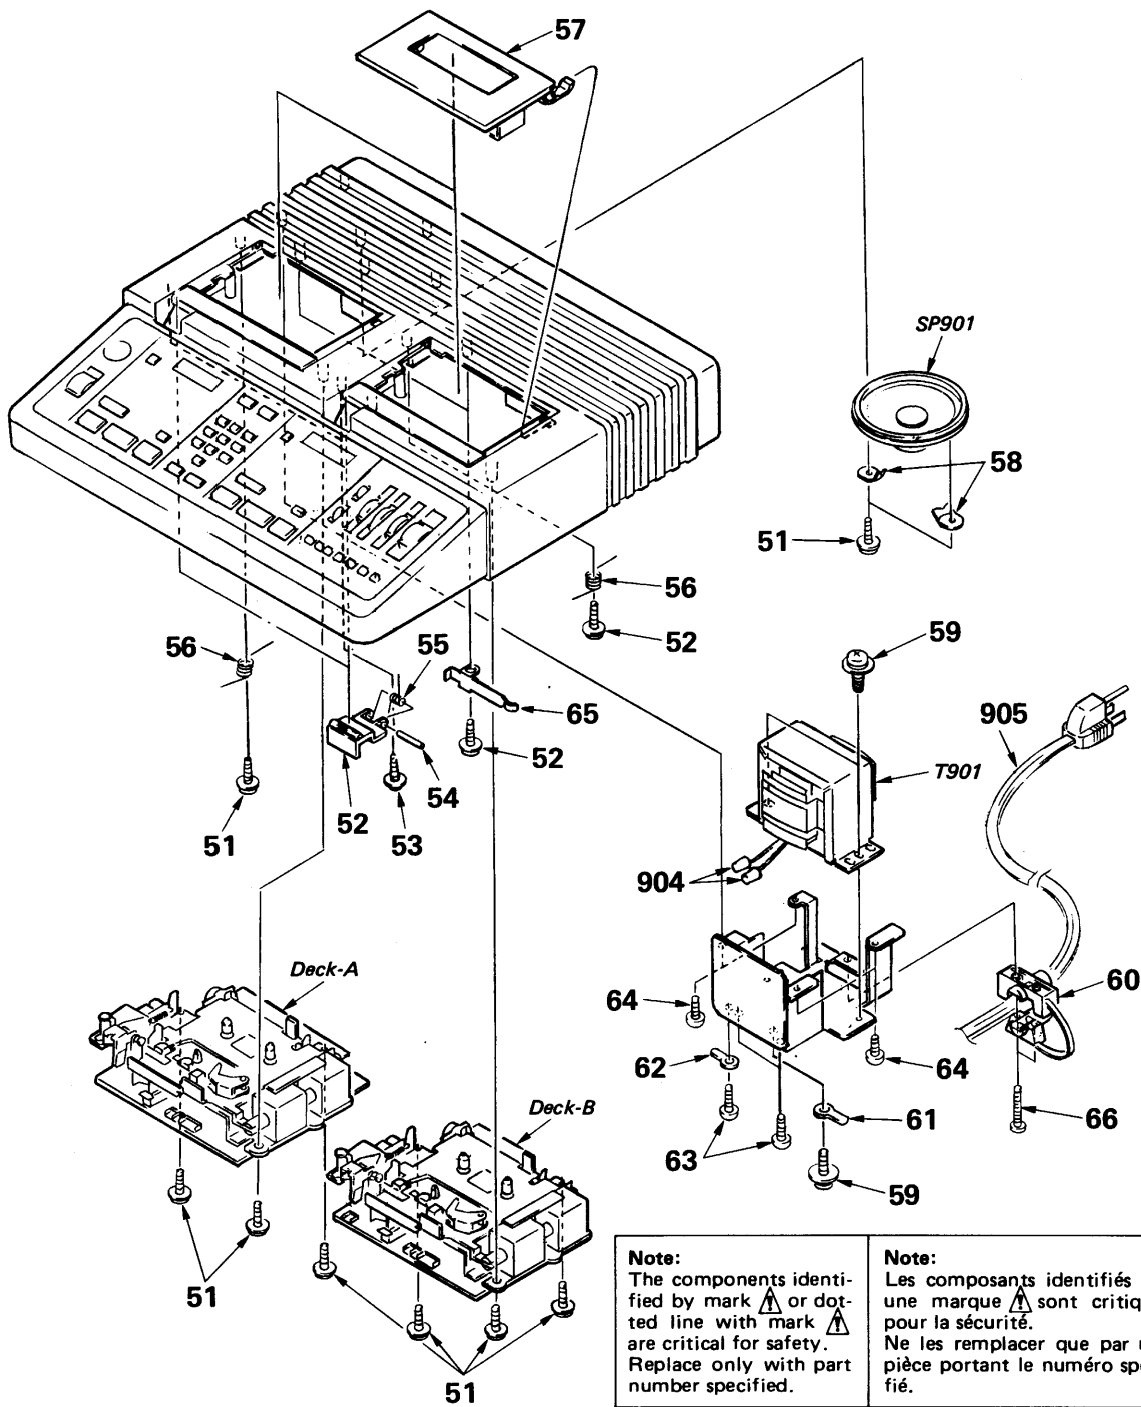

No.	Part No.	Description	Remarks	No.	Part No.	Description	Remarks
51	7-685-647-79	SCREW, TAPPING		61	7-623-510-01	LUG, 4	
52	3-345-420-01	BUTTON (EJECT)		62	7-623-508-01	LUG, 3	
53	3-669-480-21	+ PTPWH 2		63	7-682-147-01	SCREW +BVTT 3X6 (S)	
54	3-703-358-04	PIN, PARALLEL (DIA. 2X22)		64	7-685-647-79	SCREW +BVTP 3X10 TYPE2 SLIT	
55	3-345-422-01	SPRING, TORSION		65	3-345-417-01	SPRING (CASSETTE RETAINER)	
56	3-345-423-01	SPRING, TORSION		66	7-621-260-05	SCREW +P 2.6X16	
57	X-3315-021-1	HOLDER ASSY, CASSETTE		904	1-535-507-11	CONNECTOR (TRANSRATION)	
58	3-845-110-00	RETAINER, SPEAKER		905	 1-551-780-00	CORD, POWER	
59	7-682-661-09	SCREW +PSW 4X8		SP901	1-503-344-21	SPEAKER	
60	3-556-081-00	RETAINER (B), CORD		T901	 1-449-140-11	TRANSFORMER, POWER	

7-3.

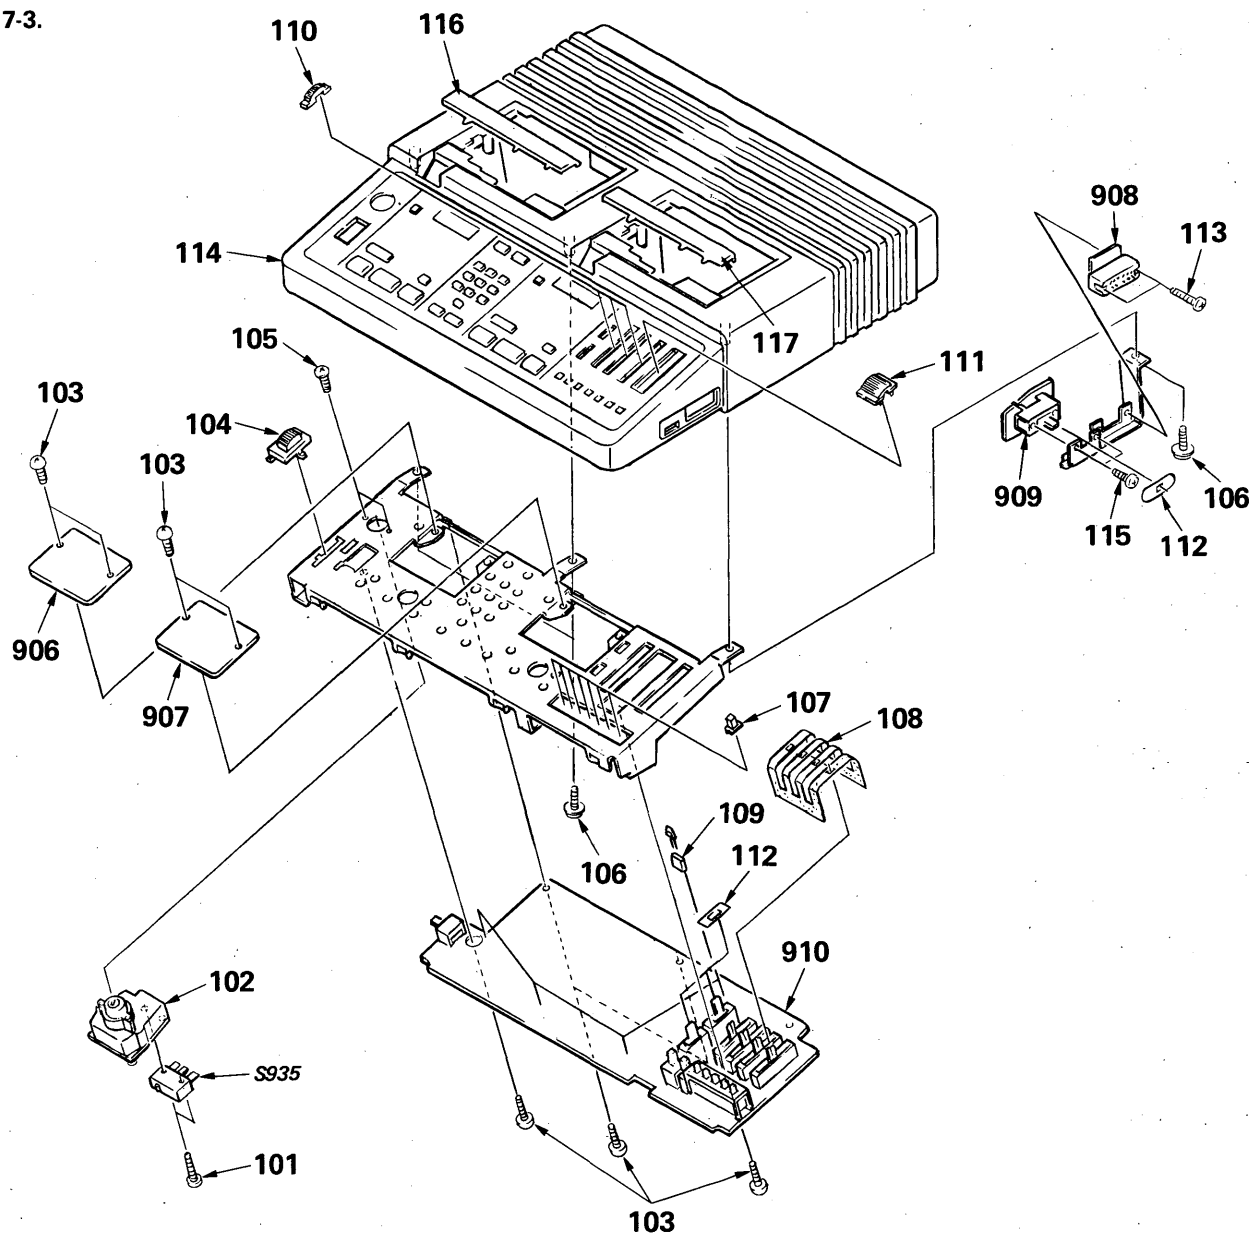


No.	Part No.	Description
101	3-315-015-00	SCREW, TAPPING
102	3-315-028-00	SWITCH, KEY
103	7-682-147-01	SCREW +BVTT 3X6 (S)
104	3-345-425-01	KNOB (SLIDE)
105	7-628-254-00	SCREW +PS 2.6X5
106	7-685-647-79	SCREW +BVTP 3X10 TYPE2 SLIT
107	3-345-418-01	BUTTON
108	*3-345-427-01	COVER (VOLUME)
109	*3-345-439-01	HOLDER, LED
110	3-323-562-21	KNOB (B)
111	3-323-561-21	KNOB (A)
112	*3-315-010-00	COVER, SWITCH

No.	Part No.	Description	Remarks
113	7-621-770-XX	SCREW +P 2.6X8	
114	X-3315-022-1	CABINET (FRONT) ASSY	
115	7-621-259-25	SCREW +P 2.6X4	
116	X-3315-023-1	COVER (VERTICAL ADJUSTMENT) ASSY	
117	X-3315-025-1	COVER (SWITCHADJUSTMENT)(B) ASSY	
906	*1-625-466-11	PC BOARD, LED (A)	
907	*1-625-467-11	PC BOARD, LED (B)	
908	*1-625-463-11	PC BOARD, CONNECTOR 12P	
909	*1-625-464-11	PC BOARD, SWITCH	
910	*A-3089-330-A	MOUNTED PCB, SYSTEM CONTROL	
S935	1-553-539-00	SWITCH, MICRO (STANDBY/ON)	

SEE ADDITIONAL
INFORMATION


7-4. MECHANISM

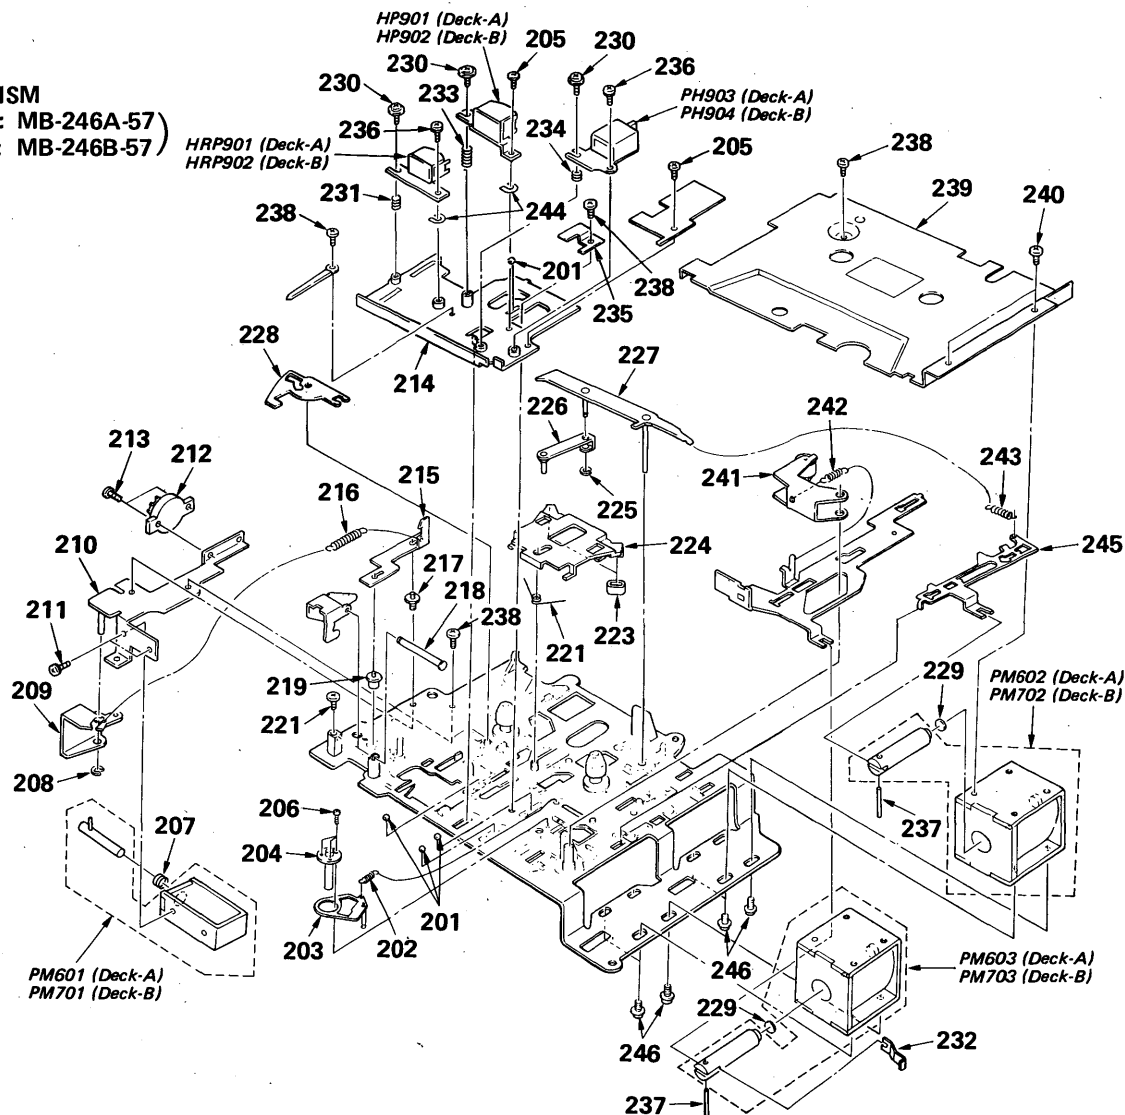(DECK A: MB-246A-57)
(DECK B: MB-246B-57)

No.	Part No.	Description	Remarks	No.	Part No.	Description	Remarks
201	7-671-111-11	STEEL, BOUL 1.5MM		231	3-345-409-01	SPRING, COMPRESSION	
202	3-509-127-00	SPRING, TENSION		232	3-323-606-01	SPRING	
203	X-3323-501-1	LEVER ASSY, F.I		233	3-345-408-01	SPRING, COMPRESSION	
204	3-323-654-01	BEARING, CAPSTAN		234	3-345-407-01	SPRING, COMPRESSION	
				235	3-323-520-01	SPRING	
205	7-627-553-17	SCREW, PRECISION +P 2X2		236	7-628-253-00	SCREW +PS 2X4	
206	7-627-551-58	SCREW, PRECISION +P 1.4X3		237	7-626-320-21	PIN, SPRING 3X10	
207	3-315-098-01	SPRING, COMPRESSION		238	7-621-775-10	SCREW +B 2.6X4	
208	7-624-105-04	STOP RING 2.3, TYPE -E		239	*3-345-411-01	COVER, MD	
				240	7-682-546-09	SCREW +B 3X5	
209	*3-315-097-01	PLATE, EJECT SELECT		241	X-3323-503-1	PINCH LEVER ASSY	
210	*X-3315-017-1	BRACKET ASSY, SOLENOID		242	3-527-189-00	SPRING, TENSION	
211	7-628-253-90	SCREW +PS 2.6X4		243	3-323-657-01	SPRING, TENSION	
212	3-319-224-31	DAMPER, SMALL		244	3-578-138-01	SEAM t=0.1	
213	7-628-253-10	SCREW +PS 2X5			3-578-138-11	SEAM t=0.2	
				245	3-323-542-01	LEVER, FUNCTION, F/R	
214	*X-3315-018-1	CHASSIS ASSY, HEAD		246	7-682-647-09	SCREW +PSW 3X6	
215	*3-315-092-01	PLATE, LOCK, CASSETTE HOLDER		HP901	X-3315-027-1	(DECK-A)...HEAD, MAGNETIC (PLAYBACK)	
216	4-858-478-00	SPRING, TENSION		HP902	X-3315-027-1	(DECK-B)...HEAD, MAGNETIC (PLAYBACK)	
217	*3-315-094-01	SHAFT (B), LOCK PLATE		HP903	8-825-659-00	(DECK-A)...HEAD, MONITOR	
218	3-323-551-01	SHAFT, FULCRUM, EJECT		HP904	8-825-659-00	(DECK-B)...HEAD, MONITOR	
				HRP901	1-543-498-11	(DECK-A)...HEAD, MAGNETIC (REC/PB)	
219	*3-315-093-01	SHAFT (A), LOCK PLATE		HRP902	1-543-498-11	(DECK-B)...HEAD, MAGNETIC (REC/PB)	
221	3-323-508-01	SPRING					
223	3-323-596-01	RUBBER, BRAKE		PM601	1-454-179-21	(DECK-A)...SOLENOID, PLUNGER (EJECT)	
224	*3-323-511-01	LEVER, BRAKE		PM602	1-454-385-11	(DECK-A)...SOLENOID, PLUNGER (FF/REW)	
225	3-321-483-11	RING, RETAINING		PM603	1-454-385-11	(DECK-A)...SOLENOID, PLUNGER (FWD)	
226	X-3323-507-1	LEVER ASSY, F/R		PM701	1-454-179-21	(DECK-B)...SOLENOID, PLUNGER (EJECT)	
227	*X-3315-020-1	ARM ASSY, F/R		PM702	1-454-385-11	(DECK-B)...SOLENOID, PLUNGER (FF/REW)	
228	*3-323-518-01	PLATE, PREVENTION, EJECT		PM703	1-454-385-11	(DECK-B)...SOLENOID, PLUNGER (FWD)	
229	3-323-645-01	STOPPER					
230	3-701-468-00	SCREW (+- 2X4), LOCK					

SEE ADDITIONAL
INFORMATION

7-5. MECHANISM

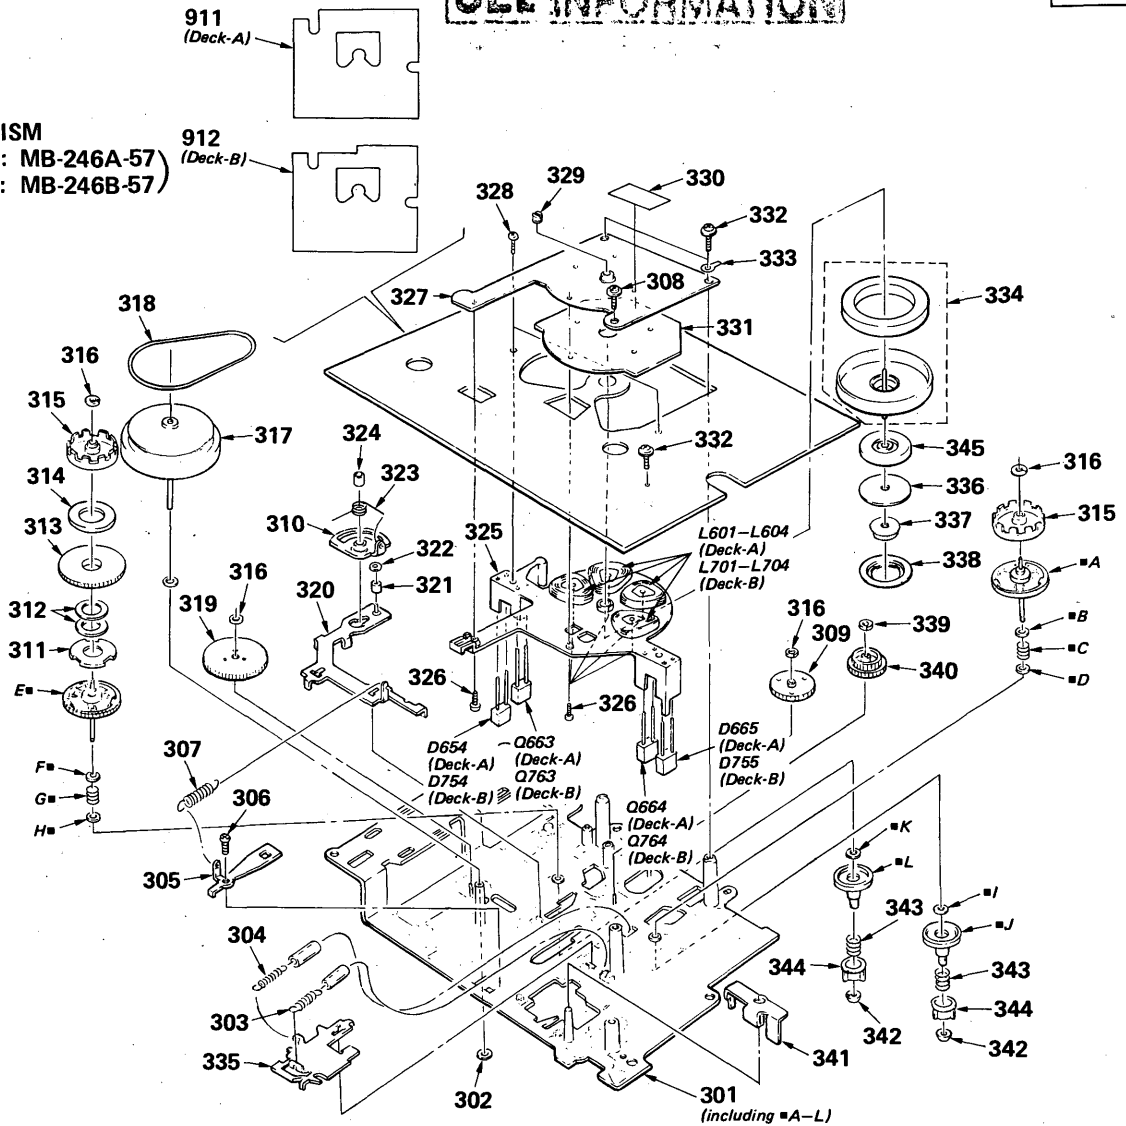(DECK A: MB-246A-57)
(DECK B: MB-246B-57)

No.	Part No.	Description	Remarks	No.	Part No.	Description	Remarks
301	X-3323-515-1	CHASSIS ASSY, MECHANISM		328	7-685-104-19	SCREW +P 2X6 TYPE2 NON-SLIT	
302	3-325-698-01	RING, RETAINING		329	3-547-625-00	SCREW, THRUST ADJUST	
303	3-701-788-XX	SPRING, TENSION		330	3-846-312-00	SPACER	
304	3-305-903-00	SPRING, TENSION		331	3-323-601-01	SHEET, INSULATING, COIL	
305	X-3323-504-1	SPRING ASSY, LOCK		332	7-685-133-19	SCREW +BTP 2.6X6 TYPE2 N-S	
306	3-703-502-01	SCREW		333	7-623-507-01	LUG, 2.6	
307	4-858-478-00	SPRING, TENSION		334	X-3323-525-1	MAGNET ASSY, ROTOR	
308	7-621-775-10	SCREW +B 2.6X4		335	*3-323-506-01	CHASSIS (E), HEAD	
309	3-323-539-01	GEAR (B), F/R		336	3-323-656-01	WASHER	
310	X-3323-506-1	CAM ASSY, S		337	3-323-515-01	GEAR, M	
311	3-561-827-00	PLATE (A), HYSTERESIS		338	3-323-655-01	PLATE, CLUTCH	
312	3-307-493-01	SPACER (t=0.1)		339	3-321-483-11	RING, RETAINING	
	3-307-493-11	SPACER (t=0.15)		340	3-323-516-01	GEAR (A), F/R	
	3-307-493-21	SPACER (t=0.2)		341	*3-345-410-01	LEVER (A), EJECT	
313	3-307-953-00	MAGNET, REEL TABLE		342	3-307-362-00	CAP, REEL	
314	3-307-313-00	PLATE, YOKE		343	3-307-380-00	SPRING, COMPRESSION	
315	3-323-541-01	PLATE		344	3-307-363-00	CLAW (N), REEL	
316	3-307-948-01	WASHER, NYLON		345	3-310-071-21	TABLE (M), REEL	
317	X-3315-019-1	FLYWHEEL ASSY		911	*A-3089-335-A	MOUNTED PCB, SERVO (A)	
318	3-323-651-01	BELT		912	*A-3089-336-A	MOUNTED PCB, SERVO (B)	
319	3-323-540-01	IDLER, FWD		L601	1-462-196-21	(DECK-A)...COIL, MOTOR (STATOR)	
320	X-3323-510-1	LEVER ASSY, S		L602	1-462-196-21	(DECK-A)...COIL, MOTOR (STATOR)	
321	3-323-534-01	ROLLER (S LEVER)		L603	1-462-196-21	(DECK-A)...COIL, MOTOR (STATOR)	
322	3-570-615-00	POLY-WASHER (DIA.1.2)		L604	1-462-196-21	(DECK-A)...COIL, MOTOR (STATOR)	
323	3-323-587-01	SPRING		L701	1-462-196-21	(DECK-B)...COIL, MOTOR (STATOR)	
324	3-319-662-01	RUBBER, BRAKE		L702	1-462-196-21	(DECK-B)...COIL, MOTOR (STATOR)	
325	*3-323-552-01	BRACKET, COIL		L703	1-462-196-21	(DECK-B)...COIL, MOTOR (STATOR)	
326	3-323-501-01	SCREW (M1.4X3)		L704	1-462-196-21	(DECK-B)...COIL, MOTOR (STATOR)	
327	*X-3323-502-1	CHASSIS ASSY, STATOR					

SEE ADDITIONAL
INFORMATION

SECTION 8

ELECTRICAL PARTS LIST

NOTE:

- Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.
- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- If there are two or more same circuits in a set such as a stereophonic machine, only typical circuit parts may be indicated and capacitors and resistors in other same circuits may be omitted.

CAPACITORS:

MF: μ F, PF: μ F.

RESISTORS

- All resistors are in ohms.
- F: nonflammable

COILS

- MMH: mH, UH: μ H

SEMICONDUCTORS

In each case, U: μ , for example:
 UA...: μ A..., UPA...: μ PA...,
 UPC...: μ PC, UPD...: μ PD...

The components identified by mark Δ or dotted line with mark Δ are critical for safety. Replace only with part number specified.

Les composants identifiés par une marque Δ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

Ref.No.	Part No.	Description					Ref.No.	Part No.	Description				
901	*A-3089-334-A	MOUNTED PCB, AUDIO					C168	1-123-611-00	ELECT	1MF	20%	50V	
902	*1-625-939-11	PC BOARD, MIC					C169	1-123-611-00	ELECT	1MF	20%	50V	
903	*1-533-189-11	HOLDER, FUSE					C201	1-123-611-00	ELECT	1MF	20%	50V	
904	1-535-507-11	CONNECTOR (TRANSTRATION)					C202	1-162-835-11	CERAMIC	0.0047MF	10%	16V	
905	Δ 1-551-780-00	CORD, POWER					C203	1-162-282-31	CERAMIC	100PF	10%	50V	
906	*1-625-466-11	PC BOARD, LED (A)					C204	1-124-927-11	ELECT	4.7MF	20%	50V	
907	*1-625-467-11	PC BOARD, LED (B)					C205	1-162-286-31	CERAMIC	220PF	10%	50V	
908	*1-625-463-11	PC BOARD, CONNECTOR 12P					C206	1-123-611-00	ELECT	1MF	20%	50V	
909	*1-625-464-11	PC BOARD, SWITCH					C212	1-162-294-31	CERAMIC	0.001MF	10%	50V	
910	*A-3089-330-A	MOUNTED PCB, SYSTEM CONTROL					C213	1-124-444-00	ELECT	220MF	20%	6.3V	
911	*A-3089-335-A	MOUNTED PCB, SERVO (A)					C214	1-124-927-11	ELECT	4.7MF	20%	50V	
912	*A-3089-336-A	MOUNTED PCB, SERVO (B)					C215	1-162-284-31	CERAMIC	150PF	10%	50V	
C101	1-123-611-00	ELECT	1MF	20%	50V		C216	1-123-611-00	ELECT	1MF	20%	50V	
C102	1-162-835-11	CERAMIC	0.0047MF	10%	16V		C217	1-161-379-00	CERAMIC	0.01MF	20%	16V	
C103	1-162-282-31	CERAMIC	100PF	10%	50V		C218	1-130-475-00	MYLAR	0.0022MF	5%	50V	
C104	1-124-927-11	ELECT	4.7MF	20%	50V		C219	1-123-611-00	ELECT	1MF	20%	50V	
C105	1-162-286-31	CERAMIC	220PF	10%	50V		C220	1-123-875-11	ELECT	10MF	20%	50V	
C106	1-123-611-00	ELECT	1MF	20%	50V		C221	1-161-379-00	CERAMIC	0.01MF	20%	16V	
C112	1-162-294-31	CERAMIC	0.001MF	10%	50V		C222	1-162-282-31	CERAMIC	100PF	10%	50V	
C113	1-124-444-00	ELECT	220MF	20%	6.3V		C223	1-162-284-31	CERAMIC	150PF	10%	50V	
C114	1-124-927-11	ELECT	4.7MF	20%	50V		C251	1-106-347-00	MYLAR	0.0015MF	5%	200V	
C115	1-162-284-31	CERAMIC	150PF	10%	50V		C252	1-130-483-00	MYLAR	0.01MF	5%	50V	
C116	1-123-611-00	ELECT	1MF	20%	50V		C253	1-123-611-00	ELECT	1MF	20%	50V	
C117	1-161-379-00	CERAMIC	0.01MF	20%	16V		C255	1-161-327-00	CERAMIC	0.0033MF	20%	16V	
C118	1-130-475-00	MYLAR	0.0022MF	5%	50V		C256	1-162-294-31	CERAMIC	0.001MF	10%	50V	
C119	1-123-611-00	ELECT	1MF	20%	50V		C257	1-162-286-31	CERAMIC	220PF	10%	50V	
C120	1-123-875-11	ELECT	10MF	20%	50V		C258	1-123-875-11	ELECT	10MF	20%	50V	
C121	1-161-379-00	CERAMIC	0.01MF	20%	16V		C259	1-162-286-31	CERAMIC	220PF	10%	50V	
C122	1-162-282-31	CERAMIC	100PF	10%	50V		C260	1-123-611-00	ELECT	1MF	20%	50V	
C123	1-162-284-31	CERAMIC	150PF	10%	50V		C261	1-123-611-00	ELECT	1MF	20%	50V	
C151	1-106-347-00	MYLAR	0.0015MF	5%	200V		C262	1-124-446-11	ELECT	47MF	20%	10V	
C152	1-130-483-00	MYLAR	0.01MF	5%	50V		C264	1-161-379-00	CERAMIC	0.01MF	20%	16V	
C153	1-123-611-00	ELECT	1MF	20%	50V		C265	1-162-282-31	CERAMIC	100PF	10%	50V	
C155	1-161-327-00	CERAMIC	0.0033MF	20%	16V		C266	1-162-290-31	CERAMIC	470PF	10%	50V	
C156	1-162-294-31	CERAMIC	0.001MF	10%	50V		C267	1-130-475-00	MYLAR	0.0022MF	5%	50V	
C157	1-162-286-31	CERAMIC	220PF	10%	50V		C268	1-123-611-00	ELECT	1MF	20%	50V	
C158	1-123-875-11	ELECT	10MF	20%	50V		C269	1-123-611-00	ELECT	1MF	20%	50V	
C159	1-162-286-31	CERAMIC	220PF	10%	50V		C301	1-123-611-00	ELECT	1MF	20%	50V	
C160	1-123-611-00	ELECT	1MF	20%	50V		C302	1-162-835-11	CERAMIC	0.0047MF	10%	16V	
C161	1-123-611-00	ELECT	1MF	20%	50V		C303	1-162-282-31	CERAMIC	100PF	10%	50V	
C162	1-124-446-11	ELECT	47MF	20%	10V		C304	1-124-927-11	ELECT	4.7MF	20%	50V	
C164	1-161-379-00	CERAMIC	0.01MF	20%	16V		C305	1-162-286-31	CERAMIC	220PF	10%	50V	
C165	1-162-282-31	CERAMIC	100PF	10%	50V		C306	1-123-611-00	ELECT	1MF	20%	50V	
C166	1-162-290-31	CERAMIC	470PF	10%	50V		C312	1-162-294-31	CERAMIC	0.001MF	10%	50V	
C167	1-130-475-00	MYLAR	0.0022MF	5%	50V		C313	1-124-444-00	ELECT	220MF	20%	6.3V	

Ref.No.	Part No.	Description							
C314	1-124-927-11	ELECT	4.7MF	20%	50V				
C315	1-162-284-31	CERAMIC	150PF	10%	50V				
C316	1-123-611-00	ELECT	1MF	20%	50V				
C317	1-161-379-00	CERAMIC	0.01MF	20%	16V				
C318	1-130-475-00	MYLAR	0.0022MF	5%	50V				
C319	1-123-611-00	ELECT	1MF	20%	50V				
C320	1-123-875-11	ELECT	10MF	20%	50V				
C321	1-161-379-00	CERAMIC	0.01MF	20%	16V				
C322	1-162-282-31	CERAMIC	100PF	10%	50V				
C323	1-162-284-31	CERAMIC	150PF	10%	50V				
C351	1-124-120-11	ELECT	220MF	20%	16V				
C352	1-124-120-11	ELECT	220MF	20%	16V				
C353	1-124-120-11	ELECT	220MF	20%	16V				
C354	1-124-120-11	ELECT	220MF	20%	16V				
C355	1-161-379-00	CERAMIC	0.01MF	20%	16V				
C356	1-161-379-00	CERAMIC	0.01MF	20%	16V				
C357	1-161-379-00	CERAMIC	0.01MF	20%	16V				
C358	1-161-379-00	CERAMIC	0.01MF	20%	16V				
C359	1-124-902-00	ELECT	0.47MF	20%	50V				
C360	1-162-290-31	CERAMIC	470PF	10%	50V				
C361	1-130-481-00	MYLAR	0.0068MF	5%	50V				
C362	1-124-902-00	ELECT	0.47MF	20%	50V				
C363	1-124-902-00	ELECT	0.47MF	20%	50V				
C364	1-162-282-31	CERAMIC	100PF	10%	50V				
C365	1-124-902-00	ELECT	0.47MF	20%	50V				
C366	1-123-611-00	ELECT	1MF	20%	50V				
C367	1-162-294-31	CERAMIC	0.001MF	10%	50V				
C368	1-123-611-00	ELECT	1MF	20%	50V				
C369	1-162-292-31	CERAMIC	680PF	10%	50V				
C370	1-123-875-11	ELECT	10MF	20%	50V				
C371	1-124-120-11	ELECT	220MF	20%	16V				
C372	1-124-120-11	ELECT	220MF	20%	16V				
C373	1-130-499-00	MYLAR	0.22MF	5%	50V				
C374	1-124-927-11	ELECT	4.7MF	20%	50V				
C375	1-124-477-11	ELECT	47MF	20%	16V				
C376	1-124-908-11	ELECT	22MF	20%	25V				
C377	1-123-611-00	ELECT	1MF	20%	50V				
C378	1-123-611-00	ELECT	1MF	20%	50V				
C379	1-123-611-00	ELECT	1MF	20%	50V				
C380	1-123-611-00	ELECT	1MF	20%	50V				
C381	1-130-475-00	MYLAR	0.0022MF	5%	50V				
C382	1-123-611-00	ELECT	1MF	20%	50V				
C383	1-124-902-00	ELECT	0.47MF	20%	50V				
C384	1-161-379-00	CERAMIC	0.01MF	20%	16V				
C385	1-161-379-00	CERAMIC	0.01MF	20%	16V				
C386	1-161-379-00	CERAMIC	0.01MF	20%	16V				
C387	1-161-379-00	CERAMIC	0.01MF	20%	16V				
C388	1-161-051-00	CERAMIC	0.01MF	10%	50V				
C389	1-161-051-00	CERAMIC	0.01MF	10%	50V				
C390	1-162-851-11	CERAMIC	0.1MF	10%	16V				
C391	1-161-379-00	CERAMIC	0.01MF	20%	16V				
C392	1-161-379-00	CERAMIC	0.01MF	20%	16V				
C393	1-162-282-31	CERAMIC	100PF	10%	50V				
C394	1-161-379-00	CERAMIC	0.01MF	20%	16V				
C395	1-123-611-00	ELECT	1MF	20%	50V				
C401	1-123-611-00	ELECT	1MF	20%	50V				
C402	1-162-835-11	CERAMIC	0.0047MF	10%	16V				
C403	1-162-282-31	CERAMIC	100PF	10%	50V				
C404	1-124-927-11	ELECT	4.7MF	20%	50V				
C405	1-162-286-31	CERAMIC	220PF	10%	50V				
C406	1-123-611-00	ELECT	1MF	20%	50V				
C412	1-162-294-31	CERAMIC	0.001MF	10%	50V				
C413	1-124-444-00	ELECT	220MF	20%	6.3V				
C414	1-124-927-11	ELECT	4.7MF	20%	50V				
C415	1-162-284-31	CERAMIC	150PF	10%	50V				
C416	1-123-611-00	ELECT	1MF	20%	50V				
C417	1-161-379-00	CERAMIC	0.01MF	20%	16V				
C418	1-130-475-00	MYLAR	0.0022MF	5%	50V				
C419	1-123-611-00	ELECT	220MF	20%	50V				
C420	1-123-875-11	ELECT	10MF	20%	50V				
C421	1-161-379-00	CERAMIC	0.01MF	20%	16V				
C422	1-162-282-31	CERAMIC	100PF	10%	50V				
C423	1-162-284-31	CERAMIC	150PF	10%	50V				
C451	1-124-563-11	ELECT	2200MF	20%	25V				
C452	1-124-563-11	ELECT	2200MF	20%	25V				
C453	1-124-563-11	ELECT	2200MF	20%	25V				
C454	1-130-491-00	MYLAR	0.047MF	5%	50V				
C455	1-130-491-00	MYLAR	0.047MF	5%	50V				
C456	1-124-120-11	ELECT	220MF	20%	16V				
C458	1-130-491-00	MYLAR	0.047MF	5%	50V				
C459	1-124-472-11	ELECT	470MF	20%	6.3V				
C461	1-124-472-11	ELECT	470MF	20%	6.3V				
C462	1-125-447-11	DOUBLE LAYERS	1F		5.5V				
C463	1-130-491-00	MYLAR	0.047MF	5%	50V				
C464	1-130-491-00	MYLAR	0.047MF	5%	50V				
C465	1-124-120-11	ELECT	220MF	20%	16V				
C466	1-161-039-00	CERAMIC	0.001MF	10%	50V				
C467	1-161-039-00	CERAMIC	0.001MF	10%	50V				
C468	1-161-039-00	CERAMIC	0.001MF	10%	50V				
C469	1-124-963-11	ELECT	33MF	20%	16V				
C470	1-161-051-00	CERAMIC	0.01MF	10%	50V				
C471	1-161-051-00	CERAMIC	0.01MF	10%	50V				
C472	1-124-224-00	ELECT	47MF	20%	6.3V				
C501	1-123-611-00	ELECT	1MF	20%	50V				
C502	1-162-835-11	CERAMIC	0.0047MF	10%	16V				
C503	1-162-282-31	CERAMIC	100PF	10%	50V				
C504	1-124-927-11	ELECT	4.7MF	20%	50V				
C505	1-162-286-31	CERAMIC	220PF	10%	50V				
C506	1-123-611-00	ELECT	1MF	20%	50V				
C512	1-162-294-31	CERAMIC	0.001MF	10%	50V				
C513	1-124-444-00	ELECT	220MF	20%	6.3V				
C514	1-124-927-11	ELECT	4.7MF	20%	50V				
C515	1-162-284-31	CERAMIC	150PF	10%	50V				
C516	1-123-611-00	ELECT	1MF	20%	50V				
C517	1-161-379-00	CERAMIC	0.01MF	20%	16V				
C518	1-130-475-00	MYLAR	0.0022MF	5%	50V				
C519	1-123-611-00	ELECT	1MF	20%	50V				
C520	1-123-875-11	ELECT	10MF	20%	50V				
C521	1-161-379-00	CERAMIC	0.01MF	20%	16V				
C601	1-123-611-00	ELECT	1MF	20%	50V				
C602	1-162-835-11	CERAMIC	0.0047MF	10%	16V				
C603	1-162-282-31	CERAMIC	100PF	10%	50V				
C604	1-124-927-11	ELECT	4.7MF	20%	50V				
C605	1-162-286-31	CERAMIC	220PF	10%	50V				
C606	1-123-611-00	ELECT	1MF	20%	50V				

SEE ADDITIONAL
SEE INFORMATION

Ref.No.	Part No.	Description				Ref.No.	Part No.	Description			
C612	1-162-294-31	CERAMIC	0.001MF	10%	50V	C762	1-124-245-00	ELECT	4.7MF	20%	25V
C613	1-124-444-00	ELECT	220MF	20%	6.3V	C763	1-162-282-31	CERAMIC	100PF	10%	50V
C614	1-124-927-11	ELECT	4.7MF	20%	50V	C764	1-162-282-31	CERAMIC	100PF	10%	50V
C615	1-162-284-31	CERAMIC	150PF	10%	50V	C765	1-124-908-11	ELECT	22MF	20%	25V
C616	1-123-611-00	ELECT	1MF	20%	50V	C766	1-123-611-00	ELECT	1MF	20%	50V
C617	1-161-379-00	CERAMIC	0.01MF	20%	16V	C767	1-124-257-00	ELECT	2.2MF	20%	50V
C618	1-130-475-00	MYLAR	0.0022MF	5%	50V	C768	1-124-257-00	ELECT	2.2MF	20%	50V
C619	1-123-611-00	ELECT	1MF	20%	50V	C769	1-126-101-11	ELECT	100MF	20%	16V
C620	1-123-875-11	ELECT	10MF	20%	50V	C770	1-126-101-11	ELECT	100MF	20%	16V
C621	1-161-379-00	CERAMIC	0.01MF	20%	16V	C801	1-123-611-00	ELECT	1MF	20%	50V
C651	1-162-294-31	CERAMIC	0.001MF	10%	50V	C802	1-162-835-11	CERAMIC	0.0047MF	10%	16V
C652	1-162-294-31	CERAMIC	0.001MF	10%	50V	C803	1-162-282-31	CERAMIC	100PF	10%	50V
C653	1-124-245-00	ELECT	4.7MF	20%	25V	C804	1-124-927-11	ELECT	4.7MF	20%	50V
C654	1-124-462-00	ELECT	10MF	20%	16V	C805	1-162-286-31	CERAMIC	220PF	10%	50V
C655	1-124-236-00	ELECT	47MF	20%	10V	C806	1-123-611-00	ELECT	1MF	20%	50V
C656	1-124-463-00	ELECT	0.1MF	20%	50V	C812	1-162-294-31	CERAMIC	0.001MF	10%	50V
C657	1-124-257-00	ELECT	2.2MF	20%	50V	C813	1-124-444-00	ELECT	220MF	20%	6.3V
C658	1-130-487-00	MYLAR	0.022MF	5%	50V	C814	1-124-927-11	ELECT	4.7MF	20%	50V
C659	1-130-497-00	MYLAR	0.15MF	5%	50V	C815	1-162-284-31	CERAMIC	150PF	10%	50V
C660	1-136-177-00	FILM	1MF	5%	50V	C816	1-123-611-00	ELECT	1MF	20%	50V
C661	1-136-177-00	FILM	1MF	5%	50V	C817	1-161-379-00	CERAMIC	0.01MF	20%	16V
C662	1-124-245-00	ELECT	4.7MF	20%	25V	C818	1-130-475-00	MYLAR	0.0022MF	5%	50V
C663	1-162-282-31	CERAMIC	100PF	10%	50V	C819	1-123-611-00	ELECT	1MF	20%	50V
C664	1-162-282-31	CERAMIC	100PF	10%	50V	C820	1-123-875-11	ELECT	10MF	20%	50V
C665	1-124-908-11	ELECT	22MF	20%	25V	C821	1-161-379-00	CERAMIC	0.01MF	20%	16V
C666	1-123-611-00	ELECT	1MF	20%	50V	C902	1-123-661-00	ELECT	100MF	20%	6.3V
C667	1-124-257-00	ELECT	2.2MF	20%	50V	C903	1-123-661-00	ELECT	100MF	20%	6.3V
C668	1-124-257-00	ELECT	2.2MF	20%	50V	C904	1-162-851-11	CERAMIC	0.1MF	10%	16V
C669	1-126-101-11	ELECT	100MF	20%	16V	C905	1-162-211-31	CERAMIC	33PF	5%	50V
C670	1-126-101-11	ELECT	100MF	20%	16V	C906	1-162-211-31	CERAMIC	33PF	5%	50V
C701	1-123-611-00	ELECT	1MF	20%	50V	C907	1-124-462-00	ELECT	10MF	20%	16V
C702	1-162-835-11	CERAMIC	0.0047MF	10%	16V	C908	1-162-282-31	CERAMIC	100PF	10%	50V
C703	1-162-282-31	CERAMIC	100PF	10%	50V	C909	1-161-023-00	CERAMIC	0.068MF	10%	16V
C704	1-124-927-11	ELECT	4.7MF	20%	50V	C910	1-161-051-00	CERAMIC	0.01MF	10%	50V
C705	1-162-286-31	CERAMIC	220PF	10%	50V	C911	1-161-051-00	CERAMIC	0.01MF	10%	50V
C706	1-123-611-00	ELECT	1MF	20%	50V	C912	1-161-051-00	CERAMIC	0.01MF	10%	50V
C712	1-162-294-31	CERAMIC	0.001MF	10%	50V	C914	1-162-851-11	CERAMIC	0.1MF	10%	16V
C713	1-124-444-00	ELECT	220MF	20%	6.3V	C915	1-161-051-00	CERAMIC	0.01MF	10%	25V
C714	1-124-927-11	ELECT	4.7MF	20%	50V	CN912	*1-562-148-11	HOUSING, CONNECTOR 3P			
C715	1-162-284-31	CERAMIC	150PF	10%	50V	CNJ101*	*1-562-148-11	HOUSING, CONNECTOR 3P			
C716	1-123-611-00	ELECT	1MF	20%	50V	CNJ102*	*1-562-148-11	HOUSING, CONNECTOR 3P			
C717	1-161-379-00	CERAMIC	0.01MF	20%	16V	CNJ103*	*1-562-148-11	HOUSING, CONNECTOR 3P			
C718	1-130-475-00	MYLAR	0.0022MF	5%	50V	CNJ104*	*1-562-148-11	HOUSING, CONNECTOR 3P			
C719	1-123-611-00	ELECT	1MF	20%	50V	CNJ105*	*1-562-148-11	HOUSING, CONNECTOR 3P			
C720	1-123-875-11	ELECT	10MF	20%	50V	CNJ106*	*1-562-148-11	HOUSING, CONNECTOR 3P			
C721	1-161-379-00	CERAMIC	0.01MF	20%	16V	CNJ107*	*1-562-148-11	HOUSING, CONNECTOR 3P			
C751	1-162-294-31	CERAMIC	0.001MF	10%	50V	CNJ108*	*1-562-148-11	HOUSING, CONNECTOR 3P			
C752	1-162-294-31	CERAMIC	0.001MF	10%	50V	CNJ109*	*1-562-147-11	HOUSING, CONNECTOR 2P			
C753	1-124-245-00	ELECT	4.7MF	20%	25V	CNJ110*	*1-562-147-11	HOUSING, CONNECTOR 2P			
C754	1-124-462-00	ELECT	10MF	20%	16V	CNJ111*	*1-562-147-11	HOUSING, CONNECTOR 2P			
C755	1-124-236-00	ELECT	47MF	20%	10V	CNJ112*	*1-562-147-11	HOUSING, CONNECTOR 2P			
C756	1-124-463-00	ELECT	0.1MF	20%	50V	CNJ113*	*1-562-151-11	HOUSING, CONNECTOR 6P			
C757	1-124-257-00	ELECT	2.2MF	20%	50V	CNJ117*	*1-562-149-11	HOUSING, CONNECTOR 4P			
C758	1-130-487-00	MYLAR	0.022MF	5%	50V	CNJ120*	*1-562-149-11	HOUSING, CONNECTOR 4P			
C759	1-130-497-00	MYLAR	0.15MF	5%	50V	CNJ124*	*1-562-148-11	HOUSING, CONNECTOR 3P			
C760	1-136-177-00	FILM	1MF	5%	50V	CNJ128*	*1-562-150-11	HOUSING, CONNECTOR 5P			
C761	1-136-177-00	FILM	1MF	5%	50V	CNJ818*	*1-562-148-11	HOUSING, CONNECTOR 3P			

Ref.No. Part No. Description

CNJ903*1-562-148-11 HOUSING, CONNECTOR 3P
CNJ909*1-562-151-11 HOUSING, CONNECTOR 6P
CNJ913*1-562-153-11 HOUSING, CONNECTOR 8P

CNJ914*1-562-150-11 HOUSING, CONNECTOR 5P
CNJ915*1-562-152-11 HOUSING, CONNECTOR 7P
CNJ916*1-562-153-11 HOUSING, CONNECTOR 8P

CNJ918*1-562-153-11 HOUSING, CONNECTOR 8P
CNJ919*1-562-153-11 HOUSING, CONNECTOR 8P
CNJ920*1-562-150-11 HOUSING, CONNECTOR 5P

CNJ921*1-562-152-11 HOUSING, CONNECTOR 7P
CNJ922*1-562-153-11 HOUSING, CONNECTOR 8P
CNJ923*1-562-149-11 HOUSING, CONNECTOR 4P
CNJ924*1-562-149-11 HOUSING, CONNECTOR 4P

CNP101*1-564-002-00 PIN, CONNECTOR 3P
CNP102*1-564-002-00 PIN, CONNECTOR 3P
CNP103*1-564-002-00 PIN, CONNECTOR 3P

CNP104*1-564-002-00 PIN, CONNECTOR 3P
CNP105*1-564-002-00 PIN, CONNECTOR 3P
CNP106*1-564-002-00 PIN, CONNECTOR 3P

CNP107*1-564-002-00 PIN, CONNECTOR 3P
CNP108*1-564-002-00 PIN, CONNECTOR 3P
CNP109*1-564-001-11 PIN, CONNECTOR 2P

CNP110*1-564-001-11 PIN, CONNECTOR 2P
CNP111*1-564-001-11 PIN, CONNECTOR 2P
CNP112*1-564-001-11 PIN, CONNECTOR 2P

CNP113*1-564-005-00 PIN, CONNECTOR 6P
CNP114*1-564-003-00 PIN, CONNECTOR 4P
CNP115*1-564-003-00 PIN, CONNECTOR 4P

CNP116*1-564-003-00 PIN, CONNECTOR 4P
CNP117*1-564-003-00 PIN, CONNECTOR 4P
CNP118*1-564-002-00 PIN, CONNECTOR 3P

CNP119*1-564-002-00 PIN, CONNECTOR 3P
CNP120*1-564-003-00 PIN, CONNECTOR 4P
CNP122*1-564-001-11 PIN, CONNECTOR 2P

CNP123*1-508-742-00 PIN, CONNECTOR 3P
CNP124*1-564-002-00 PIN, CONNECTOR 3P
CNP125*1-564-002-00 PIN, CONNECTOR 3P

CNP126*1-564-003-00 PIN, CONNECTOR 4P
CNP127*1-564-006-11 PIN, CONNECTOR 7P
CNP128*1-564-004-00 PIN, CONNECTOR 5P

CNP601*1-564-001-11 PIN, CONNECTOR 2P
CNP602*1-564-001-11 PIN, CONNECTOR 2P
CNP603*1-564-001-11 PIN, CONNECTOR 2P

CNP604*1-564-017-00 PIN, CONNECTOR 7P
CNP605*1-564-014-00 PIN, CONNECTOR 4P
CNP606*1-564-013-00 PIN, CONNECTOR 3P

CNP607*1-564-001-11 PIN, CONNECTOR 2P
CNP701*1-564-001-11 PIN, CONNECTOR 2P
CNP702*1-564-001-11 PIN, CONNECTOR 2P

CNP703*1-564-001-11 PIN, CONNECTOR 2P
CNP704*1-564-017-00 PIN, CONNECTOR 7P
CNP705*1-564-014-00 PIN, CONNECTOR 4P

CNP706*1-564-014-00 PIN, CONNECTOR 4P
CNP707*1-564-013-00 PIN, CONNECTOR 3P
CNP708*1-564-001-11 PIN, CONNECTOR 2P

CNP901*1-564-018-11 PIN, CONNECTOR 8P
CNP902*1-564-013-00 PIN, CONNECTOR 3P
CNP903*1-564-013-00 PIN, CONNECTOR 3P

Ref.No. Part No. Description

CNP904*1-564-002-00 PIN, CONNECTOR 3P
CNP905*1-564-006-11 PIN, CONNECTOR 7P
CNP906*1-564-003-00 PIN, CONNECTOR 4P
CNP907*1-564-006-11 PIN, CONNECTOR 7P

CNP908*1-564-002-00 PIN, CONNECTOR 3P
CNP909*1-564-016-00 PIN, CONNECTOR 6P
CNP910*1-564-002-00 PIN, CONNECTOR 3P

CNP911*1-564-017-00 PIN, CONNECTOR 7P
CNP912*1-564-013-00 PIN, CONNECTOR 3P
CNP913*1-564-007-00 PIN, CONNECTOR 8P

CNP914*1-564-004-00 PIN, CONNECTOR 5P
CNP915*1-564-006-11 PIN, CONNECTOR 7P
CNP916*1-564-007-00 PIN, CONNECTOR 8P

CNP917*1-564-017-00 PIN, CONNECTOR 7P
CNP919*1-564-018-11 PIN, CONNECTOR 8P
CNP920*1-564-015-00 PIN, CONNECTOR 5P

CNP921*1-564-017-00 PIN, CONNECTOR 7P
CNP922*1-564-018-11 PIN, CONNECTOR 8P
CNP923*1-564-014-00 PIN, CONNECTOR 4P

CNP924*1-564-014-00 PIN, CONNECTOR 4P
CNP925*1-564-001-11 PIN, CONNECTOR 2P
CNP926*1-564-004-00 PIN, CONNECTOR 5P

D101 8-719-911-19 DIODE 1SS119
D102 8-719-911-19 DIODE 1SS119
D103 8-719-911-19 DIODE 1SS119

D104 8-719-911-19 DIODE 1SS119
D105 8-719-911-19 DIODE 1SS119
D151 8-719-911-19 DIODE 1SS119

D152 8-719-200-02 DIODE 10E2
D153 8-719-911-19 DIODE 1SS119
D154 8-719-911-19 DIODE 1SS119

D201 8-719-911-19 DIODE 1SS119
D202 8-719-911-19 DIODE 1SS119
D203 8-719-911-19 DIODE 1SS119

D204 8-719-911-19 DIODE 1SS119
D205 8-719-911-19 DIODE 1SS119
D251 8-719-911-19 DIODE 1SS119

D252 8-719-200-02 DIODE 10E2
D253 8-719-911-19 DIODE 1SS119
D254 8-719-911-19 DIODE 1SS119

D256 8-719-911-19 DIODE 1SS119
D301 8-719-911-19 DIODE 1SS119
D302 8-719-911-19 DIODE 1SS119

D303 8-719-911-19 DIODE 1SS119
D304 8-719-911-19 DIODE 1SS119
D305 8-719-911-19 DIODE 1SS119

D351 8-719-911-19 DIODE 1SS119
D352 8-719-911-19 DIODE 1SS119
D353 8-719-911-19 DIODE 1SS119

D401 8-719-911-19 DIODE 1SS119
D402 8-719-911-19 DIODE 1SS119
D403 8-719-911-19 DIODE 1SS119

D404 8-719-911-19 DIODE 1SS119
D405 8-719-911-19 DIODE 1SS119
D451 8-719-200-02 DIODE 10E2

D452 8-719-200-02 DIODE 10E2
D453 8-719-200-02 DIODE 10E2
D454 8-719-200-92 DIODE 10E2
D455 8-719-200-02 DIODE 10E2

Ref.No.	Part No.	Description
D456	8-719-200-02	DIODE 10E2
D458	8-719-911-19	DIODE 1SS119
D459	8-719-911-19	DIODE 1SS119
D460	8-719-911-19	DIODE 1SS119
D461	8-719-911-19	DIODE 1SS119
D501	8-719-911-19	DIODE 1SS119
D502	8-719-911-19	DIODE 1SS119
D503	8-719-911-19	DIODE 1SS119
D504	8-719-911-19	DIODE 1SS119
D505	8-719-911-19	DIODE 1SS119
D601	8-719-911-19	DIODE 1SS119
D602	8-719-911-19	DIODE 1SS119
D603	8-719-911-19	DIODE 1SS119
D604	8-719-911-19	DIODE 1SS119
D605	8-719-911-19	DIODE 1SS119
D651	8-719-911-19	DIODE 1SS119
D654	8-719-103-15	DIODE SE304-2K
D655	8-719-103-15	DIODE SE304-2K
D656	8-719-911-19	DIODE 1SS119
D658	8-719-911-19	DIODE 1SS119
D659	8-719-200-02	DIODE 10E2
D660	8-719-110-11	DIODE RD9.1ES-B
D661	8-719-200-02	DIODE 10E2
D662	8-719-200-02	DIODE 10E2
D663	8-719-200-02	DIODE 10E2
D664	8-719-911-19	DIODE 1SS119
D665	8-719-200-02	DIODE 10E2
D666	8-719-911-19	DIODE 1SS119
D701	8-719-911-19	DIODE 1SS119
D702	8-719-911-19	DIODE 1SS119
D703	8-719-911-19	DIODE 1SS119
D704	8-719-911-19	DIODE 1SS119
D705	8-719-911-19	DIODE 1SS119
D751	8-719-911-19	DIODE 1SS119
D752	8-719-911-19	DIODE 1SS119
D753	8-719-911-19	DIODE 1SS119
D754	8-719-103-15	DIODE SE304-2K
D755	8-719-103-15	DIODE SE304-2K
D756	8-719-911-19	DIODE 1SS119
D757	8-719-911-19	DIODE 1SS119
D758	8-719-911-19	DIODE 1SS119
D759	8-719-200-02	DIODE 10E2
D760	8-719-110-11	DIODE RD9.1ES-B
D761	8-719-200-02	DIODE 10E2
D762	8-719-200-02	DIODE 10E2
D763	8-719-200-02	DIODE 10E2
D801	8-719-911-19	DIODE 1SS119
D802	8-719-911-19	DIODE 1SS119
D803	8-719-911-19	DIODE 1SS119
D804	8-719-911-19	DIODE 1SS119
D805	8-719-911-19	DIODE 1SS119
D901	8-719-936-56	DIODE DAN209S
D902	8-719-936-56	DIODE DAN209S
D903	8-719-936-56	DIODE DAN209S
D904	8-719-936-56	DIODE DAN209S
D905	8-719-936-56	DIODE DAN209S
D906	8-719-933-28	DIODE DAP209S
D907	8-719-933-28	DIODE DAP209S
D908	8-719-933-28	DIODE DAP209S

Ref.No.	Part No.	Description
D909	8-719-933-28	DIODE DAP209S
D910	8-719-936-56	DIODE DAN209S
D911	8-719-936-56	DIODE DAN209S
D912	8-719-800-33	DIODE SLP162B
D913	8-719-933-28	DIODE DAP209S
D914	8-719-933-28	DIODE DAP209S
D916	8-719-800-33	DIODE SLP162B
D917	8-719-800-33	DIODE SLP162B
D918	8-719-800-33	DIODE SLP162B
D919	8-719-936-56	DIODE DAN209S
D920	8-719-936-56	DIODE DAN209S
D921	8-719-936-56	DIODE DAN209S
D922	8-719-936-56	DIODE DAN209S
D923	8-719-936-56	DIODE DAN209S
D924	8-719-936-56	DIODE DAN209S
D925	8-719-936-56	DIODE DAN209S
D926	8-719-911-19	DIODE 1SS119
D927	8-719-933-28	DIODE DAP209S
D928	8-719-933-28	DIODE DAP209S
D929	8-719-911-19	DIODE 1SS119
D930	8-719-911-19	DIODE 1SS119
D931	8-719-911-19	DIODE 1SS119
D932	8-719-933-28	DIODE DAP209S
D933	8-719-911-19	DIODE 1SS119
D934	8-719-911-19	DIODE 1SS119
D935	8-719-933-28	DIODE DAP209S
D936	8-719-933-28	DIODE DAP209S
D937	8-719-948-16	DIODE SLP278B
D938	8-719-948-16	DIODE SLP278B
D939	8-719-948-16	DIODE SLP278B
D940	8-719-948-16	DIODE SLP278B
D941	8-719-948-16	DIODE SLP278B
D942	8-719-948-16	DIODE SLP278B
D943	8-719-948-16	DIODE SLP278B
D944	8-719-948-16	DIODE SLP278B
D945	8-719-948-16	DIODE SLP278B
D947	8-719-936-56	DIODE DAN209S
D949	8-719-911-19	DIODE 1SS119
D950	8-719-936-56	DIODE DAN209S
D951	8-719-911-19	DIODE 1SS119
D952	8-719-911-19	DIODE 1SS119
D953	8-719-936-56	DIODE DAN209S
F451	△.1-532-743-11	FUSE, GLASS TUBE (2A)
F452	△.1-532-743-11	FUSE, GLASS TUBE (2A)
H601	8-719-800-18	DIODE THS103A
H602	8-719-800-18	DIODE THS103A
H701	8-719-800-18	DIODE THS103A
H702	8-719-800-18	DIODE THS103A
HP901	X-3315-027-1	(DECK-A)...HEAD, MAGNETIC (PLAYBACK)
HP902	X-3315-027-1	(DECK-B)...HEAD, MAGNETIC (PLAYBACK)
HP903	8-825-659-00	(DECK-A)...HEAD, MONITOR
HP904	8-825-659-00	(DECK-B)...HEAD, MONITOR
HRP901	1-543-498-11	(DECK-A)...HEAD, MAGNETIC (REC/PB)
HRP902	1-543-498-11	(DECK-B)...HEAD, MAGNETIC (REC/PB)
IC101	8-759-745-61	IC NJM4560D-D
IC102	8-759-745-61	IC NJM4560D-D
IC103	8-759-745-61	IC NJM4560D-D

Note:

The components identified by mark  or dotted line with mark  are critical for safety. Replace only with part number specified.

Note:

Les composants identifiés par une marque  sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

Ref.No.	Part No.	Description
IC104	8-759-745-61	IC NJM4560D-D
IC105	8-759-140-66	IC UPD4066BC
IC106	8-759-140-66	IC UPD4066BC
IC107	8-759-140-66	IC UPD4066BC
IC108	8-759-140-66	IC UPD4066BC
IC109	8-759-745-61	IC NJM4560D-D
IC110	8-759-745-61	IC NJM4560D-D
IC111	8-759-745-61	IC NJM4560D-D
IC112	8-759-745-61	IC NJM4560D-D
IC113	8-759-140-66	IC UPD4066BC
IC114	8-759-140-66	IC UPD4066BC
IC115	8-759-140-66	IC UPD4066BC
IC116	8-759-140-66	IC UPD4066BC
IC117	8-759-145-58	IC UPC4558C
IC118	8-759-145-58	IC UPC4558C
IC119	8-759-145-58	IC UPC4558C
IC120	8-759-145-58	IC UPC4558C
IC121	8-759-145-58	IC UPC4558C
IC122	8-759-157-52	IC UPC575C
IC123	8-759-145-58	IC UPC4558C
IC124	8-759-745-61	IC NJM4560D-D
IC125	8-759-145-58	IC UPC4558C
IC126	8-759-745-61	IC NJM4560D-D
IC127	8-759-103-93	IC UPC393C
IC128	8-759-940-94	IC MSM4094RS
IC129	8-759-140-66	IC UPD4066BC
IC130	8-759-140-66	IC UPD4066BC
IC131	8-759-700-06	IC NJM7812B
IC132	8-759-278-06	IC TA78L006AP
IC133	8-759-179-12	IC UPC7912H
IC134	8-759-745-61	IC NJM4560D-D
IC135	8-759-745-61	IC NJM4560D-D
IC601	8-759-145-58	IC UPC4558C
IC602	8-759-145-58	IC UPC4558C
IC603	8-759-600-69	IC CX-069A
IC701	8-759-145-58	IC UPC4558C
IC702	8-759-145-58	IC UPC4558C
IC703	8-759-600-69	IC CX-069A
IC901	8-759-141-26	IC UPD75108CW-151
IC902	8-759-133-90	IC UPC339C
IC903	8-759-929-11	IC BA618
IC904	8-759-929-11	IC BA618
IC905	8-759-203-95	IC TD62104P
J101	1-507-806-41	JACK (EARPHONE)
J102	1-507-922-00	JACK (REMOTE)
J103	1-565-114-11	JACK, MODULAR (DISPLAY)
J104	1-507-826-00	JACK, LARGE TYPE (PA)
J105	1-565-173-11	CONNECTOR, D-SUB (MOUNT TYPE 15P (CONTROL UNIT))
J901	*1-561-533-00	SOCKET, CONNECTOR 12P (FOOT SWITCH)
J902	1-562-299-21	CONNECTOR (RECEPTACLE) (MIC CH1)
J903	1-562-299-21	CONNECTOR (RECEPTACLE) (MIC CH1)
J904	1-562-299-21	CONNECTOR (RECEPTACLE) (MIC CH2)
J905	1-562-299-21	CONNECTOR (RECEPTACLE) (MIC CH2)
J906	1-562-299-21	CONNECTOR (RECEPTACLE) (MIC CH3)
J907	1-562-299-21	CONNECTOR (RECEPTACLE) (MIC CH3)
J908	1-562-299-21	CONNECTOR (RECEPTACLE) (MIC CH4)
J909	1-562-299-21	CONNECTOR (RECEPTACLE) (MIC CH4)

Ref.No.	Part No.	Description
L101	1-433-220-00	TRANSFORMER, BIAS
L201	1-433-220-00	TRANSFORMER, BIAS
L601	1-462-196-21	(DECK-A)...COIL, MOTOR (STATOR)
L602	1-462-196-21	(DECK-A)...COIL, MOTOR (STATOR)
L603	1-462-196-21	(DECK-A)...COIL, MOTOR (STATOR)
L604	1-462-196-21	(DECK-A)...COIL, MOTOR (STATOR)
L701	1-462-196-21	(DECK-B)...COIL, MOTOR (STATOR)
L702	1-462-196-21	(DECK-B)...COIL, MOTOR (STATOR)
L703	1-462-196-21	(DECK-B)...COIL, MOTOR (STATOR)
L704	1-462-196-21	(DECK-B)...COIL, MOTOR (STATOR)
ND901	8-719-938-24	DIODE LC-305MK
ND902	8-719-938-24	DIODE LC-305MK
PM601	1-454-179-21	(DECK-A)...SOLENOID, PLUNGER (EJECT)
PM602	1-454-385-11	(DECK-A)...SOLENOID, PLUNGER (FF/REW)
PM603	1-454-385-11	(DECK-A)...SOLENOID, PLUNGER (FWD)
PM701	1-454-179-21	(DECK-B)...SOLENOID, PLUNGER (EJECT)
PM702	1-454-385-11	(DECK-B)...SOLENOID, PLUNGER (FF/REW)
PM703	1-454-385-11	(DECK-B)...SOLENOID, PLUNGER (FWD)
Q102	8-729-811-24	TRANSISTOR 2SD1012
Q103	8-729-117-54	TRANSISTOR 2SA1175
Q151	8-729-802-34	TRANSISTOR 2SD1388
Q152	8-729-900-36	TRANSISTOR DTC124ES
Q153	8-729-600-27	TRANSISTOR 2SC634SP
Q154	8-729-900-36	TRANSISTOR DTC124ES
Q155	8-729-900-65	TRANSISTOR DTA144ES
Q156	8-729-900-65	TRANSISTOR DTA144ES
Q157	8-729-900-89	TRANSISTOR DTC144ES
Q158	8-729-600-27	TRANSISTOR 2SC634SP
Q160	8-729-600-27	TRANSISTOR 2SC634SP
Q202	8-729-811-24	TRANSISTOR 2SD1012
Q203	8-729-117-54	TRANSISTOR 2SA1175
Q251	8-729-802-34	TRANSISTOR 2SD1388
Q252	8-729-900-36	TRANSISTOR DTC124ES
Q253	8-729-600-27	TRANSISTOR 2SC634SP
Q254	8-729-900-36	TRANSISTOR DTC124ES
Q255	8-729-900-65	TRANSISTOR DTA144ES
Q256	8-729-900-65	TRANSISTOR DTA144ES
Q257	8-729-900-89	TRANSISTOR DTC144ES
Q258	8-729-600-27	TRANSISTOR 2SC634SP
Q260	8-729-600-27	TRANSISTOR 2SC634SP
Q302	8-729-811-24	TRANSISTOR 2SD1012
Q303	8-729-117-54	TRANSISTOR 2SA1175
Q351	8-729-600-27	TRANSISTOR 2SC634SP
Q352	8-729-811-24	TRANSISTOR 2SD1012
Q353	8-729-811-24	TRANSISTOR 2SD1012
Q402	8-729-811-24	TRANSISTOR 2SD1012
Q403	8-729-117-54	TRANSISTOR 2SA1175
Q451	8-729-600-27	TRANSISTOR 2SC634SP
Q452	8-729-600-27	TRANSISTOR 2SC634SP
Q453	8-729-600-27	TRANSISTOR 2SC634SP
Q454	8-729-900-89	TRANSISTOR DTC144ES
Q455	8-729-117-54	TRANSISTOR 2SA1175
Q502	8-729-811-24	TRANSISTOR 2SD1012
Q503	8-729-117-54	TRANSISTOR 2SA1175
Q602	8-729-811-24	TRANSISTOR 2SD1012
Q603	8-729-117-54	TRANSISTOR 2SA1175
Q651	8-729-177-43	TRANSISTOR 2SD774
Q652	8-729-374-02	TRANSISTOR 2SB740

Ref.No.	Part No.	Description
Q653	8-729-177-43	TRANSISTOR 2SD774
Q654	8-729-374-02	TRANSISTOR 2SB740
Q655	8-729-600-27	TRANSISTOR 2SC634SP
Q657	8-729-117-54	TRANSISTOR 2SA1175
Q658	8-729-900-61	TRANSISTOR DTA114ES
Q660	8-729-900-74	TRANSISTOR DTC143TS
Q661	8-729-900-89	TRANSISTOR DTC144ES
Q662	8-729-900-89	TRANSISTOR DTC144ES
Q663	8-729-102-10	TRANSISTOR PH104
Q664	8-729-102-10	TRANSISTOR PH104
Q665	8-729-801-83	TRANSISTOR 2SB1013
Q667	8-729-900-36	TRANSISTOR DTC124ES
Q668	8-729-900-36	TRANSISTOR DTC124ES
Q669	8-729-900-36	TRANSISTOR DTC124ES
Q671	8-729-900-61	TRANSISTOR DTA114ES
Q672	8-729-900-61	TRANSISTOR DTA114ES
Q673	8-729-801-93	TRANSISTOR 2SD1387
Q674	8-729-801-93	TRANSISTOR 2SD1387
Q677	8-729-801-83	TRANSISTOR 2SB1013
Q702	8-729-811-24	TRANSISTOR 2SD1012
Q703	8-729-117-54	TRANSISTOR 2SA1175
Q751	8-729-177-43	TRANSISTOR 2SD774
Q752	8-729-374-02	TRANSISTOR 2SB740
Q753	8-729-177-43	TRANSISTOR 2SD774
Q754	8-729-374-02	TRANSISTOR 2SB740
Q755	8-729-600-27	TRANSISTOR 2SC634SP
Q756	8-729-900-61	TRANSISTOR DTA114ES
Q757	8-729-117-54	TRANSISTOR 2SA1175
Q758	8-729-117-54	TRANSISTOR 2SA1175
Q759	8-729-900-89	TRANSISTOR DTC144ES
Q760	8-729-900-74	TRANSISTOR DTC143TS
Q761	8-729-900-89	TRANSISTOR DTC144ES
Q762	8-729-900-89	TRANSISTOR DTC144ES
Q763	8-729-102-10	TRANSISTOR PH104
Q764	8-729-102-10	TRANSISTOR PH104
Q765	8-729-801-83	TRANSISTOR 2SB1013
Q767	8-729-900-36	TRANSISTOR DTC124ES
Q768	8-729-900-36	TRANSISTOR DTC124ES
Q769	8-729-900-36	TRANSISTOR DTC124ES
Q770	8-729-900-65	TRANSISTOR DTA144ES
Q771	8-729-900-61	TRANSISTOR DTA114ES
Q772	8-729-900-61	TRANSISTOR DTA114ES
Q773	8-729-801-93	TRANSISTOR 2SD1387
Q774	8-729-801-93	TRANSISTOR 2SD1387
Q775	8-729-900-89	TRANSISTOR DTC144ES
Q776	8-729-801-93	TRANSISTOR 2SD1387
Q802	8-729-811-24	TRANSISTOR 2SD1012
Q803	8-729-117-54	TRANSISTOR 2SA1175
Q904	8-729-900-65	TRANSISTOR DTA144ES
Q905	8-729-900-65	TRANSISTOR DTA144ES
Q906	8-729-900-65	TRANSISTOR DTA144ES
Q907	8-729-900-65	TRANSISTOR DTA144ES
Q908	8-729-900-65	TRANSISTOR DTA144ES
Q909	8-729-900-65	TRANSISTOR DTA144ES
Q910	8-729-900-80	TRANSISTOR DTC114ES
Q912	8-729-600-27	TRANSISTOR 2SC634SP
Q915	8-729-600-27	TRANSISTOR 2SC634SP

Ref.No.	Part No.	Description
Q916	8-729-900-61	TRANSISTOR DTA114ES
Q917	8-729-600-27	TRANSISTOR 2SC634SP
Q918	8-729-900-61	TRANSISTOR DTA114ES
Q919	8-729-600-27	TRANSISTOR 2SC634SP
Q920	8-729-600-27	TRANSISTOR 2SC634SP
Q921	8-729-117-54	TRANSISTOR 2SA1175
Q922	8-729-117-54	TRANSISTOR 2SA1175
Q923	8-729-900-80	TRANSISTOR DTC114ES
Q924	8-729-900-36	TRANSISTOR DTC124ES
Q925	8-729-900-36	TRANSISTOR DTC124ES
Q926	8-729-900-89	TRANSISTOR DTC144ES
Q927	8-729-900-89	TRANSISTOR DTC144ES
R101	1-249-437-11	CARBON 47K 5% 1/4W
R102	1-249-410-11	CARBON 270 5% 1/4W
R103	1-249-437-11	CARBON 47K 5% 1/4W
R104	1-249-437-11	CARBON 47K 5% 1/4W
R105	1-249-429-11	CARBON 10K 5% 1/4W
R110	1-249-429-11	CARBON 10K 5% 1/4W
R111	1-249-437-11	CARBON 47K 5% 1/4W
R112	1-249-433-11	CARBON 22K 5% 1/4W
R113	1-249-438-11	CARBON 56K 5% 1/4W
R114	1-249-439-11	CARBON 68K 5% 1/4W
R115	1-249-410-11	CARBON 270 5% 1/4W
R116	1-249-407-11	CARBON 150 5% 1/4W
R117	1-249-417-11	CARBON 1K 5% 1/4W
R118	1-249-405-11	CARBON 100 5% 1/4W
R119	1-249-433-11	CARBON 22K 5% 1/4W
R120	1-249-425-11	CARBON 4.7K 5% 1/4W
R121	1-249-441-11	CARBON 100K 5% 1/4W
R122	1-249-419-11	CARBON 1.5K 5% 1/4W
R123	1-215-483-00	CARBON 390K 5% 1/4W
R124	1-249-417-11	CARBON 1K 5% 1/4W
R125	1-249-433-11	CARBON 22K 5% 1/4W
R126	1-249-417-11	CARBON 1K 5% 1/4W
R127	1-249-429-11	CARBON 10K 5% 1/4W
R128	1-249-441-11	CARBON 100K 5% 1/4W
R129	1-249-429-11	CARBON 10K 5% 1/4W
R130	1-249-435-11	CARBON 33K 5% 1/4W
R131	1-249-423-11	CARBON 3.3K 5% 1/4W
R132	1-249-423-11	CARBON 3.3K 5% 1/4W
R133	1-249-439-11	CARBON 68K 5% 1/4W
R134	1-249-434-11	CARBON 27K 5% 1/4W
R135	1-249-423-11	CARBON 3.3K 5% 1/4W
R151	1-249-426-11	CARBON 5.6K 5% 1/4W
R152	1-249-424-11	CARBON 3.9K 5% 1/4W
R153	1-249-422-11	CARBON 2.7K 5% 1/4W
R154	1-249-410-11	CARBON 270 5% 1/4W
R155	1-249-437-11	CARBON 47K 5% 1/4W
R156	1-249-409-11	CARBON 220 5% 1/4W
R157	1-249-404-00	CARBON 82 5% 1/4W
R158	1-249-437-11	CARBON 47K 5% 1/4W
R159	1-249-425-11	CARBON 4.7K 5% 1/4W
R161	1-249-441-11	CARBON 100K 5% 1/4W
R162	1-249-433-11	CARBON 22K 5% 1/4W
R163	1-249-429-11	CARBON 10K 5% 1/4W
R164	1-247-887-00	CARBON 220K 5% 1/4W
R165	1-249-413-11	CARBON 470 5% 1/4W

Ref.No.	Part No.	Description
---------	----------	-------------

R166	1-249-441-11	CARBON	100K	5%	1/4W
R167	1-249-413-11	CARBON	470	5%	1/4W
R168	1-249-417-11	CARBON	1K	5%	1/4W
R169	1-249-429-11	CARBON	10K	5%	1/4W
R170	1-249-431-11	CARBON	15K	5%	1/4W
R171	1-249-441-11	CARBON	100K	5%	1/4W
R172	1-249-437-11	CARBON	47K	5%	1/4W
R173	1-249-417-11	CARBON	1K	5%	1/4W
R174	1-249-429-11	CARBON	10K	5%	1/4W
R175	1-249-441-11	CARBON	100K	5%	1/4W
R176	1-249-417-11	CARBON	1K	5%	1/4W
R177	1-249-421-11	CARBON	2.2K	5%	1/4W
R178	1-249-413-11	CARBON	470	5%	1/4W
R179	1-249-429-11	CARBON	10K	5%	1/4W
R201	1-249-437-11	CARBON	47K	5%	1/4W
R202	1-249-410-11	CARBON	270	5%	1/4W
R203	1-249-437-11	CARBON	47K	5%	1/4W
R204	1-249-437-11	CARBON	47K	5%	1/4W
R205	1-249-429-11	CARBON	10K	5%	1/4W
R210	1-249-429-11	CARBON	10K	5%	1/4W
R211	1-249-437-11	CARBON	47K	5%	1/4W
R212	1-249-433-11	CARBON	22K	5%	1/4W
R213	1-249-438-11	CARBON	56K	5%	1/4W
R214	1-249-439-11	CARBON	68K	5%	1/4W
R215	1-249-410-11	CARBON	270	5%	1/4W
R216	1-249-407-11	CARBON	150	5%	1/4W
R217	1-249-417-11	CARBON	1K	5%	1/4W
R218	1-249-405-11	CARBON	100	5%	1/4W
R219	1-249-433-11	CARBON	22K	5%	1/4W
R220	1-249-425-11	CARBON	4.7K	5%	1/4W
R221	1-249-441-11	CARBON	100K	5%	1/4W
R222	1-249-419-11	CARBON	1.5K	5%	1/4W
R223	1-215-483-00	CARBON	390K	5%	1/4W
R224	1-249-417-11	CARBON	1K	5%	1/4W
R225	1-249-433-11	CARBON	22K	5%	1/4W
R226	1-249-417-11	CARBON	1K	5%	1/4W
R227	1-249-429-11	CARBON	10K	5%	1/4W
R228	1-249-441-11	CARBON	100K	5%	1/4W
R229	1-249-429-11	CARBON	10K	5%	1/4W
R230	1-249-435-11	CARBON	33K	5%	1/4W
R231	1-249-423-11	CARBON	3.3K	5%	1/4W
R232	1-249-423-11	CARBON	3.3K	5%	1/4W
R233	1-249-439-11	CARBON	68K	5%	1/4W
R234	1-249-434-11	CARBON	27K	5%	1/4W
R235	1-249-423-11	CARBON	3.3K	5%	1/4W
R251	1-249-426-11	CARBON	5.6K	5%	1/4W
R252	1-249-424-11	CARBON	3.9K	5%	1/4W
R253	1-249-422-11	CARBON	2.7K	5%	1/4W
R254	1-249-410-11	CARBON	270	5%	1/4W
R255	1-249-437-11	CARBON	47K	5%	1/4W
R256	1-249-409-11	CARBON	220	5%	1/4W
R257	1-249-404-00	CARBON	82	5%	1/4W
R258	1-249-437-11	CARBON	47K	5%	1/4W
R259	1-249-425-11	CARBON	4.7K	5%	1/4W
R261	1-249-441-11	CARBON	100K	5%	1/4W
R262	1-249-433-11	CARBON	22K	5%	1/4W
R263	1-249-429-11	CARBON	10K	5%	1/4W

Ref.No.	Part No.	Description
---------	----------	-------------

R264	1-247-887-00	CARBON	220K	5%	1/4W
R265	1-249-413-11	CARBON	470	5%	1/4W
R266	1-249-441-11	CARBON	100K	5%	1/4W
R267	1-249-413-11	CARBON	470	5%	1/4W
R268	1-249-417-11	CARBON	1K	5%	1/4W
R269	1-249-429-11	CARBON	10K	5%	1/4W
R270	1-249-431-11	CARBON	15K	5%	1/4W
R271	1-249-441-11	CARBON	100K	5%	1/4W
R272	1-249-437-11	CARBON	47K	5%	1/4W
R273	1-249-417-11	CARBON	1K	5%	1/4W
R274	1-249-429-11	CARBON	10K	5%	1/4W
R275	1-249-441-11	CARBON	100K	5%	1/4W
R276	1-249-417-11	CARBON	1K	5%	1/4W
R277	1-249-421-11	CARBON	2.2K	5%	1/4W
R278	1-249-413-11	CARBON	470	5%	1/4W
R279	1-249-429-11	CARBON	10K	5%	1/4W
R301	1-249-437-11	CARBON	47K	5%	1/4W
R302	1-249-410-11	CARBON	270	5%	1/4W
R303	1-249-437-11	CARBON	47K	5%	1/4W
R304	1-249-437-11	CARBON	47K	5%	1/4W
R305	1-249-429-11	CARBON	10K	5%	1/4W
R310	1-249-429-11	CARBON	10K	5%	1/4W
R311	1-249-437-11	CARBON	47K	5%	1/4W
R312	1-249-433-11	CARBON	22K	5%	1/4W
R313	1-249-438-11	CARBON	56K	5%	1/4W
R314	1-249-439-11	CARBON	68K	5%	1/4W
R315	1-249-410-11	CARBON	270	5%	1/4W
R316	1-249-407-11	CARBON	150	5%	1/4W
R317	1-249-417-11	CARBON	1K	5%	1/4W
R318	1-249-405-11	CARBON	100	5%	1/4W
R319	1-249-433-11	CARBON	22K	5%	1/4W
R320	1-249-425-11	CARBON	4.7K	5%	1/4W
R321	1-249-441-11	CARBON	100K	5%	1/4W
R322	1-249-419-11	CARBON	1.5K	5%	1/4W
R323	1-215-483-00	CARBON	390K	5%	1/4W
R324	1-249-417-11	CARBON	1K	5%	1/4W
R325	1-249-433-11	CARBON	22K	5%	1/4W
R326	1-249-417-11	CARBON	1K	5%	1/4W
R327	1-249-429-11	CARBON	10K	5%	1/4W
R328	1-249-441-11	CARBON	100K	5%	1/4W
R329	1-249-429-11	CARBON	10K	5%	1/4W
R330	1-249-435-11	CARBON	33K	5%	1/4W
R331	1-249-423-11	CARBON	3.3K	5%	1/4W
R332	1-249-423-11	CARBON	3.3K	5%	1/4W
R333	1-249-439-11	CARBON	68K	5%	1/4W
R334	1-249-434-11	CARBON	27K	5%	1/4W
R335	1-249-423-11	CARBON	3.3K	5%	1/4W
R351	1-249-405-11	CARBON	100	5%	1/4W
R352	1-249-405-11	CARBON	100	5%	1/4W
R353	1-249-405-11	CARBON	100	5%	1/4W
R354	1-249-405-11	CARBON	100	5%	1/4W
R356	1-249-409-11	CARBON	220	5%	1/4W
R357	1-249-409-11	CARBON	220	5%	1/4W
R360	1-249-437-11	CARBON	47K	5%	1/4W
R361	1-247-883-00	CARBON	150K	5%	1/4W
R362	1-249-438-11	CARBON	56K	5%	1/4W
R363	1-249-434-11	CARBON	27K	5%	1/4W

SEE ADDITIONAL
INFORMATION

Ref.No.	Part No.	Description					Ref.No.	Part No.	Description				
R364	1-249-433-11	CARBON	22K	5%	1/4W		R428	1-249-441-11	CARBON	100K	5%	1/4W	
R365	1-249-437-11	CARBON	47K	5%	1/4W		R429	1-249-429-11	CARBON	10K	5%	1/4W	
R366	1-249-431-11	CARBON	15K	5%	1/4W		R430	1-249-435-11	CARBON	33K	5%	1/4W	
R367	1-249-433-11	CARBON	22K	5%	1/4W								
R368	1-249-441-11	CARBON	100K	5%	1/4W		R431	1-249-423-11	CARBON	3.3K	5%	1/4W	
R369	1-249-441-11	CARBON	100K	5%	1/4W		R432	1-249-423-11	CARBON	3.3K	5%	1/4W	
R370	1-249-433-11	CARBON	22K	5%	1/4W		R433	1-249-439-11	CARBON	68K	5%	1/4W	
R371	1-249-425-11	CARBON	4.7K	5%	1/4W		R434	1-249-434-11	CARBON	27K	5%	1/4W	
R372	1-249-433-11	CARBON	22K	5%	1/4W		R435	1-249-423-11	CARBON	3.3K	5%	1/4W	
R373	1-249-437-11	CARBON	47K	5%	1/4W		R451	1-249-441-11	CARBON	100K	5%	1/4W	
R374	1-249-433-11	CARBON	22K	5%	1/4W		R452	1-249-405-11	CARBON	100	5%	1/4W	
R375	1-249-437-11	CARBON	47K	5%	1/4W		R453	1-249-405-11	CARBON	100	5%	1/4W	
R376	1-249-437-11	CARBON	47K	5%	1/4W		R454	1-249-405-11	CARBON	100	5%	1/4W	
R377	1-247-883-00	CARBON	150K	5%	1/4W		R455	1-249-437-11	CARBON	47K	5%	1/4W	
R378	1-247-881-00	CARBON	120K	5%	1/4W		R456	1-249-437-11	CARBON	47K	5%	1/4W	
R379	1-249-438-11	CARBON	56K	5%	1/4W		R457	1-249-437-11	CARBON	47K	5%	1/4W	
R380	1-249-409-11	CARBON	220	5%	1/4W		R458	1-249-441-11	CARBON	100K	5%	1/4W	
R381	1-249-411-11	CARBON	330	5%	1/4W		R459	1-249-429-11	CARBON	10K	5%	1/4W	
R382	1-249-399-11	CARBON	33	5%	1/4W		R460	1-249-417-11	CARBON	1K	5%	1/4W	
R383	1-249-441-11	CARBON	100K	5%	1/4W		R461	1-249-417-11	CARBON	1K	5%	1/4W	
R384	1-249-429-11	CARBON	10K	5%	1/4W		R462	1-249-441-11	CARBON	100K	5%	1/4W	
R385	1-249-437-11	CARBON	47K	5%	1/4W		R463	1-249-425-11	CARBON	4.7K	5%	1/4W	
R386	1-249-433-11	CARBON	22K	5%	1/4W		R464	1-249-425-11	CARBON	4.7K	5%	1/4W	
R387	1-249-429-11	CARBON	10K	5%	1/4W		R465	1-249-425-11	CARBON	4.7K	5%	1/4W	
R388	1-249-429-11	CARBON	10K	5%	1/4W		R466	1-249-425-11	CARBON	4.7K	5%	1/4W	
R389	1-249-434-11	CARBON	27K	5%	1/4W		R501	1-249-437-11	CARBON	47K	5%	1/4W	
R390	1-249-429-11	CARBON	10K	5%	1/4W		R502	1-249-410-11	CARBON	270	5%	1/4W	
R391	1-249-437-11	CARBON	47K	5%	1/4W		R503	1-249-437-11	CARBON	47K	5%	1/4W	
R392	1-249-429-11	CARBON	10K	5%	1/4W		R504	1-249-437-11	CARBON	47K	5%	1/4W	
R393	1-249-437-11	CARBON	47K	5%	1/4W		R505	1-249-429-11	CARBON	10K	5%	1/4W	
R394	1-249-425-11	CARBON	4.7K	5%	1/4W		R510	1-249-429-11	CARBON	10K	5%	1/4W	
R395	1-249-441-11	CARBON	100K	5%	1/4W		R511	1-249-437-11	CARBON	47K	5%	1/4W	
R396	1-247-887-00	CARBON	220K	5%	1/4W		R512	1-249-433-11	CARBON	22K	5%	1/4W	
R397	1-249-417-11	CARBON	1K	5%	1/4W		R513	1-249-438-11	CARBON	56K	5%	1/4W	
R398	1-249-437-11	CARBON	47K	5%	1/4W		R514	1-249-439-11	CARBON	68K	5%	1/4W	
R401	1-249-437-11	CARBON	47K	5%	1/4W		R515	1-249-410-11	CARBON	270	5%	1/4W	
R402	1-249-410-11	CARBON	270	5%	1/4W		R516	1-249-407-11	CARBON	150	5%	1/4W	
R403	1-249-437-11	CARBON	47K	5%	1/4W		R517	1-249-417-11	CARBON	1K	5%	1/4W	
R404	1-249-437-11	CARBON	47K	5%	1/4W		R518	1-249-405-11	CARBON	100	5%	1/4W	
R405	1-249-429-11	CARBON	10K	5%	1/4W		R519	1-249-433-11	CARBON	22K	5%	1/4W	
R410	1-249-429-11	CARBON	10K	5%	1/4W		R520	1-249-425-11	CARBON	4.7K	5%	1/4W	
R411	1-249-437-11	CARBON	47K	5%	1/4W		R521	1-249-441-11	CARBON	100K	5%	1/4W	
R412	1-249-433-11	CARBON	22K	5%	1/4W		R522	1-249-419-11	CARBON	1.5K	5%	1/4W	
R413	1-249-438-11	CARBON	56K	5%	1/4W		R523	1-215-483-00	CARBON	390K	5%	1/4W	
R414	1-249-439-11	CARBON	68K	5%	1/4W		R524	1-249-417-11	CARBON	1K	5%	1/4W	
R415	1-249-410-11	CARBON	270	5%	1/4W		R525	1-249-433-11	CARBON	22K	5%	1/4W	
R416	1-249-407-11	CARBON	150	5%	1/4W		R526	1-249-417-11	CARBON	1K	5%	1/4W	
R417	1-249-417-11	CARBON	1K	5%	1/4W		R527	1-249-429-11	CARBON	10K	5%	1/4W	
R418	1-249-405-11	CARBON	100	5%	1/4W		R528	1-249-441-11	CARBON	100K	5%	1/4W	
R419	1-249-433-11	CARBON	22K	5%	1/4W		R529	1-249-429-11	CARBON	10K	5%	1/4W	
R420	1-249-425-11	CARBON	4.7K	5%	1/4W		R601	1-249-437-11	CARBON	47K	5%	1/4W	
R421	1-249-441-11	CARBON	100K	5%	1/4W		R602	1-249-410-11	CARBON	270	5%	1/4W	
R422	1-249-419-11	CARBON	1.5K	5%	1/4W		R603	1-249-437-11	CARBON	47K	5%	1/4W	
R423	1-215-483-00	CARBON	390K	5%	1/4W		R604	1-249-437-11	CARBON	47K	5%	1/4W	
R424	1-249-417-11	CARBON	1K	5%	1/4W		R605	1-249-429-11	CARBON	10K	5%	1/4W	
R425	1-249-433-11	CARBON	22K	5%	1/4W		R610	1-249-429-11	CARBON	10K	5%	1/4W	
R426	1-249-417-11	CARBON	1K	5%	1/4W		R611	1-249-437-11	CARBON	47K	5%	1/4W	
R427	1-249-429-11	CARBON	10K	5%	1/4W		R612	1-249-433-11	CARBON	22K	5%	1/4W	

SEE ADDITIONAL
INFORMATION

BM-246

Ref.No.	Part No.	Description							
R613	1-249-438-11	CARBON	56K	5%	1/4W				
R614	1-249-439-11	CARBON	68K	5%	1/4W				
R615	1-249-410-11	CARBON	270	5%	1/4W				
R616	1-249-407-11	CARBON	150	5%	1/4W				
R617	1-249-417-11	CARBON	1K	5%	1/4W				
R618	1-249-405-11	CARBON	100	5%	1/4W				
R619	1-249-433-11	CARBON	22K	5%	1/4W				
R620	1-249-425-11	CARBON	4.7K	5%	1/4W				
R621	1-249-441-11	CARBON	100K	5%	1/4W				
R622	1-249-419-11	CARBON	1.5K	5%	1/4W				
R623	1-215-483-00	CARBON	390K	5%	1/4W				
R624	1-249-417-11	CARBON	1K	5%	1/4W				
R625	1-249-433-11	CARBON	22K	5%	1/4W				
R626	1-249-417-11	CARBON	1K	5%	1/4W				
R627	1-249-429-11	CARBON	10K	5%	1/4W				
R628	1-249-441-11	CARBON	100K	5%	1/4W				
R629	1-249-429-11	CARBON	10K	5%	1/4W				
R648	1-249-433-11	CARBON	22K	5%	1/4W				
R651	1-249-411-11	CARBON	330	5%	1/4W				
R652	1-249-411-11	CARBON	330	5%	1/4W				
R653	1-249-411-11	CARBON	330	5%	1/4W				
R654	1-249-424-11	CARBON	3.9K	5%	1/4W				
R655	1-215-489-00	CARBON	680K	5%	1/4W				
R656	1-249-424-11	CARBON	3.9K	5%	1/4W				
R657	1-215-489-00	CARBON	680K	5%	1/4W				
R658	1-249-405-11	CARBON	100	5%	1/4W				
R659	1-249-411-11	CARBON	330	5%	1/4W				
R660	1-249-411-11	CARBON	330	5%	1/4W				
R661	1-249-411-11	CARBON	330	5%	1/4W				
R662	1-249-424-11	CARBON	3.9K	5%	1/4W				
R663	1-215-489-00	CARBON	680K	5%	1/4W				
R664	1-249-405-11	CARBON	100	5%	1/4W				
R665	1-215-489-00	CARBON	680K	5%	1/4W				
R666	1-249-424-11	CARBON	3.9K	5%	1/4W				
R667	1-249-419-11	CARBON	1.5K	5%	1/4W				
R668	1-247-883-00	CARBON	150K	5%	1/4W				
R669	1-249-441-11	CARBON	100K	5%	1/4W				
R670	1-249-441-11	CARBON	100K	5%	1/4W				
R671	1-249-441-11	CARBON	100K	5%	1/4W				
R672	1-249-441-11	CARBON	100K	5%	1/4W				
R673	1-249-441-11	CARBON	100K	5%	1/4W				
R674	1-249-437-11	CARBON	47K	5%	1/4W				
R675	1-249-429-11	CARBON	10K	5%	1/4W				
R677	1-249-430-11	CARBON	12K	5%	1/4W				
R678	1-249-430-11	CARBON	12K	5%	1/4W				
R679	1-249-429-11	CARBON	10K	5%	1/4W				
R680	1-249-429-11	CARBON	10K	5%	1/4W				
R681	1-249-435-11	CARBON	33K	5%	1/4W				
R683	1-249-413-11	CARBON	470	5%	1/4W				
R684	1-249-431-11	CARBON	15K	5%	1/4W				
R685	1-249-431-11	CARBON	15K	5%	1/4W				
R686	1-249-441-11	CARBON	100K	5%	1/4W				
R687	1-249-421-11	CARBON	2.2K	5%	1/4W				
R689	1-249-433-11	CARBON	22K	5%	1/4W				
R690	1-249-433-11	CARBON	22K	5%	1/4W				
R691	1-249-423-11	CARBON	3.3K	5%	1/4W				
R692	1-249-441-11	CARBON	100K	5%	1/4W				
R693	1-249-423-11	CARBON	3.3K	5%	1/4W				
R694	1-249-441-11	CARBON	100K	5%	1/4W				
R696	1-215-911-11	METAL OXIDE	100	5%	3W	F			
R697	1-249-441-11	CARBON	100K	5%	1/4W				
R698	1-249-419-11	CARBON	1.5K	5%	1/4W				
R701	1-249-437-11	CARBON	47K	5%	1/4W				
R702	1-249-410-11	CARBON	270	5%	1/4W				
R703	1-249-437-11	CARBON	47K	5%	1/4W				
R704	1-249-437-11	CARBON	47K	5%	1/4W				
R705	1-249-429-11	CARBON	10K	5%	1/4W				
R710	1-249-429-11	CARBON	10K	5%	1/4W				
R711	1-249-437-11	CARBON	47K	5%	1/4W				
R712	1-249-433-11	CARBON	22K	5%	1/4W				
R713	1-249-438-11	CARBON	56K	5%	1/4W				
R714	1-249-439-11	CARBON	68K	5%	1/4W				
R715	1-249-410-11	CARBON	270	5%	1/4W				
R716	1-249-407-11	CARBON	150	5%	1/4W				
R717	1-249-417-11	CARBON	1K	5%	1/4W				
R718	1-249-405-11	CARBON	100	5%	1/4W				
R719	1-249-433-11	CARBON	22K	5%	1/4W				
R720	1-249-425-11	CARBON	4.7K	5%	1/4W				
R721	1-249-441-11	CARBON	100K	5%	1/4W				
R722	1-249-419-11	CARBON	1.5K	5%	1/4W				
R723	1-215-483-00	CARBON	390K	5%	1/4W				
R724	1-249-417-11	CARBON	1K	5%	1/4W				
R725	1-249-433-11	CARBON	22K	5%	1/4W				
R726	1-249-417-11	CARBON	1K	5%	1/4W				
R727	1-249-429-11	CARBON	10K	5%	1/4W				
R728	1-249-441-11	CARBON	100K	5%	1/4W				
R729	1-249-429-11	CARBON	10K	5%	1/4W				
R748	1-249-433-11	CARBON	22K	5%	1/4W				
R749	1-249-441-11	CARBON	100K	5%	1/4W				
R750	1-249-441-11	CARBON	100K	5%	1/4W				
R751	1-249-411-11	CARBON	330	5%	1/4W				
R752	1-249-411-11	CARBON	330	5%	1/4W				
R753	1-249-411-11	CARBON	330	5%	1/4W				
R754	1-249-424-11	CARBON	3.9K	5%	1/4W				
R755	1-215-489-00	CARBON	680K	5%	1/4W				
R756	1-249-424-11	CARBON	3.9K	5%	1/4W				
R757	1-215-489-00	CARBON	680K	5%	1/4W				
R758	1-249-405-11	CARBON	100	5%	1/4W				
R759	1-249-411-11	CARBON	330	5%	1/4W				
R760	1-249-411-11	CARBON	330	5%	1/4W				
R761	1-249-411-11	CARBON	330	5%	1/4W				
R762	1-249-424-11	CARBON	3.9K	5%	1/4W				
R763	1-215-489-00	CARBON	680K	5%	1/4W				
R764	1-249-405-11	CARBON	100	5%	1/4W				
R765	1-215-489-00	CARBON	680K	5%	1/4W				
R766	1-249-424-11	CARBON	3.9K	5%	1/4W				
R767	1-249-419-11	CARBON	1.5K	5%	1/4W				
R768	1-247-883-00	CARBON	150K	5%	1/4W				
R769	1-249-441-11	CARBON	100K	5%	1/4W				
R770	1-249-441-11	CARBON	100K	5%	1/4W				
R771	1-249-441-11	CARBON	100K	5%	1/4W				
R772	1-249-441-11	CARBON	100K	5%	1/4W				
R773	1-249-441-11	CARBON	100K	5%	1/4W				
R774	1-249-437-11	CARBON	47K	5%	1/4W				

SEE ADDITIONAL
INFORMATION

Ref.No.	Part No.	Description				Ref.No.	Part No.	Description			
R775	1-249-429-11	CARBON	10K	5%	1/4W	R915	1-249-417-11	CARBON	1K	5%	1/4W
R776	1-249-428-11	CARBON	8.2K	5%	1/4W	R916	1-249-441-11	CARBON	100K	5%	1/4W
R777	1-249-430-11	CARBON	12K	5%	1/4W	R917	1-249-441-11	CARBON	100K	5%	1/4W
R778	1-249-430-11	CARBON	12K	5%	1/4W	R918	1-249-437-11	CARBON	47K	5%	1/4W
R779	1-249-429-11	CARBON	10K	5%	1/4W	R919	1-249-437-11	CARBON	47K	5%	1/4W
R780	1-249-429-11	CARBON	10K	5%	1/4W	R920	1-249-429-11	CARBON	10K	5%	1/4W
R781	1-249-435-11	CARBON	33K	5%	1/4W	R921	1-249-417-11	CARBON	1K	5%	1/4W
R782	1-249-429-11	CARBON	10K	5%	1/4W	R923	1-249-437-11	CARBON	47K	5%	1/4W
R783	1-249-413-11	CARBON	470	5%	1/4W	R924	1-249-441-11	CARBON	100K	5%	1/4W
R784	1-249-431-11	CARBON	15K	5%	1/4W	R925	1-249-433-11	CARBON	22K	5%	1/4W
R785	1-249-431-11	CARBON	15K	5%	1/4W	R926	1-249-441-11	CARBON	100K	5%	1/4W
R786	1-249-441-11	CARBON	100K	5%	1/4W	R927	1-249-433-11	CARBON	22K	5%	1/4W
R787	1-249-421-11	CARBON	2.2K	5%	1/4W	R929	1-249-437-11	CARBON	47K	5%	1/4W
R789	1-249-433-11	CARBON	22K	5%	1/4W	R931	1-249-441-11	CARBON	100K	5%	1/4W
R790	1-249-433-11	CARBON	22K	5%	1/4W	R932	1-249-425-11	CARBON	4.7K	5%	1/4W
R791	1-249-423-11	CARBON	3.3K	5%	1/4W	R933	1-249-425-11	CARBON	4.7K	5%	1/4W
R792	1-249-441-11	CARBON	100K	5%	1/4W	R934	1-249-421-11	CARBON	2.2K	5%	1/4W
R793	1-249-423-11	CARBON	3.3K	5%	1/4W	R935	1-249-421-11	CARBON	2.2K	5%	1/4W
R794	1-249-441-11	CARBON	100K	5%	1/4W	R936	1-249-421-11	CARBON	2.2K	5%	1/4W
R798	1-249-423-11	CARBON	3.3K	5%	1/4W	R937	1-249-431-11	CARBON	15K	5%	1/4W
R799	1-249-441-11	CARBON	100K	5%	1/4W	R938	1-249-437-11	CARBON	47K	5%	1/4W
R801	1-249-437-11	CARBON	47K	5%	1/4W	R939	1-249-423-11	CARBON	3.3K	5%	1/4W
R802	1-249-410-11	CARBON	270	5%	1/4W	R940	1-249-437-11	CARBON	47K	5%	1/4W
R803	1-249-437-11	CARBON	47K	5%	1/4W	R941	1-249-431-11	CARBON	15K	5%	1/4W
R804	1-249-437-11	CARBON	47K	5%	1/4W	R942	1-249-437-11	CARBON	47K	5%	1/4W
R805	1-249-429-11	CARBON	10K	5%	1/4W	R943	1-249-423-11	CARBON	3.3K	5%	1/4W
R810	1-249-429-11	CARBON	10K	5%	1/4W	R944	1-249-437-11	CARBON	47K	5%	1/4W
R811	1-249-437-11	CARBON	47K	5%	1/4W	R945	1-249-431-11	CARBON	15K	5%	1/4W
R812	1-249-433-11	CARBON	22K	5%	1/4W	R946	1-249-437-11	CARBON	47K	5%	1/4W
R813	1-249-438-11	CARBON	56K	5%	1/4W	R947	1-249-423-11	CARBON	3.3K	5%	1/4W
R814	1-249-439-11	CARBON	68K	5%	1/4W	R948	1-249-437-11	CARBON	47K	5%	1/4W
R815	1-249-410-11	CARBON	270	5%	1/4W	R949	1-249-431-11	CARBON	15K	5%	1/4W
R816	1-249-407-11	CARBON	150	5%	1/4W	R950	1-249-437-11	CARBON	47K	5%	1/4W
R817	1-249-417-11	CARBON	1K	5%	1/4W	R951	1-249-423-11	CARBON	3.3K	5%	1/4W
R818	1-249-405-11	CARBON	100	5%	1/4W	R952	1-249-437-11	CARBON	47K	5%	1/4W
R819	1-249-433-11	CARBON	22K	5%	1/4W	R953	1-249-433-11	CARBON	22K	5%	1/4W
R820	1-249-425-11	CARBON	4.7K	5%	1/4W	R954	1-249-441-11	CARBON	100K	5%	1/4W
R821	1-249-441-11	CARBON	100K	5%	1/4W	R955	1-249-437-11	CARBON	47K	5%	1/4W
R822	1-249-419-11	CARBON	1.5K	5%	1/4W	R956	1-249-441-11	CARBON	100K	5%	1/4W
R823	1-215-483-00	CARBON	390K	5%	1/4W	R957	1-249-433-11	CARBON	22K	5%	1/4W
R824	1-249-417-11	CARBON	1K	5%	1/4W	R958	1-249-437-11	CARBON	47K	5%	1/4W
R825	1-249-433-11	CARBON	22K	5%	1/4W	R959	1-249-437-11	CARBON	47K	5%	1/4W
R826	1-249-417-11	CARBON	1K	5%	1/4W	R960	1-249-437-11	CARBON	47K	5%	1/4W
R827	1-249-429-11	CARBON	10K	5%	1/4W	R961	1-249-437-11	CARBON	47K	5%	1/4W
R828	1-249-441-11	CARBON	100K	5%	1/4W	R962	1-249-437-11	CARBON	47K	5%	1/4W
R829	1-249-429-11	CARBON	10K	5%	1/4W	R963	1-249-437-11	CARBON	47K	5%	1/4W
R901	1-249-437-11	CARBON	47K	5%	1/4W	R964	1-249-411-11	CARBON	330	5%	1/4W
R902	1-249-417-11	CARBON	1K	5%	1/4W	R965	1-249-411-11	CARBON	330	5%	1/4W
R904	1-249-437-11	CARBON	47K	5%	1/4W	R966	1-249-411-11	CARBON	330	5%	1/4W
R905	1-249-417-11	CARBON	1K	5%	1/4W	R967	1-249-411-11	CARBON	330	5%	1/4W
R907	1-249-437-11	CARBON	47K	5%	1/4W	R968	1-249-411-11	CARBON	330	5%	1/4W
R908	1-249-417-11	CARBON	1K	5%	1/4W	R969	1-249-411-11	CARBON	330	5%	1/4W
R910	1-249-437-11	CARBON	47K	5%	1/4W	R970	1-249-411-11	CARBON	330	5%	1/4W
R911	1-249-437-11	CARBON	47K	5%	1/4W	R971	1-249-411-11	CARBON	330	5%	1/4W
R912	1-249-429-11	CARBON	10K	5%	1/4W	R972	1-249-411-11	CARBON	330	5%	1/4W
R913	1-249-429-11	CARBON	10K	5%	1/4W	R973	1-249-411-11	CARBON	330	5%	1/4W
R914	1-249-421-11	CARBON	2.2K	5%	1/4W	R974	1-249-411-11	CARBON	330	5%	1/4W

Ref.No.	Part No.	Description
R975	1-249-411-11	CARBON 330 5% 1/4W
R976	1-249-411-11	CARBON 330 5% 1/4W
R977	1-249-411-11	CARBON 330 5% 1/4W
R978	1-249-417-11	CARBON 1K 5% 1/4W
R982	1-249-437-11	CARBON 47K 5% 1/4W
R983	1-249-437-11	CARBON 47K 5% 1/4W
RV901	1-230-566-11	RES, VAR, SLIDE 20K(SPEED CONTROL)
RV902	1-230-564-11	RES, VAR, SLIDE 10K(TONE)
RV903	1-230-564-11	RES, VAR, SLIDE 10K(VOLUME)
RY101	1-515-642-11	RELAY
RY201	1-515-642-11	RELAY
S101	1-552-334-00	SWITCH, BAND CHANGER (TAPE SPEED)
S601	1-570-503-11	SWITCH, MICRO (CASSETTE EMPTY DET, DECK-A)
S701	1-570-503-11	SWITCH, MICRO (CASSETTE EMPTY DET, DECK-B)
S901	1-554-118-00	SWITCH, PUSH (1 KEY)(MONITOR A/B)
S902	1-570-550-11	SWITCH, PUSH (5 KEY)(CHANNEL)
S903	1-554-118-00	SWITCH, PUSH (1 KEY) (MONITOR TAPE/SOURCE)
S904	1-571-083-21	SWITCH, SLIDE (PA)
S905	1-571-083-21	SWITCH, SLIDE (SPEED CONTROL)
S906	1-570-313-11	SWITCH, KEY BOARD (STOP-A)
S907	1-570-313-11	SWITCH, KEY BOARD (FF-A)
S908	1-570-313-11	SWITCH, KEY BOARD (PLAY-A)
S909	1-570-313-11	SWITCH, KEY BOARD (REW-A)
S910	1-570-313-11	SWITCH, KEY BOARD (REC-A)
S911	1-570-313-11	SWITCH, KEY BOARD (1)
S912	1-570-313-11	SWITCH, KEY BOARD (2)
S913	1-570-313-11	SWITCH, KEY BOARD (3)
S914	1-570-313-11	SWITCH, KEY BOARD (4)
S915	1-570-313-11	SWITCH, KEY BOARD (5)
S916	1-570-313-11	SWITCH, KEY BOARD (6)
S917	1-570-313-11	SWITCH, KEY BOARD (STOP-B)
S918	1-570-313-11	SWITCH, KEY BOARD (FF-B)
S919	1-570-313-11	SWITCH, KEY BOARD (PLAY-B)
S920	1-570-313-11	SWITCH, KEY BOARD (REW-B)
S921	1-570-313-11	SWITCH, KEY BOARD (REC-B)
S922	1-570-313-11	SWITCH, KEY BOARD (7)
S923	1-570-313-11	SWITCH, KEY BOARD (8)
S924	1-570-313-11	SWITCH, KEY BOARD (9)
S925	1-570-313-11	SWITCH, KEY BOARD (0)
S926	1-570-313-11	SWITCH, KEY BOARD (SEARCH)
S927	1-570-313-11	SWITCH, KEY BOARD (REC END)

Ref.No.	Part No.	Description
S928	1-570-313-11	SWITCH, KEY BOARD (RESET-A)
S929	1-570-313-11	SWITCH, KEY BOARD (DECK-A)
S930	1-552-334-00	SWITCH, BAND CHANGER (AUTO CHANGE)
S931	1-570-313-11	SWITCH, KEY BOARD (RESET-B)
S932	1-570-313-11	SWITCH, KEY BOARD (DECK-B)
S933	1-570-361-11	SWITCH, SLIDE (DIGITAL CORD) (REVERSE TIME)
S934	1-571-083-21	SWITCH, SLIDE (TRANSCRIBE)
S935	1-553-539-00	SWITCH, MICRO (STANDBY/ON)
SP901	1-503-344-21	SPEAKER
T901	A.1-449-140-11	TRANSFORMER, POWER
X901	1-567-160-21	OSCILLATOR, CERAMIC (4.19MHz)

ACCESSORY & PACKING MATERIAL

3-315-007-02	KEY
*3-345-416-01	(Canadian)...LABEL, MODEL NUMBER (CA)
*3-345-436-01	(US).....LABEL, MODEL NUMBER (U)
3-345-444-01	CUSHION (LEFT)
3-345-445-01	CUSHION (RIGHT)
3-345-446-01	INDIVIDUAL CARTON
3-570-631-51	BAG, POLYETHYLENE
3-769-762-21	MANUAL INSTRUCTION
3-769-762-31	(Canadian)...MANUAL INSTRUCTION
3-793-912-21	TAG, INDICATION
8-890-126-15	TAPE (DC-90N(S)E)

Note:

The components identified by mark  or dotted line with mark  are critical for safety. Replace only with part number specified.

Note:

Les composants identifiés par une marque  sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

BM-246

SONY[®] SERVICE MANUAL

*US Model/
Canadian Model*

SUPPLEMENT-1

File this supplement with the service manual.

**Subject: Printed Wiring Boards and Schematic Diagrams
have been changed.**

- Applicable Serial No.

US Model: 0501101 and later
Canadian Model: A501101 and later

Note

MICRO COMPUTER of SYSTEM CONTROL has been changed.

FORMER TYPE: μ PD75108CW-151
(8-759-141-26)

NEW TYPE: μ PD75108CW-246
(8-759-144-34)

There is interchangeability between former type and new type for IC901, so that a new type part is supplied for replacement.

- Applicable Serial No.

US Model: 0501201 and later

Canadian Model: A501101 and later

● CHANGED PARTS


Ref. No.	Former Parts				New Parts				Remarks
	Description				Part No.	Description			
C162	ELECT	47MF	20%	10V	1-126-154-11	ELECT	47MF	20% 6.3V	CHANGED
C262	ELECT	47MF	20%	10V	1-126-154-11	ELECT	47MF	20% 6.3V	CHANGED
C666	ELECT	1MF	20%	50V	1-124-257-00	ELECT	2.2MF	20% 50V	CHANGED
C907	ELECT	10MF	20%	16V	1-161-379-00	CERAMIC	0.01MF	20% 16V	CHANGED
C915	CERAMIC	0.01MF	10%	25V	_____	_____	_____	_____	DELETED
C917	_____	_____	_____	_____	1-161-051-00	CERAMIC	0.01MF	10% 25V	ADDED
CN912	HOUSING, CONNECTOR 3P	_____	_____	_____	_____	_____	_____	_____	DELETED
CNJ118	_____	_____	_____	_____	1-562-148-11	HOUSING, CONNECTOR 3P	_____	_____	ADDED
CNJ912	_____	_____	_____	_____	1-562-148-11	HOUSING, CONNECTOR 3P	_____	_____	ADDED
CNP918	_____	_____	_____	_____	1-564-018-11	PIN, CONNECTOR 8P	_____	_____	ADDED
D256	DIODE	1SS119	_____	_____	_____	_____	_____	_____	DELETED
R382	CARBON	33	5%	1/4W	1-249-405-11	CARBON	100	5% 1/4W	CHANGED
R678	CARBON	12K	5%	1/4W	_____	_____	_____	_____	DELETED
R680	CARBON	10K	5%	1/4W	1-249-434-11	CARBON	27K	5% 1/4W	CHANGED
R681	CARBON	33K	5%	1/4W	1-249-434-11	CARBON	27K	5% 1/4W	CHANGED
R778	CARBON	12K	5%	1/4W	_____	_____	_____	_____	DELETED
R780	CARBON	10K	5%	1/4W	1-249-434-11	CARBON	27K	5% 1/4W	CHANGED
R781	CARBON	33K	5%	1/4W	1-249-434-11	CARBON	27K	5% 1/4W	CHANGED
R916	CARBON	100K	5%	1/4W	1-249-437-11	CARBON	47K	5% 1/4W	CHANGED
R917	CARBON	100K	5%	1/4W	1-249-437-11	CARBON	47K	5% 1/4W	CHANGED
R953	CARBON	22K	5%	1/4W	1-247-862-11	CARBON	20K	5% 1/4W	CHANGED
R956	CARBON	100K	5%	1/4W	_____	_____	_____	_____	DELETED
R958	CARBON	47K	5%	1/4W	1-249-443-11	CARBON	22K	5% 1/4W	CHANGED
R959	CARBON	47K	5%	1/4W	1-249-443-11	CARBON	22K	5% 1/4W	CHANGED
R960	CARBON	47K	5%	1/4W	1-249-443-11	CARBON	22K	5% 1/4W	CHANGED
R961	CARBON	47K	5%	1/4W	1-249-443-11	CARBON	22K	5% 1/4W	CHANGED
R962	CARBON	47K	5%	1/4W	1-249-443-11	CARBON	22K	5% 1/4W	CHANGED
R963	CARBON	47K	5%	1/4W	1-249-443-11	CARBON	22K	5% 1/4W	CHANGED
R985	_____	_____	_____	_____	1-249-425-11	CARBON	4.7K	5% 1/4W	ADDED
R986	_____	_____	_____	_____	1-249-425-11	CARBON	4.7K	5% 1/4W	ADDED
RV603	_____	_____	_____	_____	1-226-772-11	RES. ADJ. METAL GLAZE	4.7K	_____	ADDED
RV604	_____	_____	_____	_____	1-226-772-11	RES. ADJ. METAL GLAZE	4.7K	_____	ADDED
RV702	_____	_____	_____	_____	1-226-774-11	RES. ADJ. METAL GLAZE	47K	_____	ADDED
RV703	_____	_____	_____	_____	1-226-772-11	RES. ADJ. METAL GLAZE	4.7K	_____	ADDED
RV704	_____	_____	_____	_____	1-226-772-11	RES. ADJ. METAL GLAZE	4.7K	_____	ADDED

• Semiconductor Location


Ref. No.	Location	Ref. No.	Location	Ref. No.	Location
D651	E-20	D931	I-7	Q667	E-16
D654	C-17	D932	G-7	Q668	E-16
D655	C-20	D933	H-7	Q669	E-16
D656	E-17	D934	J-7	Q671	F-17
D658	F-17	D935	H-3	Q672	F-17
D659	C-16	D936	F-8	Q673	C-16
D660	B-16	D937	C-6	Q674	C-16
D661	B-16	D938	C-5	Q677	B-17
D662	A-19	D939	C-5	Q751	H-20
D663	B-16	D940	C-4	Q752	H-20
D664	D-16	D941	C-2	Q753	G-20
D665	A-18	D942	C-2	Q754	G-19
D666	D-17	D943	C-2	Q755	J-20
D751	J-20	D944	C-1	Q756	G-21
D752	G-20	D945	C-2	Q757	G-20
D753	G-21	D947	I-4	Q758	G-20
D754	H-17	D949	I-1	Q759	G-20
D755	H-20	D950	I-4	Q760	F-20
D756	J-17	D951	J-5	Q761	G-20
D757	J-17	D952	H-1	Q762	J-20
D758	K-16	D953	H-5	Q763	H-17
D759	I-16			Q764	H-20
D760	G-16	H601	D-18	Q765	I-17
D761	G-16	H602	D-19	Q767	I-16
D762	F-19	H701	I-18	Q768	J-16
D763	G-16	H702	I-19	Q769	J-16
D901	J-1			Q770	G-17
D902	I-1	ND901	B-5	Q771	J-17
D903	I-1	ND902	B-2	Q772	J-17
D904	I-1			Q773	H-16
D905	I-2	IC601	D-20	Q774	H-16
D906	J-1	IC602	E-19	Q775	G-17
D907	J-2	IC603	F-20	Q776	G-17
D908	J-3	IC701	I-20	Q904	I-3
D909	J-2	IC702	J-19	Q905	I-2
D910	J-4	IC703	K-20	Q906	I-2
D911	J-4	IC901	H-10	Q907	I-3
D912	F-3	IC902	H-6	Q908	I-2
D913	G-4	IC903	G-11	Q909	I-2
D914	G-5	IC904	G-10	Q910	J-12
D916	H-13	IC905	G-11	Q912	J-5
D917	I-5			Q915	G-5
D918	I-11	Q651	C-20	Q916	G-4
D919	G-9	Q652	C-20	Q917	G-5
D920	H-9	Q653	B-20	Q918	G-5
D921	H-8	Q654	B-20	Q919	H-12
D922	J-10	Q655	D-20	Q920	H-12
D923	J-11	Q657	B-20	Q921	F-10
D924	J-9	Q658	B-21	Q922	F-9
D925	H-7	Q660	A-20	Q923	J-12
D926	F-12	Q661	B-20	Q924	G-4
D927	J-13	Q662	F-21	Q925	H-4
D928	F-12	Q663	C-17	Q926	H-4
D929	G-8	Q664	C-20	Q927	H-4
D930	H-8	Q665	D-17		

Note.

- Color code or sleeving over the end of the jacket.






- — : parts extracted from the component side.
- — : parts extracted from the conductor side.
- ■ : parts mounted on the conductor side.
- ⊗ : Through hole.
- ⊞ : Pattern on the side which is seen.
- ⊞ : Pattern of the rear side.
- WHT : Connector color.

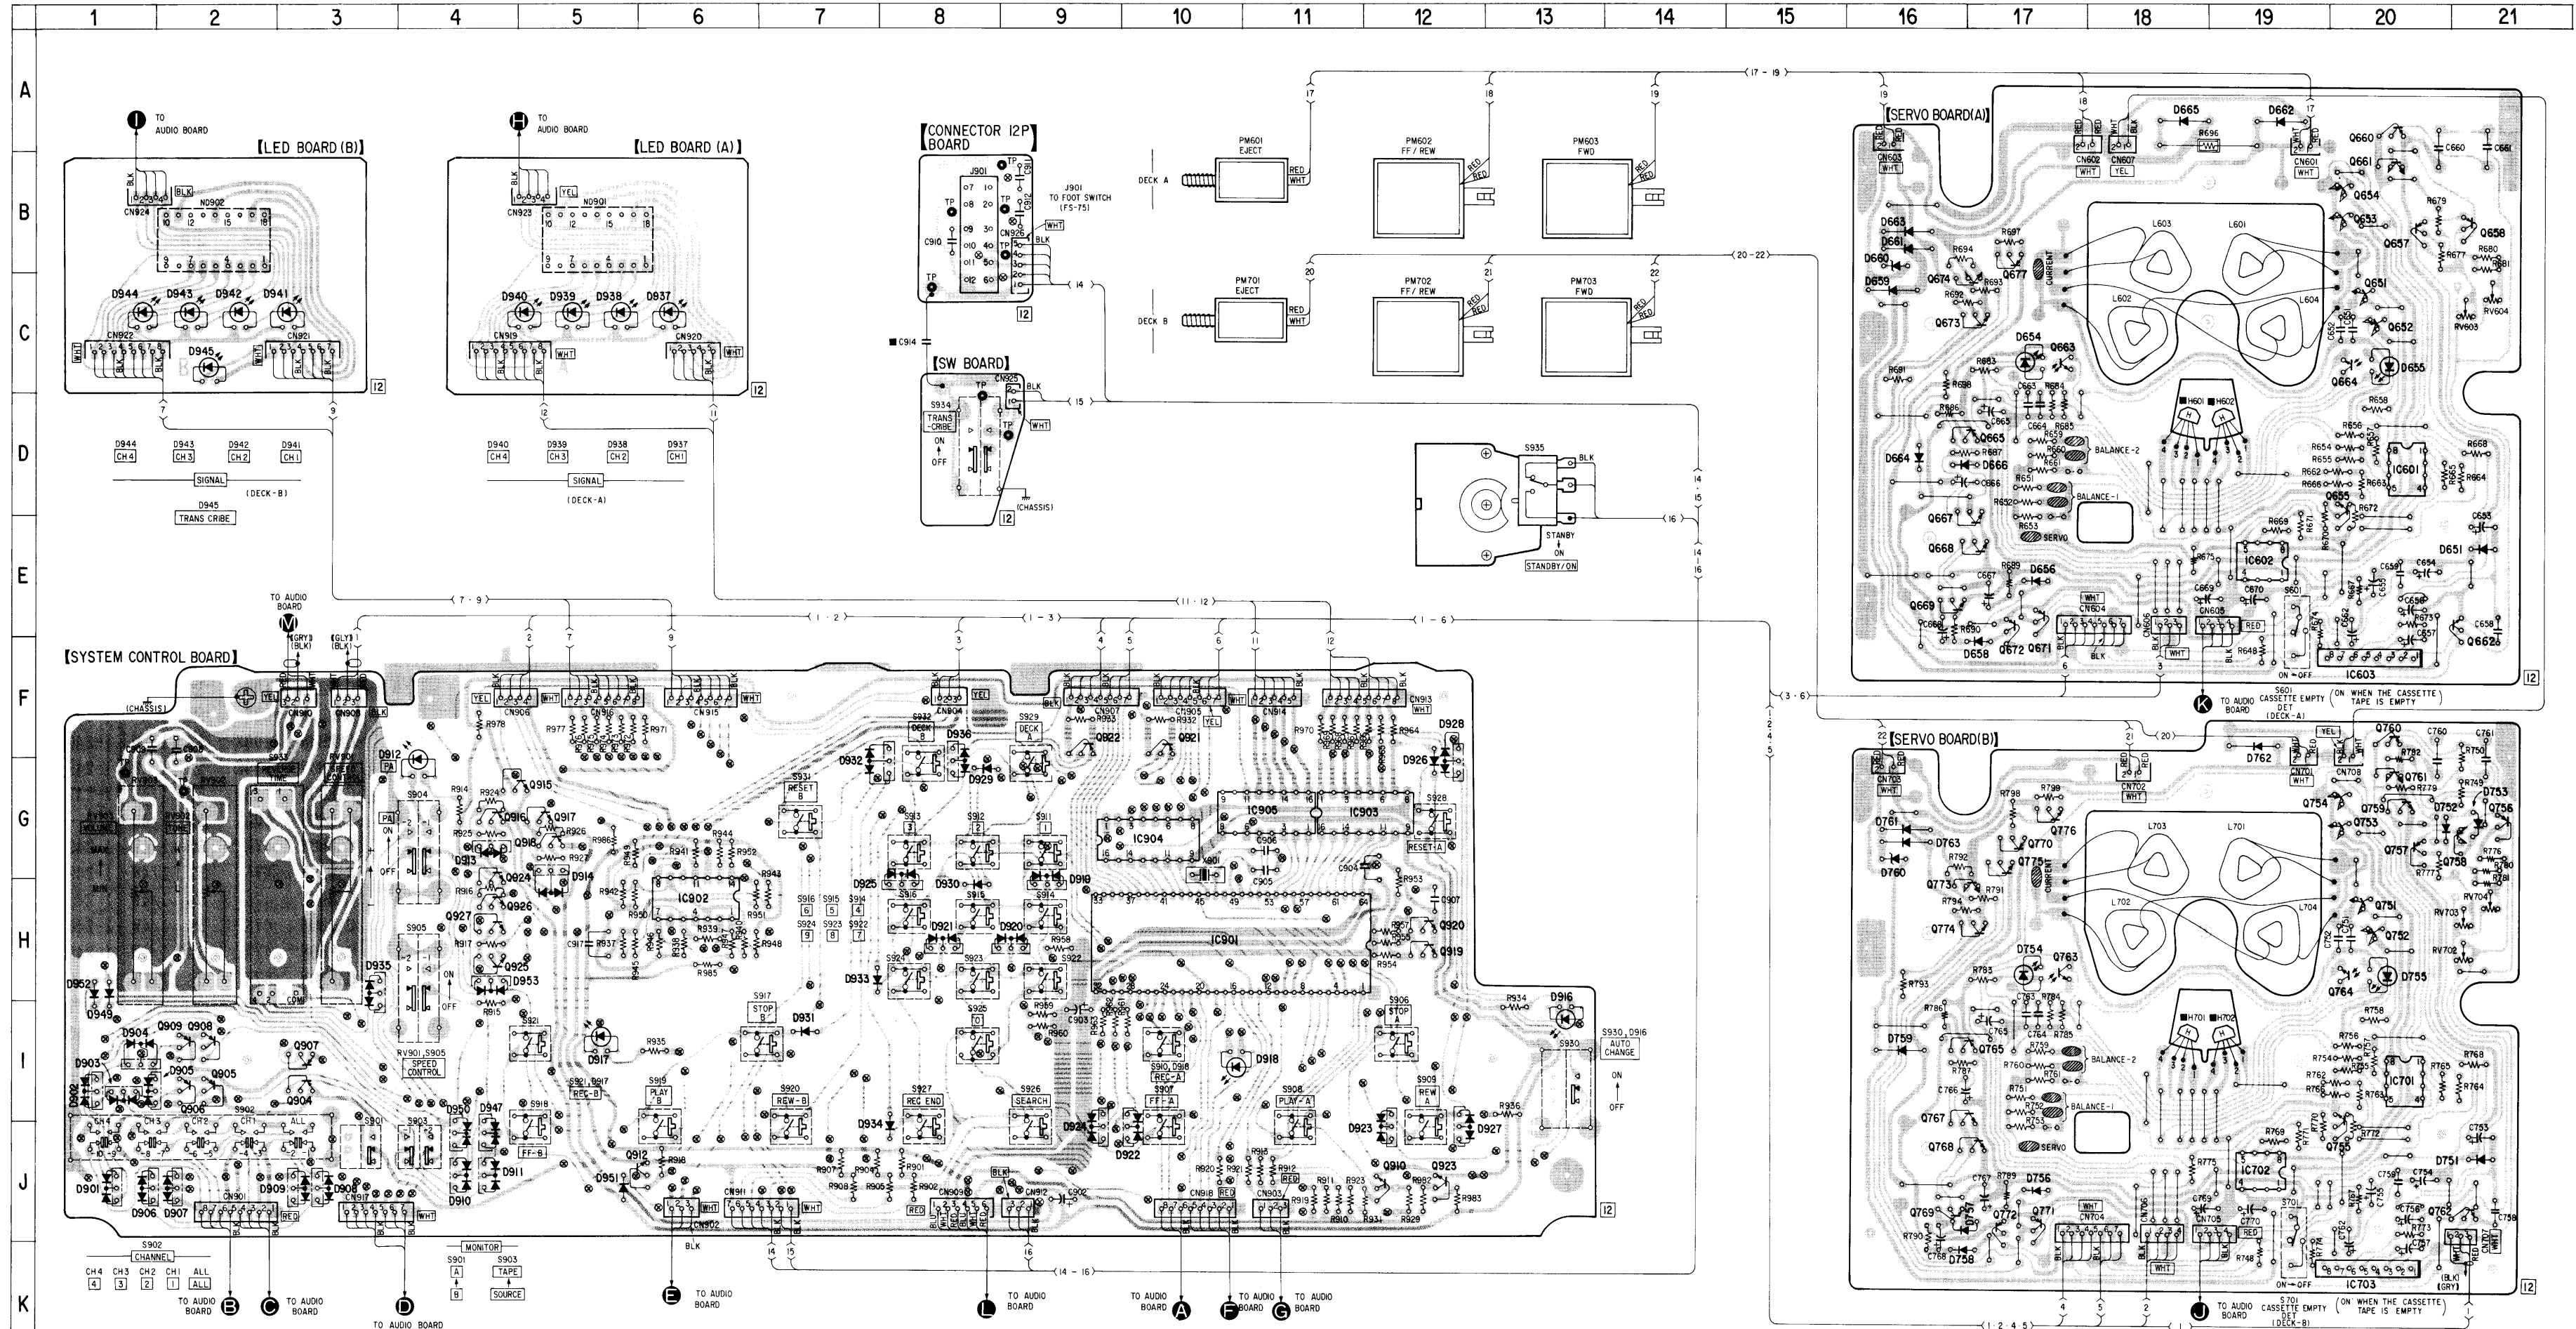

-SERVO CONTROL SECTION-

SCHEMATIC DIAGRAM (1)

• See page 12 for switches note.

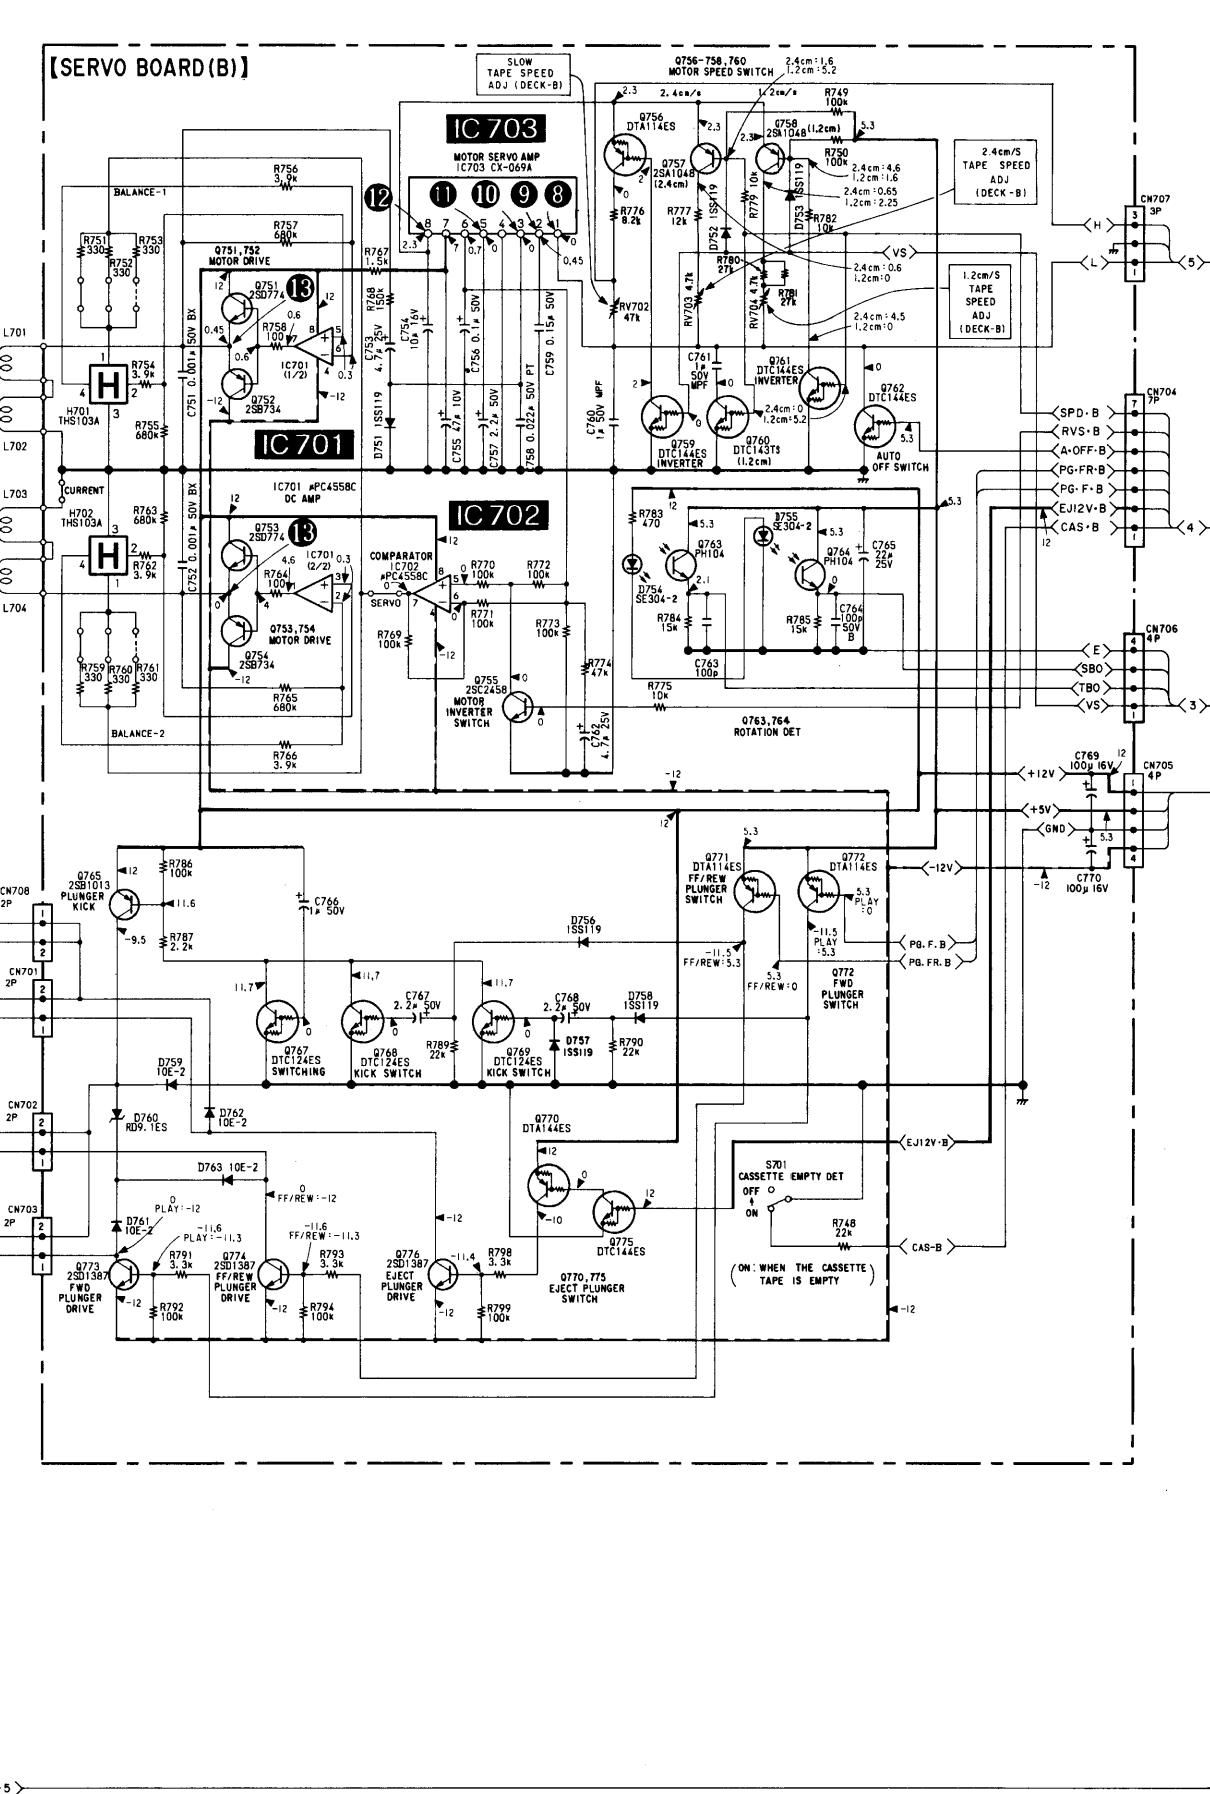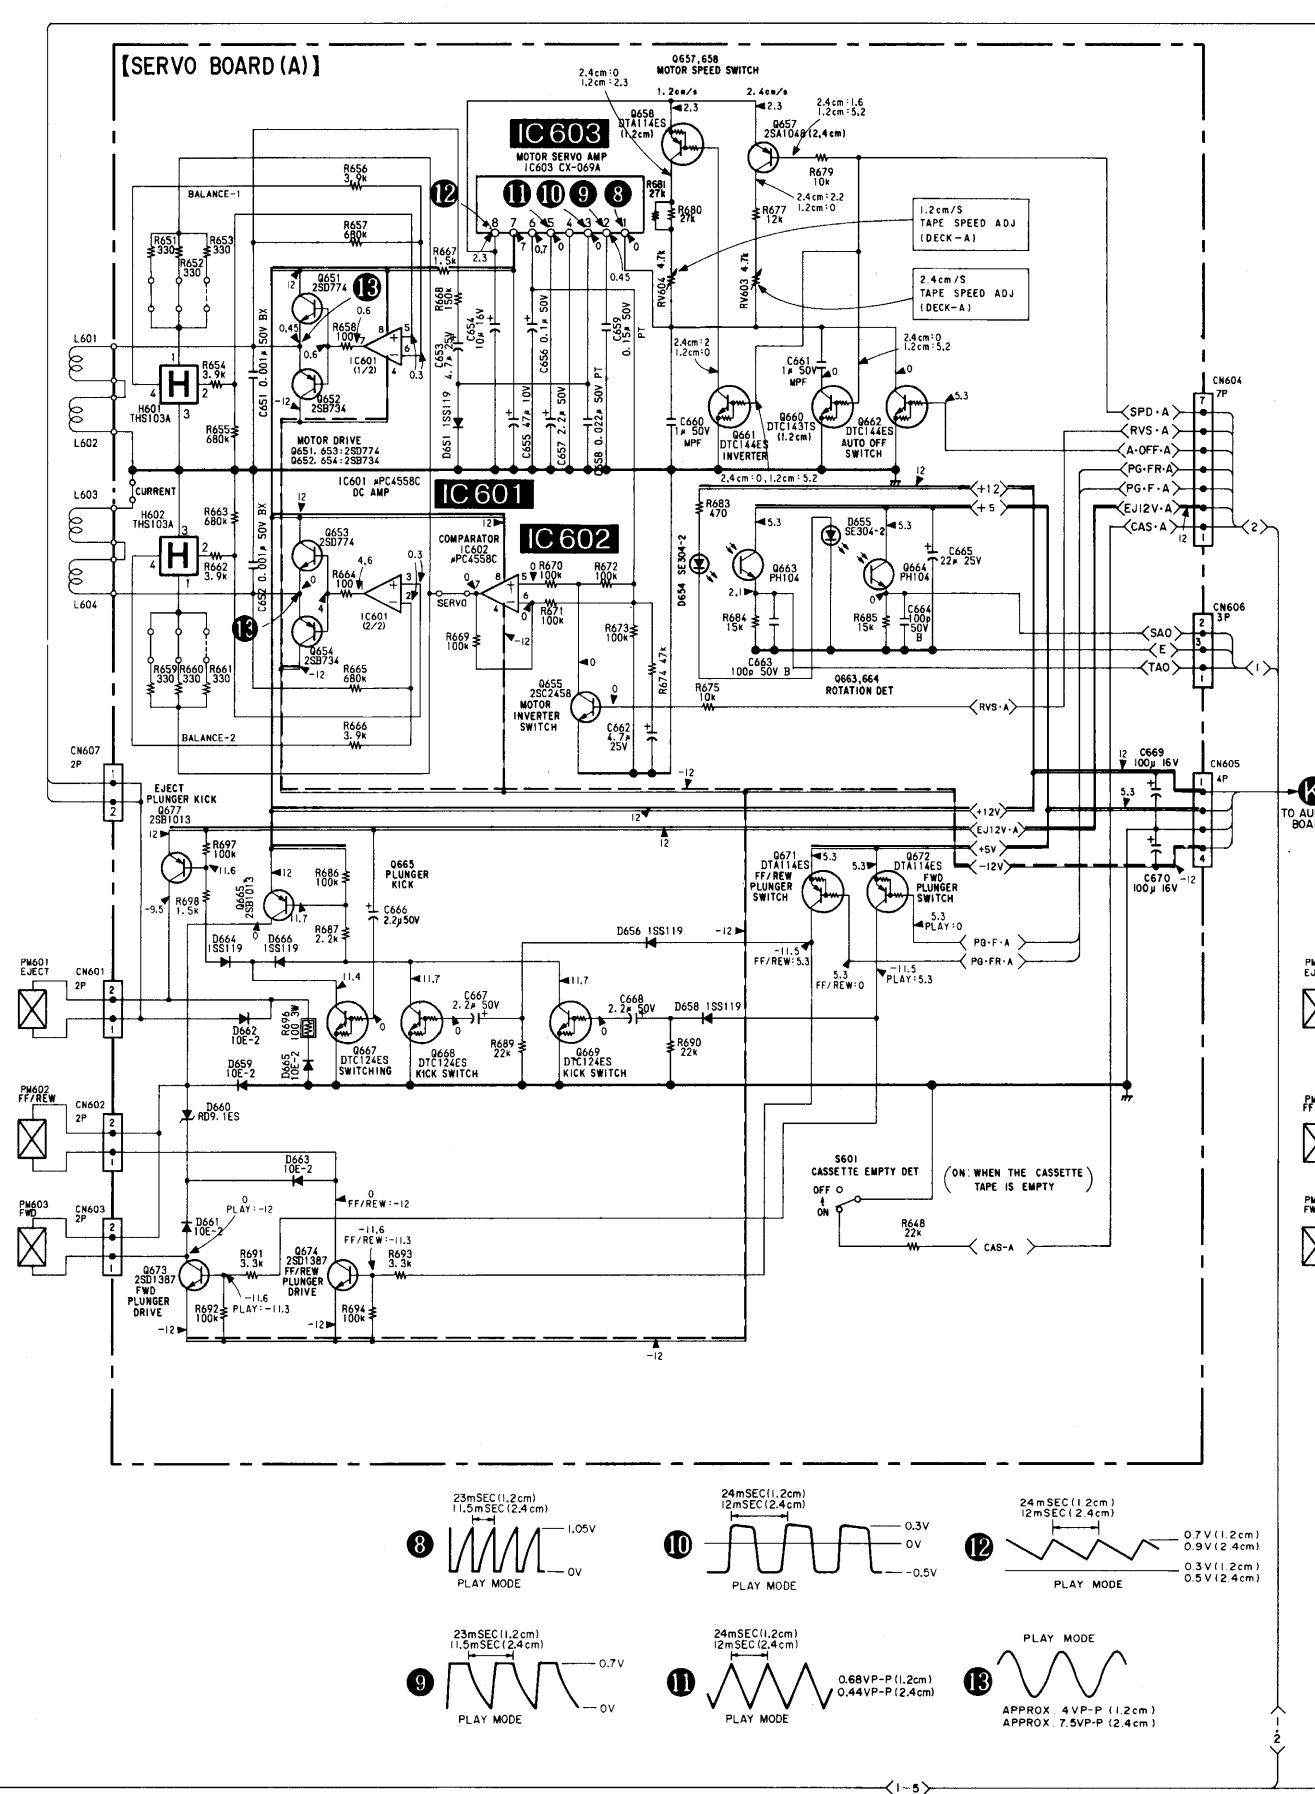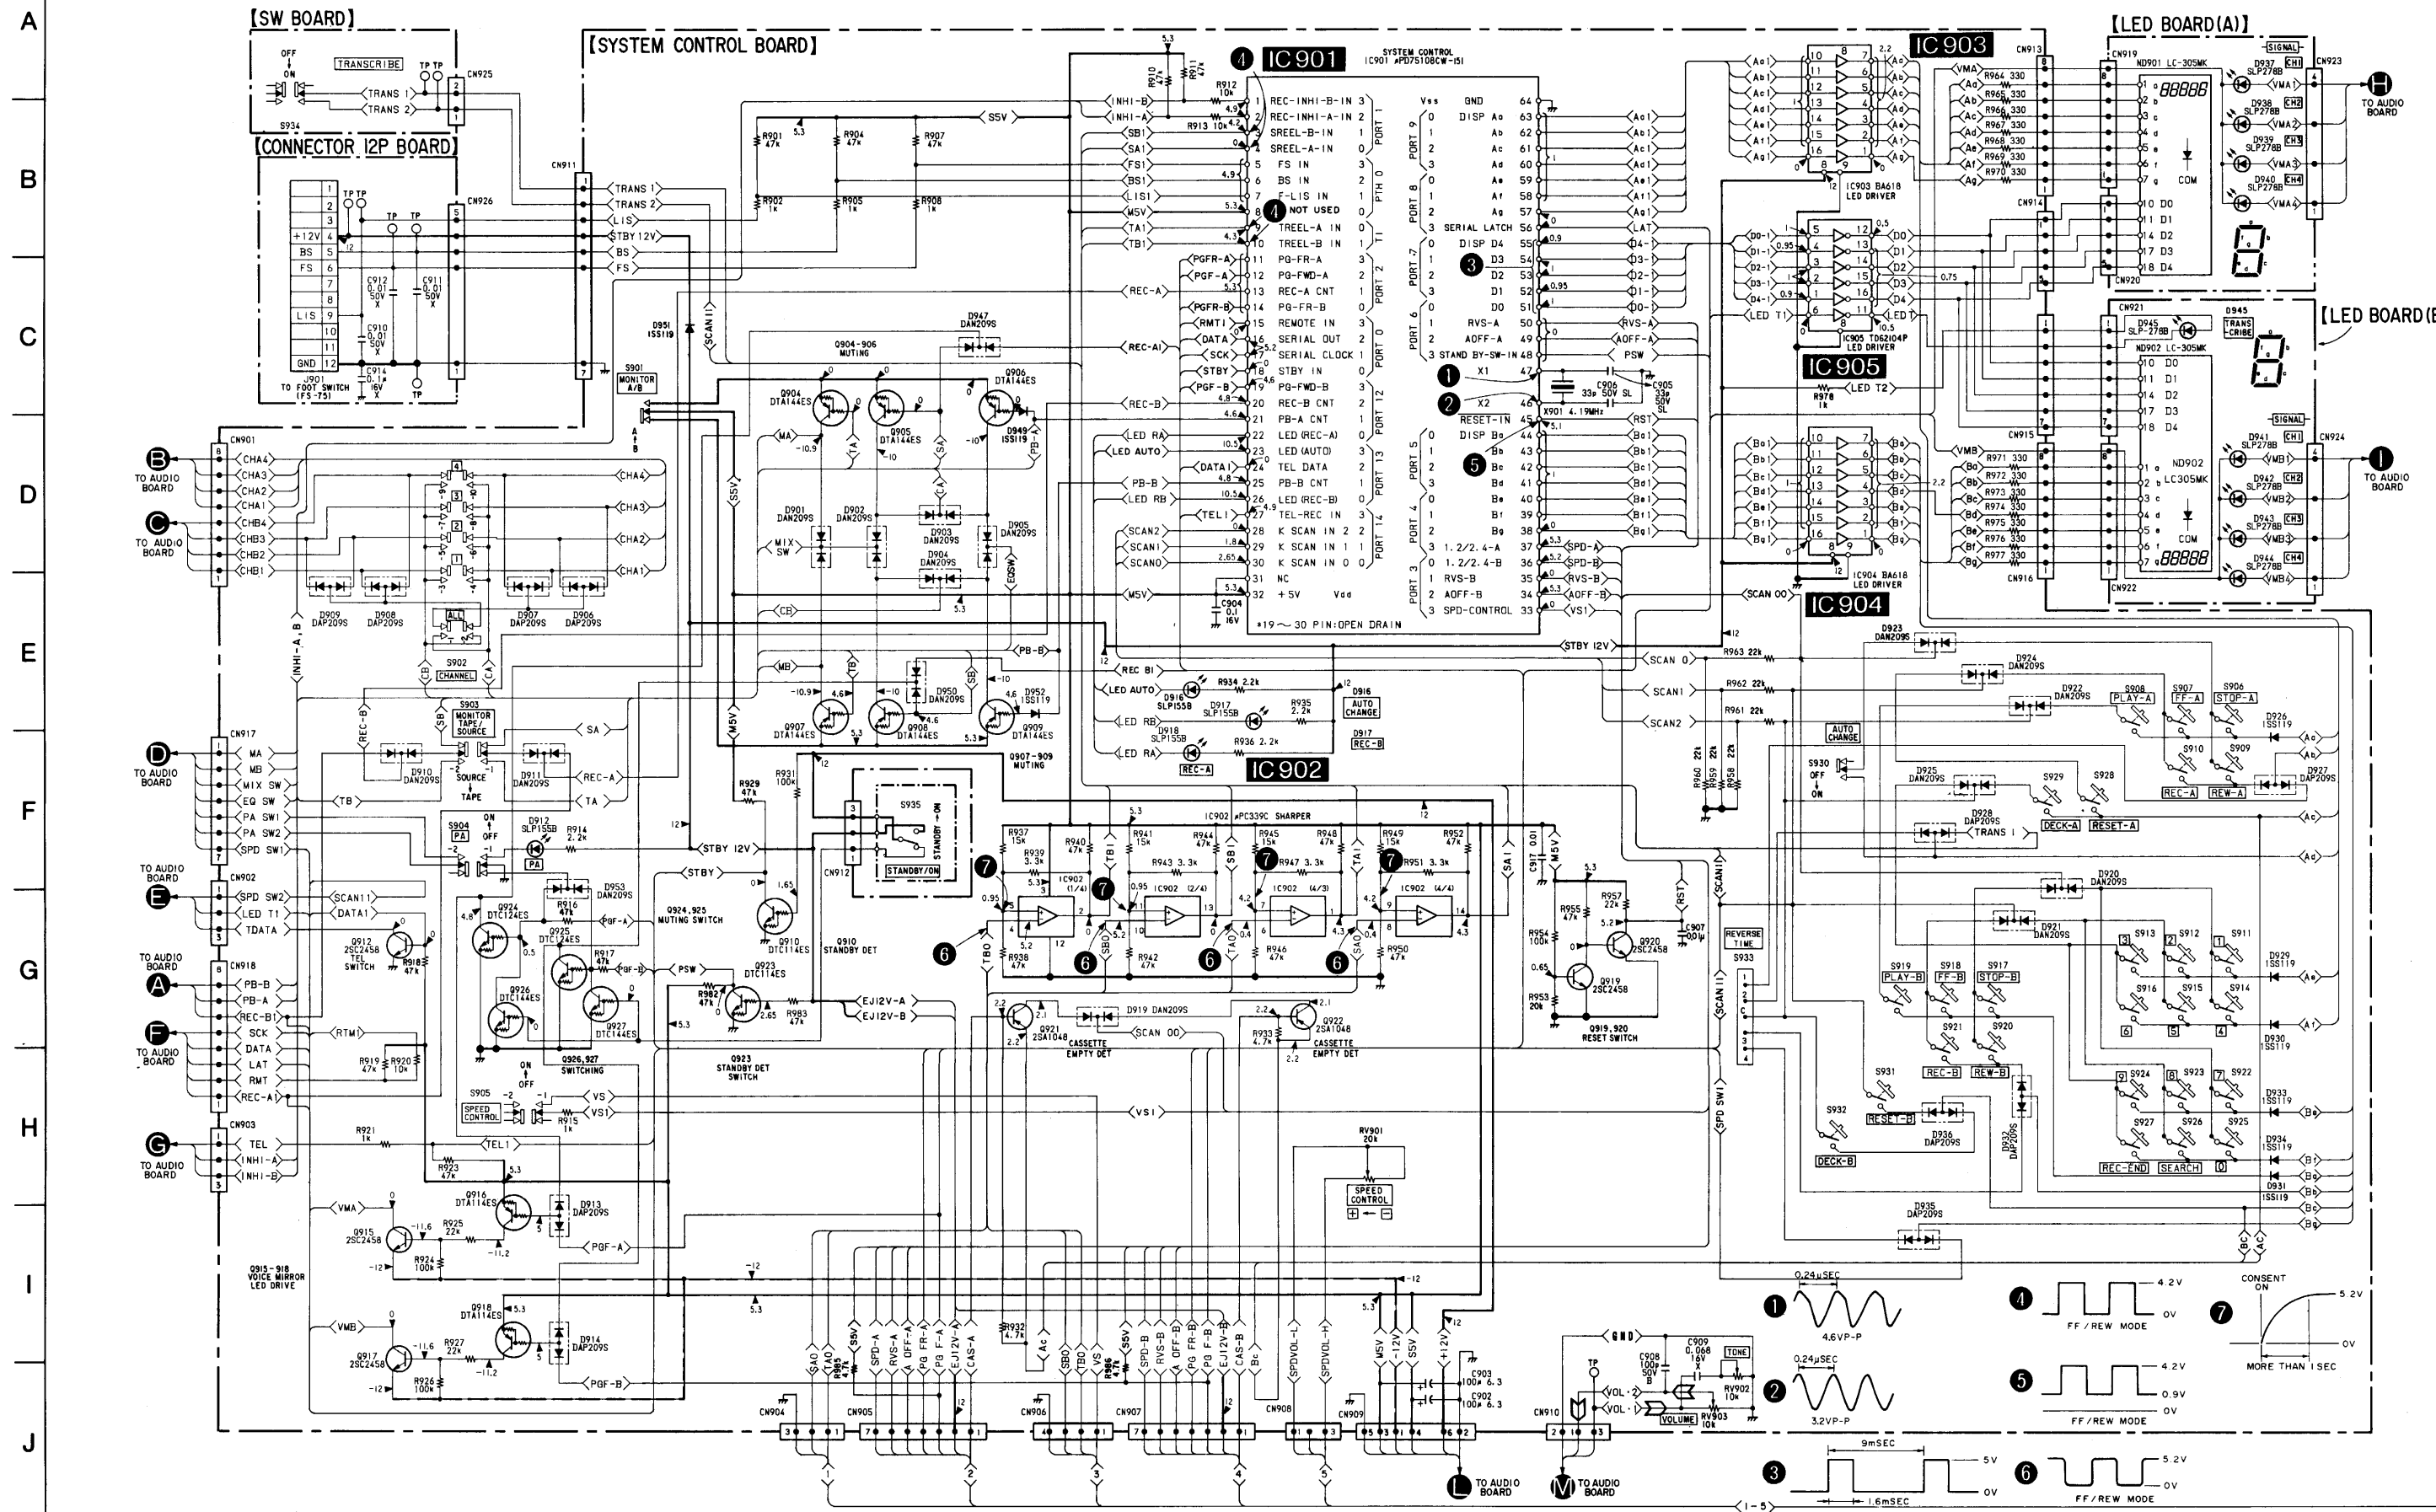


- Note:
- All capacitors are in μF unless otherwise noted. pF : μF 50WV or less are not indicated except for electrolytics and tantalums.
 - All resistors are in Ω and $\frac{1}{4}\text{W}$ or less unless otherwise specified.
 - $\square$: nonflammable resistor.
 - --- : B+ bus.
 - --- : B- bus.
 - $\square$: adjustment for repair.
 - Voltage and waveforms are dc with respect to ground under no-signal conditions. no mark: STOP mode.
 - Voltages are taken with a VOM (50 k Ω /V).
 - Voltage variations may be noted due to normal production tolerances.
 - Waveforms are taken with an oscilloscope. Voltage variations may be noted due to normal production tolerances.
 - Signal path.
 - --- : PB (DECK A)

• See page 12 for switches note.

• IC BLOCK DIAGRAM

IC603, 703 CX-069A

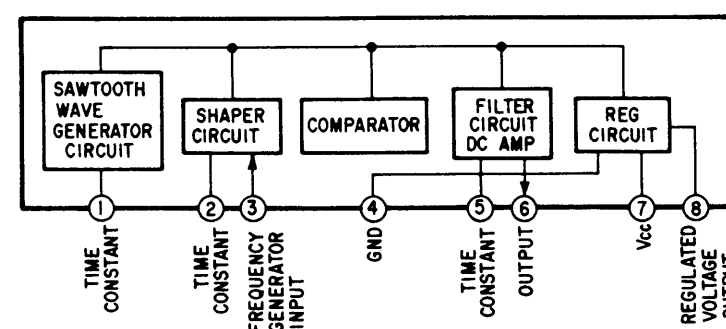

Switches note (SERVO CONTROL SECTION)

Ref. No.	Switch	Position
S601	CASSETTE EMPTY DET (DECK A)	ON
S701	CASSETTE EMPTY DET (DECK B)	ON
S901	MONITOR A/B	B
S902-1, 2	CHANNEL ALL	OFF
S902-3, 4	CHANNEL 1	OFF
S902-5, 6	CHANNEL 2	OFF
S902-7, 8	CHANNEL 3	OFF
S902-9, 10	CHANNEL 4	OFF
S903	MONITOR TAPE/SOURCE	SOURCE
S904	PA	OFF
S905	SPEED CONTROL	OFF
S906	STOP-A	OFF
S907	FF-A	OFF
S908	PLAY-A	OFF
S909	REW-A	OFF
S910	REC-A	OFF
S911	1	OFF
S912	2	OFF
S913	3	OFF
S914	4	OFF
S915	5	OFF
S916	6	OFF
S917	STOP-B	OFF
S918	FF-B	OFF
S919	PLAY-B	OFF
S920	REW-B	OFF
S921	REC-B	OFF
S922	7	OFF
S923	8	OFF
S924	9	OFF
S925	0	OFF
S926	SEARCH	OFF
S927	REC END	OFF
S928	RESET-A	OFF
S929	DECK-A	OFF
S930	AUTO CHANGE	OFF
S931	RESET-B	OFF
S932	DECK-B	OFF
S933	REVERSE TIME	—
S934	TRANSCRIBE	OFF
S935	STANDBY/ON	STANDBY

SEMICONDUCTOR LEAD LAYOUTS

TA78L006AP	NJM7812B	μPC7912H	2SB1013, 2SD1387, 2SD1388	2SB740	DTA114ES, DTA144ES, DTC114ES, DTC124ES, DTC143TS, DTC144ES, 2SC634SP, 2SD1012
2SD774	PH104	2SA1175	RD9.1ES-B, 1SS119	10E2	THS103A
DAP209S	DAN209S	SLP162B	SE304-2K	SLP278B	LC-305MK


PRINTED WIRING BOARDS (2) — Conductor Side —

Semiconductor Location

Ref. No.	Location	Ref. No.	Location	Ref. No.	Location
D101	K-14	D601	H-14	IC132	D-13
D102	K-14	D602	H-14	IC133	C-13
D103	K-13	D603	H-13	IC134	I-14
D104	I-5	D604	C-4	IC135	H-14
D105	I-4	D701	G-14		
D151	J-11	D702	G-14		
D152	I-10	D703	G-13		
D153	G-5	D704	B-5		
D154	G-5	D705	C-4		
D201	I-13	D801	F-14		
D202	I-13	D802	F-14		
D203	I-13	D803	F-12		
D204	I-4	D804	B-4		
D205	I-4	D805	B-5		
D251	D-11				
D252	B-10				
D253	G-6				
D254	G-5				
D301	H-13				
D302	H-13				
D303	H-13				
D304	H-5				
D305	H-4				
D351	E-5				
D352	D-8				
D353	E-7				
D401	G-13				
D402	G-13				
D403	G-13				
D404	H-4				
D405	G-5				
D451	B-15				
D452	B-15				
D453	B-15				
D454	B-15				
D455	D-13				
D456	D-13				
D458	F-4				
D459	F-4				
D460	F-5				
D461	F-5				
D501	J-14				
D502	J-14				
D503	J-13				
D504	D-5				
D505	D-4				


Note.

- Color code or sleeving over the end of the jacket.




- Parts extracted from the component side.
- Parts extracted from the conductor side.
- Indicates side identified with part number.
- Pattern on the side which is seen.
- [WHIT] : Connector color.

—AUDIO SECTION—

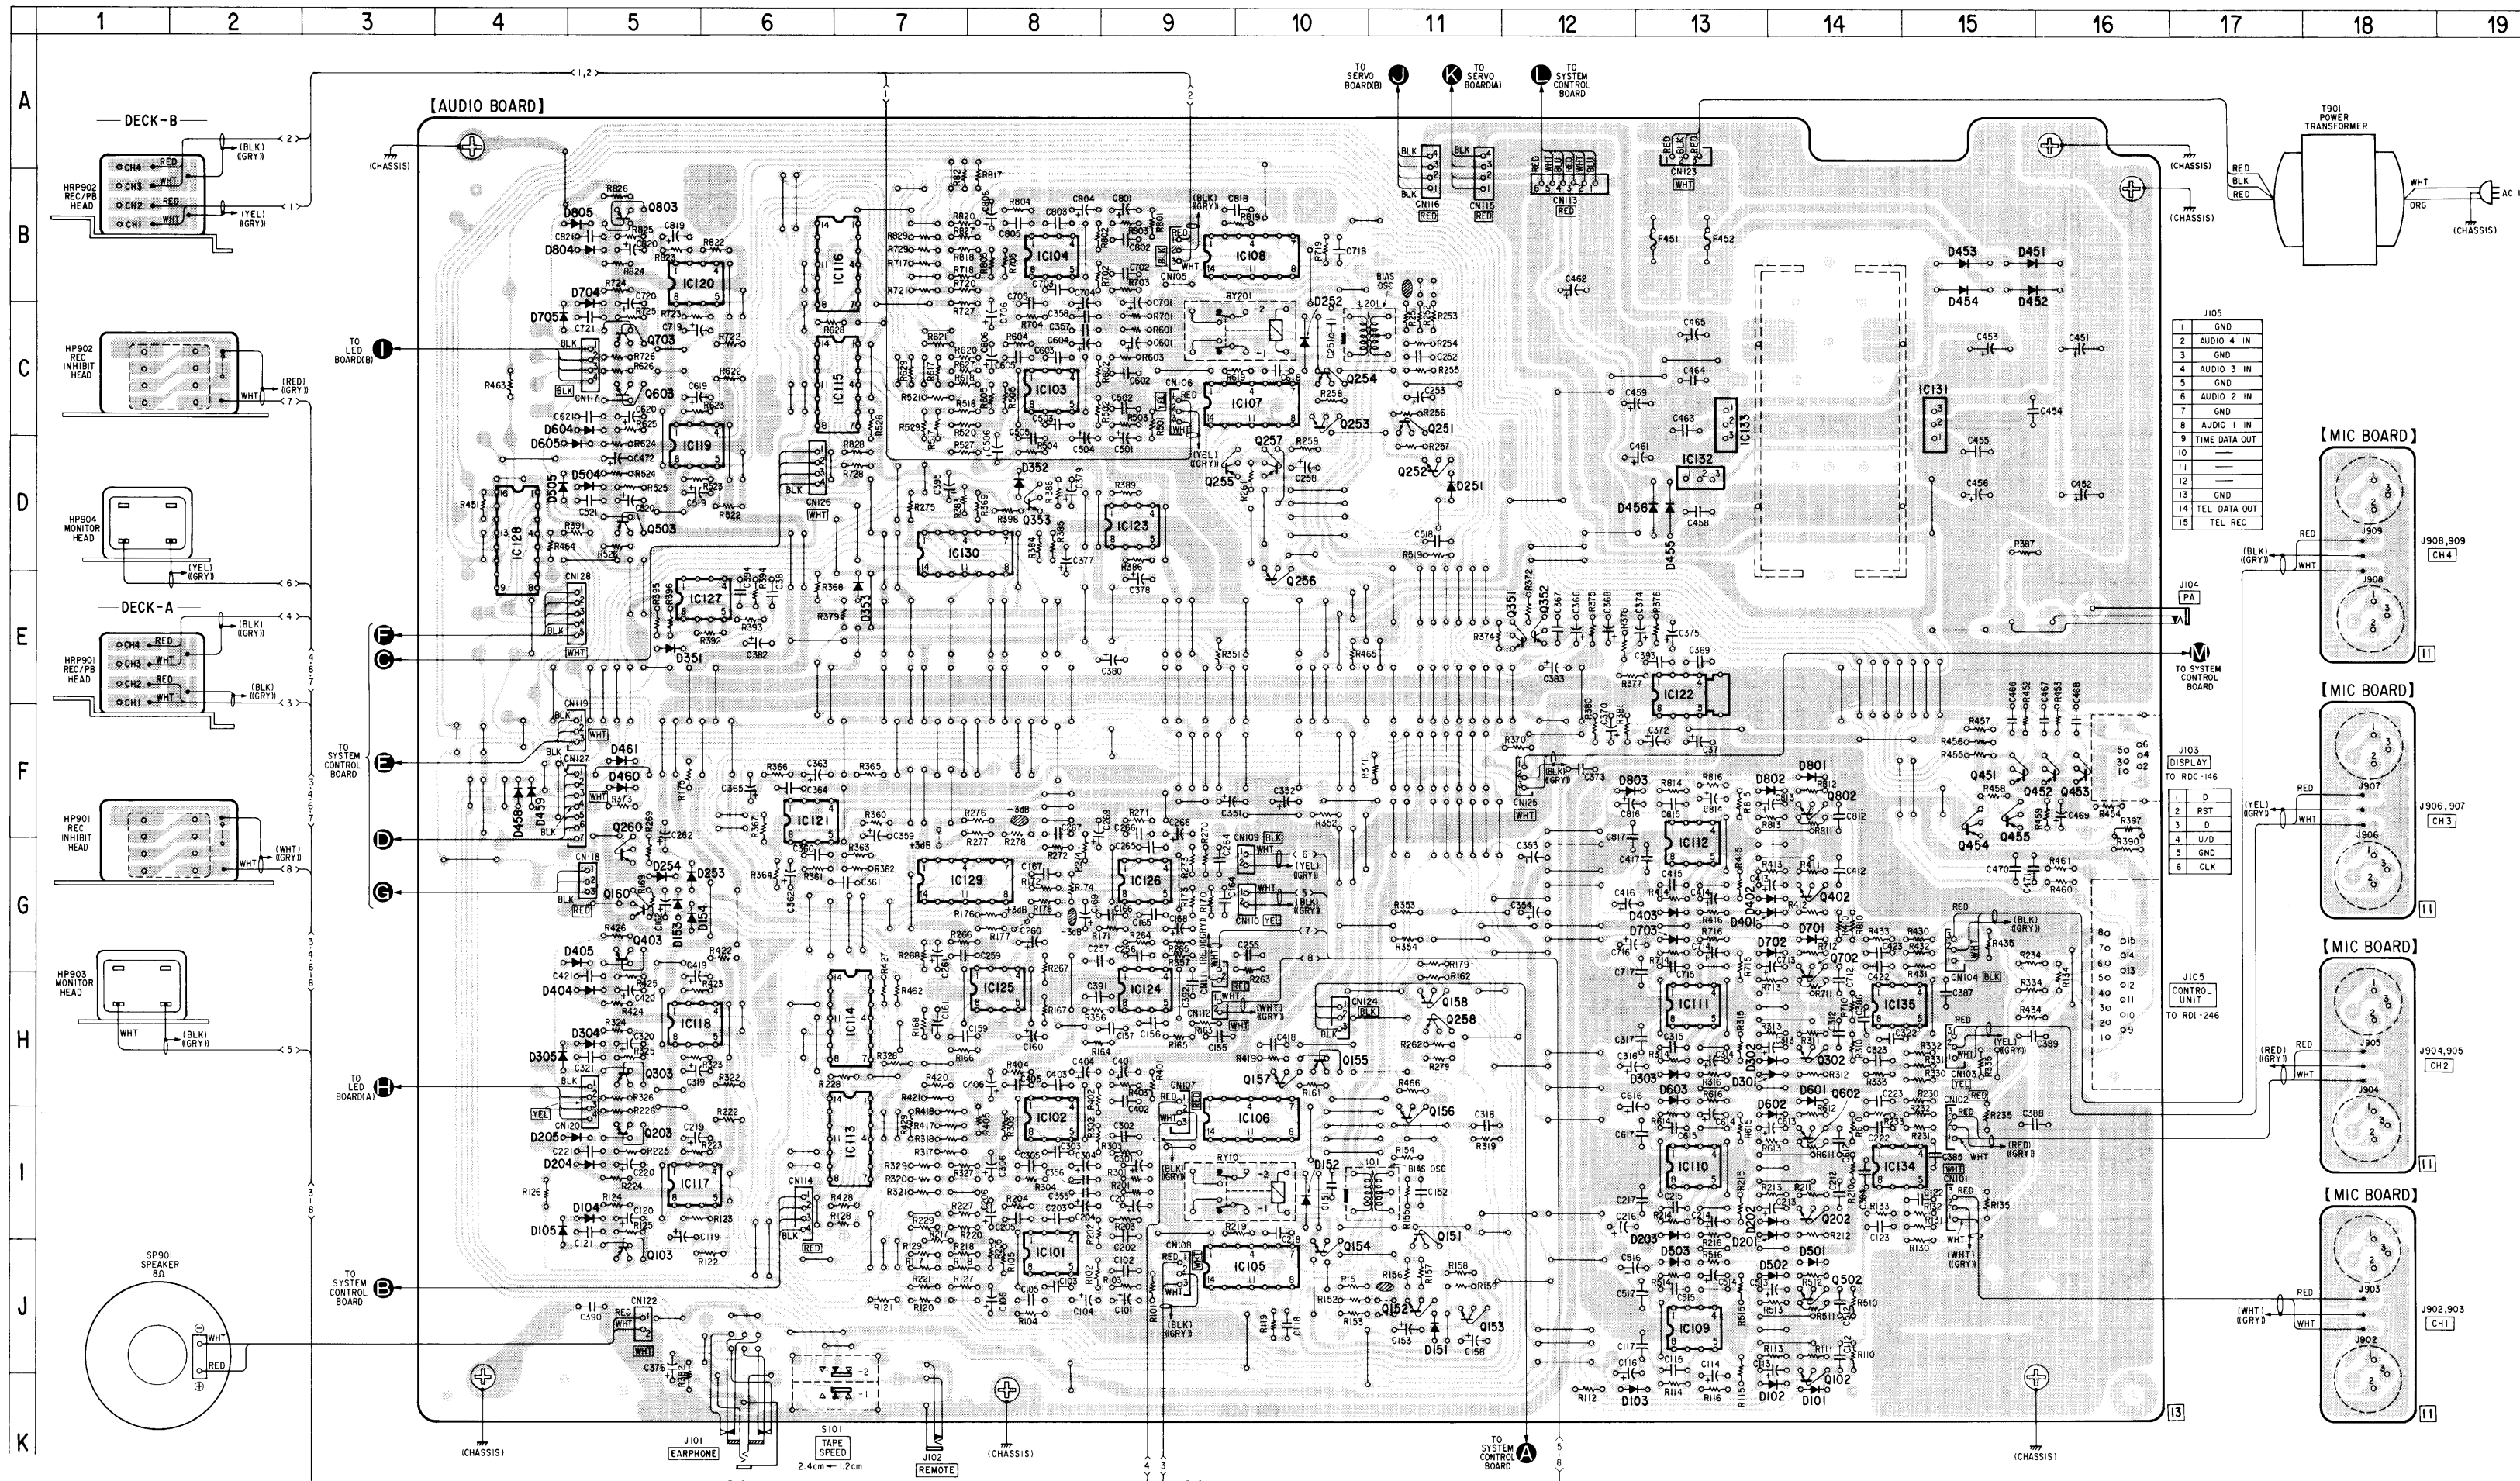

—AUDIO SECTION—

—Audio Section—

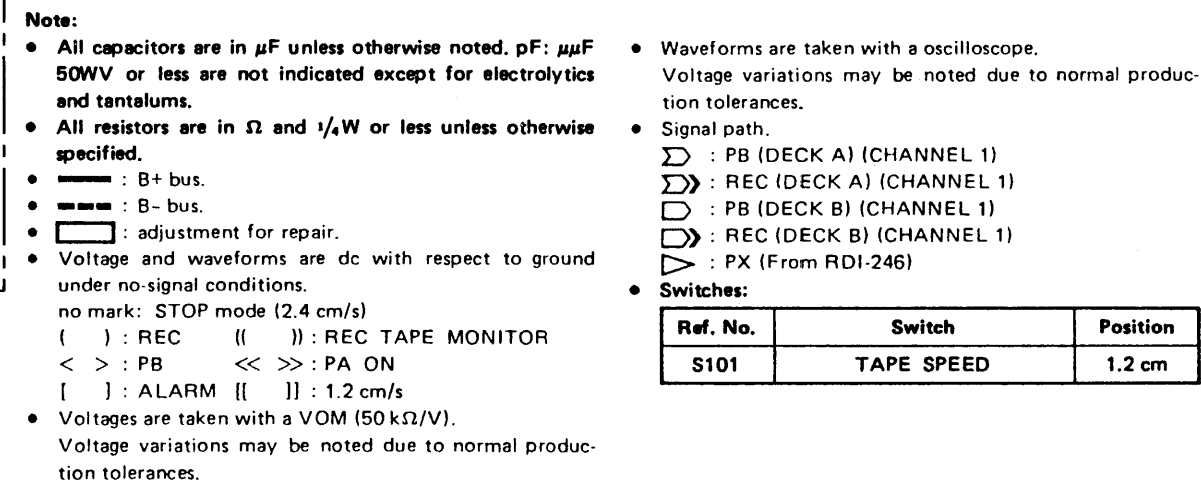


Note: The components identified by mark  or dotted line with mark  are critical for safety. Replace only with part number specified.	Note: Les composants identifiés par une marque  sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.
--	--

EXPLODED VIEWS CHANGE

Page 48

(REVISED)

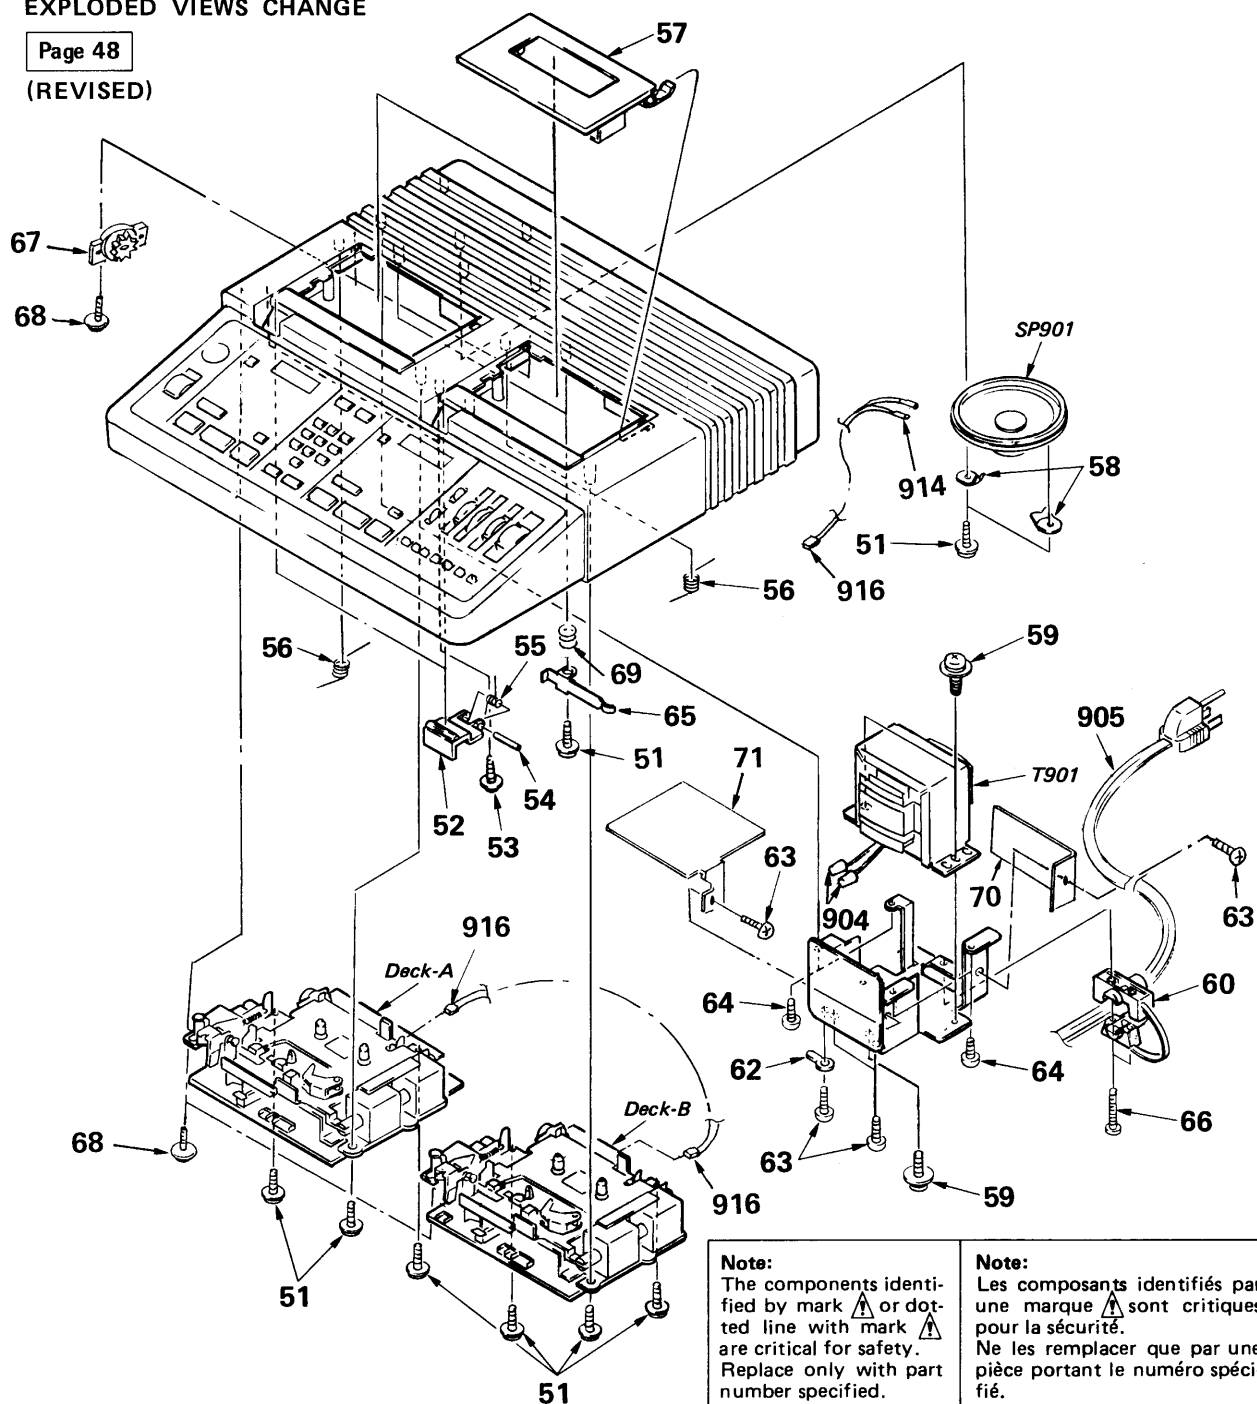


Note:
The components identified by mark Δ or dotted line with mark Δ are critical for safety. Replace only with part number specified.

Note:
Les composants identifiés par une marque Δ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

No.	Part No.	Description	Remarks	No.	Part No.	Description	Remarks
51	7-685-647-79	SCREW, TAPPING		67	3-319-224-31	DAMPER, SMALL	
52	3-345-420-11	BUTTON (EJECT)		68	7-685-647-79	SCREW (+ PTP DIA.12 WH 3)	
53	3-669-480-21	+ PTPWH 2		69	3-307-380-00	SPRING, COMPRESSION	
54	3-703-358-04	PIN, PARALLEL (DIA. 2X22)		70	*3-345-460-01	PLATE (T2), SHIELD	
55	3-345-423-01	SPRING, TORSION		71	*3-345-459-01	PLATE (T1), SHIELD	
56	3-345-422-01	SPRING, TORSION		904	1-535-507-11	CONNECTOR (TRANSPORTATION)	
57	X-3315-021-1	HOLDER ASSY, CASSETTE		905	Δ 1-551-780-00	CORD, POWER	
58	3-845-110-00	RETAINER, SPEAKER		914	1-535-047-00	FASTEN RECEPTACLE	
59	7-682-661-09	SCREW +PSW 4X8		916	*1-562-147-11	HOUSING, CONNECTOR 2P	
60	3-556-081-00	RETAINER (B), CORD		SP901	1-503-344-21	SPEAKER	
62	7-623-508-01	LUG, 3		T901	Δ 1-449-140-11	TRANSFORMER, POWER	
63	7-682-147-01	SCREW +BVTT 3X6 (S)					
64	7-685-647-79	SCREW +BVTP 3X10 TYPE2 N-S					
65	3-345-417-01	SPRING (CASSETTE RETAINER)					
66	7-621-775-80	SCREW +B 2.6X16					

 : Added portion


Page 49

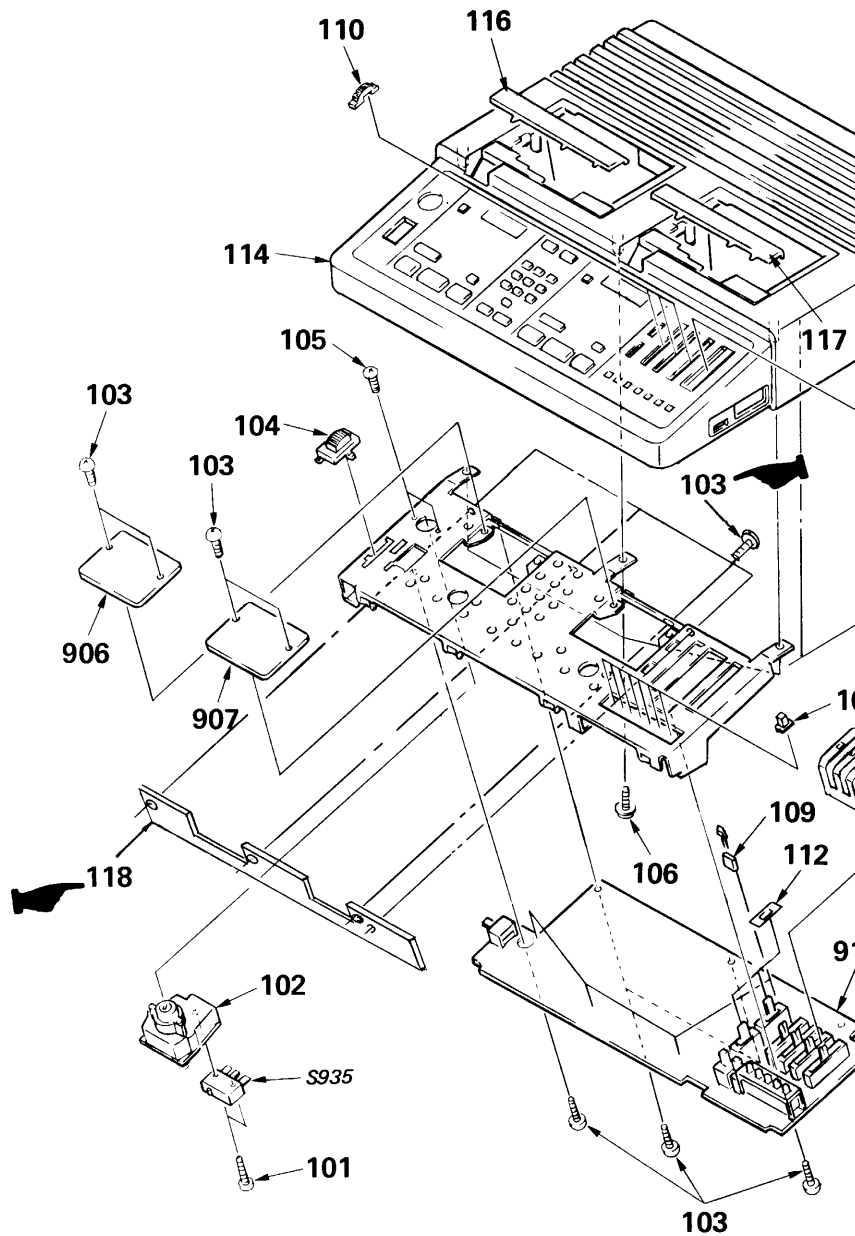


No.	Part No.	Description
103	7-682-147-01	SCREW +BVT 3x6 (S)
118	*3-345-451-01	REINFORCEMENT

: Corrected portion and Added portion

Page 50

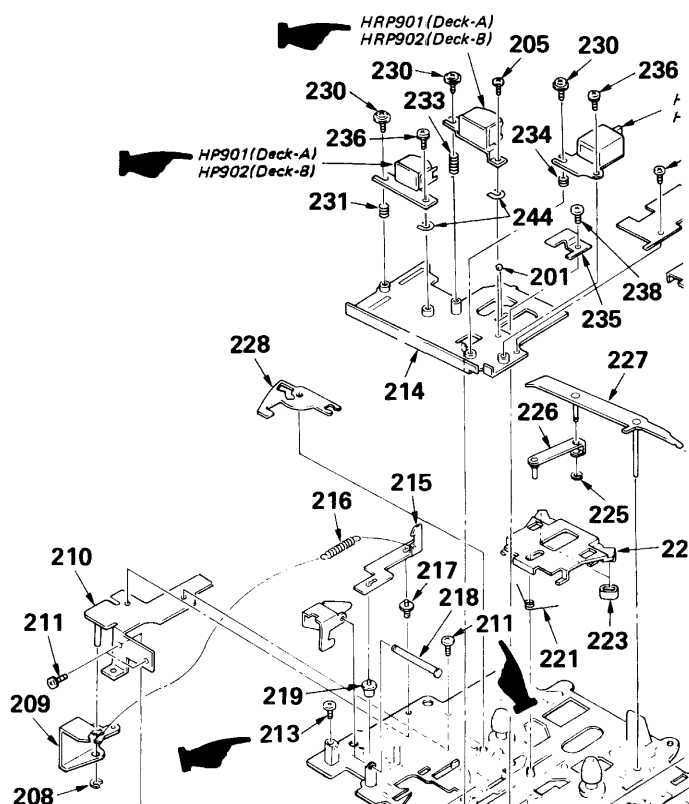

Page 51

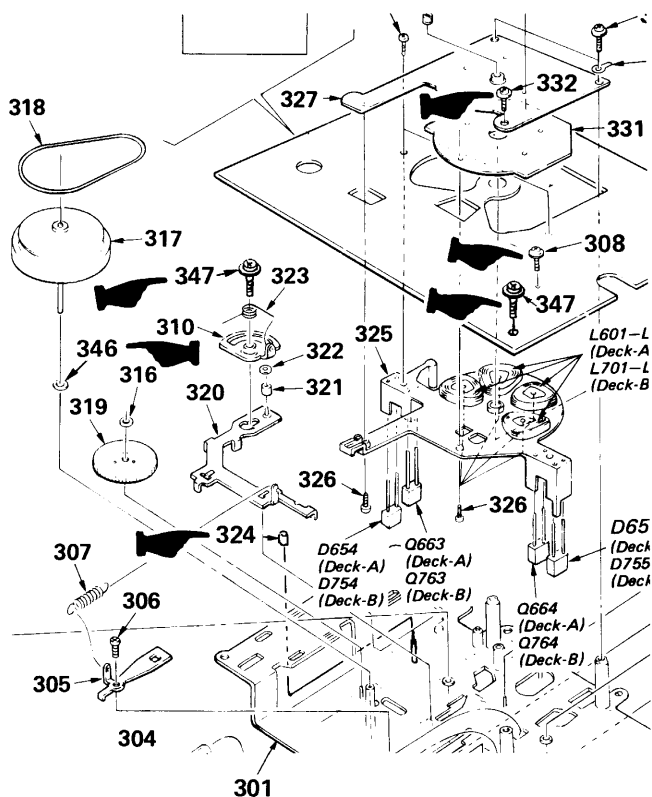

Corrected Part (Page 50, 51)

Page	Incorrect				Correct			
	No.	Part No.	Description	Remarks	No.	Part No.	Description	Remarks
50	221	3-323-508-01	SPRING		213	7-685-133-19	SCREW +BTP 2.6x6 TYPE2 N-S	
	238	7-621-775-10	SCREW +B 2.6x4		211	7-628-253-90	SCREW +PS 2.6x4	
	HP901	X-3315-027-1	(DECK-A)...HEAD, MAGNETIC		HRP901	1-543-498-11	(DECK-A)...HEAD, MAGNETIC	
	HP902	X-3315-027-1	(DECK-B)...HEAD, MAGNETIC		HRP902	1-543-498-11	(DECK-B)...HEAD, MAGNETIC	
	HRP901	1-543-498-11	(DECK-A)...HEAD, MAGNETIC		HP901	1-543-497-12	(DECK-A)...HEAD, MAGNETIC	
	HRP902	1-543-498-11	(DECK-B)...HEAD, MAGNETIC		HP902	1-543-497-12	(DECK-B)...HEAD, MAGNETIC	
51	301	X-3323-515-1	CHASSIS ASSY, MECHANISM		301	X-3315-028-1	CHASSIS ASSY, MECHANISM	
	308	7-621-775-10	SCREW +B 2.6x4		332	7-685-133-19	SCREW +BTP 2.6x6 TYPE2 N-S	
	332	7-685-133-19	SCREW +BTP 2.6x6 TYPE N-S		308	7-621-775-10	SCREW +B 2.6x4	

Added part (Page 51)

No.	Part No.	Description
324	3-319-662-01	RUBBER, BRAKE
346	3-701-437-01	WASHER (T=0.13)
347	3-342-759-01	SCREW (B 1.7x6), TAPPING

BM-246

SONY[®] SERVICE MANUAL

*US Model
Canadian Model*

SUPPLEMENT-2

File this supplement with the service manual.

Subject: Change notice for audio circuit



(SPM-95014)

- Applicable Serial No.
US Model: 0501185 and after
Canadian Model: A502151 and after

1. The IC's has been changed as stated below chart.

Ref. No.	Former Type	New Type
IC101 IC102 IC103 IC104 IC124 IC126 IC134 IC135	NJM4560D-D	μ PC4570C

2. SCHEMATIC DIAGRAM (AUDIO BOARD)

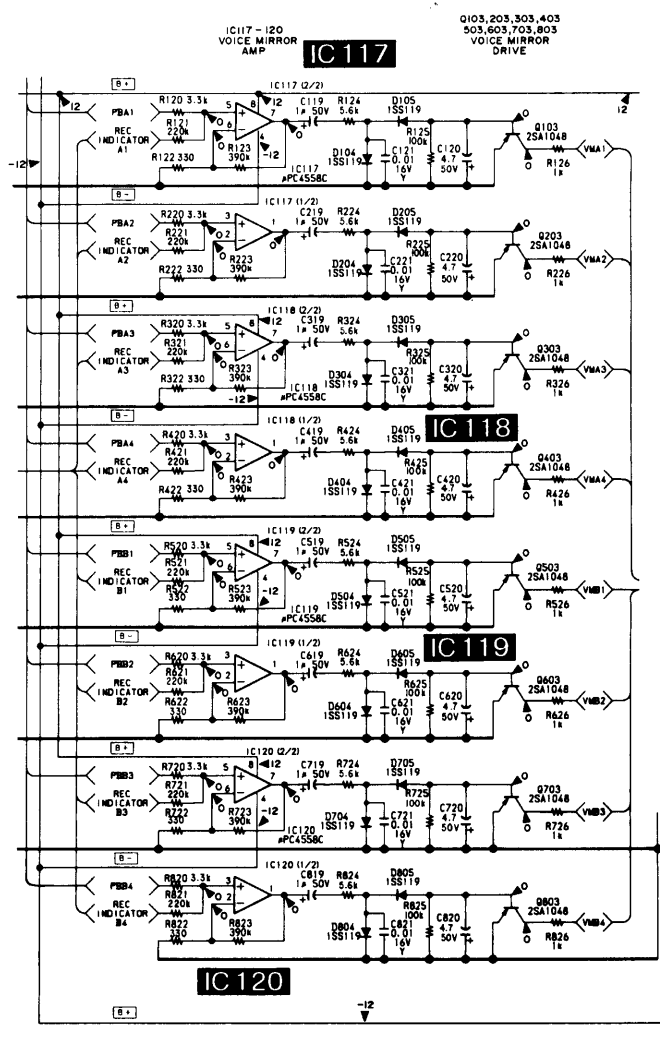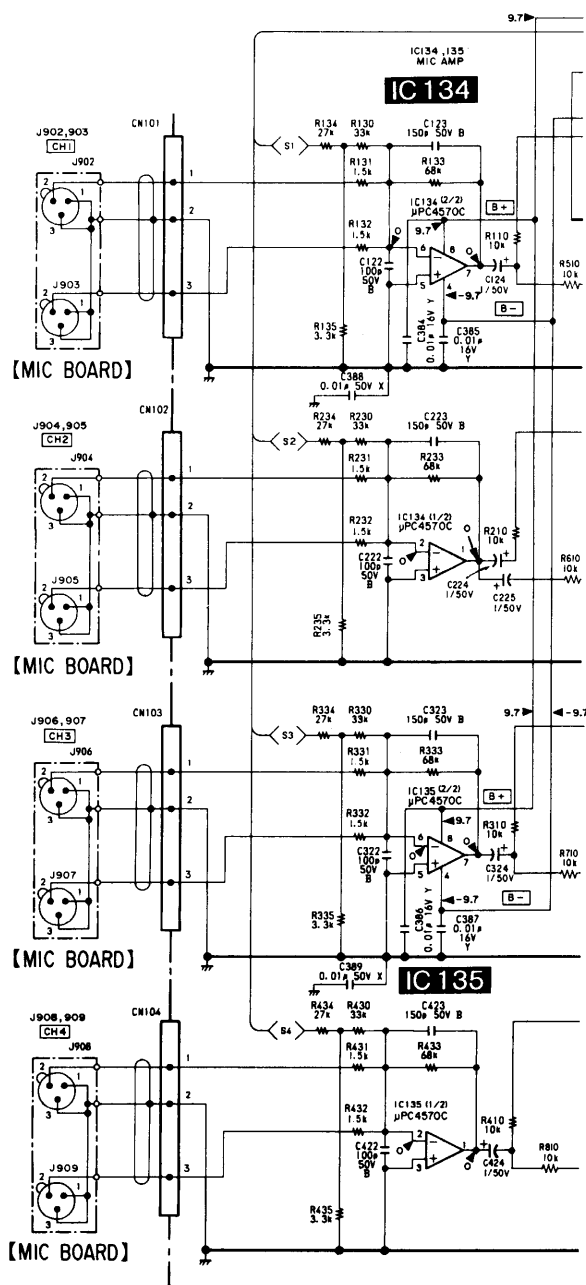

4. CHANGED PARTS

Ref. No.	Former Parts				New Parts				Remarks	
	Description				Part No.	Description				
	<CAPACITOR>					<CAPACITOR>				
C120	ELECT	10 μ F	20%	50V	1-126-963-11	ELECT	4.7 μ F	20%	50V	CHANGED
C124					1-126-301-11	ELECT	1 μ F	20%	50V	ADDED
C166	CERAMIC	470PF	10%	50V	1-162-294-31	CERAMIC	0.001 μ F	10%	50V	CHANGED
C167	MYLAR	0.0022 μ F	5%	50V	1-162-294-31	CERAMIC	0.001 μ F	10%	50V	CHANGED
C168	ELECT	1 μ F	20%	50V	1-124-902-00	ELECT	0.47 μ F	20%	50V	CHANGED
C220	ELECT	10 μ F	20%	50V	1-126-963-11	ELECT	4.7 μ F	20%	50V	CHANGED
C224					1-126-301-11	ELECT	1 μ F	20%	50V	ADDED
C225					1-126-301-11	ELECT	1 μ F	20%	50V	ADDED
C266	CERAMIC	470PF	10%	50V	1-162-294-31	CERAMIC	0.001 μ F	10%	50V	CHANGED
C267	MYLAR	0.0022 μ F	5%	50V	1-162-294-31	CERAMIC	0.001 μ F	10%	50V	CHANGED
C268	ELECT	1 μ F	20%	50V	1-124-902-00	ELECT	0.47 μ F	20%	50V	CHANGED
C320	ELECT	10 μ F	20%	50V	1-126-963-11	ELECT	4.7 μ F	20%	50V	CHANGED
C324					1-126-301-11	ELECT	1 μ F	20%	50V	ADDED
C420	ELECT	10 μ F	20%	50V	1-126-963-11	ELECT	4.7 μ F	20%	50V	CHANGED
C424					1-126-301-11	ELECT	1 μ F	20%	50V	ADDED
C520	ELECT	10 μ F	20%	50V	1-126-963-11	ELECT	4.7 μ F	20%	50V	CHANGED
C620	ELECT	10 μ F	20%	50V	1-126-963-11	ELECT	4.7 μ F	20%	50V	CHANGED
C720	ELECT	10 μ F	20%	50V	1-126-963-11	ELECT	4.7 μ F	20%	50V	CHANGED
C820	ELECT	10 μ F	20%	50V	1-126-963-11	ELECT	4.7 μ F	20%	50V	CHANGED
	<IC>					<IC>				
IC101	IC	NJM4560D-D			8-759-106-41	IC	μ PC4570C			CHANGED
IC102	IC	NJM4560D-D			8-759-106-41	IC	μ PC4570C			CHANGED
IC103	IC	NJM4560D-D			8-759-106-41	IC	μ PC4570C			CHANGED
IC104	IC	NJM4560D-D			8-759-106-41	IC	μ PC4570C			CHANGED
IC124	IC	NJM4560D-D			8-759-106-41	IC	μ PC4570C			CHANGED
IC126	IC	NJM4560D-D			8-759-106-41	IC	μ PC4570C			CHANGED
IC134	IC	NJM4560D-D			8-759-106-41	IC	μ PC4570C			CHANGED
IC135	IC	NJM4560D-D			8-759-106-41	IC	μ PC4570C			CHANGED
	<RESISTOR>					<RESISTOR>				
R120	CARBON	4.7K	5%	1/4W	1-249-423-11	CARBON	3.3K	5%	1/4W	CHANGED
R121	CARBON	100K	5%	1/4W	1-247-887-00	CARBON	220K	5%	1/4W	CHANGED
R122	CARBON	1.5K	5%	1/4W	1-249-411-11	CARBON	330	5%	1/4W	CHANGED
R124	CARBON	1K	5%	1/4W	1-249-426-11	CARBON	5.6K	5%	1/4W	CHANGED
R125	CARBON	22K	5%	1/4W	1-249-441-11	CARBON	100K	5%	1/4W	CHANGED
R131	CARBON	3.3K	5%	1/4W	1-249-419-11	CARBON	1.5K	5%	1/4W	CHANGED
R132	CARBON	3.3K	5%	1/4W	1-249-419-11	CARBON	1.5K	5%	1/4W	CHANGED
R171	CARBON	100K	5%	1/4W	1-247-887-00	CARBON	220K	5%	1/4W	CHANGED
R172	CARBON	47K	5%	1/4W	1-249-441-11	CARBON	100K	5%	1/4W	CHANGED
R173	CARBON	1K	5%	1/4W	1-249-415-11	CARBON	680	5%	1/4W	CHANGED
R176	CARBON	1K	5%	1/4W	1-249-421-11	CARBON	2.2K	5%	1/4W	CHANGED
R177	CARBON	2.2K	5%	1/4W	1-249-423-11	CARBON	3.3K	5%	1/4W	CHANGED
R178	CARBON	470	5%	1/4W	1-249-417-11	CARBON	1K	5%	1/4W	CHANGED
R220	CARBON	4.7K	5%	1/4W	1-249-423-11	CARBON	3.3K	5%	1/4W	CHANGED
R221	CARBON	100K	5%	1/4W	1-247-887-00	CARBON	220K	5%	1/4W	CHANGED
R222	CARBON	1.5K	5%	1/4W	1-249-411-11	CARBON	330	5%	1/4W	CHANGED
R224	CARBON	1K	5%	1/4W	1-249-426-11	CARBON	5.6K	5%	1/4W	CHANGED
R225	CARBON	22K	5%	1/4W	1-249-441-11	CARBON	100K	5%	1/4W	CHANGED
R231	CARBON	3.3K	5%	1/4W	1-249-419-11	CARBON	1.5K	5%	1/4W	CHANGED
R232	CARBON	3.3K	5%	1/4W	1-249-419-11	CARBON	1.5K	5%	1/4W	CHANGED

	Former Parts				New Parts					
Ref. No.	Description				Part No.	Description				Remarks
	<RESISTOR>					<RESISTOR>				
R271	CARBON	100K	5%	1/4W	1-247-887-00	CARBON	220K	5%	1/4W	CHANGED
R272	CARBON	47K	5%	1/4W	1-249-441-11	CARBON	100K	5%	1/4W	CHANGED
R273	CARBON	1K	5%	1/4W	1-249-415-11	CARBON	680	5%	1/4W	CHANGED
R276	CARBON	1K	5%	1/4W	1-249-421-11	CARBON	2. 2K	5%	1/4W	CHANGED
R277	CARBON	2. 2K	5%	1/4W	1-249-423-11	CARBON	3. 3K	5%	1/4W	CHANGED
R278	CARBON	470	5%	1/4W	1-249-417-11	CARBON	1k	5%	1/4W	CHANGED
R320	CARBON	4. 7K	5%	1/4W	1-249-423-11	CARBON	3. 3K	5%	1/4W	CHANGED
R321	CARBON	100K	5%	1/4W	1-247-887-00	CARBON	220K	5%	1/4W	CHANGED
R322	CARBON	1. 5K	5%	1/4W	1-249-411-11	CARBON	330	5%	1/4W	CHANGED
R324	CARBON	1K	5%	1/4W	1-249-426-11	CARBON	5. 6K	5%	1/4W	CHANGED
R325	CARBON	22K	5%	1/4W	1-249-441-11	CARBON	100K	5%	1/4W	CHANGED
R331	CARBON	3. 3K	5%	1/4W	1-249-419-11	CARBON	1. 5K	5%	1/4W	CHANGED
R332	CARBON	3. 3K	5%	1/4W	1-249-419-11	CARBON	1. 5K	5%	1/4W	CHANGED
R420	CARBON	4. 7K	5%	1/4W	1-249-423-11	CARBON	3. 3K	5%	1/4W	CHANGED
R421	CARBON	100K	5%	1/4W	1-247-887-00	CARBON	220K	5%	1/4W	CHANGED
R422	CARBON	1. 5K	5%	1/4W	1-249-411-11	CARBON	330	5%	1/4W	CHANGED
R424	CARBON	1K	5%	1/4W	1-249-426-11	CARBON	5. 6K	5%	1/4W	CHANGED
R425	CARBON	22K	5%	1/4W	1-249-441-11	CARBON	100K	5%	1/4W	CHANGED
R431	CARBON	3. 3K	5%	1/4W	1-249-419-11	CARBON	1. 5K	5%	1/4W	CHANGED
R432	CARBON	3. 3K	5%	1/4W	1-249-419-11	CARBON	1. 5K	5%	1/4W	CHANGED
R520	CARBON	4. 7K	5%	1/4W	1-249-423-11	CARBON	3. 3K	5%	1/4W	CHANGED
R521	CARBON	100K	5%	1/4W	1-247-887-00	CARBON	220K	5%	1/4W	CHANGED
R522	CARBON	1. 5K	5%	1/4W	1-249-411-11	CARBON	330	5%	1/4W	CHANGED
R524	CARBON	1K	5%	1/4W	1-249-426-11	CARBON	5. 6K	5%	1/4W	CHANGED
R525	CARBON	22K	5%	1/4W	1-249-441-11	CARBON	100K	5%	1/4W	CHANGED
R620	CARBON	4. 7K	5%	1/4W	1-249-423-11	CARBON	3. 3K	5%	1/4W	CHANGED
R621	CARBON	100K	5%	1/4W	1-247-887-00	CARBON	220K	5%	1/4W	CHANGED
R622	CARBON	1. 5K	5%	1/4W	1-249-411-11	CARBON	330	5%	1/4W	CHANGED
R624	CARBON	1K	5%	1/4W	1-249-426-11	CARBON	5. 6K	5%	1/4W	CHANGED
R625	CARBON	22K	5%	1/4W	1-249-441-11	CARBON	100K	5%	1/4W	CHANGED
R720	CARBON	4. 7K	5%	1/4W	1-249-423-11	CARBON	3. 3K	5%	1/4W	CHANGED
R721	CARBON	100K	5%	1/4W	1-247-887-00	CARBON	220K	5%	1/4W	CHANGED
R722	CARBON	1. 5K	5%	1/4W	1-249-411-11	CARBON	330	5%	1/4W	CHANGED
R724	CARBON	1K	5%	1/4W	1-249-426-11	CARBON	5. 6K	5%	1/4W	CHANGED
R725	CARBON	22K	5%	1/4W	1-249-441-11	CARBON	100K	5%	1/4W	CHANGED
R820	CARBON	4. 7K	5%	1/4W	1-249-423-11	CARBON	3. 3K	5%	1/4W	CHANGED
R821	CARBON	100K	5%	1/4W	1-247-887-00	CARBON	220K	5%	1/4W	CHANGED
R822	CARBON	1. 5K	5%	1/4W	1-249-411-11	CARBON	330	5%	1/4W	CHANGED
R824	CARBON	1K	5%	1/4W	1-249-426-11	CARBON	5. 6K	5%	1/4W	CHANGED
R825	CARBON	22K	5%	1/4W	1-249-441-11	CARBON	100K	5%	1/4W	CHANGED