



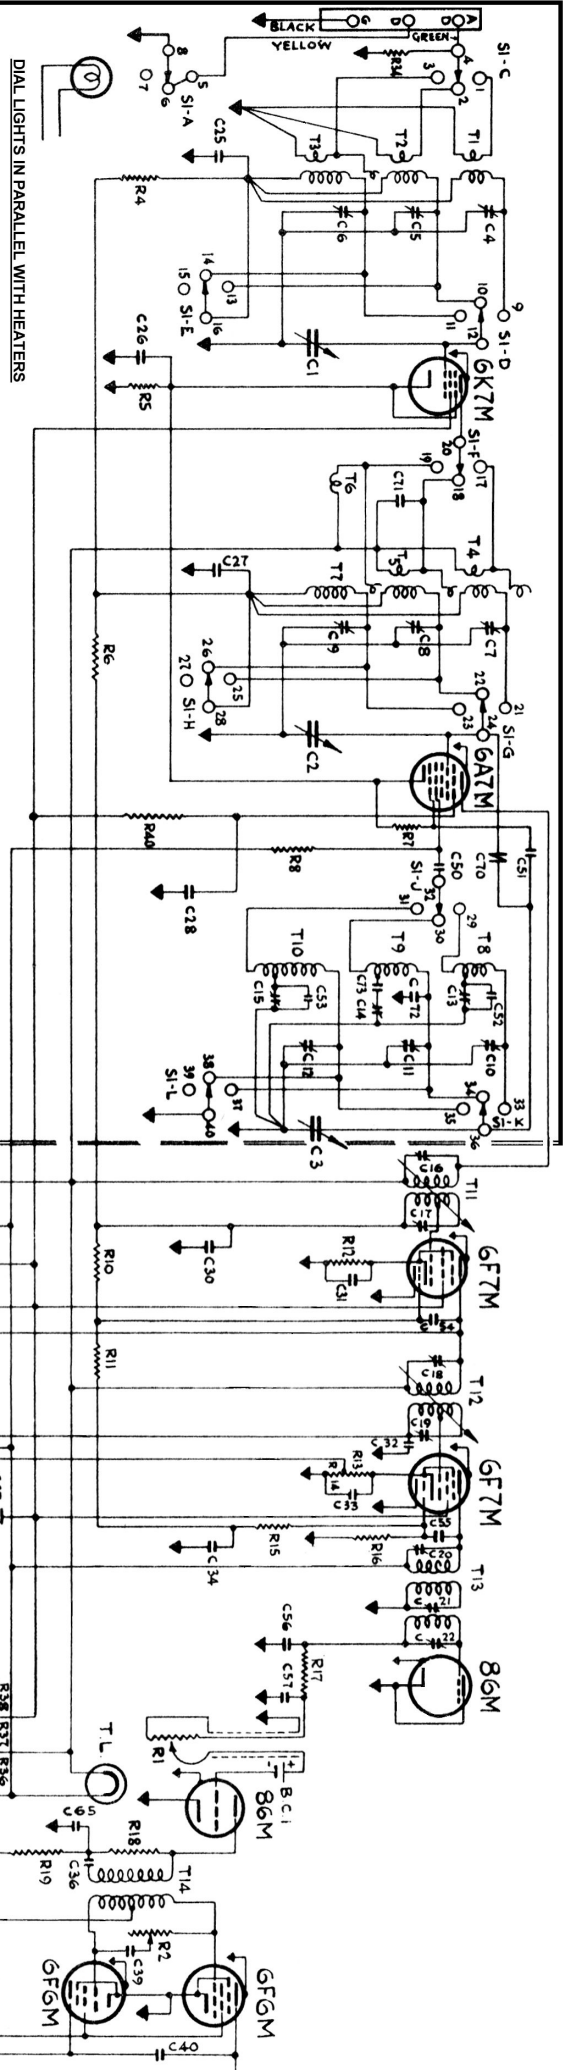


DIAL LIGHTS IN PARALLEL WITH HEATERS

DOUBLET & PILOT LIGHTS ANTENNA INTERSTAGE OSCILLATOR

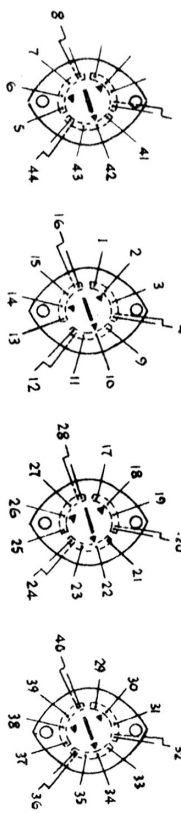

BOTTOM OF CHASSIS TOP OF CHASSIS DIAGRAM OF WAVE CHANGE SWITCH CONNECTIONS FROM FRONT OF CHASSIS

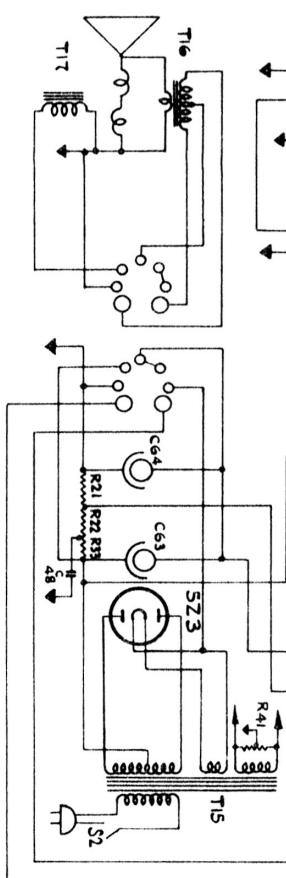

Rogers Model 11-1X (Export) Chassis 6113R1

Parts List for;

Rogers Model 11-1X

Export

(Chassis 6113R1)

RESISTORS			CONDENSERS		
Item #	Resistance	Part #	Item #	Capacitance	Part #
Variable			Variable Air		
R1	1,000,000 Ohm	L.C.13466	C1	450 mmf. Gang	Def. 13521
R2	10,000,000 Ohm	T.C.13400	C2	450 mmf. Gang	R.& M. 13365
R3	100,000 Ohm	S.C.13523	C3	450 mmf. Gang	
Graphite			Variable Mica		
R4	100,000 Ohm	40531	C4	S.W. Ant. Pad.)	
R5	150 Ohm	33313	C5	*X* Ant. Pad.)	5353
R6	100,000 Ohm	40531	C6	B.C. Ant. Pad.)	
R7	50,000 Ohm	33301	C7	S.M. Int. P. Pad.)	
R8	20,000 Ohm	40542	C8	*X* Int. P. Pad.)	5353
R9		40546	C9	B.C. Int. F. Pad.)	
R10	500,000 Ohm	33303	C10	S.M. Osc. Pad.)	
R11	500,000 Ohm	33303	C11	*X* Osc. Pad.)	5353
R12	400 Ohm	33310	C12	B.C. Osc. Pad.)	
R13	400 Ohm	33310	C13	S.W. Osc. S. Pad.)	
R14	1,000 Ohm	33315	C14	*X* Osc. S. Pad.)	5287
R15	500,000 Ohm	33303	C15	B.C. Osc. S. Pad.	4670
R16	500,000 Ohm	33303	C16	1st I. F. Pad.)	4639
R17	50,000 Ohm	33301	C17	1st I. F. Pad.)	
R18	50,000 Ohm	33301	C18	2nd I. F. Pad.)	4639
R19	50,000 Ohm	33301	C19	2nd I. F. Pad.)	
R20	50,000 Ohm	40543	C20	3rd I. F. Pad.)	4639
R21	50,000 Ohm	33301	C21	3rd I. F. Pad.)	
R22	50,000 Ohm	33301	C22	3rd I. F. Pad.	
R23	500,000 Ohm	33303	C23	Sup. I. F. Pad.)	12404
R24	250,000 Ohm	33316	C24	Sup. I. F. Pad.)	4639
R25	250,000 Ohm	33316	Tubular		
R26	10,000 Ohm	33318	C25	0.05 mf. 200 V.	38102
R27	250,000 Ohm	33316	C26	0.1 mf. 200 V.	38106
R28	500,000 Ohm	33303	C27	0.05 mf. 200 V.	38102
R29	500,000 Ohm	33303	C28	0.1 mf. 200 V.	38106
R30	400 Ohm	33310	C29	0.1 mf. 400 V.	38121
R31	1,000,000 Ohm	33306	C30	0.05 mf. 200 V.	38102
R32		33319	C31	0.1 mf. 200 V.	38106
R33	50,000 Ohm	33301	C32	0.05 mf. 200 V.	38102
R34	10,000 Ohm	33318	C33	0.1 mf. 200 V.	38106
R35	1,180 Ohm		C34	0.05 mf. 200 V.	38102
R36	3,600 Ohm	Candohm	C35	0.05 mf. 200 V.	38102
R37	10,000 Ohm	13554	C36	0.25 mf. 200 V.	38107
R38	10,000 Ohm		C37	0.25 mf. 200 V.	38107
R39	20,000 Ohm		C38	0.25 mf. 400 V.	38127
R40	5,000 Ohm	33314	C39	0.005 mf. 600 V.	38110
R41	40 Ohm	C.T.12551	C40	0.0015 mf. 800 V.	11977
			C41	0.5 mf. 200 V.	38108
			C42	0.5 mf. 200 V.	38108
			C43	0.25 mf. 200 V.	38107
			C44	0.1 mf. 200 V.	38106
			C45	0.1 mf. 200 V.	38106
			C46	0.1 mf. 200 V.	38106
			C47	0.1 mf. 200 V.	38106
			C48	0.5 mf. 200 V.	38108


CONDENSERS		
Item #	Capacitance	Part #
Mica		
C50	200 mmf.	37905
C51	100 mmf.	37906
C52	1500 mmf.	34122
C53	200 mmf.	37908
C54	50 mmf.	37904
C55	50 mmf.	37904
C56	200 mmf.	37902
C57	100 mmf.	37906
C58	25 mmf.	37910
C59	200 mmf.	37905
C60	50 mmf.	37904
C61	50 mmf.	37904
C63	30 mf. Net	39012
C64	30 mf. Net	13014
C65	2 mf. Dry	
C66	4 mf. Dry	13085
C67	4 mf. Dry	
C70	4 mf. Dry	

Neutralizing Capacity

TRANSFORMERS

Item #	Description	Part #
T1	S.W. Ant. Trans.	5279
T2	*X* Ant. Trans.	5369
T3	B.C. Ant. Trans.	5277
T4	S.W. Int. Trans.	5283
T5	*X* Int. Trans.	539C
T6	B.C. Int. Ptl.	5281
T7	B.C. Int. Sec.	5280
T8	S.W. Osc. Trans.	5286
T9	*X* Osc. Trans.	5391
T10	B.C. Osc. Trans.	5284
T11	1st I. F. Trans.	5257
T12	2nd I. F. Trans.	5257
T13	3rd I. F. Trans.	5007
T14	1st A. F. Trans.	5333
T15	Power Trans.	5409
T16	Output Trans.	5413
T17	Speaker	5412
T18	Supp. I. F. Trans.	5384

CONDENSERS		
Item #	Capacitance	Part #
C71	500 mmf.d. Mica	34117
C72	25 mmf. Mica	37911
C73	150 mmf.d. Mica	37912

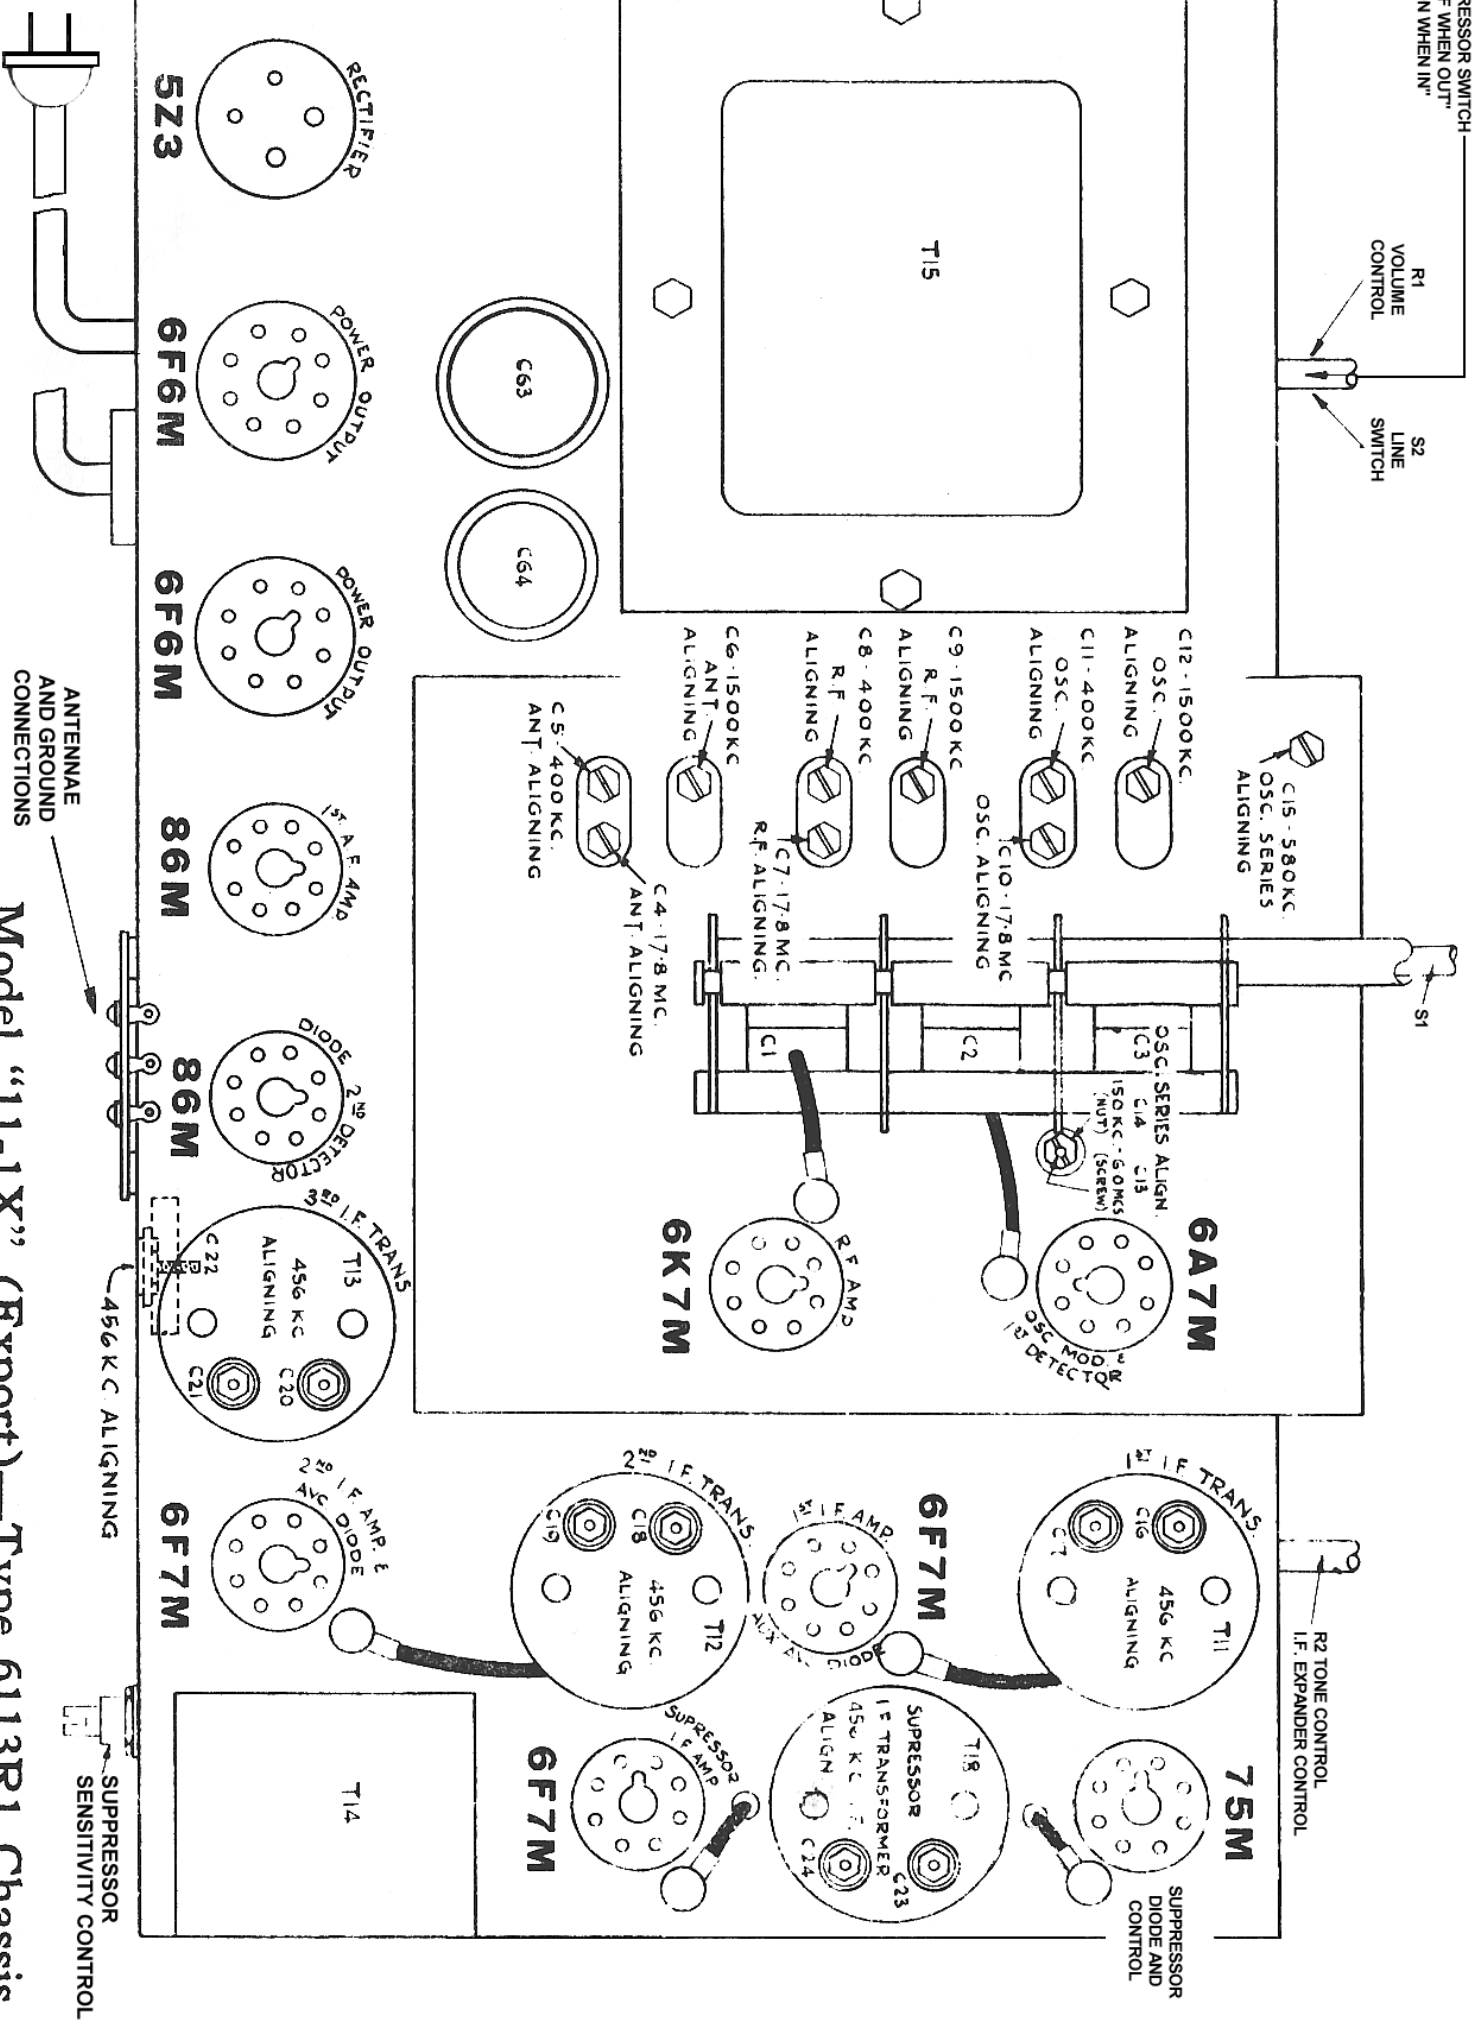

Model "11-1X" (Export)—Type 6113R1 Chassis