


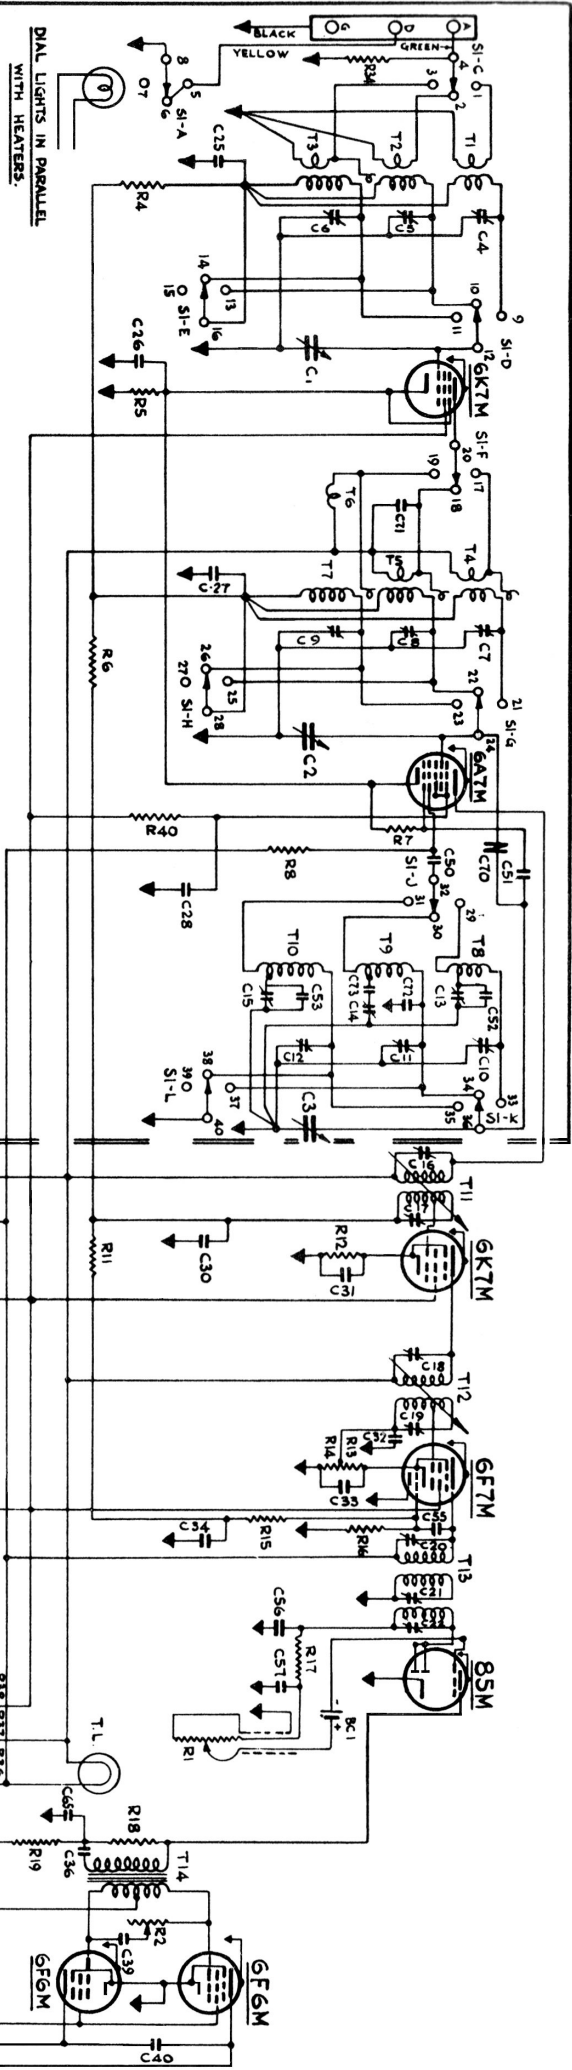

DIAL LIGHTS IN PARALLEL WITH HEATERS.

DOUBLET & PILOT LIGHTS

ANTENNA

INTERSTAGE

OSCILLATOR


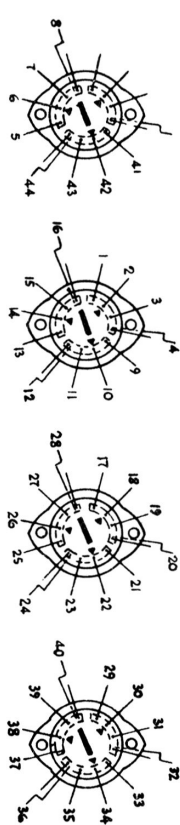


DIAGRAM OF WAVE CHANGE SWITCH CONNECTIONS FROM FRONT OF CHASSIS

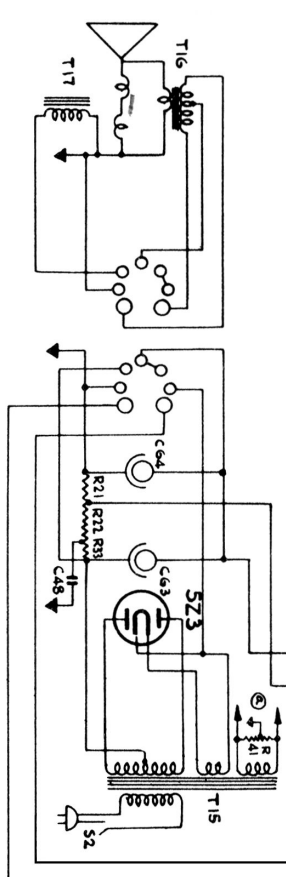

Rogers Model 11/8X Export (Chassis 683R1)

RESISTORS

Item #	Resistance	Part #
Variable		
R1	1,000,000 Ohm L.C.	13402
R2	10,000,000 Ohm T.C.	13400
Graphite		
R4	100,000 Ohm	40531
R5	150 Ohm	33313
R6	100,000 Ohm	40531
R7	50,000 Ohm	33301
R8	20,000 Ohm	40542
R11	500,000 Ohm	33303
R12	400 Ohm	33310
R13	400 Ohm	33310
R14	1,000 Ohm	33315
R15	500,000 Ohm	33303
R16	500,000 Ohm	33303
R17	50,000 Ohm	33301
R18	50,000 Ohm	33301
R19	50,000 Ohm	33301
R20	750 Ohm	40543
R21	50,000 Ohm	33301
R22	50,000 Ohm	33301
R33	50,000 Ohm	33301
R34	10,000 Ohm	33316
Wire Wound		
R35	1,180 Ohm)	
R36	3,600 Ohm)	Candohm
R37	10,000 Ohm)	13554
R38	10,000 Ohm)	
R39	20,000 Ohm)	
R40	5,000 Ohm	33314
R41	40 Ohm C.T.	13551

CONDENSERS

Item #	Capacitance	Part #
Variable		
C1	450 mf. Gang)	
C2	450 mf. Gang) R&M	
C3	450 mf. Gang)	13565
Variable Mica		
C4	3.7. Ant. Pad.)	
C5	"X". Ant. Pad.)	5353
C6	B.C. Ant. Pad.)	
Variable Air		
C7	3.7. Int. P. Pad.)	
C8	"X". Int. P. Pad.)	5353
C9	B.C. Int. P. Pad.)	
C10	3.7. Osc. Pad.)	
C11	"X". Osc. Pad.)	5353
C12	B.C. Osc. Pad.)	
C13	S.W. Osc. S. Pad.)	
C14	"X". Osc. S. Pad.)	5287
C15	B.C. Osc. S. Pad.)	4670
C16	1st I. F. Pad.)	4639
C17	1st I. F. Pad.)	
C18	2nd I. F. Pad.)	4639
C19	2nd I. F. Pad.)	
C20	3rd I. F. Pad.)	4639
C21	3rd I. F. Pad.)	
C22	3rd I. F. Pad.	12404
Tubular		
C25	0.05 mf. 200 V.	38102
C26	0.1 mf. 200 V.	38106
C27	0.05 mf. 200 V.	38102
C28	0.1 mf. 200 V.	38106
C29	0.1 mf. 400 V.	38121
C30	0.05 mf. 200 V.	38102
C31	0.1 mf. 200 V.	38106
C32	0.05 mf. 200 V.	38102
C33	0.1 mf. 200 V.	38106
C34	0.05 mf. 200 V.	38102
C36	0.25 mf. 200 V.	38107
C38	0.25 mf. 400 V.	38127
C39	0.005 mf. 600 V.	38110
C40	0.0015 mf. 800 V.	11977
C41	0.5 mf. 200 V.	38108
C47	0.1 mf. 200 V.	38106
C48	0.5 mf. 200 V.	38108
Mica		
C50	200 mf.	37905
C51	100 mf.	37906
C52	1,500 mf.	34122
C53	200 mf.	37908
C55	50 mf.	37904
C56	200 mf.	37902
C57	100 mf.	37906

CONDENSERS


Item #	Capacitance	Part #
C63	30 mf. Wet	39012
C64	30 mf. Wet	13014
C65	2 mf. Dry)	
C66	4 mf. Dry)	13085
C67	4 mf. Dry)	
C70	Neutralizing Capacity	
C71	500 mf. Mica	34117
C72	25 mf. Mica	37911
C73	150 mf. Mica	37912

TRANSFORMERS

Item #	Description	Part #
T1	S.W. Ant. Trans.	5279
T2	"X". Ant. Trans.	5389
T3	B.C. Ant. Trans.	5277
T4	S.W. Int. Trans.	5283
T5	"X". Int. Trans.	5390
T6	B.C. Int. Pri.	5281
T7	B.C. Int. Sec.	5280
T8	S. Osc. Trans.	5286
T9	"X". Osc. Trans.	5391
T10	B.C. Osc. Trans.	5284
T11	1st I. F. Trans.	5257
T12	2nd I. F. Trans.	5257
T13	3rd I. F. Trans.	5007
T14	1st A. F. Trans.	5333
T15	Power Trans.	5409
T16	Output Trans	5431
T17	Speaker	5328

Parts List for;

Rogers Model 11/8X Export
(Chassis 683R1)

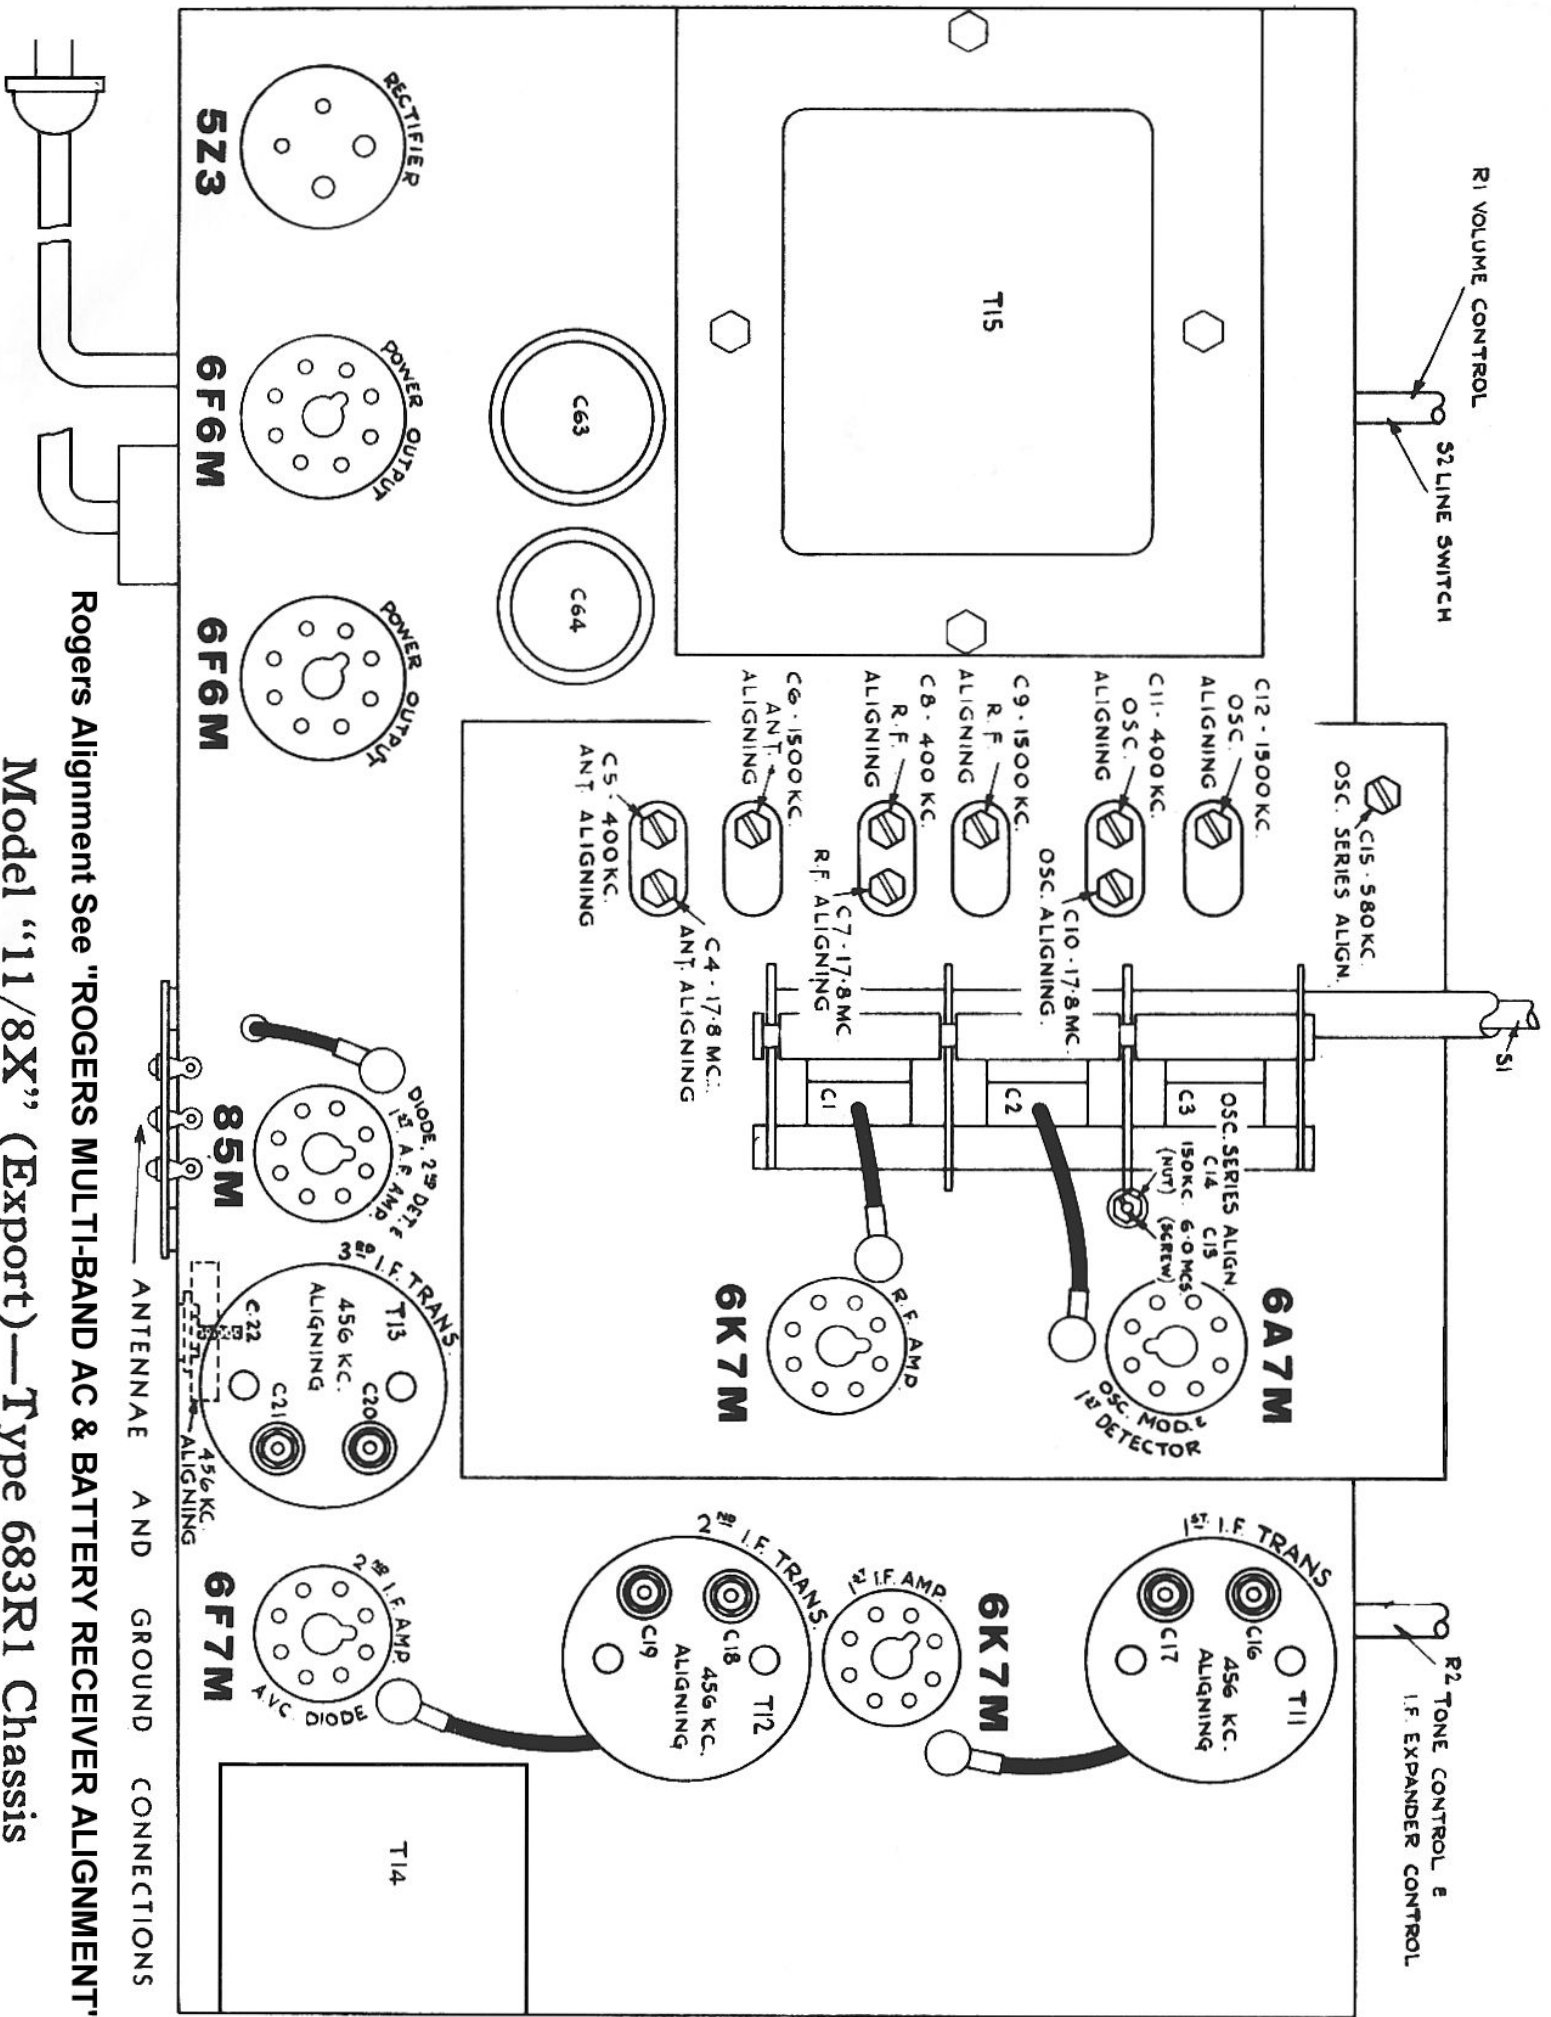

Rogers Alignment See "ROGERS MULTI-BAND AC & BATTERY RECEIVER ALIGNMENT"

Model "11/8X" (Export)—Type 683R1 Chassis