


No.	Dummy Antenna	Connection of Signal Generator to Receiver	Signal Generator Frequency	Receiver Dial Setting	Trimmers to be Adjusted	Description of Adjustment
1	.1 mid cond.	6SA7 Grid	455 kc	Anywhere that does not affect the signal	2nd I.F. 1st I.F.	Peak both transformers for maximum output, then repeat until no further increase in output can be obtained.
2	200 mm <sup>2</sup> cond.	Antenna	1500 kc	1500 kc	Oscillator trimmer on front section of gang.	Adjust to bring in signal.

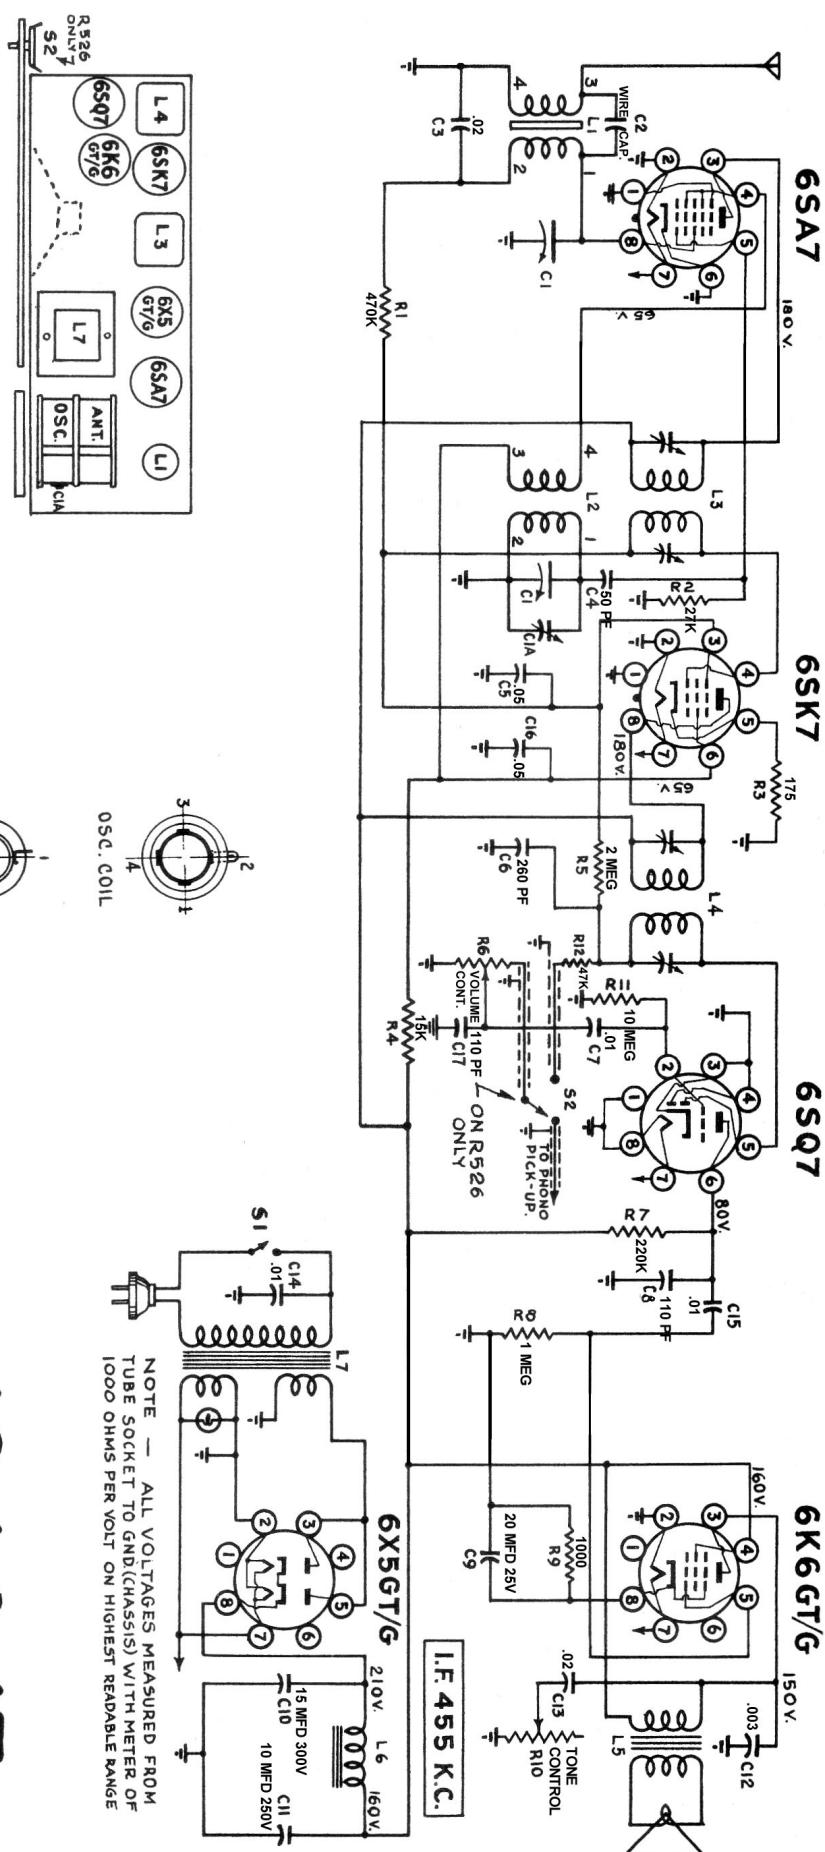

1946-47

## MODELS

R 515

R 526

STEWART-WARNER

DATA SHEET 122