


AKAI SERVICE MANUAL

S2000
S3000XL
S3200XL

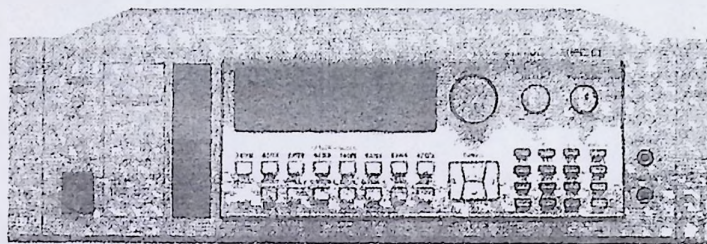

Model S3200XL

MIDI STEREO DIGITAL SAMPLER

MODEL **S2000**

MODEL **S3000XL**


MODEL **S3200XL**

OPTIONAL BOARD

EB16, IB-208P

PRECAUTIONS DURING SERVICING

1. Parts identified by the Δ symbol are critical for safety. Replace them only with the parts number specified.
2. In addition to safety, other parts and assemblies are specified for conformance with such regulations as those applying to spurious radiation. These must also be replaced only with the specified replacements.
Examples: RF converters, tuner units, antenna selector switches, RF cables, noise blocking capacitors, noise blocking filters, etc.
3. Use specified internal wiring. Note especially:
 - 1) Wires covered with PVC tubing
 - 2) Double insulated wires
 - 3) High voltage leads
4. Use specified insulating materials for hazardous live parts.
Note especially:
 - 1) Insulation Tape
 - 2) PVC tubing
 - 3) Spacers (insulating barriers)
 - 4) Insulation sheets for transistors
 - 5) Plastic screws for fixing micro switches
5. When replacing AC primary side components (transformers, power cords, noise blocking capacitors, etc.), wrap the ends of the wires securely around the terminals before soldering.

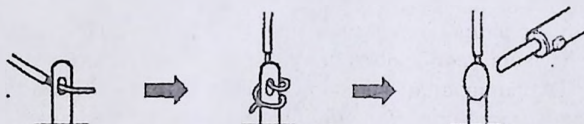

6. Make sure that wires do not contact heat producing parts (heat sinks, oxide metal film resistors, fusible resistors, etc.).
7. Check that replaced wires do not contact sharp edged or pointed parts.
8. Also check areas surrounding repaired locations.
9. Make sure that foreign objects (screws, solder droplets, etc.) do not remain inside the set.

SAFETY CHECK AFTER SERVICING

After servicing, make measurements of leakage-current or resistance in order to determine that exposed parts are acceptably insulated from the supply circuit.

The leakage-current measurement should be done between accessible metal parts (such as chassis, ground terminal, microphone jacks, signal input/output connectors, etc.) and the earth ground through a resistor of 1500 ohms paralleled with a 0.15 μ F capacitor, under the unit's normal working conditions. The leakage-current should be less than 0.5 mA rms AC.

The resistance measurement should be done between accessible exposed metal parts and power cord plug prongs with the power switch (if included) "ON". The resistance should be more than 2.2 M ohms.

SYMBOLS FOR PRIMARY DESTINATION

Unit destinations are indicated with letters as shown below.

Symbols	Principal Destinations
A	U.S.A
B	U.K
C	Canada
E	Europe (except U.K)
J	Japan
S	Australia
V	Germany
U	Universal Area
Y*	Custom version

I. SPECIFICATIONS

1-1. Model S2000 and S3000XL

Sampling data format	16 bit linear encoding
Sampling rates	44.1 kHz (20 Hz - 20 kHz range), 22.05 kHz (20 Hz - 10 kHz range)
Sampling time	
S2000	22.28 seconds (mono/44.1 kHz), 11.14 seconds (stereo/44.1 kHz)
S3000XL	44.56 seconds (mono/22.05 kHz), 22.28 seconds (stereo/22.05 kHz)
S3000XL	20.80 seconds (mono/44.1 kHz), 10.40 seconds (stereo/44.1 kHz)
S3000XL	41.60 seconds (mono/22.05 kHz), 20.80 seconds (stereo/22.05 kHz)
Internal memory	2 Mbytes standard, expandable to 32 Mbytes using 72 pin SIMMs
Polyphony	32 voices
Maximum sample number	255
Maximum program number	254
Filter	Digital dynamic-low pass filter (-12 dB/octave with resonance)
Envelope generators	2 (1 multi-stage)
L.F.O	2
Display	
S2000	Back lit 16 characters x 2 lines LCD
S3000XL	Back lit 320 characters/240 x 64 graphic LCD
Diskette drive	3.5-inch dual density drive (2HD, 2DD)
Connectors	
REC IN	1/4-inch phone jack (balanced) x 2
STEREO OUT	1/4-inch phone jack (unbalanced) x 2, 0 dBm 600 ohms
ASSIGNABLE OUTS	1/4-inch phone jack (balanced) x 8 (S2000 : IB-208P optional)
DIGITAL INPUT/OUTPUT	RCA pin jack (S2000 : IB-208P optional)
HEADPHONES	1/4 inch stereo phone jack x 1
MIDI	DIN 5P IN x 1, OUT x 1, THRU x 1
SCSI interface	25 pin D-SuB
REC GAIN volume	-6 dBm (min) ~ -44 dBm (max)
Power requirements	
AC 100 V, 50/60 Hz for Japan	
AC 120 V, 60 Hz for U.S.A. and Canada	
AC 220 ~ 230 V, 50 Hz for Europe	
AC 240 V, 50 Hz for Australia	
Power consumption	
S2000	35 W for Japan
S2000	42 W for U.S.A and Canada
S3000XL	26 W for Japan
S3000XL	42 W for U.S.A and Canada
Dimensions	483 (W) x 88.1 (H) x *408.8 (D) mm
	(EIA 2U size), (* S2000 : maximum 423.1 mm, S3000XL : maximum 432 mm)
Weight	
S2000	7.7 kg
S3000XL	7.1 kg

Standard accessories

AC power cable	1
Sound library disk	
S2000	1
S3000XL	2
Modular editing system disk (for Macintosh™)	1 MESA
MSF sequence disk	1
System disk (S2000 only)	1
Operator's manual	1

Optional accessories

IB-208P (8 parallel-out / Digital I/O board) (S2000 only)	
EB16 (Multi effects processor board)	
IB-304F (2nd LSI filter board)	
FMX008 (8 Mbyte flash memory board)	

* For improvement purposes, specifications and design are subject to change without notice.

1-2. Model S3200XL

Sampling data format	16 bit linear encoding
Sampling rates	44.1 kHz (20 Hz - 20 kHz range), 22.05 kHz (20 Hz - 10 kHz range)
Sampling time (unexpanded memory) ...	3 min 07 sec. (mono/44.1 kHz), 1 min 33 sec. (stereo/44.1 kHz) 6 min 14 sec (mono/22.05 kHz), 3 min 07 sec (stereo/22.05 kHz)
Internal memory	16 Mbytes standard, expandable to 32 Mbytes using 72 pin SIMMs
Polyphony	32 voices
Maximum sample number	255
Maximum program number	254
Filter	Digital dynamic-low pass filter (-12 dB/octave with resonance)
Envelope generators	Digital envelope generator x 3 (2 multi-stage)
L.F.O	Multi wave Low Frequency Oscillator x 2
Display	Back lit 320 characters/240 x 64 graphic LCD
Diskette drive	3.5-inch dual density drive (2HD,2DD)
Connectors	
REC IN	XLR (balanced) x 2, 1/4-inch phone jack (balanced) x 2
STEREO OUT	XLR (balanced) x 2 (5.0 dBm/600 ohms), 1/4-inch phone jack (unbalanced) x 2 (5.0 dBm)
ASSIGNABLE OUTS	1/4-inch phone jack (unbalanced) x 8 (7.5 dBm)
HEADPHONES	1/4 inch stereo phone jack x 1
FOOTSWITCH	1/4 inch phone jack
MIDI	DIN 5P IN x 1, OUT x 1, THRU x 1
SCSI interface	25 pin D-SuB
AES/EBU digital IN/OUT	1/4-inch phone jack (balanced) x 2 and Optical input/output
SMPTE time code IN/OUT	1/4-inch phone jack (balanced) x 2
REC GAIN	HI: -56 dBm, MID: -37 dBm, LO: -15 dBm
Power requirements	
AC 100 V, 50/60 Hz for Japan	
AC 120 V, 60 Hz for U.S.A. and Canada	
AC 220 ~ 230 V, 50 Hz for Europe	
AC 240 V, 50 Hz for Australia	
Power consumption	
38 W for Japan	
45 W for U.S.A. and Canada	
Dimensions	
483 (W) x 133 (H) x *410 (D) mm	
(EIA 3U size), (* : maximum 429 mm)	
Weight	8.8 kg

Standard accessories

AC power cable	1
Sound library disk	2
SMF sequence disk	1
Modular editing system disk (for Macintosh™)	1
Operator's manual	1

Optional accessories

FMX008 (8 Mbyte flash memory board)	
-------------------------------------	--


* For improvement purposes, specifications and design are subject to change without notice.

II. DISASSEMBLY



In case of trouble, etc., necessitating dismantling, please dismantle in the order shown in the illustrations.
Reassemble in the reverse order.

2-1. Model S2000 and S3000XL

1. Removal of the UPPER COVER

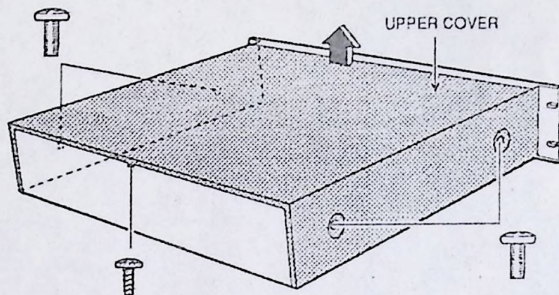


2. Removal of the FRONT PANEL BLK

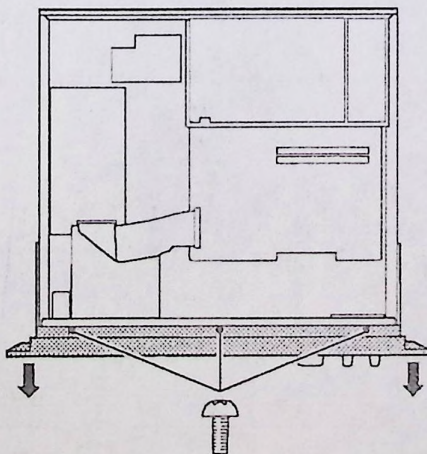
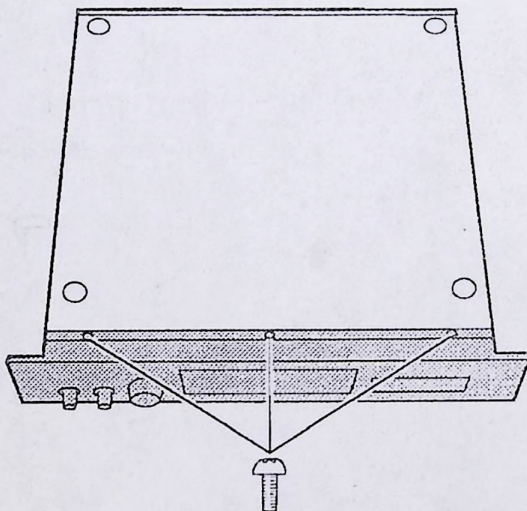


2-2. Model S3200XL

1. Removal of the UPPER COVER

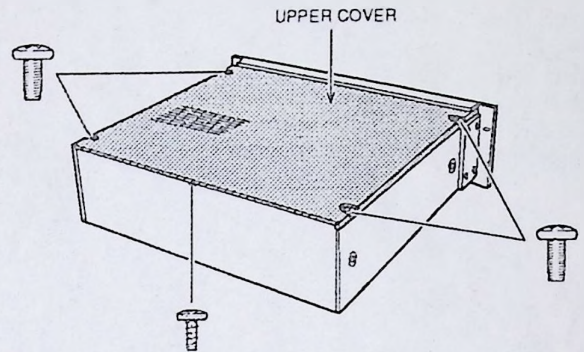

2. Removal of the FRONT PANEL BLK

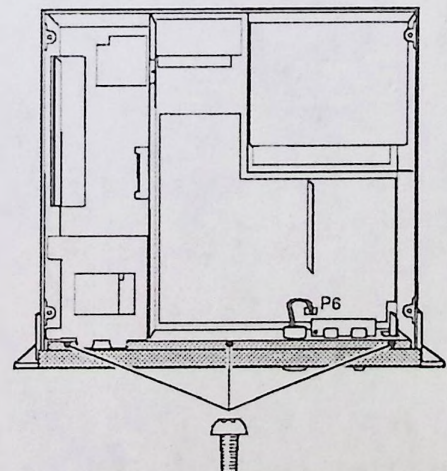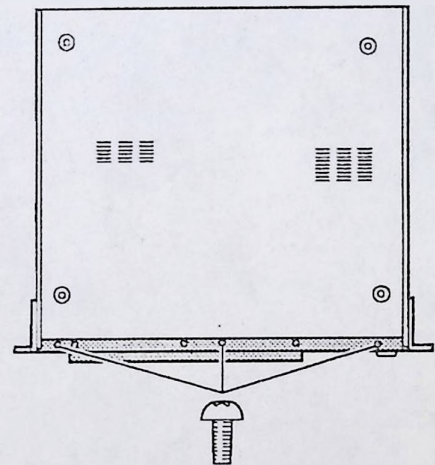

* Disconnect the P6 connector on the MAIN PCB before removal.

III. PRINCIPAL PARTS LOCATION

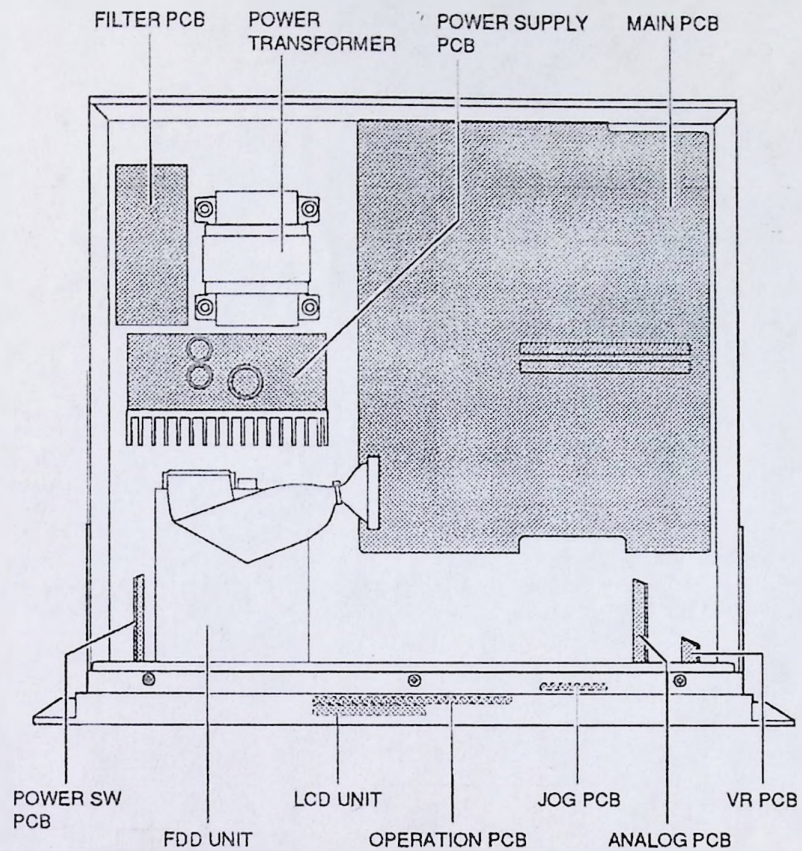


Fig. 3-1 Model S2000

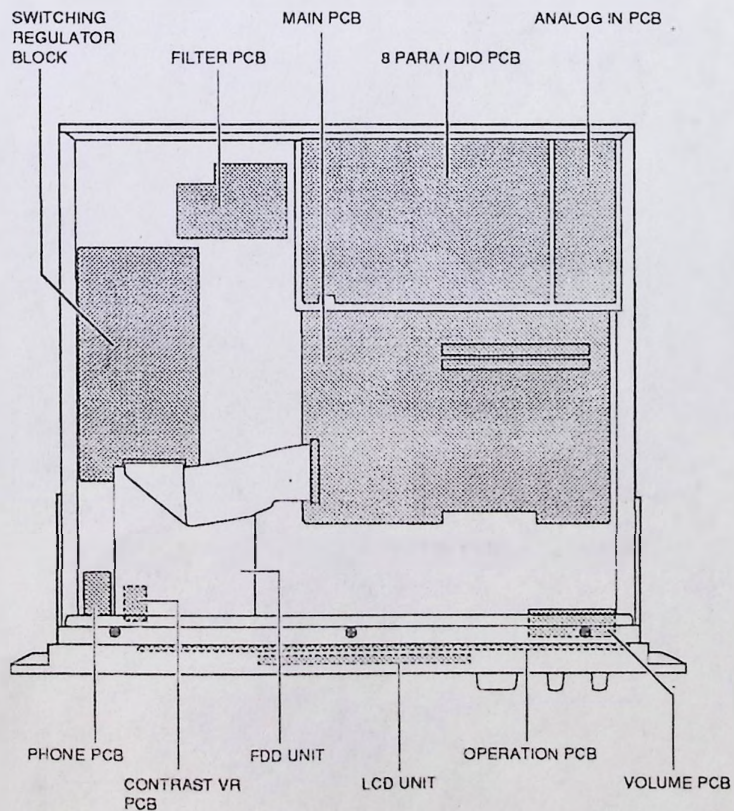


Fig. 3-2 Model S3000X1

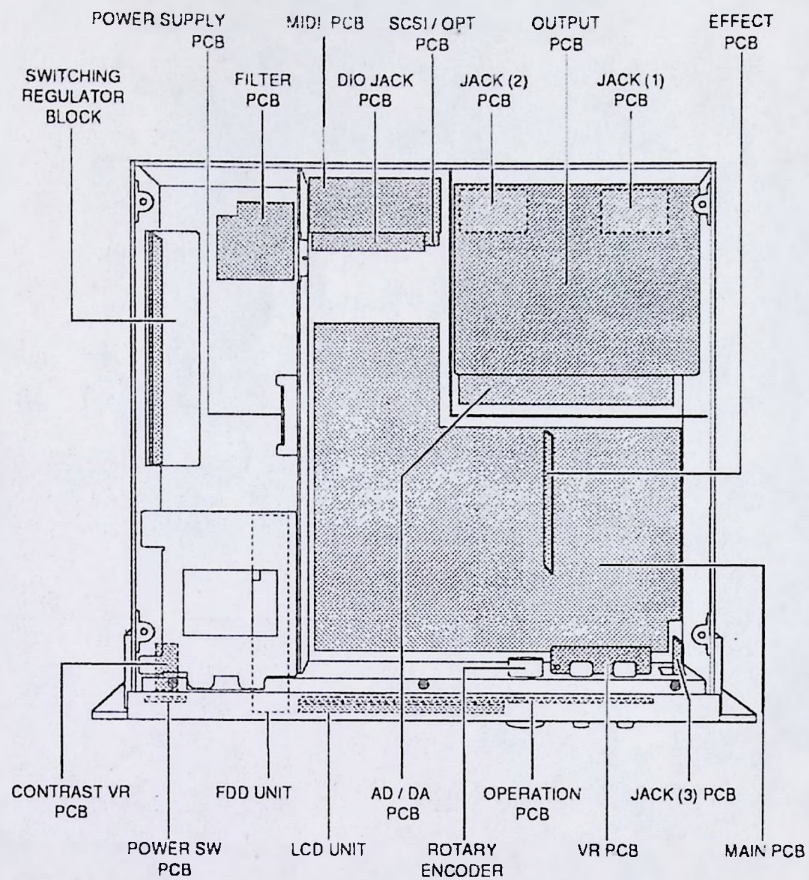


Fig. 3-3 Model S3200XL

IV. ELECTRICAL ADJUSTMENT (S3200XL ONLY)

4-1. INSTRUMENT CONNECTION

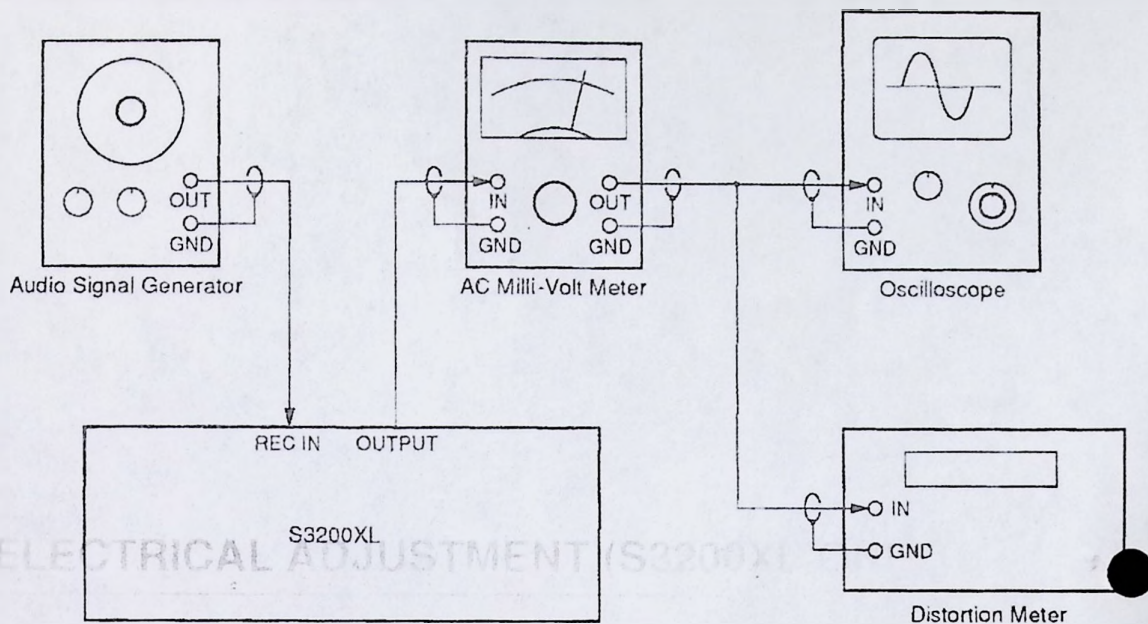


Fig. 4-1 Instrument connection

4-2. LOCATION OF THE ADJUSTMENT POINTS

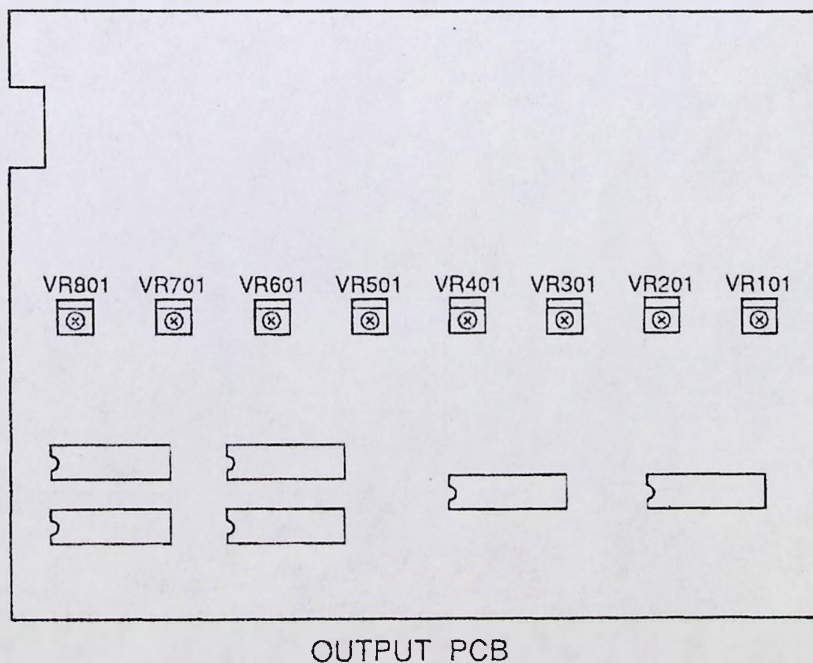


Fig. 4-2

4-3. MSB ADJUSTMENT


- 1) Connect an audio signal generator to the LEFT channel analog input and make a 1 kHz sinewave sample as follows.

Press the "MARK/#" and "NAME" buttons simultaneously then press the " $\rightarrow$ " button to set the unit to the default condition. After it is initialized, press the "EDIT SAMPLE" button. Next, use the DATA knob to select the sample "SINE", then press the "F3/C" (REC2) button. Move the cursor to "tim: 1 : 00S" then enter "1000" with the numerical buttons and then press the "ENT/PLAY" button to set the sampling time of 10 seconds. Adjust the REC LEVEL volume on the front panel so that the level meter indication on the left side of the display is slightly over -20 dBm and then press the "F8/H" (ARM) button to start sampling.


- 2) Connect an AC milli-volt meter to the analog output CH-1.

- 3) Press the "EDIT PROGRAM" button then press the "F5/E" (OUT). Move the cursor to "indiv output: OFF" position and select CH-1 by pressing the "1" numerical button. Then move the cursor to "loudness: 80" position and keep pressing the "ENT/PLAY" button to play back the sample. Adjust the output level to -60 dBm with the data knob.


- 4) Adjust the VR101 (CH-1) on the OUTPUT PCB while pressing the "ENT/PLAY" button so that the waveform displayed on the oscilloscope become a smooth continuous sinewave at -60 dBm level as shown.



INCORRECT



INCORRECT



CORRECT

- 5) Move the cursor back to "indiv output : 1" position then select the appropriate channel from CH-2 to CH-8 with one of the numerical buttons where the meter is connected. Adjust the corresponding semi-fixed VRs the same way as in step 4).

VR101 (CH-1)	VR501 (CH-5)
VR201 (CH-2)	VR601 (CH-6)
VR301 (CH-3)	VR701 (CH-7)
VR401 (CH-4)	VR801 (CH-8)

V. SUPPLEMENTARY INFORMATION

5-1. MEMORY TEST

* This test mode is used for the inspection of the unit. To check the unit, proceed as follows.

5-1-1. Memory test for S2000 model

- 1) While pressing the "PAGE ^" button, turn the power on. Keep pressing the "PAGE ^" button until the following messages will be displayed on the LC display.

hardware testing
wave memory

- 2) Next, the following messages will be displayed on the LC display and the "EDIT" indicator starts flashing.

01MW wave memory
testing . . .

- 3) After a few seconds, "EDIT" indicator stops flashing and then "GLOBAL" indicator starts flashing.
- 4) The "SAVE" and "LOAD" indicators start flashing in turn in the same manner as 3).
- 5) If the function of the unit is normal, the following message will be displayed on the LC display. Also the "MULTI", "EFFECTS", "EDIT" and "SAVE" indicators turn on.

01MW wave memory
tested okay

- 6) Turn the power off to disengage the "test mode".

5-1-2. Memory test for model S3000XL and S3200XL models

- 1) Press the "MARK/#" and "NAME" buttons simultaneously after the power has been turned on for 10 seconds. All eight LEDs which belong to "SINGLE/A" to "LOAD/H" buttons ("SINGLE/I" to "LOAD/P" for S3200XL model) turn on accordingly.
- 2) Press the "+/<" button. The following messages will be displayed on the LC display and the value indicator will start increasing.

Testing Memory...
testing 01 Mword 01

S3000XL

Testing Memory...
testing 08 Mword 01

S3200XL

- 3) The following message will be displayed on the LC display after the display stops incrementing.

Testing Memory...
testing 01 Mword 10 okay

Press F8 to continue

S3000XL

Testing Memory...
testing 08 Mword 80 okay

Press F8 to continue

S3200XL

This means the function of the unit is operating properly. Turn the power off to terminate the test mode.

5-2. MEMORY RESET (S3000XL/S3200XL only)

To initialize all the internal memories and circuit, while the power is turned on, press the "MARK/#" and "NAME" buttons simultaneously. Then press the "-/>" button.

VI. PARTS LIST

ATTENTION

1. When placing an order for parts, be sure to list the Part No., Model No. and the description of each part. Otherwise, the non-delivery of the part or the delivery of a wrong part may result.
2. Please make sure that Part No. is correct when ordering.
If not, a part different from the one you ordered may be delivered.
3. Since the parts shown in Parts List or Preliminary Service Manual may have been the subject of changes, please use this Parts List for all future reference.

HOW TO USE THIS PARTS LIST

1. This Parts List lists those parts which are considered necessary for repairs. Other common parts, such as resistors and capacitors, are listed in the "Common List for Service Parts" from which these parts should be selected and stocked.
2. The Recommended Spare Parts List shows those parts in the Parts List which are considered particularly important for service.
3. Parts not shown in the Parts List and "Common List for Service Parts" will not in principle be supplied.
4. How to read the Parts List.

a) Mechanism Block

2. HEAD BASE BLOCK

Ref. No.	Part No.	Description
1	BH-T2023A320A	HEAD BASE BLOCK
2	HP-H2206A010A	HEAD R/P PR4-8FU C
3	ZS-477876	PAN20x03STL CMT
4	ZS-536488	BID20x08STL CMT
5	ZG-402895	SP CS ANGLE ADJUST

SP (Service Parts) Classification

This number corresponds with the individual parts index number in the figure.

b) PC Board

2. MAIN PC BOARD

Ref. No.	Part No.	Description
IC1	EI-324536	IC HD14049BP
IC2	EI-336801	IC MB8841-564M
C1A	EC-338399	C MMY V 223M 250AC [U,E,B,S]
C1B	EC-350949	C MMY V 223M 250DC [J]
C1C	EC-338397	C MMY V 223M 125AC [C,A]
X1	EI-318384	OSC X'TAL NC-18C

Symbols for primary destination

[A] : AAL (U.S.A) [S] : SAA (Australia)
[B] : BEAB (England)[U] : U/T (Universal Area)
[C] : CSA (Canada)
[E] : CEE (Europe) [V] : VDE (Germany)
[J] : JPN (Japan) [Y] : Custom

SP (Service Parts) Classification

These reference symbols correspond with component symbols in the Schematic Diagrams.

The available PC Board Blocks are listed separately.

5. When Part No. is known, Parts Index at end of Parts List can be used to locate where that part is shown in Parts List by its Reference No. listed at right of Part No.

WARNING

△ INDICATES SAFETY CRITICAL COMPONENTS. FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURE'S RECOMMENDED PARTS.

AVERTISSEMENT

△ IL INDIQUE LES COMPOSANTS CRITIQUES DE SÉCURITÉ. POUR MAINTENIR LE DEGRÉ DE SÉCURITÉ DE L'APPAREIL, NE REMPLACER QUE DES PIÈCES RECOMMANDÉES PAR LE FABRICANT.

6-1. Model S2000, IB-208P, EB16

1. RECOMMENDED SPARE PARTS

We suggest you to stock the following Recommended Spare Part items listed below since they can cover most of the routine service.

Ref. No.	Part No.	Description
1	BB-431282J	FDD D359T5 R69-1212
2	△BT-430823J1	TRANS POW L6039 J,A,E
3	ED-388539J	D LED GL-3HD43
4	△ED-357038	D SILICON DBB10B 100/1.0A
5	△ED-400842J	D SILICON DBF60B 100V/6.0A
6	ED-389834J	D SILICON DS135E-FB2 F12 100/1
7	ED-344280	D SILICON H GMA-01-FY2 F05
8	△EF-359007	FUSE BET T 250V 1.25A [B]
9	△EF-359086	FUSE BET T 250V 4.00A [B]
10	△EF-358641	FUSE BET T 250V 800MA [B]
11	△EF-376821	FUSE ICP-N15 50V 0.6A
12	△EF-373142	FUSE ICP-N25 50V 1.0A
13	△EF-373143	FUSE ICP-N38 50V 1.5A
14	△EF-602550	FUSE SET T 250V 1.25A [E.V]
15	△EF-690996	FUSE SET T 250V 4.00A [E.V]
16	△EF-258344	FUSE SET T 250V 800MA [E.V]
17	△EF-309387	FUSE TSC A 250V 1.00A [J]
18	△EF-311839	FUSE TSC A 250V 1.60A [J]
19	△EF-326613	FUSE TSC A 250V 5.00A [J]
20	△EF-310229	FUSE TSC 125V 1.00A [A]
21	△EF-308847	FUSE TSC 125V 1.60A [A]
22	△EF-346139	FUSE TSC 125V 5.00A [A]
23	EH-384817J	COMP R RKC1/8B8 102J
24	EH-349374	COMP R RKC1/8B8 472J
25	EH-408860J	COMP R RKC1/8B9 111J
26	EI-427259J	IC AK5339-VP
27	EI-397343J	ICAM27C256 150DC [BLANK ROM]
28	EI-429988J	ICAV9173-01-CN8
29	EI-410414J1	IC CS8402A-CP
30	EI-389061J	IC HD74AC04P
31	EI-430678J	IC HD74AC244P
32	EI-388711J	IC HD74HC00P
33	EI-394832J	IC HD74HC123AP
34	EI-386289J	IC HD74HC138P
35	EI-386707J	IC HD74HC244P
36	EI-388712J	IC HD74HC245P
37	EI-397090J	IC HD74HC273P
38	EI-388709J	IC HD74HC32P
39	EI-393702J	IC HD74HC595P
40	EI-393696J	IC HD74HC86P
41	EI-430679J	IC HM514260AZ-B [OLD]
42	EI-430979J	IC HM514400CZ-B [OLD]
43	EI-413120J	IC L7A1045 L6028 DSP-A
44	EI-427564J	IC L7A1414 L6038 DFX
45	EI-379657J	IC MB89255A-P-G
46	EI-388602J	IC MB89352A-P-G
47	EI-414841J	IC MC74HC04N
48	EI-430680J	IC M51957AL
49	EI-430691J	IC M51958AL
50	EI-353227	IC M5216L
51	EI-393325N	IC M5218AP
52	EI-348785	IC M5220L
53	EI-360043	IC M5220P

Ref. No.	Part No.	Description
54	△EI-348123	IC M5230L
55	△EI-430677J	IC M5237L
56	EI-377191	IC NJM5532D-D
57	EI-413206J	IC NJM7905FA
58	EI-430668J	IC PALCE16V8Q-15PC L6039A
59	EI-430669J	IC PALCE16V8Q-15PC L6039B
60	EI-430670J	IC PALCE16V8Q-15PC L6039C
61	EI-430671J	IC PALCE16V8Q-15PC L6039D
62	EI-430673J	IC PALCE20V8Q-15PC L6039A
63	EI-430674J	IC PALCE20V8Q-15PC L6039B
64	EI-412279J1	IC PCM69AP-4
65	EI-410389J	IC PQ30RV1
66	EI-430682J	IC TC74AC257P
67	EI-377101	IC UPC7805HF
68	EI-432915J	IC UPD424260GS-70-7JF [NEW]
69	EI-432772J	IC UPD424400GS-60-9JD [NEW]
70	EI-430776J	IC UPD431000AGW-85L
71	EI-430684J	IC UPD70236AGD-16-5BB
72	EI-413121J	IC UPD72069GF-3BA
73	EI-379997J	IC YM3623B
74	EI-374176	OSC X TAL AT-51 16.9344MHZ
75	EI-430998J	OSC X TAL HC-49/U 31.9284MHZ
76	EM-432814J	IND LCD LM162ET2
77	EQ-348929	RELAY SIG GSA-237P 2TR 12V
78	△ER-200746	R FUSE H ERD2FC 1/4W 1000G
79	△ES-430685J1	SW PUSH SDDF3A 02-1 [POWER SW]
80	ES-403377J	SW ROTARY ENCODER SRGPHJ [JOG VOLUME]
81	ES-430686J	SW TACT SKHQAC
82	ES-410552J	SW TACT SKHVBE T05
83	ET-379341	DETECTOR PC910X
84	ET-366753N	TR DTA114ES T05
85	△ET-430675J	TR 2SB1340
86	△ET-356817N	TR 2SB891 Q,R
87	△ET-354083N	TR 2SD1189 Q,R
88	EV-430696J	VR ROTARY RK0971220 L20 B103X2 [MAIN VOLUME]
89	EV-430697J	VR ROTARY RK0971220 L20 C503X2 [REC GAIN VOLUME]

2. P.C. BOARD BLOCK

Ref. No.	Part No.	Description
1	BA-L6039A020A	PC MAIN BLK S2000

3. MAIN P.C. BOARD

Ref. No.	Part No.	Description
D1	ED-344280	D SILICON H GMA-01-FY2 F05
D2	ED-389834J	D SILICON DS135E-FB2 F12 100/1
D4	ED-389834J	D SILICON DS135E-FB2 F12 100/1
D11	ED-344280	D SILICON H GMA-01-FY2 F05
D12	ED-389834J	D SILICON DS135E-FB2 F12 100/1
FL1	EH-410420J	FILTER EMI DSS306-93B101MT05
FL2	EH-410420J	FILTER EMI DSS306-93B101MT05
FL3	EH-410420J	FILTER EMI DSS306-93B101MT05
FL4	EH-410420J	FILTER EMI DSS306-93B101MT05
FL5	EH-410420J	FILTER EMI DSS306-93B101MT05
FL6	EH-410420J	FILTER EMI DSS306-93B101MT05
FL8	EH-405610J	FILTER EMI DSS310H54B 222M 250
FL36	EH-410420J	FILTER EMI DSS306-93B101MT05
FL37	EH-410420J	FILTER EMI DSS306-93B101MT05
FL41	EH-410420J	FILTER EMI DSS306-93B101MT05
FL45	EH-410420J	FILTER EMI DSS306-93B101MT05
FL46	EH-410420J	FILTER EMI DSS306-93B101MT05
FR122	△ER-200746	R FUSE H ERD2FC 1/4W 1000G
FR123	△ER-200746	R FUSE H ERD2FC 1/4W 1000G
FS1	△EF-373142	FUSE ICP-N25 50V 1.0A

Ref. No.	Part No.	Description
FS2	△ EF-376821	FUSE ICP-N15 50V 0.6A
FS3	△ EF-376821	FUSE ICP-N15 50V 0.6A
IB1	EH-349374	COMP R RKC1/8B8 472J
IB2	EH-384817J	COMP R RKC1/8B8 102J
IB3	EH-405260J	COMP R RKC1/8B9 111J
IB4	EH-408860J	COMP R RKC1/8B9 111J
IC1	EI-430684J	IC UPD70236AGD-16-5BB
IC2	EI-430690J	IC M51957AL
IC3	EI-388712J	IC HD74HC245P
IC4	EI-430688J	IC PALCE16V8Q-15PC L6039A
IC5	EI-430682J	IC TC74AC257P
IC6	EI-430682J	IC TC74AC257P
IC7	EI-388711J	IC HD74HC00P
IC8	EI-388709J	IC HD74HC32P
IC9-A	EI-432915J	IC UPD424260G5-70-7JF [NEW]
IC9-B	EI-430679J	IC HM514260AZ-B [OLD]
IC10-A	EI-432915J	IC UPD424260G5-70-7JF [NEW]
IC10-B	EI-430679J	IC HM514260AZ-B [OLD]
IC11	EI-386289J	IC HD74HC138P
IC12-A	EI-810024J	IC AM27C256-150DC S2000 V1.02 [PROGRAM ROM]
IC12-B	EI-397343J	IC AM27C256-150DC [BLANK ROM]
IC13	EI-379657J	IC MB89255A-P-G
IC16	EI-430669J	IC PALCE16V8Q-15PC L6039B
IC17	EI-413121J	IC UPD72069GF-3BA
IC18	EI-388602J	IC MB89352A-P-G
IC19	EI-410389J	IC PQ30RV1
IC20	EI-413120J	IC L7A1045 L6028 DSP-A
IC21	EI-429988J	IC AV9173-01-CN8
IC23	EI-430678J	IC HD74AC244P
IC24	EI-430673J	IC PALCE20V8Q-15PC L6039A
IC25	EI-430670J	IC PALCE16V8Q-15PC L6039C
IC26	EI-397090J	IC HD74HC273P
IC27	EI-393702J	IC HD74HC595P
IC28	EI-393702J	IC HD74HC595P
IC29	EI-430671J	IC PALCE16V8Q-15PC L6039D
IC30	EI-430674J	IC PALCE20V8Q-15PC L6039B
IC31-A	EI-432772J	IC UPD424400GS-60-9JD [NEW]
IC31-B	EI-430979J	IC HM514400CZ-B [OLD]
IC32-A	EI-432772J	IC UPD424400GS-60-9JD [NEW]
IC32-B	EI-430979J	IC HM514400CZ-B [OLD]
IC33-A	EI-432772J	IC UPD424400GS-60-9JD [NEW]
IC33-B	EI-430979J	IC HM514400CZ-B [OLD]
IC34-A	EI-432772J	IC UPD424400GS-60-9JD [NEW]
IC34-B	EI-430979J	IC HM514400CZ-B [OLD]
IC35	EI-389061J	IC HD74AC04P
IC41	EI-388707J	IC HD74HC244P
IC42	EI-412279J1	IC PCM89AP-4
IC43	EI-377101	IC UPC7805HF
IC44	EI-430681J	IC M51958AI
IC45	EI-360043	IC M5220P
IC46	EI-360043	IC M5220P
IC47	EI-393325N	IC M5218AP
IC48	EI-393325N	IC M5218AP
IC49	EI-353227	IC M5216L
IC50	EI-427259J	IC AIK5339-VP
IC51	EI-377101	IC UPC7805HF
IC52	EI-413206J	IC NJM7905FA
IC53	EI-377101	IC UPC7805HF
J1	EJ-403478J	DIN J YKF51-5040 5P
J2	EJ-428182J	SOCKET DBLC-J25SAF-20L9 25P
J3	EJ-419240J	SOCKET FCN-235J068-G/0 68P
J5	EJ-424423J	SOCKET 6-176438-7 72P
J6	EJ-424423J	SOCKET 6-176438-7 72P

Ref. No.	Part No.	Description
J11	EJ-354105	PHONE J 2P HLJ0520-110 6.3
J12	EJ-354105	PHONE J 2P HLJ0520-110 6.3
L1	EO-345995N	COIL FIX 1 EL0606RA T05 101J
L11	EO-345990N	COIL FIX 1 EL0606RA T05 470J
PH1	ET-378341	DETECTOR PC910X
P9	EJ-429926J	PLUG 302-14TSB 14P
P10	EJ-429929J	PLUG 302-34GSB 34P
P13	EJ-429929J	PLUG 302-34GSB 34P
P19	EJ-430689J	PLUG 128A-060P3C-S14N 60P
P20	EJ-430689J	PLUG 128A-060P3C-S14N 60P
RL1	EO-348929	RELAY SIG G5A-237P 2TR 12V
R29	ER-386215J	ROMF H S12 FS 1W 220J
R130	ER-410305J	ROMF H S12 FS 1W 510J
TR11	ET-366753N	TRDTA114EST05
VR1	EV-356323	RS-FIX H KVSF637A 0.10W 102
X1	EI-430998J	OSC XTAL HC-49/U 31.9284MHZ

4. OPERATION P.C. BOARD

Ref. No.	Part No.	Description
D201	ED-388539J	D LED GL-3HD43
D202	ED-388539J	D LED GL-3HD43
D203	ED-388539J	D LED GL-3HD43
D204	ED-388539J	D LED GL-3HD43
D205	ED-388539J	D LED GL-3HD43
D206	ED-388539J	D LED GL-3HD43
D207	ED-388539J	D LED GL-3HD43
D208	ED-388539J	D LED GL-3HD43
D209	ED-344280	D SILICON H GMA-01-FY2 F05
D210	ED-344280	D SILICON H GMA-01-FY2 F05
D211	ED-344280	D SILICON H GMA-01-FY2 F05
D212	ED-344280	D SILICON H GMA-01-FY2 F05
D213	ED-344280	D SILICON H GMA-01-FY2 F05
D214	ED-344280	D SILICON H GMA-01-FY2 F05
D215	ED-344280	D SILICON H GMA-01-FY2 F05
D216	ED-344280	D SILICON H GMA-01-FY2 F05
D217	ED-344280	D SILICON H GMA-01-FY2 F05
D218	ED-344280	D SILICON H GMA-01-FY2 F05
D219	ED-344280	D SILICON H GMA-01-FY2 F05
D220	ED-344280	D SILICON H GMA-01-FY2 F05
D221	ED-344280	D SILICON H GMA-01-FY2 F05
D222	ED-344280	D SILICON H GMA-01-FY2 F05
D223	ED-344280	D SILICON H GMA-01-FY2 F05
SW201	ES-430686J	SW TACT SKHQAC
SW202	ES-430686J	SW TACT SKHQAC
SW203	ES-410552J	SW TACT SKHVBET05
SW204	ES-410552J	SW TACT SKHVBET05
SW205	ES-410552J	SW TACT SKHVBET05
SW206	ES-410552J	SW TACT SKHVBET05
SW207	ES-410552J	SW TACT SKHVBET05
SW208	ES-410552J	SW TACT SKHVBET05
SW209	ES-410552J	SW TACT SKHVBET05
SW210	ES-410552J	SW TACT SKHVBET05
SW211	ES-410552J	SW TACT SKHVBET05
SW212	ES-410552J	SW TACT SKHVBET05
SW213	ES-410552J	SW TACT SKHVBET05
SW214	ES-410552J	SW TACT SKHVBET05
SW215	ES-410552J	SW TACT SKHVBET05
W201	EW-432645J	WIRE ASSY L6039-1 W201 10P
W202	EW-432646J	WIRE ASSY L6039-1 W202 9P

5. POWER SUPPLY P.C. BOARD

Ref. No.	Part No.	Description
C301	EC-379611	C EC V S10 SME 123M 10.0DC
C302	EC-410497J	C EC V CUT TWSS 222M 25.0DC
C303	EC-410497J	C EC V CUT TWSS 222M 25.0DC
C304	△ EC-389895J	C CE V T05 DD003 F 103Z 50DC
C305	△ EC-389895J	C CE V T05 DD003 F 103Z 50DC
C306	△ EC-389895J	C CE V T05 DD003 F 103Z 50DC
C307	△ EC-389895J	C CE V T05 DD003 F 103Z 50DC

Ref. No.	Part No.	Description
D301	△ ED-400842J	D SILICON DBF60B 100V/6.0A
D302	△ ED-357030	D SILICON DBB10B 100/ 1.0A
D303	ED-389834J	D SILICON DS135E-FB2 F12 100/1
IC301	△ EI-430677J	IC M5237L
IC302	△ EI-348123	IC M5230L
R301	ER-327710	R CB H S10 FS RDS 1/4W 151J
R304	ER-324185	R CB H S10 FS RDS 1/4W 221J
R305	ER-324185	R CB H S10 FS RDS 1/4W 221J
TR301	△ ET-430675J	TR 2SB1340
TR302	△ ET-356917N	TR 2SB691 Q,R
TR303	△ ET-354083N	TR 2SD1189 Q,R
1	EZ-412419J	TR ACC. SILICON SHEET TC-20CG
F2-A	△ EF-326613	FUSE TSC A 250V 5.00A [J]
F2-B	△ EF-346139	FUSE TSC 125V 5.00A [A]
F2-C	△ EF-690996	FUSE SET T 250V 4.00A [E,V]
F2-D	△ EF-359086	FUSE BET T 250V 4.00A [B]
F3-A	△ EF-309387	FUSE TSC A 250V 1.00A [J]
F3-B	△ EF-310229	FUSE TSC 125V 1.00A [A]
F3-C	△ EF-258344	FUSE SET T 250V 800MA [E,V]
F3-D	△ EF-358641	FUSE BET T 250V 800MA [B]
F4-A	△ EF-309387	FUSE TSC A 250V 1.00A [J]
F4-B	△ EF-310229	FUSE TSC 125V 1.00A [A]
F4-C	△ EF-258344	FUSE SET T 250V 800MA [E,V]
F4-D	△ EF-358641	FUSE BET T 250V 800MA [B]

6. FILTER P.C. BOARD

Ref. No.	Part No.	Description
C401	△ EC-425606J	C MMY V CUT MMRC 683M 275AC
C402	△ EC-410346J	C CE V DE1110E102M 400AC
C403	△ EC-410346J	C CE V DE1110E102M 400AC
C404	△ EC-410346J	C CE V DE1110E102M 400AC
C405	△ EC-410346J	C CE V DE1110E102M 400AC
FL401	△ EO-389172J	COIL LF LF-4N 502
F1-A	△ EF-311839	FUSE TSC A 250V 1.60A [J]
F1-B	△ EF-308847	FUSE TSC 125V 1.60A [A]
F1-C	△ EF-602550	FUSE SET T 250V 1.25A [E,V]
F1-D	△ EF-359007	FUSE BET T 250V 1.25A [B]

7. ANALOG P.C. BOARD

Ref. No.	Part No.	Description
IC501	EI-360043	IC M5220P
IC502	EI-377191	IC NJM5532D-D
IC503	EI-377191	IC NJM5532D-D
J501	EJ-432660J	PHONE J 3P HTJ-06411DH 6.3
J502	EJ-432660J	PHONE J 3P HTJ-06411DH 6.3
VR501	EV-430697J	VR ROTARY RK0971220 L20 C503X2 [REC GAIN VOLUME]
W501	EW-432647J	WIRE ASSY L6039-1 W501 8P

8. VR P.C. BOARD

Ref. No.	Part No.	Description
J601	EJ-432660J	PHONE J 3P HTJ-06411DH 6.3 [PHONES]
R601	ER-430691J	R OMF H S12 FS 1W 101J
R602	ER-430691J	R OMF H S12 FS 1W 101J
VR601	EV-430696J	VR ROTARY RK0971220 L20 B103X2 [MAIN VOLUME]

9. JOG P.C. BOARD

Ref. No.	Part No.	Description
SW701	ES-403377J	SW ROTARY ENCODER SRGPHJ [JOG VOLUME]

10. POWER SW P.C. BOARD

Ref. No.	Part No.	Description
C801	△ EC-427562J	C MMY V CUT MKP3362 103M 275AC
SW801	△ ES-430685J1	SW PUSH SDDF3A 02-1 [POWER SW]


11. FINAL ASSEMBLY BLOCK

Ref. No.	Part No.	Description
1	SP-429683J1	COVER UPPER
2	ZS-418385J	BT B1D30X06STL BNI EARTH LOCK
3	ZS-322570	ST B1D40X08STL NI3
4	ZS-428277J	PAN30X06STL CMT POLY WAVE
5	ZW-413267	N FRANGE 40STL CMT
6	△ BT-430823J1	TRANS POW L6039 J,A,E
7	EW-430651J	WIRE ASSY L6039-2 W104 34P
8	BB-431282J	FDD D359T5 R69-1212
9	SP-429697J	PANEL REAR S2000
10	ZS-345272	ST BR30X06STL BNI
11	△ EZ-371605	BUSH CORD 2271
12-A	△ EW-427587J	AC CORD200 KP210VCTFKVHR3M W J [J]
12-B	△ EW-410481M1	AC CORD 200 SU1P SPT2 VAR-2 AC [A]
12-C	△ EW-408724M1	AC CORD200 SE1H03VVH2F VHR3N F [E,V,B]
13	ZS-350934	PT BR30X08STL BNI
14	SA-349332	FOOT
15	ZS-344754	ST PAN30X06STL CMT C080
16	ZS-416687	B1D40X08STL CMT
17	ZS-379405N	B1D30X06STL CMT (SG)
18	ZS-320906	ST BR30X06STL CMT
19	SZ-429678J	PANEL ANGLE
20	SP-429430J1	PANEL FRONT S2000
21	SE-429695J	LENS LED
22	SE-429696J	WINDOW LCD
23	SK-429688J	KNOB VOL(A) [MAIN]
24	SK-429589J	KNOB VOL(B) [REC]
25	SK-429687J	KNOB JOG
26	SK-429686J	KNOB SHUTTLE
27	SE-429691J	ESCUTCHEON POWER
28	SB-429692J	BUTTON POWER → SUB 38 211713
29	SB-429685J	BUTTON PUSH(B)
30	SB-429684J	BUTTON PUSH(A)
31	SB-429694J	BUTTON FUNCTION
32	ZS-201275	ST PAN26X06STL CMT
33	EM-432814J	IND LCD LM162ET2

NOTE :

Parts will not be supplied if they are not listed in the parts list, even if they appear on the assembling illustrations with reference No.

FINAL ASSEMBLY BLOCK

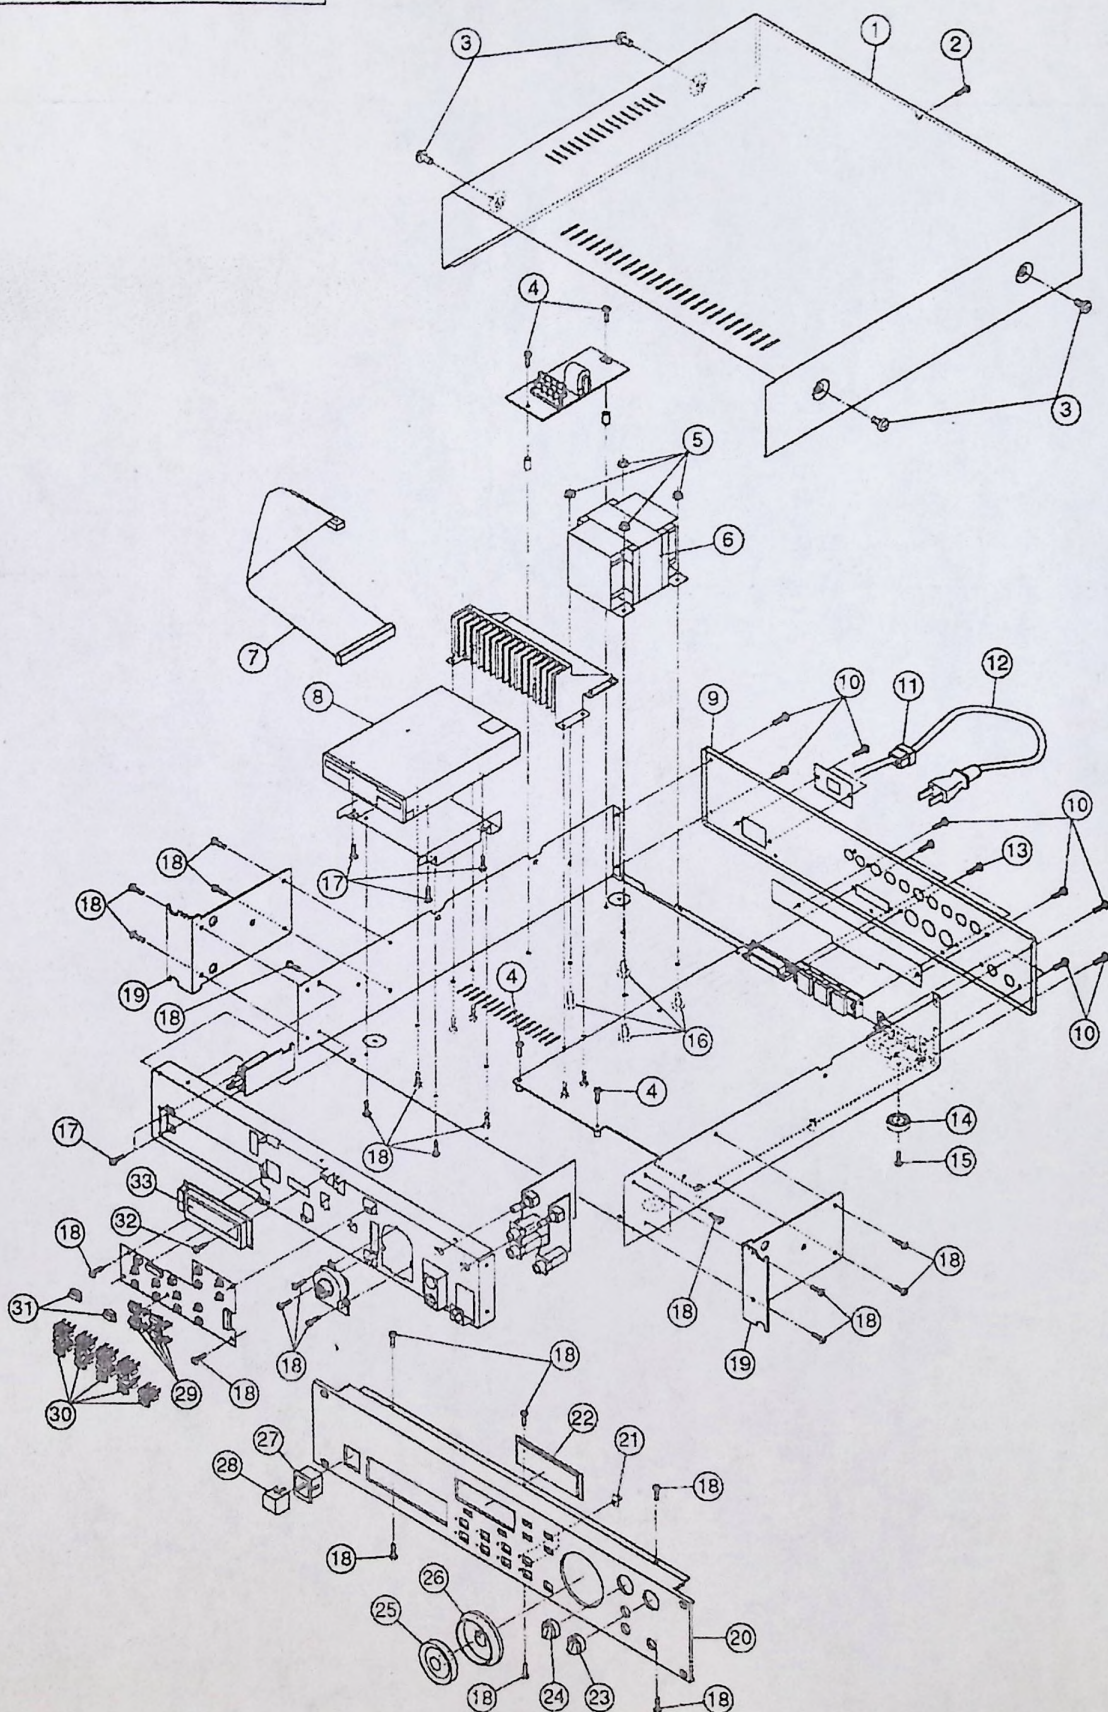

12. IB-208P (OPTIONAL P.C. BOARD)

Ref. No.	Part No.	Description
FL501	EH-410420J	FILTER EMI DSS306-93B101MT05
FL506	EH-410420J	FILTER EMI DSS306-93B101MT05
FL507	EH-410420J	FILTER EMI DSS306-93B101MT05
FL508	EH-410420J	FILTER EMI DSS306-93B101MT05
FL509	EH-410420J	FILTER EMI DSS306-93B101MT05
FL511	EH-404248J	FILTER EMI DSS310-54B 101M CUT
FL512	EH-404248J	FILTER EMI DSS310-54B 101M CUT
FS501	△ EF-376821	FUSE ICP-N15 50V 0.6A
FS502	△ EF-373143	FUSE ICP-N38 50V 1.5A
IC501	EI-388707J	IC HD74HC244P
IC502	EI-393696J	IC HD74HC66P
IC503	EI-412279J1	IC PCM69AP-4
IC504	EI-412279J1	IC PCM69AP-4
IC505	EI-412279J1	IC PCM69AP-4
IC506	EI-412279J1	IC PCM69AP-4
IC507	EI-348785	IC M5220L
IC508	EI-348785	IC M5220L
IC509	EI-348785	IC M5220L
IC510	EI-348785	IC M5220L
IC511	EI-348785	IC M5220L
IC512	EI-348785	IC M5220L
IC513	EI-348785	IC M5220L
IC514	EI-348785	IC M5220L
IC515	EI-393325N	IC M5218AP
IC516	EI-393325N	IC M5218AP
IC517	EI-393325N	IC M5218AP
IC518	EI-393325N	IC M5218AP
IC519	EI-379997J	IC YM3623B
IC521	EI-410414J1	IC CS8402A-CP
IC522	EI-377101	IC UPC7805HF
IC524	EI-414841J	IC MC74HCU04N
IC525	EI-394832J	IC HD74HC123AP
J501	EJ-364322	PHONE J 2P HLJ0520-110 W/NUT
J502	EJ-364322	PHONE J 2P HLJ0520-110 W/NUT
J503	EJ-364322	PHONE J 2P HLJ0520-110 W/NUT
J504	EJ-364322	PHONE J 2P HLJ0520-110 W/NUT
J505	EJ-364322	PHONE J 2P HLJ0520-110 W/NUT
J506	EJ-364322	PHONE J 2P HLJ0520-110 W/NUT
J507	EJ-364322	PHONE J 2P HLJ0520-110 W/NUT
J508	EJ-364322	PHONE J 2P HLJ0520-110 W/NUT
J509	EJ-430794J	PIN J YKC21-3045 2P
T501	EO-414952J	TRANS PULSE CIT0705D-35101
W501	EW-430793J	WIRE ASSY L6036-2 W501 34P
X501	EI-374176	OSC X'TAL AT-51 16.9344MHZ

13. EB16 (OPTIONAL P.C. BOARD)

Ref. No.	Part No.	Description
IC1	EI-427564J	IC L7A1414 L6038 DFX
IC2	EI-430776J	IC UPD431000AGW-85L
IC3	EI-430776J	IC UPD431000AGW-85L
IC4	EI-430776J	IC UPD431000AGW-85L
IC5	EI-430682J	IC TC74AC257P
P1	EJ-431264J	PLUG 123A-044P2B-L14A 44P

6-2. Model S3000XL

1. RECOMMENDED SPARE PARTS

We suggest you to stock the following Recommended Spare Part items listed below since they can cover most of the routine service.

Ref. No.	Part No.	Description
1	BB-431283J	FDD D359T5 R69-1324
2	△BP-397454J	SW POW PMC50E4XULA 100/200 [POWER BLOCK]
3	BT-390145J	TRANS PULSE N105-05-5
4	ED-38834J	D SILICON DS135E-FB2 F12 100/1
5	ED-344280	D SILICON H GMA-01-FY2 F05
6	△EF-376821	FUSE ICP-N15 50V 0.6A
7	△EF-373142	FUSE ICP-N25 50V 1.0A
8	△EF-373143	FUSE ICP-N38 50V 1.5A
9	EH-384815J	COMP R RKC1/8B12 103J
10	EH-384817J	COMP R RKC1/8B8 102J
11	EH-413158J	COMP R RKC1/8B8 471J
12	EH-349374	COMP R RKC1/8B8 472J
13	EH-408860J	COMP R RKC1/8B9 111J
14	EI-427259J	ICAK5339-VP
15	EI-427280J	ICAM27C040-150DC [BLANK ROM]
16	EI-429988J	ICAV9173-01-CN8
17	EI-427660J	ICBR6216B-10LL
18	EI-410414J1	ICCS8402A-CP
19	EI-389061J	ICHD74AC04P
20	EI-430678J	ICHD74AC244P
21	EI-388711J	ICHD74HC00P
22	EI-394832J	ICHD74HC123AP
23	EI-386289J	ICHD74HC138P
24	EI-388707J	ICHD74HC244P
25	EI-388712J	ICHD74HC245P
26	EI-397090J	ICHD74HC273P
27	EI-388709J	ICHD74HC32P
28	EI-393702J	ICHD74HC595P
29	EI-393696J	ICHD74HC86P
30	EI-430679J	ICHM514260AZ-8 [OLD]
31	EI-430979J	ICHM514400CZ-8 [OLD]
32	EI-378276	ICLC7981
33	EI-413120J	ICL7A1045 L6028 DSP-A
34	EI-379657J	ICMB89255A-P-G
35	EI-388602J	ICMB89352A-P-G
36	EI-414841J	ICMC74HCU04N
37	EI-430680J	ICM51957AL
38	EI-430681J	ICM51958AL
39	EI-353227	ICM5216L
40	EI-393325N	ICM5218AP
41	EI-348785	ICM5220L
42	EI-360043	ICM5220P
43	EI-413206J	ICNJM7905FA
44	EI-430688J	ICPALCE16V8Q-15PC L6039A
45	EI-430669J	ICPALCE16V8Q-15PC L6039B
46	EI-430670J	ICPALCE16V8Q-15PC L6039C
47	EI-430671J	ICPALCE16V8Q-15PC L6039D
48	EI-430673J	ICPALCE20V8Q-15PC L6039A
49	EI-430674J	ICPALCE20V8Q-15PC L6039B
50	EI-412279J1	ICPCM69AP-4
51	EI-410389J	ICPQ30RV1
52	EI-430682J	ICTC74AC257P
53	EI-377101	ICUPC7805HF
54	EI-432916J	ICUPD424280G5-70-7JF [NEW]
55	EI-432772J	ICUPD424400GS-60-9JD [NEW]
56	EI-430684J	ICUPD70236AGD-16-5BB
57	EI-413121J	ICUPD72069GF-3BA
58	EI-379997J	ICYM3623B
59	EI-374176	OSC X-TAL AT-51 16.9344MHZ
60	EI-396541J	OSC X-TAL HC-49/U 32.000000MHZ
61	EL-733752J	EL BACK LIGHT (C)
62	EM-418780J	IND LCD NFM243N20

Ref. No.	Part No.	Description
63	EQ-348929	RELAY SIG G5A-237P 2TR 12V
64	△ER-200972	R FUSE H S10 ERD2FC 1/4W 33R0G
65	△ER-412299J	R FUSE H S12 ERQ12AJ 1/2W 3R3J
66	ES-414627J	SW ROTARY EC24B50D0 [DATA VOLUME]
67	△ES-427895J	SW SEESAW EST-15992V 02-1 [POWER SW]
68	ES-411687N	SW TACT EVO-PAE05R
69	ES-413139J	SW TACT SKHJAB
70	ES-413140J	SW TACT SKHJGS
71	ET-379341	DETECTOR PC910X
72	ET-366753N	TR DTA114EST05
73	ET-386938N	TR DTC123EST05
74	ET-370013	TR 2SA874 Q,R
75	EV-412275J	VR ROTARY RK0971112 L20 B502 [CONTRAST VOLUME]
76	EV-430796J	VR ROTARY RK16312A0 C503X2 [REC GAIN VOLUME]
77	EV-425557J	VR ROTARY RK16312A0 L30B103X2 [MAIN VOLUME]

2. P.C. BOARD BLOCK

Ref. No.	Part No.	Description
1	BA-L6039B020B	PC MAIN BLK S3000XL
2	BA-L6036A050A	PC ELINV BLK S300XL
3	BA-L6036A030A	PC (#) 8PARA BLK S3000XL

PC (#) 8 PARA BLK CONSISTS OF FOLLOWING P.C. BOARDS.

- 8 PARA/DIO P.C. BOARD
- ANALOG IN P.C. BOARD

3. MAIN P.C. BOARD

Ref. No.	Part No.	Description
D1	ED-344280	D SILICON H GMA-01-FY2 F05
D2	ED-389834J	D SILICON DS135E-FB2 F12 100/1
D4	ED-389834J	D SILICON DS135E-FB2 F12 100/1
D11	ED-344280	D SILICON H GMA-01-FY2 F05
D12	ED-389834J	D SILICON DS135E-FB2 F12 100/1
FL1	EH-410420J	FILTER EMI DSS306-93B101MT05
FL2	EH-410420J	FILTER EMI DSS306-93B101MT05
FL3	EH-410420J	FILTER EMI DSS306-93B101MT05
FL4	EH-410420J	FILTER EMI DSS306-93B101MT05
FL5	EH-410420J	FILTER EMI DSS306-93B101MT05
FL6	EH-410420J	FILTER EMI DSS306-93B101MT05
FL8	EH-405610J	FILTER EMI DSS310H54B 222M 250
FL36	EH-410420J	FILTER EMI DSS306-93B101MT05
FL37	EH-410420J	FILTER EMI DSS306-93B101MT05
FL41	EH-410420J	FILTER EMI DSS306-93B101MT05
FL46	EH-410420J	FILTER EMI DSS306-93B101MT05
FR14	Δ ER-200972	R FUSE H S10 ERD2FC 1/4W 33R0G
FS1	Δ EF-373142	FUSE ICP-N25 50V 1.0A
FS2	Δ EF-376821	FUSE ICP-N15 50V 0.6A
FS3	Δ EF-376821	FUSE ICP-N15 50V 0.6A
IB1	EH-349374	COMP R RKC1/8B8 472J
IB2	EH-384817J	COMP R RKC1/8B8 102J
IB3	EH-408860J	COMP R RKC1/8B9 111J
IB4	EH-408860J	COMP R RKC1/8B9 111J
IC1	EI-430684J	IC UPD70236AGD-16-5BB
IC2	EI-430680J	IC M51957AL
IC3	EI-388712J	IC HD74HC245P
IC4	EI-430668J	IC PALCE16V8Q-15PC L6039A
IC5	EI-430682J	IC TC74AC257P
IC6	EI-430682J	IC TC74AC257P
IC7	EI-388711J	IC HD74HC00P
IC8	EI-388709J	IC HD74HC32P
IC9-A	EI-432915J	IC UPD424260G5-70-7JF [NEW]
IC9-B	EI-430679J	IC HM514260AZ-8 [OLD]
IC10-A	EI-432915J	IC UPD424260G5-70-7JF [NEW]
IC10-B	EI-430679J	IC HM514260AZ-8 [OLD]
IC11	EI-386289J	IC HD74HC138P
IC12-A	EI-810021J	IC AM27C040-150DC S3000XLV1.06 [PROGRAM ROM]
IC12-B	EI-427280J	IC AM27C040-150DC [BLANK ROM]
IC13	EI-379657J	IC MB893255A-P-G
IC14	EI-378276	IC LC7081
IC15	EI-427660J	IC BR6216B-10LL
IC16	EI-430669J	IC PALCE16V8Q-15PC L6039B
IC17	EI-413121J	IC UPD72089GF-3BA
IC18	EI-388602J	IC MB89352A-P-G
IC19	EI-410389J	IC PQ30RV1
IC20	EI-413120J	IC L7A1045 L6028 DSP-A
IC21	EI-429988J	IC AV9173-01-CN8
IC23	EI-430678J	IC HD74AC244P
IC24	EI-430673J	IC PALCE20V8Q-15PC L6039A
IC25	EI-430670J	IC PALCE16V8Q-15PC L6039C
IC26	EI-397090J	IC HD74HC273P
IC27	EI-393702J	IC HD74HC595P

Ref. No.	Part No.	Description
IC28	EI-393702J	IC HD74HC595P
IC29	EI-430671J	IC PALCE16V8Q-15PC L6039D
IC30	EI-430674J	IC PALCE20V8Q-15PC L6039B
IC31-A	EI-432772J	IC UPD424400GS-60-9JD [NEW]
IC31-B	EI-430979J	IC HM514400CZ-8 [OLD]
IC32-A	EI-432772J	IC UPD424400GS-60-9JD [NEW]
IC32-B	EI-430979J	IC HM514400CZ-8 [OLD]
IC33-A	EI-432772J	IC UPD424400GS-60-9JD [NEW]
IC33-B	EI-430979J	IC HM514400CZ-8 [OLD]
IC34-A	EI-432772J	IC UPD424400GS-60-9JD [NEW]
IC34-B	EI-430979J	IC HM514400CZ-8 [OLD]
IC35	EI-389061J	IC HD74AC04P
IC41	EI-388707J	IC HD74HC244P
IC42	EI-412279J1	IC PCM69AP-4
IC43	EI-377101	IC UPC78C5HF
IC44	EI-430681J	IC M51958AL
IC45	EI-360043	IC M5220P
IC46	EI-360043	IC M5220P
IC47	EI-393325N	IC M5218AP
IC48	EI-393325N	IC M5218AP
IC49	EI-353227	IC M5216L
IC50	EI-427259J	IC AK539-VP
IC51	EI-377101	IC UPC7805HF
IC52	EI-413206J	IC NJM7905FA
IC53	EI-377101	IC UPC7805HF
J1	EJ-403478J	DIN J YKF51-5040 5P
J2	EJ-428182J	SOCKET DBLC-J25SAF-20L9 25P
J3	EJ-419240J	SOCKET FCN-235J068-G/0 68P
J5	EJ-424423J	SOCKET 6-176438-7 72P
J6	EJ-424423J	SOCKET 6-176438-7 72P
J11	EJ-354105	PHONE J 2P HLJ0520-110 6.3
J12	EJ-354105	PHONE J 2P HLJ0520-110 6.3
L1	EO-345995N	COIL FIX 1 EL0606RA T05 101J
L11	EO-345990N	COIL FIX 1 EL0606RA T05 470J
PH	ET-379341	DETECTOR PC910X
P11	EJ-429932J	PLUG 302-50GSB 50P
P13	EJ-429929J	PLUG 302-34GSB 34P
P19	EJ-430689J	PLUG 128A-060P3C-S14N 60P
P20	EJ-430689J	PLUG 128A-060P3C-S14N 60P
RL1	EO-348929	RELAY SIG G5A-237P 2TR 12V
R130	ER-410305J	ROMF H S12 FS 1W 510J
TR1	ET-386938N	TR DTC123ES T05
TR2	ET-370013	TR 2SA874 Q.9
TR11	ET-366753N	TR DTA114ES T05
W101	EW-810045J	WIRE ASSY L6036-2 W101 34P
X1	EI-396541J	OSC X'TAL HC-49U 32.000000MHZ

4. 8PARA / DIO P.C. BOARD

Ref. No.	Part No.	Description
FL501	EH-410420J	FILTER EMI DSS306-93B101MT05
FL506	EH-410420J	FILTER EMI DSS306-93B101MT05
FL507	EH-410420J	FILTER EMI DSS306-93B101MT05
FL508	EH-410420J	FILTER EMI DSS306-93B101MT05
FL509	EH-410420J	FILTER EMI DSS306-93B101MT05
FL511	EH-404248J	FILTER EMI DSS310-54B 101M CUT
FL512	EH-404248J	FILTER EMI DSS310-54B 101M CUT
FS501	Δ EF-376821	FUSE ICP-N15 50V 0.6A
FS502	Δ EF-373143	FUSE ICP-N38 50V 1.5A
IC501	EI-388707J	IC HD74HC244P
IC502	EI-393696J	IC HD74HC86P
IC503	EI-412279J1	IC PCM69AP-4
IC504	EI-412279J1	IC PCM69AP-4
IC505	EI-412279J1	IC PCM69AP-4
IC506	EI-412279J1	IC PCM69AP-4
IC507	EI-348785	IC M5220L

Ref. No.	Part No.	Description
IC508	EI-348785	IC M5220L
IC509	EI-348785	IC M5220L
IC510	EI-348785	IC M5220L
IC511	EI-348785	IC M5220L
IC512	EI-348785	IC M5220L
IC513	EI-348785	IC M5220L
IC514	EI-348785	IC M5220L
IC515	EI-393325N	IC M5218AP
IC516	EI-393325N	IC M5218AP
IC517	EI-393325N	IC M5218AP
IC518	EI-393325N	IC M5218AP
IC519	EI-379997J	IC YM3623B
IC521	EI-410414J1	IC C58402A-CP
IC522	EI-377101	IC UPC7805HF
IC524	EI-414841J	IC MC74HCU04N
IC525	EI-394832J	IC HD74HC123AP
J501	EJ-364322	PHONE J 2P HLJ0520-110 W/NUT
J502	EJ-364322	PHONE J 2P HLJ0520-110 W/NUT
J503	EJ-364322	PHONE J 2P HLJ0520-110 W/NUT
J504	EJ-364322	PHONE J 2P HLJ0520-110 W/NUT
J505	EJ-364322	PHONE J 2P HLJ0520-110 W/NUT
J506	EJ-364322	PHONE J 2P HLJ0520-110 W/NUT
J507	EJ-364322	PHONE J 2P HLJ0520-110 W/NUT
J508	EJ-364322	PHONE J 2P HLJ0520-110 W/NUT
J509	EJ-430794J	PIN J YKC21-3045 2P
T501	EO-414952J	TRANS PULSE CIT0705D-35101
W501	EW-430793J	WIRE ASSY L6036-2 W501 34P
X501	EI-374176	OSC X TALAT-51 16.9344MHz

5. ANALOG IN P.C. BOARD

Ref. No.	Part No.	Description
IC201	EI-360043	IC M5220P
IC202	EI-348785	IC M5220L
IC203	EI-348785	IC M5220L
J201	EJ-372275	PHONE J 3P HLJ0520-010 W/NUT 6.3
J202	EJ-372275	PHONE J 3P HLJ0520-010 W/NUT 6.3

6. FILTER P.C. BOARD

Ref. No.	Part No.	Description
C1	△ EC-410346J	C CE V DE1110E102M 400AC
C2	△ EC-410346J	C CE V DE1110E102M 400AC
C3	△ EC-410346J	C CE V DE1110E102M 400AC
C4	△ EC-410346J	C CE V DE1110E102M 400AC
C5	△ EC-425606J	C MMY V CUT MMRC 683M 275AC
C6	△ EC-427562J	C MMY V CUT MKP3362 103M 275AC
C7	△ EC-427562J	C MMY V CUT MKP3362 103M 275AC
L1-A	△ EO-427837J	COIL LF LF-4D 822 [A,J]
L1-B	△ EO-416860J	COIL LF LF-4DA 183 [B,E,V]

7. PHONE P.C. BOARD

Ref. No.	Part No.	Description
J2	EJ-372275	PHONE J 3P HLJ0520-010 W/NUT 6.3 [PHONES]
R7	ER-430691J	R OMF H S12 FS 1W 101J
R8	ER-430691J	R OMF H S12 FS 1W 101J

8. VOLUME P.C. BOARD

Ref. No.	Part No.	Description
VR1	EV-425557J	VR ROTARY RK16312A0 L30B103X2 [MAIN VOLUME]
VR2	EV-430796J	VR ROTARY RK16312A0 C503X2 [REC GAIN VOLUME]

9. OPERATION P.C. BOARD

Ref. No.	Part No.	Description
IB1	EH-384815J	COMP R RKC1/8B12 103J
IB2	EH-413158J	COMP R RKC1/8B8 471J
SW1	ES-411687N	SW TACT EVQ-PAE05R
SW2	ES-411687N	SW TACT EVQ-PAE05R
SW3	ES-411687N	SW TACT EVQ-PAE05R
SW4	ES-411687N	SW TACT EVQ-PAE05R
SW5	ES-411687N	SW TACT EVQ-PAE05R
SW6	ES-411687N	SW TACT EVQ-PAE05R
SW7	ES-411687N	SW TACT EVQ-PAE05R
SW8	ES-411687N	SW TACT EVQ-PAE05R
SW9	ES-411687N	SW TACT EVQ-PAE05R
SW10	ES-411687N	SW TACT EVQ-PAE05R
SW11	ES-411687N	SW TACT EVQ-PAE05R
SW12	ES-411687N	SW TACT EVQ-PAE05R
SW13	ES-411687N	SW TACT EVQ-PAE05R
SW14	ES-411687N	SW TACT EVQ-PAE05R
SW15	ES-411687N	SW TACT EVQ-PAE05R
SW16	ES-411687N	SW TACT EVQ-PAE05R
SW17	ES-411687N	SW TACT EVQ-PAE05R
SW18	ES-411687N	SW TACT EVQ-PAE05R
SW19	ES-411687N	SW TACT EVQ-PAE05R
SW20	ES-411687N	SW TACT EVQ-PAE05R
SW21	ES-413139J	SW TACT SKHJAB
SW22	ES-413139J	SW TACT SKHJAB
SW23	ES-413139J	SW TACT SKHJAB
SW24	ES-413139J	SW TACT SKHJAB
SW25	ES-413139J	SW TACT SKHJAB
SW26	ES-413139J	SW TACT SKHJAB
SW27	ES-413139J	SW TACT SKHJAB
SW28	ES-413139J	SW TACT SKHJAB
SW29	ES-413140J	SW TACT SKHJGS
SW30	ES-413140J	SW TACT SKHJGS
SW31	ES-413140J	SW TACT SKHJGS
SW32	ES-413140J	SW TACT SKHJGS
SW33	ES-413140J	SW TACT SKHJGS
SW34	ES-413140J	SW TACT SKHJGS
SW35	ES-413140J	SW TACT SKHJGS
SW36	ES-413140J	SW TACT SKHJGS


10. CONTRAST VR P.C. BOARD

Ref. No.	Part No.	Description
VR3	EV-412275J	VR ROTARY RK0971112 L20 B502 [CONTRAST VOLUME]

11. EL INV P.C. BOARD

Ref. No.	Part No.	Description
R1	△ ER-412299J	R FUSE H S12 ERQ12AJ 1/2W 3R3J
T1	BT-390145J	TRANS PULSE NI05-05-5

FINAL ASSEMBLY BLOCK

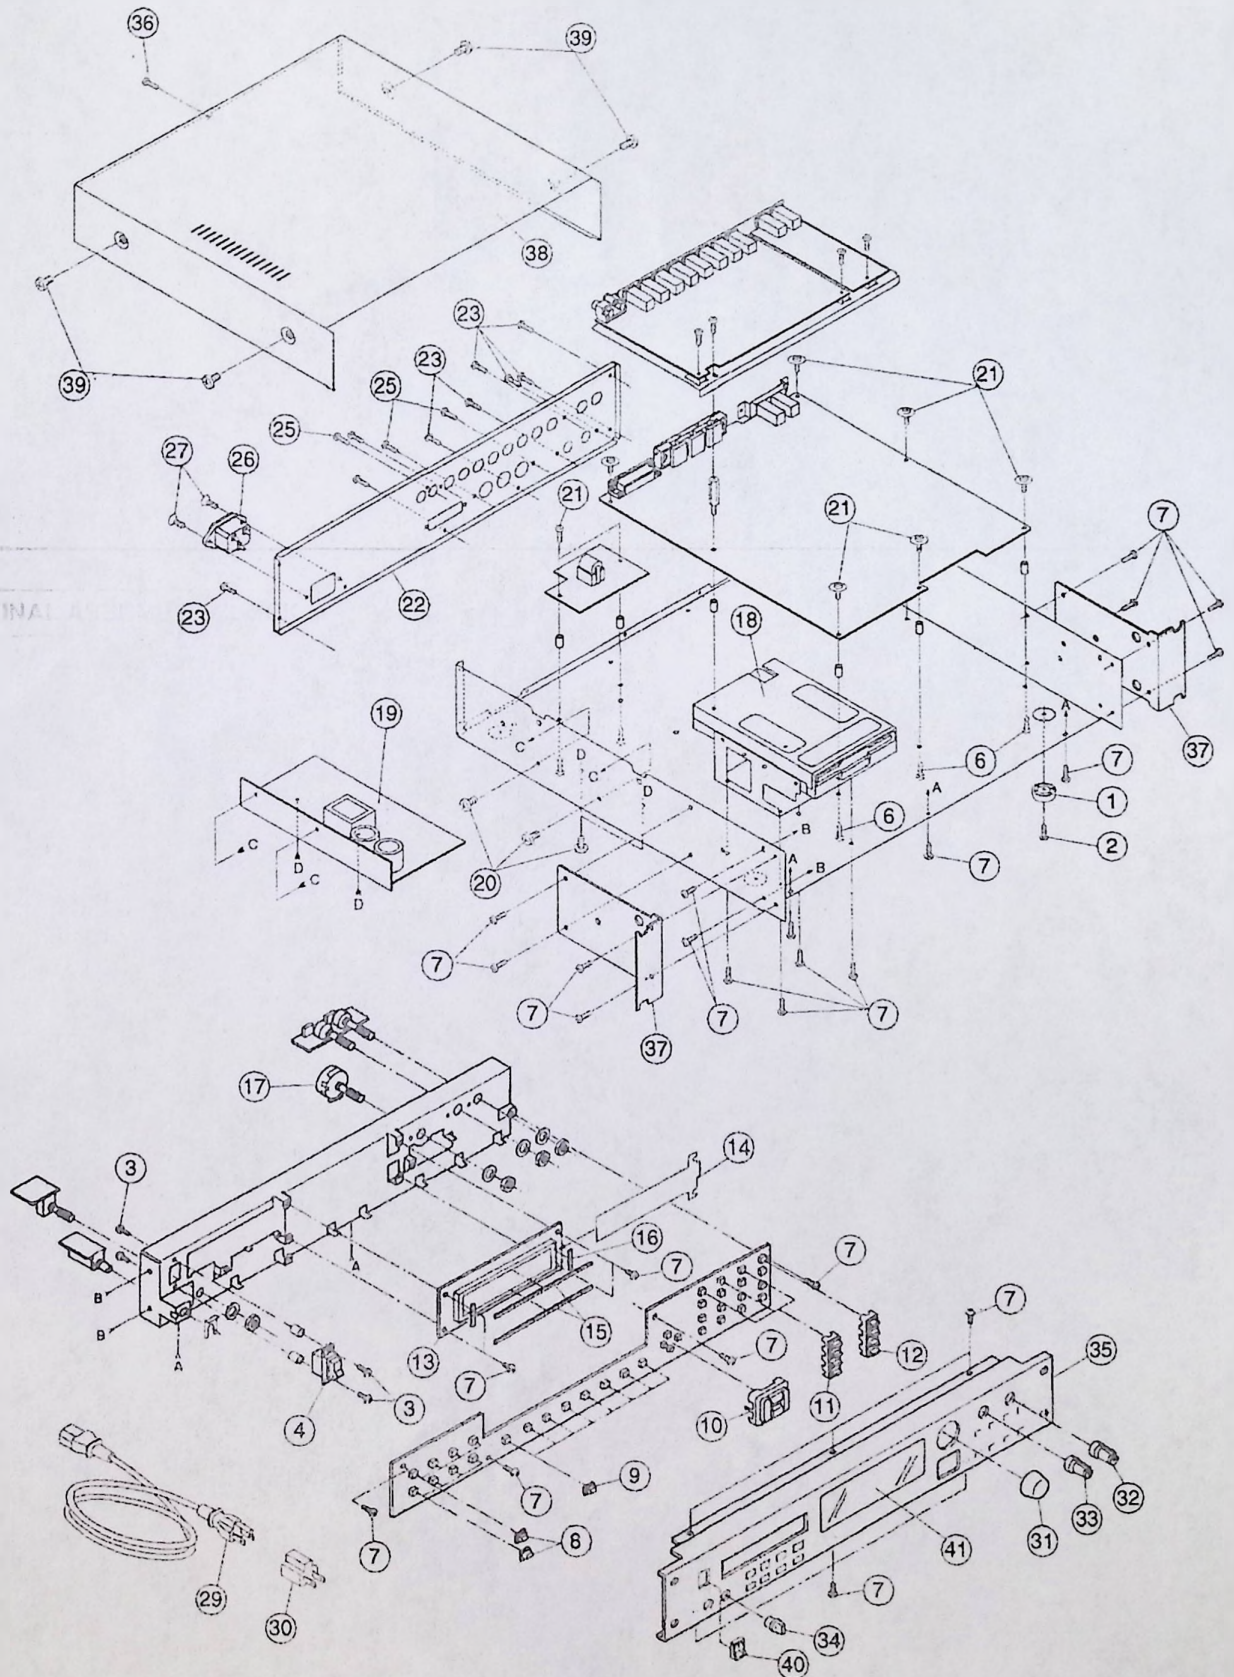

12. FINAL ASSEMBLY BLOCK

Ref. No.	Part No.	Description
1	SA-349332	FOOT
2	ZS-344754	ST PAN30X06STL CMT C080
3	ZS-422076	PAN30X05STL CMT
4	△ ES-427895J	SW SEESAW EST-15992V 02-1 [POWER SW]
6	ZS-379405N	BID30X06STL CMT (SG)
7	ZS-320906	ST BR30X06STL CMT
8	SB-413599J	BUTTON PUSH(A)
9	SB-413600J	BUTTON PUSH(B)
10	SB-413601J1	BUTTON CURSOR
11	SB-413597J	BUTTON TENKEY(A)
12	SB-413598J	BUTTON TENKEY(B)
13	EM-418780J	IND LCD NFM243N20
14	EL-733752J	EL BACK LIGHT (C)
15	SZ-407140J	SEAL DUST C
16	SZ-407141J	SEAL DUST D
17	ES-414627J	SW ROTARY EC24B50D0 [DATA VOLUME]
18	BB-431283J	FDD D359T5 R69-1324
19	△ BP-397454J	SW POW PMC50E4XULA 100/200 [POWER BLOCK]
20	ZS-417150	PAN40X06STL CMT
21	ZS-428277J	PAN30X06STL CMT POLY WAVE
22	SP-430145J	PANEL REAR S3000XL
23	ZS-345272	ST BR30X06STL BNI
25	ZS-350934	PT BR30X08STL BNI
26	△ EJ-358632J2	SOCKET INLET SOT-16 3P
27	ZS-362534	T2CTS30X10STL BNI
29-A	△ EW-380905J	AC CORD 250S KP300 KS16A H B J [J]
29-B	△ EW-368420J1	AC CORD200SKP30KS16 BAC [A]
29-C	△ EW-403993J	AC CORD200SKP4819DKS31A B E [E.V]
29-D	△ EW-419170J	AC CORD200S KP610 KS31A B [B]
30	△ EJ-405424J	PLUG ADAPTOR KPR-25 [J]
31	SK-411156J	KNOB CONTROL [DATA]
32	SK-411144J	KNOB VOL PART(1) [MAIN]
33	SK-411147J	KNOB VOL PART(2) [REC]
34	SK-413636J	KNOB VOL GR [CONTRAST]
35	SP-430213J	PANEL FRONT S3000XL
36	ZS-418385J	BT BID30X06STL BNI EARTH LOCK
37	SP-413330J1	PANEL ANGLE
38	SP-415289J	COVER UPPER(MASKING)
39	ZS-357953	ST BID40X08STL BNI3 EARTH LOCK
40	SE-413248J	ESCUTCHEON POWER
41	SE-413628J	WINDOW LCD(C)

NOTE :

Parts will not be supplied if they are not listed in the parts list, even if they appear on the assembling illustrations with reference No.

6-3. Model S3200XL

1. RECOMMENDED SPARE PARTS

We suggest you to stock the following Recommended Spare Part items listed below since they can cover most of the routine service.

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
1	BB-431283J	FDD D359T5 R69-1324	65	EJ-414697J	SOCKET OPTICAL TOTX173
2	△ BP-431265J	SW POW PMC50E1XULA [POWER BLOCK]	66	EL-733752J	EL BACK LIGHT (C)
3	BT-390145J	TRANS PULSE NI05-05-5	67	EM-418780J	IND LCD NFM243N20
4	ED-389834J	D SILICON DS135E-FB2 F12 100/1	68	EQ-348929	RELAY SIG G5A-237P 2TR 12V
5	ED-327057	D SILICON H DS442X	69	EO-413152J	RELAY SIG G6B-2014C-US 5V
6	ED-344280	D SILICON H GMA-01-FY2 F05	70	△ ER-200972	R FUSE H S10 ERD2FC 1/4W 33R0G
7	△ EF-373142	FUSE ICP-N25 50V 1.0A	71	△ ER-318647	R FUSE H S10 ERD2FC 1/4W 4R7J
8	EH-355321	COMP R RKC1/8B13 103J	72	△ ER-412299J	R FUSE H S12 ERQ12AJ 1/2W 3R3J
9	EH-384817J	COMP R RKC1/8B8 102J	73	ES-379609	(SW SLIDE SSSP12 2-03-12)
10	EH-413158J	COMP R RKC1/8B8 471J	74	ES-414627J	SW ROTARY EC24B50D0 [DATA VOLUME]
11	EH-349374	COMP R RKC1/8B8 472J	75	△ ES-413128J	SW SEESAW EST15962V [POWER SW]
12	EH-408860J	COMP R RKC1/8B9 111J	76	ES-411687N	SW TACT EVO-PAE05R
13	EI-422329J	IC AK5328-VP	77	ES-413139J	SW TACT SKHJAB
14	EI-427280J	IC AM27C040-150DC [BLANK ROM]	78	ES-413140J	SW TACT SKHJGS
15	EI-429988J	IC AV9173-01-CN8	79	ET-378219	DETECTOR PC6N137
16	EI-427660J	IC BR6216B-10LL	80	ET-386938N	TR DTC123ES T05
17	EI-410414J1	IC CS8402A-CP	81	ET-349593	TR 2SA1348 F05
18	EI-389061J	IC HD74AC04P	82	ET-370013	TR 2SA874 Q.R
19	EI-394832J	IC HD74HC123AP	83	ET-413154J	TR 2SC3918
20	EI-393695J	IC HD74HC154P	84	ET-413151J	TR 2SD1661M
21	EI-388712J	IC HD74HC245P	85	EV-413118J	VR ROTARY RK16312AA103X2 [REC LEVEL VOLUME]
22	EI-388709J	IC HD74HC32P	86	EV-414633J	VR SPL RK0971112 SW B502 [CONTRAST VOLUME]
23	EI-427843J	IC HD74HC367P			
24	EI-393702J	IC HD74HC595P			
25	EI-430679J	IC HM514260AZ-8 [OLD]			
26	EI-430810J	IC ICS2008V			
27	EI-378276	IC LC7981			
28	EI-414695J	IC L7A0986 L6029 DFL			
29	EI-413120J	IC L7A1045 L6028 DSP-A			
30	EI-427564J	IC L7A1414 L6038 DFX			
31	EI-419090J	IC MB81C4256A-80PSZ-G			
32	EI-401214J	IC MB89255B-PFS-G-BND			
33	EI-388602J	IC MB89352A-P-G			
34	EI-375185	IC M51953BL			
35	EI-356160	IC M5216P			
36	EI-360043	IC M5220P			
37	EI-362588J1	IC M5238AP			
38	EI-377191	IC NJM5532D-D			
39	EI-336995	IC NJM78L05A			
40	EI-400856J	IC NJM78M05FA			
41	EI-360772	IC NJM79L05A			
42	EI-400855J	IC NJM79M05FA			
43	EI-430814J	IC PALCE 16V8Q-15PC L6038A			
44	EI-430803J	IC PALCE 16V8Q-15PC L6038B			
45	EI-430804J	IC PALCE 16V8Q-15PC L6038C			
46	EI-430807J	IC PALCE 16V8Q-15PC L6038E			
47	EI-430808J	IC PALCE 16V8Q-15PC L6038F			
48	EI-430805J	IC PALCE 20V8Q-15PC L6038D			
49	EI-386311J	IC PCM61P			
50	EI-410559J	IC PCM63P-J			
51	EI-410389J	IC PQ30RV1			
52	EI-413131J	IC SM5840EP			
53	EI-430682J	IC TC74AC257P			
54	EI-360038J1	IC TC74HC02AP			
55	EI-413130J	IC UPC812C			
56	EI-430815J	IC UPD4217400G3-70-7JD			
57	EI-432915J	IC UPD424260G5-70-7JF [NEW]			
58	EI-430776J	IC UPD431000AGW-65L			
59	EI-430684J	IC UPD70236AGD-16-5B8			
60	EI-413121J	IC UPD72069GF-3BA			
61	EI-379997J	IC YM3623B			
62	EI-374176	OSC XTAL AT-51 16.9344MHZ			
63	EI-396541J	OSC XTAL HC-49/U 32.000000MHZ			
64	EJ-408862J	SOCKET OPTICAL TORX173			

2. P.C. BOARD BLOCK

Ref. No.	Part No.	Description
1	BA-L6038A020B	PC(##) MAIN BLK S3200XL(B)
2	BA-L6028A060C	PC AD/DA BLK S3200XL
3	BA-L6028A070A	PC OUT PUT BLK S3000
4	BA-L6028A080A	PC PANEL BLK S3000
		[OPERATION P.C. BOARD]
-5-A	BA-L6028A020E	PC(##) FILTER BLK S3200XL(A)
		[A,J]
5-B	BA-L6028A020F	PC(##) FILTER BLK S3200XL(E)
		[E,V,B]
6	BA-L6038A030A	PC EFFECT BLK S3200XL

PC (##) MAIN BLK CONSISTS OF FOLLOWING P.C. BOARD.

- MAIN P.C. BOARD
- SCSI/OPT P.C. BOARD
- DIO JACK P.C. BOARD

PC (##) FILTER BLK CONSISTS OF FOLLOWING P.C. BOARD.

- FILTER P.C. BOARD
- POWER SUPPLY P.C. BOARD
- MIDI P.C. BOARD
- CONTRAST VR P.C. BOARD
- JACK (1) P.C. BOARD
- JACK (2) P.C. BOARD
- JACK (3) P.C. BOARD
- VR P.C. BOARD

3. MAIN P.C. BOARD

Ref. No.	Part No.	Description
D2	ED-389834J	D SILICON DS135E-FB2 F12 100/1
D3	ED-344280	D SILICON H GMA-01-FY2 F05
D4	ED-344280	D SILICON H GMA-01-FY2 F05
D5	ED-344280	D SILICON H GMA-01-FY2 F05
D6	ED-344280	D SILICON H GMA-01-FY2 F05
FL56	EH-410420J	FILTER EMI DSS306-93B101MT05
FL57	EH-410420J	FILTER EMI DSS306-93B101MT05
FL58	EH-410420J	FILTER EMI DSS306-93B101MT05
FL59	EH-410420J	FILTER EMI DSS306-93B101MT05
FL60	EH-410420J	FILTER EMI DSS306-93B101MT05
FL61	EH-410420J	FILTER EMI DSS306-93B101MT05
FL62	EH-410420J	FILTER EMI DSS306-93B101MT05
FL63	EH-410420J	FILTER EMI DSS306-93B101MT05
FL64	EH-410420J	FILTER EMI DSS306-93B101MT05
FL103	EH-405610J	FILTER EMI DSS310H54B 222M 250
FL232	EH-410420J	FILTER EMI DSS306-93B101MT05
FL403	EH-410420J	FILTER EMI DSS306-93B101MT05
FL428	EH-405610J	FILTER EMI DSS310H54B 222M 250
F3	△ EF-373142	FUSE ICP-N25 50V 1.0A
IB1	EH-408860J	COMP R RKC1/8B9 111J
IB2	EH-408860J	COMP R RKC1/8B9 111J
IB3	EH-384817J	COMP R RKC1/8B8 102J
IB4	EH-349374	COMP R RKC1/8B8 472J
IC1	EI-430682J	IC TC74AC257P
IC2	EI-430682J	IC TC74AC257P
IC3-A	EI-432915J	IC UPD424260G5-70-7JF
		[NEW]
IC3-B	EI-430679J	IC HM514260AZ-8
		[OLD]
IC4	EI-375185	IC M51953BL
IC5	EI-388712J	IC HD74HC245P
IC6	EI-389061J	IC HD74AC04P
IC7-A	EI-810023J	ICAM27C040-150DC S3200XLV1.05
		[PROGRAM ROM]
IC7-B	EI-427280J	ICAM27C040-150DC
		[BLANK ROM]
IC8-A	EI-432915J	IC UPD424260G5-70-7JF
		[NEW]

Ref. No.	Part No.	Description
IC8-B	EI-430679J	IC HM514260AZ-8
		[OLD]
IC9	EI-393695J	IC HD74HC154P
IC10	EI-430684J	IC UPD70236AGD-16-5BB
IC11	EI-336995	IC NJM78L05A
IC12	EI-430814J	IC PALCE 16V8Q-15PC L6038A
IC13	EI-430807J	IC PALCE 16V8Q-15PC L6038E
IC14	EI-378276	IC LC7981
IC15	EI-401214J	IC M889255B-PFS-G-BND
IC16	EI-427660J	IC BR6216B-10LL
IC17	EI-413121J	IC UPD72069GF-3BA
IC18	EI-388602J	IC M889352A-P-G
IC19	EI-410389J	IC PQ30RV1
IC20	EI-393702J	IC HD74HC595P
IC21	EI-393702J	IC HD74HC595P
IC22	EI-379997J	IC YM3623B
IC23	EI-429988J	ICAV9173-01-CN8
IC24	EI-410414J1	IC CS8402A-CP
IC25	EI-394832J	IC HD74HC123AP
IC26	EI-360038J1	IC TC74HC02AP
IC29	EI-427843J	IC HD74HC367P
IC30	EI-401214J	IC M889255B-PFS-G-BND
IC31	EI-430805J	IC PALCE 20V8Q-15PC L6038D
IC32	EI-430808J	IC PALCE 16V8Q-15PC L6038F
IC37	EI-430803J	IC PALCE 16V8Q-15PC L6038B
IC38	EI-430804J	IC PALCE 16V8Q-15PC L6038C
IC39	EI-430810J	IC ICS2008V
IC40	EI-414695J	IC L7A0986 L6029 DFL
IC41	EI-419090J	IC MB81C4256A-80PSZ-G
IC42	EI-413120J	IC L7A1045 L6028 DSP-A
IC43	EI-336995	IC NJM78L05A
IC301	EI-430815J	IC UPD4217400G3-70-7JD
IC302	EI-430815J	IC UPD4217400G3-70-7JD
IC303	EI-430815J	IC UPD4217400G3-70-7JD
IC304	EI-430815J	IC UPD4217400G3-70-7JD
IC305	EI-430815J	IC UPD4217400G3-70-7JD
IC306	EI-430815J	IC UPD4217400G3-70-7JD
IC307	EI-430815J	IC UPD4217400G3-70-7JD
IC308	EI-430815J	IC UPD4217400G3-70-7JD
J7	EJ-424423J	SOCKET 6-176438-7 72P
P1	EJ-429929J	PLUG 302-34GSB 34P
P6	EJ-429928J	PLUG 302-26GSB 26P
P8	EJ-429932J	PLUG 302-50GSB 50P
P9	EJ-429931J	PLUG 302-40GSB 40P
P11	EJ-430689J	PLUG 128A-060P3C-S14N 60P
P12	EJ-430689J	PLUG 128A-060P3C-S14N 60P
P14	EJ-429929J	PLUG 302-34GSB 34P
R14	△ ER-200972	R FUSE H S10 ERD2FC 1/4W 33R0G
R16	△ ER-412299J	R FUSE H S12 ERQ12AJ 1/2W 3R3J
TR3	ET-349593	TR 2SA1348 F05
TR5	ET-386938N	TR DTC123EST05
TR12	ET-370013	TR 2SA874 Q,R
T1	BT-390145J	TRANS PULSE Ni05-05-5
X1	EI-396541J	OSC X'TAL HC-49/U 32.000000MHZ
X2	EI-374176	OSC X'TALAT-51 16.9344MHZ

4. SCSI / OPT P.C. BOARD

Ref. No.	Part No.	Description
J2	EJ-414697J	SOCKET OPTICAL TOTX173
J3	EJ-408862J	SOCKET OPTICAL TORX173
J20	EJ-428182J	SOCKET DBLC-J25SAF-20L9 25P
L2	EO-351868	COIL FIX 1 LAP02 F05 470K
R23	△ R-318647	R FUSE H S10 ERD2FC 1/4W 4R7J
W200	EW-427659J	WIRE ASSY L6038-2 W200 34P

5. DIO JACK P.C. BOARD

Ref. No.	Part No.	Description
FL7	EH-429990J	FILTER EMI STB101KBA F05
FL8	EH-429990J	FILTER EMI STB101KBA F05
FL9	EH-429990J	FILTER EMI STB101KBA F05
FL10	EH-429990J	FILTER EMI STB101KBA F05
FL11	EH-429990J	FILTER EMI STB101KBA F05
FL12	EH-429990J	FILTER EMI STB101KBA F05
FL13	EH-429990J	FILTER EMI STB101KBA F05
J4	EJ-390189J	PHONE J 3P HLJ0544-010 W/NUT
J5	EJ-390189J	PHONE J 3P HLJ0544-010 W/NUT
J9	EJ-390189J	PHONE J 3P HLJ0544-010 W/NUT
J10	EJ-430809J	PHONE J 3P HLJ0544-110 W/NUT
T2	EO-414952J	TRANS PULSE CIT0705D-35101
T3	EO-414952J	TRANS PULSE CIT0705D-35101

6. POWER SW P.C. BOARD

Ref. No.	Part No.	Description
C401	△ EC-427562J	C MMY V CUT MKP3362 103M 275AC [E.V.B]
C402	△ EC-427562J	C MMY V CUT MKP3362 103M 275AC

7. AD / DA P.C. BOARD

Ref. No.	Part No.	Description
D1	ED-327057	D SILICON H DS442X
D2	ED-389834J	D SILICON DS135E-FB2 F12 100/1
FL4	EH-410420J	FILTER EMI DSS306-93B101MT05
IC1	EI-360043	IC M5220P
IC2	EI-360043	IC M5220P
IC3	EI-362588J1	IC M5238AP
IC4	EI-362588J1	IC M5238AP
IC5	EI-413130J	IC UPC812C
IC6	EI-422329J	ICAK5328-VP
IC7	EI-336995	IC NJM78L05A
IC8	EI-360772	IC NJM79L05A
IC9	EI-400855J	IC NJM79M05FA
IC10	EI-400856J	IC NJM78M05FA
IC11	EI-336995	IC NJM78L05A
IC12	EI-413131J	IC SM5840EP
IC13	EI-410559J	IC PCM63P-J
IC14	EI-410559J	IC PCM63P-J
IC15	EI-377191	IC NJM5532D-D
IC16	EI-377191	IC NJM5532D-D
IC17	EI-377191	IC NJM5532D-D
IC18	EI-377191	IC NJM5532D-D
IC19	EI-360043	IC M5220P
IC20	EI-360043	IC M5220P
IC21	EI-356160	IC M5216P
J501	EJ-413136J	SOCKET RECEPTACLE XLM-3-31PCV
J502	EJ-413136J	SOCKET RECEPTACLE XLM-3-31PCV
P501	EJ-413137J	SOCKET RECEPTACLE XLM-3-32PCV
P502	EJ-413137J	SOCKET RECEPTACLE XLM-3-32PCV
RL1	EQ-348929	RELAY SIG G5A-237P 2TR 12V
RL2	EQ-348929	RELAY SIG G5A-237P 2TR 12V
RL3	EQ-348929	RELAY SIG G5A-237P 2TR 12V
R36	ER-322787	R CB H S10 FS RDS 1/4W 100J
SW1	ES-379609	(SW SLIDE SSSP12 2-03-12)
TR1	ET-413154J	TR 2SC3918
W501	EW-430819J	WIRE ASSY L6038-2 W501 40P
W502	EW-429818J	WIRE ASSY L6028-2 W502 20P

8. OUT PUT P.C. BOARD

Ref. No.	Part No.	Description
IC1	EI-413131J	IC SM5840EP
IC2	EI-413131J	IC SM5840EP
IC3	EI-413131J	IC SM5840EP
IC4	EI-413131J	IC SM5840EP
IC7	EI-400856J	IC NJM78M05FA
IC8	EI-400856J	IC NJM78M05FA
IC9	EI-400855J	IC NJM79M05FA
IC10	EI-360043	IC M5220P
IC11	EI-360043	IC M5220P
IC12	EI-360043	IC M5220P
IC13	EI-360043	IC M5220P
IC14	EI-360043	IC M5220P
IC15	EI-360043	IC M5220P
IC16	EI-360043	IC M5220P
IC17	EI-360043	IC M5220P
IC18	EI-400855J	IC NJM79M05FA
IC101	EI-386311J	IC PCM61P
IC201	EI-386311J	IC PCM61P
IC301	EI-386311J	IC PCM61P
IC401	EI-386311J	IC PCM61P
IC501	EI-386311J	IC PCM61P
IC601	EI-386311J	IC PCM61P
IC701	EI-386311J	IC PCM61P
IC801	EI-386311J	IC PCM61P
J601	EJ-354105	PHONE J 2P HLJ0520-110 6.3
J602	EJ-354105	PHONE J 2P HLJ0520-110 6.3
J603	EJ-354105	PHONE J 2P HLJ0520-110 6.3
J604	EJ-354105	PHONE J 2P HLJ0520-110 6.3
J605	EJ-354105	PHONE J 2P HLJ0520-110 6.3
J606	EJ-354105	PHONE J 2P HLJ0520-110 6.3
J607	EJ-354105	PHONE J 2P HLJ0520-110 6.3
J608	EJ-354105	PHONE J 2P HLJ0520-110 6.3
P601	EJ-429927J	PLUG 302-20GSB 20P
VR101	EV-410614J	R S-FIX H PK50HO 0.50W 104
VR201	EV-410614J	R S-FIX H PK50HO 0.50W 104
VR301	EV-410614J	R S-FIX H PK50HO 0.50W 104
VR401	EV-410614J	R S-FIX H PK50HO 0.50W 104
VR501	EV-410614J	R S-FIX H PK50HO 0.50W 104
VR601	EV-410614J	R S-FIX H PK50HO 0.50W 104
VR701	EV-410614J	R S-FIX H PK50HO 0.50W 104
VR801	EV-410614J	R S-FIX H PK50HO 0.50W 104

9. OPERATION P.C. BOARD

Ref. No.	Part No.	Description
IB1	EH-355321	COMP R RKC1/8B13 103J
IB2	EH-413158J	COMP R RKC1/8B8 471J
SW1	ES-413139J	SW TACT SKHJAB
SW2	ES-413139J	SW TACT SKHJAB
SW3	ES-413139J	SW TACT SKHJAB
SW4	ES-413139J	SW TACT SKHJAB
SW5	ES-413139J	SW TACT SKHJAB
SW6	ES-413139J	SW TACT SKHJAB
SW7	ES-413139J	SW TACT SKHJAB
SW8	ES-413139J	SW TACT SKHJAB
SW9	ES-413140J	SW TACT SKHJGS
SW10	ES-413140J	SW TACT SKHJGS
SW11	ES-413140J	SW TACT SKHJGS
SW12	ES-413140J	SW TACT SKHJGS
SW13	ES-413140J	SW TACT SKHJGS
SW14	ES-413140J	SW TACT SKHJGS
SW15	ES-413140J	SW TACT SKHJGS
SW16	ES-413140J	SW TACT SKHJGS
SW17	ES-411687N	SW TACT EVQ-PAE05R
SW18	ES-411687N	SW TACT EVQ-PAE05R
SW19	ES-411687N	SW TACT EVQ-PAE05R
SW20	ES-411687N	SW TACT EVQ-PAE05R
SW21	ES-411687N	SW TACT EVQ-PAE05R
SW22	ES-411687N	SW TACT EVQ-PAE05R
SW23	ES-411687N	SW TACT EVQ-PAE05R
SW24	ES-411687N	SW TACT EVQ-PAE05R
SW25	ES-411687N	SW TACT EVQ-PAE05R

Ref. No.	Part No.	Description
SW26	ES-411687N	SW TACT EVQ-PAE05R
SW27	ES-411687N	SW TACT EVQ-PAE05R
SW28	ES-411687N	SW TACT EVQ-PAE05R
SW29	ES-411687N	SW TACT EVQ-PAE05R
SW30	ES-411687N	SW TACT EVQ-PAE05R
SW31	ES-411687N	SW TACT EVQ-PAE05R
SW32	ES-411687N	SW TACT EVQ-PAE05R
SW33	ES-411687N	SW TACT EVQ-PAE05R
SW34	ES-411687N	SW TACT EVQ-PAE05R
SW35	ES-411687N	SW TACT EVQ-PAE05R
SW36	ES-411687N	SW TACT EVQ-PAE05R
W701	EW-429819J	WIRE ASSY L6028-2 W701 26P

10. FILTER P.C. BOARD

Ref. No.	Part No.	Description
C1	EC-425606J	C MMY V CUT MMRC 683M 275AC
C2	Δ EC-410346J	C CE V DE1110E102M 400AC
C3	Δ EC-410346J	C CE V DE1110E102M 400AC
C4	Δ EC-410346J	C CE V DE1110E102M 400AC
C5	Δ EC-410346J	C CE V DE1110E102M 400AC [E,V,B]
L1-A	Δ EO-389172J	COIL LF LF-4N 502 [A,J]
L1-B	Δ EO-416860J	COIL LF LF-4DA 183 [E,V,B]

11. POWER SUPPLY P.C. BOARD

Ref. No.	Part No.	Description
D7	ED-389834J	D SILICON DS135E-FB2 F12 100/1
D8	ED-389834J	D SILICON DS135E-FB2 F12 100/1
RL1	EQ-413152J	RELAY SIG G6B-2014C-US 5V
R9	ER-366065	R OMF H S12 FS 1W 470J
TR4	ET-413151J	TR 2SD1661M

12. MIDI P.C. BOARD

Ref. No.	Part No.	Description
D1	EO-344280	D SILICON H GMA-01-FY2 F05
FL1	EH-410420J	FILTER EMI DSS306-93B101MT05
FL2	EH-410420J	FILTER EMI DSS306-93B101MT05
FL3	EH-410420J	FILTER EMI DSS306-93B101MT05
FL4	EH-410420J	FILTER EMI DSS306-93B101MT05
FL5	EH-410420J	FILTER EMI DSS306-93B101MT05
FL6	EH-410420J	FILTER EMI DSS306-93B101MT05
FL7	EH-410420J	FILTER EMI DSS306-93B101MT05
IC1	EI-388709J	IC HD74HC32P
J401	EJ-403478J	DIN J YKF51-5040 5P
PH1	ET-378219	DETECTOR PC6N137

13. CONTRAST VR P.C. BOARD

Ref. No.	Part No.	Description
VR3	EV-414633J	VR SPL RK0971112 SW B502 [CONTRAST VOLUME]

14. JACK (1) P.C. BOARD

Ref. No.	Part No.	Description
J402	EJ-353031	PHONE J 3P HLJ0520-010 [INPUT L]
J403	EJ-353031	PHONE J 3P HLJ0520-010 [INPUT R]

15. JACK (2) P.C. BOARD

Ref. No.	Part No.	Description
J404	EJ-357159	PHONE J 2P HLJ0520-110 W/NUT [OUTPUT L]
J405	EJ-357159	PHONE J 2P HLJ0520-110 W/NUT [OUTPUT R]

16. JACK (3) P.C. BOARD

Ref. No.	Part No.	Description
FL1	EH-410420J	FILTER EMI DSS306-93B101MT05
FL2	EH-410420J	FILTER EMI DSS306-93B101MT05
J406	EJ-379523	PHONE J 3P HLJ4305-3080 S.NUT [FOOT SW]
J407	EJ-353031	PHONE J 3P HLJ0520-010 [PHONES]
R1	ER-430691J	R OMF H S12 FS 1W 101J
R2	ER-430691J	R OMF H S12 FS 1W 101J


17. VR P.C. BOARD

Ref. No.	Part No.	Description
VR1	EV-413118J	VR ROTARY RK16312AA103X2 [REC LEVEL VOLUME]
VR2	EV-413118J	VR ROTARY RK16312AA103X2 [MAIN VOLUME]

18. EFFECT P.C. BOARD

Ref. No.	Part No.	Description
IC1	EI-427564J	IC L7A1414 L6038 DFX
IC2	EI-430776J	IC UPD431000AGW-85L
IC3	EI-430776J	IC UPD431000AGW-85L
IC4	EI-430776J	IC UPD431000AGW-85L
IC5	EI-430682J	IC TC74AC257P
P1	EJ-431264J	PLUG 128A-044P2B-L14A 44P

FINAL ASSEMBLY BLOCK

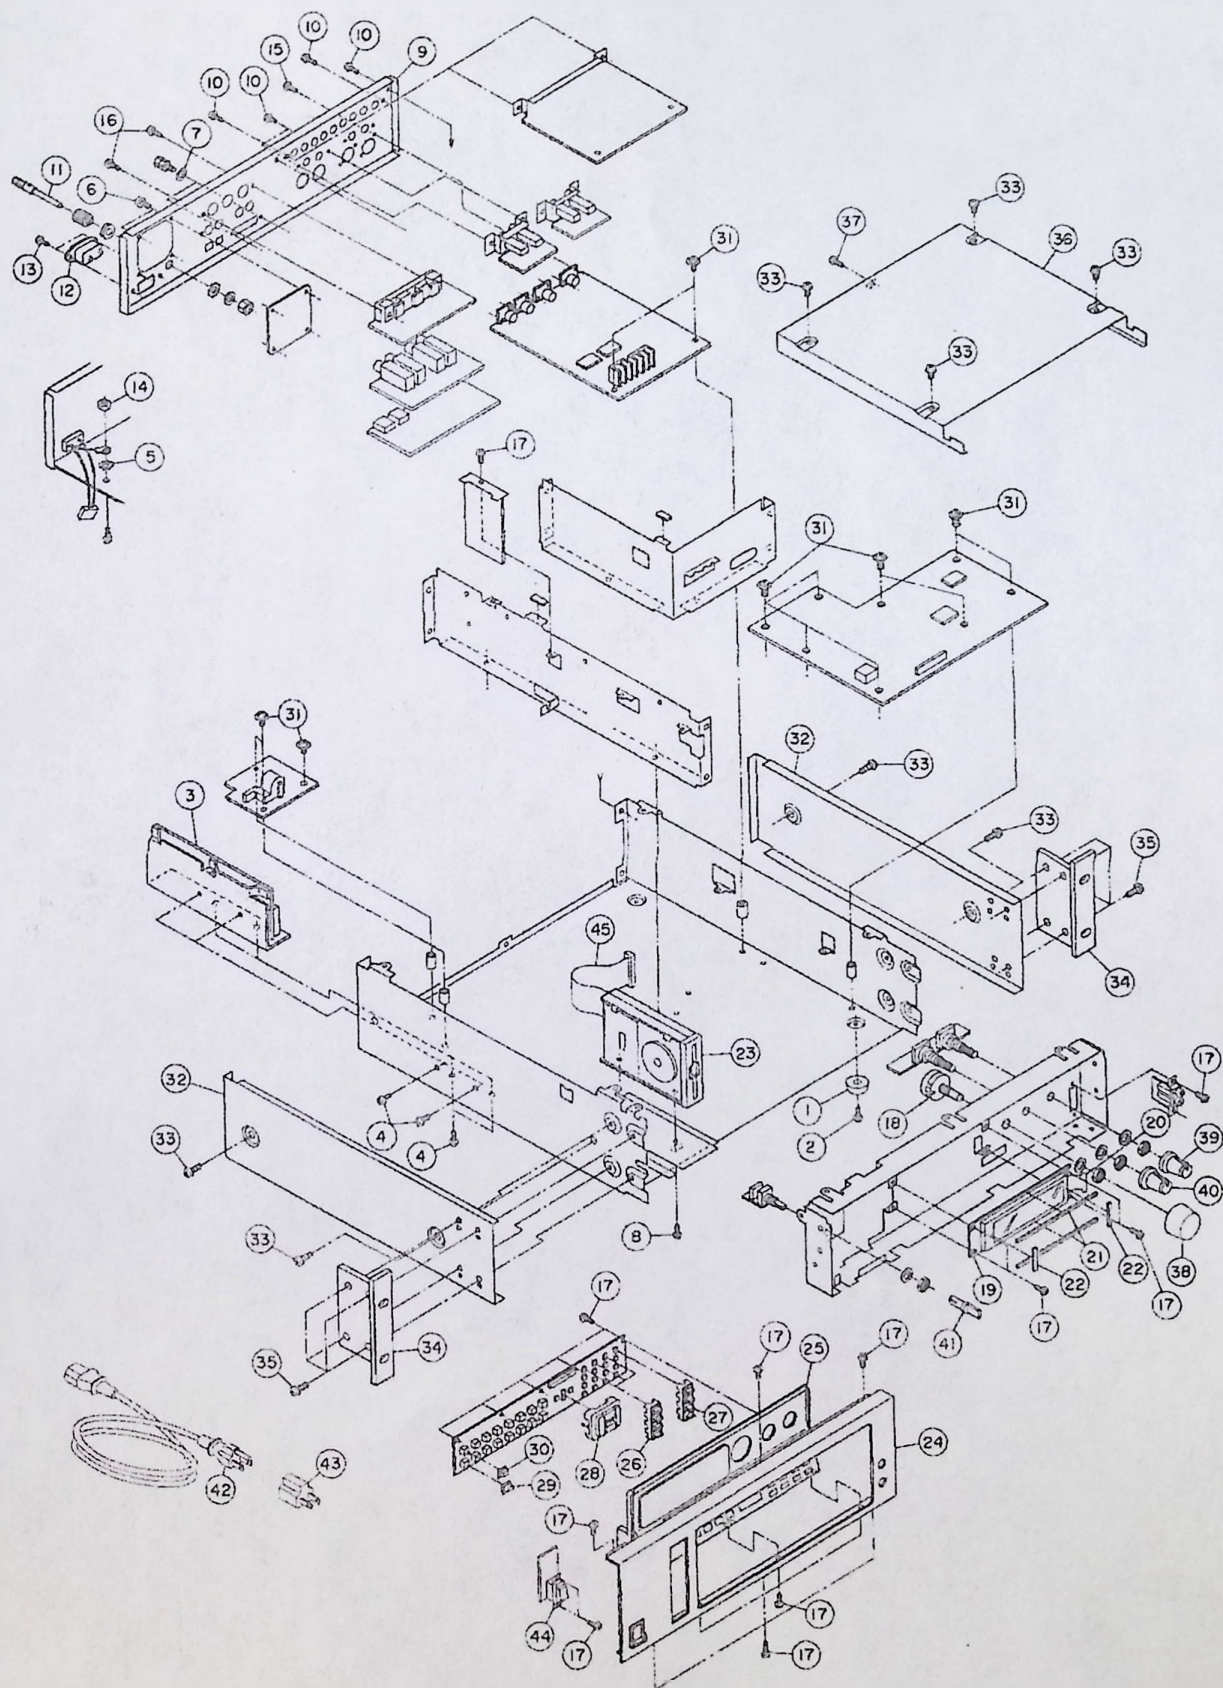

19. FINAL ASSEMBLY BLOCK

Ref. No.	Part No.	Description
1	SA-349332	FOOT
2	ZS-344754	ST PAN30X06STL CMT C080
3	△ BP-431265J	SW POW PMC50E1XULA [POWER BLOCK]
4	ZS-417150	PAN40X06STL CMT
5	ZW-273892	TWA40STL CMT
6	ZS-341960	ST BID40X06STL BNI
7	ZW-317801	TW26
8	ZS-379405N	BID30X06STL CMT (SG)
9	SP-430148J	PANEL REAR S3200XL
10	ZS-345272	ST BR30X06STL BNI
11	EJ-376872	TERMINAL SCREW1821T098.00
12	△ EJ-358632J2	SOCKET INLET SOT-163P
13	ZS-336612	ST CTS30X08STL BNI
14	ZW-413267	N FRANGE 40STL CMT
15	ZS-355511	BID30X06STL BNI
16	ZS-350934	PT BR30X08STL BNI
17	ZS-320906	ST BR30X06STL CMT
18	ES-414627J	SW ROTARY EC24B50D0 [DATA VOLUME]
19	EM-418780J	IND LCD NFM243N20
20	EL-733752J	EL BACK LIGHT (C)
21	SZ-401475J1	SEAL DUST A
22	SZ-401476J1	SEAL DUST B
23	BB-431283J	FDD D359T5 R69-1324
24	BD-430229J	PANEL FRONT S3200XL PART
25	BD-427558J	PANEL OPERATION-2 PART
26	SB-413597J	BUTTON TENKEY(A)
27	SB-413598J	BUTTON TENKEY(B)
28	SB-413601J1	BUTTON CURSOR
29	SB-413599J	BUTTON PUSH(A)
30	SB-413600J	BUTTON PUSH(B)
31	ZS-428277J	PAN30X06STL CMT POLY WAVE
32	SP-413448J	COVER SIDE
33	ZS-341959	ST BID40X06STL NI3
34	GH-413441J1	HANDLE RACK
35	ZS-365316	BID40X12STL NI3
36	SP-413449J	COVER TOP
37	ZS-418385J	BT BID30X06STL BNI EARTH LOCK
38	SK-411156J	KNOB CONTROL [DATA]
39	SK-411144J	KNOB VOL PART(1) [MAIN]
40	SK-411147J	KNOB VOL PART(2) [REC]
41	SK-413636J	KNOB VOL GR [CONTRAST]
42	△ EW-380905J	AC CORD 250S KP300 KS16A H B J [J]
42	△ EW-368420J1	AC CORD200SKP30KS16 B AC [A]
42	△ EW-403993J	AC CORD200SKP4819DKS31A B E [E,V]
42	△ EW-419170J	AC CORD200S KP610 KS31A B [B]
43	△ EJ-405424J	PLUG ADAPTOR KPR-25 [J]
44	△ ES-413128J	SW SEESAW EST15962V [POWER SW]
45	EW-429820J	WIRE ASSY LG028-2 W907 34P [W907 MAIN TO FDD]

NOTE :

Parts will not be supplied if they are not listed in the parts list, even if they appear on the assembling illustrations with reference No.

INDEX

Model S2000 (IB-208, EB16)

Part No.	Ref. No.	Part No.	Ref. No.	Part No.	Ref. No.	Part No.	Ref. No.
BAL6039AG20A	2-1	EH40424BJ	12-FL511	EI413120J	3-IC20	ER200746	3-FR123
BB431282J	11-8	EH40424BJ	12-FL512	EI413121J	3-IC17	ER324185	5-R304
BT430823J1	11-6	EH405610J	3-FL8	EI413206J	3-IC52	ER324185	5-R305
EC379611	5-C301	EH408860J	3-IB3	EI414841J	12-IC524	ER327710	5-R301
EC389895J	5-C304	EH408860J	3-IB4	EI427259J	3-IC50	ER386215J	3-R29
EC389895J	5-C305	EH410420J	3-FL1	EI427564J	13-IC1	ER410305J	3-R130
EC389895J	5-C306	EH410420J	3-FL2	EI429988J	3-IC21	ER430691J	8-R601
EC389895J	5-C307	EH410420J	3-FL3	EI430668J	3-IC4	ER430691J	8-R602
EC410346J	6-C402	EH410420J	3-FL4	EI430669J	3-IC16	ES403377J	9-SW701
EC410346J	6-C403	EH410420J	3-FL5	EI430670J	3-IC25	ES410552J	4-SW203
EC410346J	6-C404	EH410420J	3-FL6	EI430671J	3-IC29	ES410552J	4-SW204
EC410346J	6-C405	EH410420J	3-FL36	EI430673J	3-IC24	ES410552J	4-SW205
EC410497J	5-C302	EH410420J	3-FL37	EI430674J	3-IC30	ES410552J	4-SW206
EC410497J	5-C303	EH410420J	3-FL41	EI430677J	5-IC301	ES410552J	4-SW207
EC425605J	6-C401	EH410420J	3-FL45	EI430678J	3-IC23	ES410552J	4-SW208
EC427562J	10-C801	EH410420J	3-FL46	EI430679J	3-IC9-B	ES410552J	4-SW209
ED344280	3-D1	EH410420J	12-FL501	EI430679J	3-IC10-B	ES410552J	4-SW210
ED344280	3-D11	EH410420J	12-FL506	EI430680J	3-IC2	ES410552J	4-SW211
ED344280	4-D209	EH410420J	12-FL507	EI430681J	3-IC44	ES410552J	4-SW212
ED344280	4-D210	EH410420J	12-FL508	EI430682J	3-IC5	ES410552J	4-SW213
ED344280	4-D211	EH410420J	12-FL509	EI430682J	3-IC6	ES410552J	4-SW214
ED344280	4-D212	EI348123	5-IC302	EI430682J	13-IC5	ES410552J	4-SW215
ED344280	4-D213	EI348785	12-IC507	EI430684J	3-IC1	ES430685J1	10-SW801
ED344280	4-D214	EI348785	12-IC508	EI430776J	13-IC2	ES430686J	4-SW201
ED344280	4-D215	EI348785	12-IC509	EI430776J	13-IC3	ES430686J	4-SW202
ED344280	4-D216	EI348785	12-IC510	EI430776J	13-IC4	ET354083N	5-TR303
ED344280	4-D217	EI348785	12-IC511	EI430979J	3-IC31-B	ET356817N	5-TR302
ED344280	4-D218	EI348785	12-IC512	EI430979J	3-IC32-B	ET366753N	3-TR11
ED344280	4-D219	EI348785	12-IC513	EI430979J	3-IC33-B	ET379341	3-PH1
ED344280	4-D220	EI348785	12-IC514	EI430979J	3-IC34-B	ET430675J	5-TR301
ED344280	4-D221	EI353227	3-IC49	EI430998J	3-X1	EV356323	3-VR1
ED344280	4-D222	EI360043	3-IC45	EI432772J	3-IC31-A	EV430696J	8-VR601
ED344280	4-D223	EI360043	3-IC46	EI432772J	3-IC32-A	EV430697J	7-VR501
ED357038	5-D302	EI360043	7-IC501	EI432772J	3-IC33-A	EW408724M1	11-12-C
ED388539J	4-D201	EI374176	12-X501	EI432772J	3-IC34-A	EW410481M1	11-12-B
ED388539J	4-D202	EI377101	3-IC43	EI432915J	3-IC9-A	EW427587J	11-12-A
ED388539J	4-D203	EI377101	3-IC51	EI432915J	3-IC10-A	EW430651J	11-7
ED388539J	4-D204	EI377101	3-IC53	EI810024J	3-IC12-A	EW430793J	12-W501
ED388539J	4-D205	EI377101	12-IC522	EJ354105	3-J11	EW432645J	4-W201
ED388539J	4-D206	EI377191	7-IC502	EJ354105	3-J12	EW432646J	4-W202
ED388539J	4-D207	EI377191	7-IC503	EJ364322	12-J501	EW432647J	7-W501
ED388539J	4-D208	EI379657J	3-IC13	EJ364322	12-J502	EZ371605	11-11
ED389834J	3-D2	EI379997J	12-IC519	EJ364322	12-J503	EZ412419J	5-1
ED389834J	3-D4	EI386289J	3-IC11	EJ364322	12-J504	SA349332	11-14
ED389834J	3-D12	EI388602J	3-IC18	EJ364322	12-J505	SB429684J	11-30
ED389834J	5-D303	EI388707J	3-IC41	EJ364322	12-J506	SB429685J	11-29
ED400842J	5-D301	EI388707J	12-IC501	EJ364322	12-J507	SB429692J	11-28
EF258344	5-F3-C	EI388709J	3-IC8	EJ364322	12-J508	SB429694J	11-31
EF258344	5-F4-C	EI388711J	3-IC7	EJ403478J	3-J1	SE429691J	11-27
EF308847	6-F1-B	EI388712J	3-IC3	EJ419240J	3-J3	SE429695J	11-21
EF309387	5-F3-A	EI389061J	3-IC35	EJ424423J	3-J5	SE429696J	11-22
EF309387	5-F4-A	EI393325N	3-IC47	EJ424423J	3-J6	SK429686J	11-26
EF310229	5-F3-B	EI393325N	3-IC48	EJ428182J	3-J2	SK429687J	11-25
EF310229	5-F4-B	EI393325N	12-IC515	EJ429926J	3-P9	SK429688J	11-23
EF311839	6-F1-A	EI393325N	12-IC516	EJ429929J	3-P10	SK429689J	11-24
EF326613	5-F2-A	EI393325N	12-IC517	EJ429929J	3-P13	SP429430J1	11-20
EF346139	5-F2-B	EI393325N	12-IC518	EJ430689J	3-P19	SP429689J1	11-1
EF358641	5-F3-D	EI393696J	12-IC502	EJ430689J	3-P20	SP429697J	11-9
EF358641	5-F4-D	EI393702J	3-IC27	EJ430794J	12-J509	SZ429678J	11-19
EF359007	6-F1-D	EI393702J	3-IC28	EJ431264J	13-P1	ZS201275	11-32
EF359086	5-F2-D	EI394832J	12-IC525	EJ432660J	7-J501	ZS320906	11-18
EF373142	3-FS1	EI397090J	3-IC26	EJ432660J	7-J502	ZS322570	11-3
EF373143	12-FS502	EI397343J	3-IC12-B	EJ432660J	8-J601	ZS344754	11-15
EF376821	3-FS2	EI410389J	3-IC19	EM432814J	11-33	ZS345272	11-10
EF376821	3-FS3	EI410414J1	12-IC521	EO345990N	3-L11	ZS350934	11-13
EF376821	12-FS501	EI412279J1	3-IC42	EO345995N	3-L1	ZS379405N	11-17
EF602550	6-F1-C	EI412279J1	12-IC503	EO389172J	6-FL401	ZS416687	11-16
EF690996	5-F2-C	EI412279J1	12-IC504	EO414952J	12-T501	ZS418385J	11-2
EH349374	3-IB1	EI412279J1	12-IC505	EQ348929	3-RL1	ZS428277J	11-4
EH384817J	3-IB2	EI412279J1	12-IC506	ER200746	3-FR122	ZW413267	11-5

Model S3000XL

Part No.	Ref. No.	Part No.	Ref. No.	Part No.	Ref. No.	Part No.	Ref. No.
BAL6036A030A	2-3	EI388602J	3-IC18	EJ372275	5-J201	EV425557J	8-VR1
BAL6036A050A	2-2	EI388707J	3-IC41	EJ372275	5-J202	EV430798J	8-VR2
BAL6036E020B	2-1	EI388707J	4-IC501	EJ372275	7-J2	EW368420J1	12-29-B
BB431283J	12-18	EI388709J	3-IC8	EJ403478J	3-J1	EW360905J	12-29-A
BP397454J	12-19	EI388711J	3-IC7	EJ405424J	12-30	EW403993J	12-29-C
BT390145J	11-T1	EI388712J	3-IC3	EJ419240J	3-J3	EW419170J	12-29-D
EC410346J	6-C1	EI389061J	3-IC35	EJ424423J	3-J5	EW430793J	4-W501
EC410346J	6-C2	EI393325N	3-IC47	EJ424423J	3-J6	EW810045J	3-W101
EC410346J	6-C3	EI393325N	3-IC48	EJ428182J	3-J2	SA349332	12-1
EC410346J	6-C4	EI393325N	4-IC515	EJ429929J	3-P13	SB413597J	12-11
EC425606J	6-C5	EI393325N	4-IC516	EJ429932J	3-P11	SB413598J	12-12
EC427562J	6-C6	EI393325N	4-IC517	EJ430689J	3-P19	SB413599J	12-8
EC427562J	6-C7	EI393325N	4-IC518	EJ430689J	3-P20	SB413600J	12-9
ED344280	3-D1	EI393696J	4-IC502	EJ430794J	4-J509	SB413601J1	12-10
ED344280	3-D11	EI393702J	3-IC27	EL733752J	12-14	SE413248J	12-40
ED389834J	3-D2	EI393702J	3-IC28	EM418780J	12-13	SE413628J	12-41
ED389834J	3-D4	EI394832J	4-IC525	EO345990N	3-L11	SK411144J	12-32
ED389834J	3-D12	EI386541J	3-X1	EO345995N	3-L1	SK411147J	12-33
EF373142	3-FS1	EI397090J	3-IC26	EO414952J	4-T501	SK411156J	12-31
EF373143	4-FS502	EI410389J	3-IC19	EO416860J	6-L1-B	SK413636J	12-34
EF376821	3-FS2	EI410414J1	4-IC521	EO427837J	6-L1-A	SP413330J1	12-37
EF376821	3-FS3	EI412279J1	3-IC42	EQ348929	3-RL1	SP415289J	12-38
EF376821	4-FS501	EI412279J1	4-IC503	ER200972	3-FR14	SP430145J	12-22
EH349374	3-IB1	EI412279J1	4-IC504	ER410305J	3-R130	SP430213J	12-35
EH384815J	9-IB1	EI412279J1	4-IC505	ER412299J	11-R1	SZ407140J	12-15
EH384817J	3-IB2	EI412279J1	4-IC506	ER430691J	7-R7	SZ407141J	12-16
EH404248J	4-FL511	EI413120J	3-IC20	ER430691J	7-R8	ZS320906	12-7
EH404248J	4-FL512	EI413121J	3-IC17	ES411687N	9-SW1	ZS344754	12-2
EH405610J	3-FL8	EI413206J	3-IC52	ES411687N	9-SW2	ZS345272	12-23
EH408860J	3-IB3	EI414841J	4-IC524	ES411687N	9-SW3	ZS350934	12-25
EH408860J	3-IB4	EI427259J	3-IC50	ES411687N	9-SW4	ZS357953	12-39
EH410420J	3-FL1	EI427280J	3-IC12-B	ES411687N	9-SW5	ZS362534	12-27
EH410420J	3-FL2	EI427660J	3-IC15	ES411687N	9-SW6	ZS379405N	12-6
EH410420J	3-FL3	EI429988J	3-IC21	ES411687N	9-SW7	ZS417150	12-20
EH410420J	3-FL4	EI430668J	3-IC4	ES411687N	9-SW8	ZS418385J	12-36
EH410420J	3-FL5	EI430669J	3-IC16	ES411687N	9-SW9	ZS422076	12-3
EH410420J	3-FL6	EI430670J	3-IC25	ES411687N	9-SW10	ZS428277J	12-21
EH410420J	3-FL36	EI430671J	3-IC29	ES411687N	9-SW11		
EH410420J	3-FL37	EI430673J	3-IC24	ES411687N	9-SW12		
EH410420J	3-FL41	EI430674J	3-IC30	ES411687N	9-SW13		
EH410420J	3-FL46	EI430678J	3-IC23	ES411687N	9-SW14		
EH410420J	4-FL501	EI430679J	3-IC9-B	ES411687N	9-SW15		
EH410420J	4-FL506	EI430679J	3-IC10-B	ES411687N	9-SW16		
EH410420J	4-FL507	EI430680J	3-IC2	ES411687N	9-SW17		
EH410420J	4-FL508	EI430681J	3-IC44	ES411687N	9-SW18		
EH410420J	4-FL509	EI430682J	3-IC5	ES411687N	9-SW19		
EH413158J	9-IB2	EI430682J	3-IC6	ES411687N	9-SW20		
EI348785	4-IC507	EI430684J	3-IC1	ES413139J	9-SW21		
EI348785	4-IC508	EI430979J	3-IC31-B	ES413139J	9-SW22		
EI348785	4-IC509	EI430979J	3-IC32-B	ES413139J	9-SW23		
EI348785	4-IC510	EI430979J	3-IC33-B	ES413139J	9-SW24		
EI348785	4-IC511	EI430979J	3-IC34-B	ES413139J	9-SW25		
EI348785	4-IC512	EI432772J	3-IC31-A	ES413139J	9-SW26		
EI348785	4-IC513	EI432772J	3-IC32-A	ES413139J	9-SW27		
EI348785	4-IC514	EI432772J	3-IC33-A	ES413139J	9-SW28		
EI348785	5-IC202	EI432772J	3-IC34-A	ES413140J	9-SW29		
EI348785	5-IC203	EI432915J	3-IC9-A	ES413140J	9-SW30		
EI353227	3-IC49	EI432915J	3-IC10-A	ES413140J	9-SW31		
EI360043	3-IC45	EI810021J	3-IC12-A	ES413140J	9-SW32		
EI360043	3-IC46	EJ354105	3-J11	ES413140J	9-SW33		
EI360043	5-IC201	EJ354105	3-J12	ES413140J	9-SW34		
EI374176	4-X501	EJ358632J2	12-26	ES413140J	9-SW35		
EI377101	3-IC43	EJ364322	4-J501	ES413140J	9-SW36		
EI377101	3-IC51	EJ364322	4-J502	ES414627J	12-17		
EI377101	3-IC53	EJ364322	4-J503	ES427895J	12-4		
EI377101	4-IC522	EJ364322	4-J504	ET366753N	3-TR11		
EI378276	3-IC14	EJ364322	4-J505	ET370013	3-TR2		
EI379857J	3-IC13	EJ364322	4-J506	ET379341	3-PH1		
EI379997J	4-IC519	EJ364322	4-J507	ET386938N	3-TR1		
EI386289J	3-IC11	EJ364322	4-J508	EV412275J	10-VR3		

Model S3200XL

Part No.	Ref. No.	Part No.	Ref. No.	Part No.	Ref. No.	Part No.	Ref. No.
BAL6028A020E	2-5-A	E1356160	7-IC21	E1430679J	3-IC3-B	EQ414952J	5-T2
BAL6028A020F	2-5-B	E1360038J1	3-IC26	E1430679J	3-IC8-B	EQ414952J	5-T3
BAL6028A060C	2-2	E1360043	7-IC1	E1430682J	3-IC1	EQ416860J	10-L1-B
BAL6028A070A	2-3	E1360043	7-IC2	E1430682J	3-IC2	EQ348929	7-RL1
BAL6028A080A	2-4	E1360043	7-IC19	E1430682J	18-IC5	EQ348929	7-RL2
BAL6038A020B	2-1	E1360043	7-IC20	E1430684J	3-IC10	EQ348929	7-RL3
BAL6038A030A	2-6	E1360043	8-IC10	E1430776J	18-IC2	EQ413152J	11-RL1
BB431283J	19-23	E1360043	8-IC11	E1430776J	18-IC3	ER200972	3-R14
BD427558J	19-25	E1360043	8-IC12	E1430776J	18-IC4	ER318647	4-R23
BD430229J	19-24	E1360043	8-IC13	E1430803J	3-IC37	ER322787	7-R36
BP431265J	19-3	E1360043	8-IC14	E1430804J	3-IC38	ER366065	11-R9
BT390145J	3-T1	E1360043	8-IC15	E1430805J	3-IC31	ER412299J	3-R16
EC410346J	10-C2	E1360043	8-IC16	E1430807J	3-IC13	ER430691J	16-R1
EC410346J	10-C3	E1360043	8-IC17	E1430808J	3-IC32	ER430691J	16-R2
EC410346J	10-C4	E1360772	7-IC8	E1430810J	3-IC39	ES379609	7-SW1
EC410346J	10-C5	E1362588J1	7-IC3	E1430814J	3-IC12	ES411687N	9-SW17
EC425606J	10-C1	E1362588J1	7-IC4	E1430815J	3-IC301	ES411687N	9-SW18
EC427562J	6-C401	E1374176	3-X2	E1430815J	3-IC302	ES411687N	9-SW19
EC427562J	6-C402	E1375185	3-IC4	E1430815J	3-IC303	ES411687N	9-SW20
ED327057	7-D1	E1377191	7-IC15	E1430815J	3-IC304	ES411687N	9-SW21
ED344280	3-D3	E1377191	7-IC16	E1430815J	3-IC305	ES411687N	9-SW22
ED344280	3-D4	E1377191	7-IC17	E1430815J	3-IC306	ES411687N	9-SW23
ED344280	3-D5	E1377191	7-IC18	E1430815J	3-IC307	ES411687N	9-SW24
ED344280	3-D6	E1378276	3-IC14	E1430815J	3-IC308	ES411687N	9-SW25
ED344280	12-D1	E1379997J	3-IC22	E1432915J	3-IC3-A	ES411687N	9-SW26
ED389834J	3-D2	E1386311J	8-IC101	E1432915J	3-IC8-A	ES411687N	9-SW27
ED389834J	7-D2	E1386311J	8-IC201	E1810023J	3-IC7-A	ES411687N	9-SW28
ED389834J	11-D7	E1386311J	8-IC301	EJ353031	14-J402	ES411687N	9-SW29
ED389834J	11-D8	E1386311J	8-IC401	EJ353031	14-J403	ES411687N	9-SW30
EF373142	3-F3	E1386311J	8-IC501	EJ353031	16-J407	ES411687N	9-SW31
EH349374	3-IB4	E1386311J	8-IC601	EJ354105	8-J601	ES411687N	9-SW32
EH355321	9-IB1	E1386311J	8-IC701	EJ354105	8-J602	ES411687N	9-SW33
EH384817J	3-IB3	E1386311J	8-IC801	EJ354105	8-J603	ES411687N	9-SW34
EH405610J	3-FL103	E1388602J	3-IC18	EJ354105	8-J604	ES411687N	9-SW35
EH405610J	3-FL428	E1388709J	12-IC1	EJ354105	8-J605	ES411687N	9-SW36
EH408860J	3-IB1	E1388712J	3-IC5	EJ354105	8-J606	ES413128J	19-44
EH408860J	3-IB2	E1389061J	3-IC6	EJ354105	8-J607	ES413139J	9-SW1
EH410420J	3-FL56	E1393695J	3-IC9	EJ354105	8-J608	ES413139J	9-SW2
EH410420J	3-FL57	E1393702J	3-IC20	EJ357159	15-J404	ES413139J	9-SW3
EH410420J	3-FL58	E1393702J	3-IC21	EJ357159	15-J405	ES413139J	9-SW4
EH410420J	3-FL59	E1394832J	3-IC25	EJ358632J2	19-12	ES413139J	9-SW5
EH410420J	3-FL60	E1396541J	3-X1	EJ376872	19-11	ES413139J	9-SW6
EH410420J	3-FL61	E1400855J	7-IC9	EJ379523	16-J406	ES413139J	9-SW7
EH410420J	3-FL62	E1400855J	8-IC9	EJ390189J	5-J4	ES413139J	9-SW8
EH410420J	3-FL63	E1400855J	8-IC18	EJ390189J	5-J5	ES413140J	9-SW9
EH410420J	3-FL64	E1400856J	7-IC10	EJ390189J	5-J9	ES413140J	9-SW10
EH410420J	3-FL232	E1400856J	8-IC7	EJ403478J	12-J401	ES413140J	9-SW11
EH410420J	3-FL403	E1400856J	8-IC8	EJ405424J	19-43	ES413140J	9-SW12
EH410420J	7-FL4	E1401214J	3-IC15	EJ408862J	4-J3	ES413140J	9-SW13
EH410420J	12-FL1	E1401214J	3-IC20	EJ413136J	7-J501	ES413140J	9-SW14
EH410420J	12-FL2	E1410389J	3-IC19	EJ413136J	7-J502	ES413140J	9-SW15
EH410420J	12-FL3	E1410414J1	3-IC24	EJ413137J	7-P501	ES413140J	9-SW16
EH410420J	12-FL4	E1410559J	7-IC13	EJ413137J	7-P502	ES414627J	19-18
EH410420J	12-FL5	E1410559J	7-IC14	EJ414697J	4-J2	ET349593	3-TR3
EH410420J	12-FL6	E1413120J	3-IC42	EJ424423J	3-J7	ET370013	3-TR12
EH410420J	12-FL7	E1413121J	3-IC17	EJ428182J	4-J20	ET378219	12-PH1
EH410420J	16-FL1	E1413130J	7-IC5	EJ429927J	8-P601	ET386938N	3-TR5
EH410420J	16-FL2	E1413131J	7-IC12	EJ429928J	3-P6	ET413151J	11-TR4
EH413158J	9-IB2	E1413131J	8-IC1	EJ429929J	3-P1	ET413154J	7-TR1
EH429990J	5-FL7	E1413131J	8-IC2	EJ429929J	3-P14	EV410614J	8-VR101
EH429990J	5-FL8	E1413131J	8-IC3	EJ429931J	3-P9	EV410614J	8-VR201
EH429990J	5-FL9	E1413131J	8-IC4	EJ429932J	3-P8	EV410614J	8-VR301
EH429990J	5-FL10	E1414695J	3-IC40	EJ430689J	3-P1	EV410614J	8-VR401
EH429990J	5-FL11	E1419090J	3-IC41	EJ430689J	3-P12	EV410614J	8-VR501
EH429990J	5-FL12	E1422329J	7-IC6	EJ430809J	5-J10	EV410614J	8-VR601
EH429990J	5-FL13	E1427280J	3-IC7-B	EJ431264J	18-P1	EV410614J	8-VR701
E1336995	3-IC11	E1427564J	18-IC1	EL733752J	19-20	EV410614J	8-VR801
E1336995	3-IC43	E1427660J	3-IC16	EM418780J	19-19	EV413118J	17-VR1
E1336995	7-IC7	E1427843J	3-IC29	EO351869	4-L2	EV413118J	17-VR2
E1336995	7-IC11	E1429988J	3-IC23	EO389172J	10-L1-A	EV414633J	13-VR3

Part No.	Ref. No.	Part No.	Ref. No.	Part No.	Ref. No.	Part No.	Ref. No.
EW363420J1	19-42						
EW380905J	19-42						
EW403883J	19-42						
EW419170J	19-42						
EW427659J	4-W200						
EW429818J	7-W502						
EW429819J	9-W701						
EW429820J	19-45						
EW430819J	7-W501						
GH413441J1	19-34						
SA349332	19-1						
SB413597J	19-26						
SB413598J	19-27						
SB413599J	19-29						
SB413600J	19-30						
SB413601J1	19-28						
SK411144J	19-39						
SK411147J	19-40						
SK411156J	19-38						
SK413636J	19-41						
SP413448J	19-32						
SP413449J	19-36						
SP430148J	19-9						
SZ401475J1	19-21						
SZ401476J1	19-22						
ZS320906	19-17						
ZS336612	19-13						
ZS341059	19-33						
ZS341960	19-6						
ZS344754	19-2						
ZS345272	19-10						
ZS350934	19-16						
ZS355511	19-15						
ZS365316	19-35						
ZS379405N	19-8						
ZS417150	19-4						
ZS418385J	19-37						
ZS428277J	19-31						
ZW273892	19-5						
ZW317801	19-7						
ZW413267	19-14						

ABBREVIATIONS FOR THE SERVICE MANUAL

ABBREVIATION	EXPLANATION	ABBREVIATION	EXPLANATION
AMP (Amp)	AMPlifier	MINI	MINimum
BBD	Backet Brigade Diode	MIX	MIXer
BCD	Binary Code Decimal	MOD	MODulation / MODulator
B.DOWN	Brake DOWN	M.WHEEL	Modulation WHEEL
B.UP	Back UP	OSC	OSCillator
CE	Chip Enable	PLD	Programmable Logic Device
CH	CHannel	RAM	Random Access Memory
COMP	COMParator	RD	ReaD
CONT	CONTrol	REG	REGulator
CV	Control Voltage	RESO	RESOnance
D/A	Digital to Analogue	RL	ReLay
DIR	DIRectory	ROM	Read Only Memcry
DMA	Direct Memory Access	SCSI	Small Computer System Interface
DSP	Digital Signal Processor	S/H	Sample and Hold
EG	Envelope Generator	SIMM	Single Inline Memory Module
EXT	EXTernal	SMPTE	Society of Motion Picture & Television Engineers
FREQ	FREQUency	SW	SWitch
HPF	High Pass Filter	THRU	THRoUgh
INH	INHibit	TRANS	TRANSpore
INT	INTerrupt	U	Upper
INV	INVerter	VA	Voltage Analog
L	Lower	VCA	Voltage Controlled Amplifier
LAN	Local Area Network	VCF	Voltage Controlled Filter
LFO	Low Frequency Oscillator	VR	Variable Resistor
MAX	MAXimum	VREF	REFerence Voltage
MEMO	MEMOry	WR	WRite
MIDI	Musical Instrument Digital Interface		

AKAI ELECTRIC CO., LTD.

ELECTRONIC MUSICAL INSTRUMENT DIV.

12-14, 2-Chome, Higashi-Kojiya, Ohta-ku, Tokyo, Japan

SERVICE SECT. TEL: Tokyo (3745) 9621 FAX : Tokyo (3745) 9633

Printed No. 951018-A1-300

Printed Date December 10, 1995

Printed in Japan

S3000XL
S3200XL

AKAI

MODEL **S2000**
(IB-208P, EB16 OPTIONAL BOARD)

MODEL **S3000XL**
(EB16 OPTIONAL BOARD)


MODEL **S3200XL**

SCHEMATIC DIAGRAMS AND PC BOARDS

TABLE OF CONTENTS

I. BLOCK DIAGRAMS	
1. MAIN (S2000, S3000XL)	3
2. 8 PARA/DIO (IB-208P) (S3000XL)	4
3. AD/DA, OUTPUT (S3200XL)	4
4. MAIN (S3200XL)	5
II. SCHEMATIC DIAGRAMS AND PC BOARDS	
1. S2000 CONNECTION DIAGRAM	6
2. S3000XL CONNECTION DIAGRAM	9
3. MAIN 1/3 (CPU, DISK BLOCK) (S2000, S3000XL)	10
4. MAIN 2/3 (VOICE BLOCK) (S2000, S3000XL)	11
5. MAIN 3/3 (AD/DA BLOCK) (S2000, S3000XL)	12
6. 8 PARA/DIO, IB-208P (OPTION) (S3000XL, S2000)	16
7. OPERATION (S2000)	18
8. OPERATION (S3000XL)	20
9. ANALOG (S2000)	22
10. ANALOG INPUT (S3000XL)	25
11. S3200XL CONNECTION DIAGRAM	27
12. AD/DA (S3200XL)	28
13. OUT PUT (S3200XL)	31
14. EFFECT (S3200XL) EB16 (OPTION) (S2000, S3000XL)	32
15. MAIN 1/3 (CPU, ROM, RAM) (S3200XL)	33
16. MAIN 2/3 (WAVE MEMORY, VOICE, DIO SMPTE, OPTION) (S3200XL)	34
17. MAIN 3/3 (PANEL, LCD, FDD, SCSI)	35
18. CONNECTOR & JACK (S3200XL)	38
III. INFORMATION OF ICs	39

Use these schematic diagrams and PC boards together with the provided service manual.

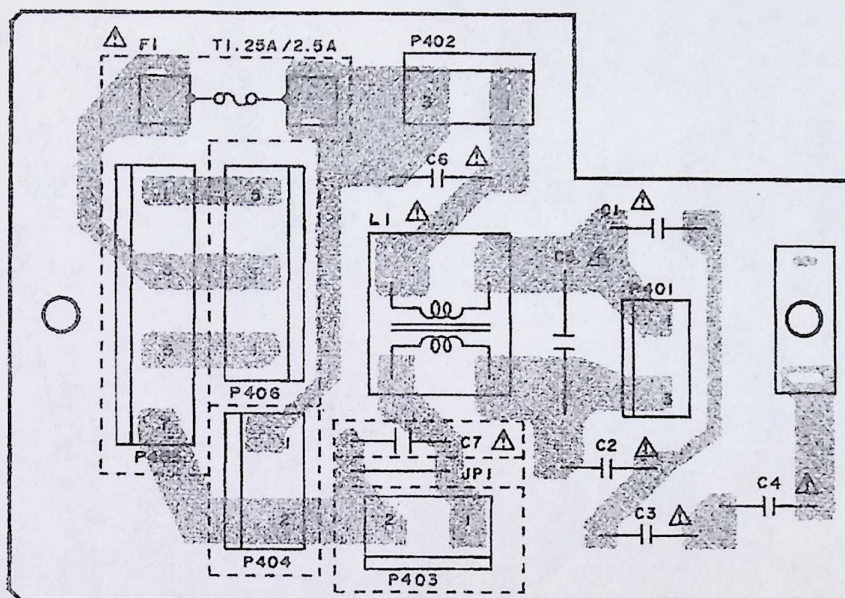


FILTER PCB L30I9B504A


WARNING: $\triangle$ INDICATES SAFETY CRITICAL COMPONENTS FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS

AVERTISSEMENT: $\triangle$ IL INDIQUE LES COMPOSANTS CRITIQUES DE SÉCURITÉ. POUR MAINTENIR LE DEGRÉ DE SÉCURITÉ DE L'APPAREIL, NE REMPLACER QUE DES PIÈCES RECOMMANDÉES PAR LE FABRICANT


NOTE : PARTS DIFFER DEPENDING ON MODEL NUMBER
REFER TO SCHEMATIC DIAGRAMS FOR PERTINENT
PARTS INFORMATION.

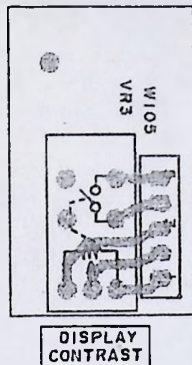


CONTRAST VR PCB
L6036A502G

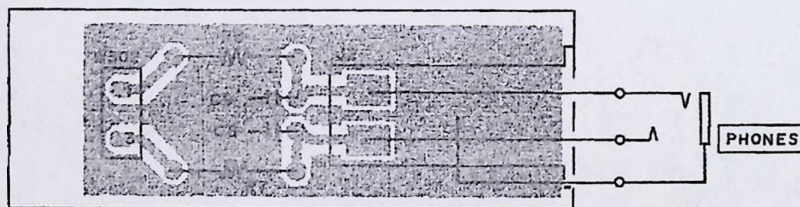


PHONE PCB L6036A502D

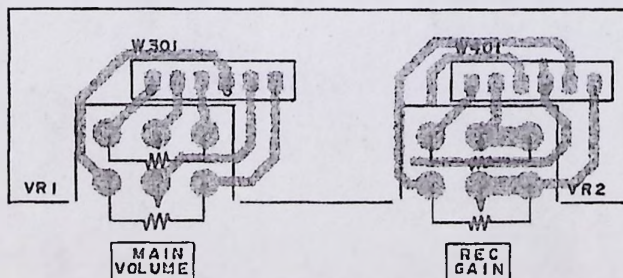


VOLUME PCB L6036A502E

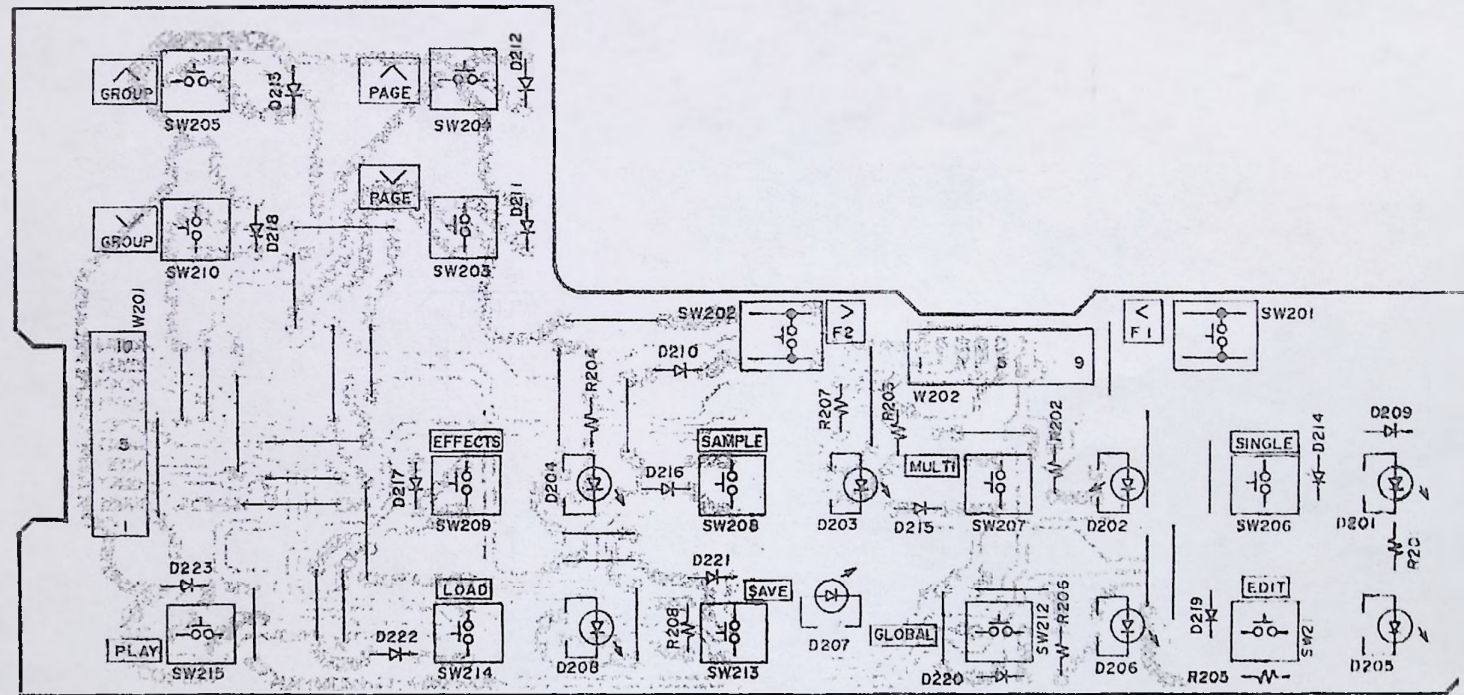

OPERATION PCB L6039A503A



ANALOG PCB L6039A503D

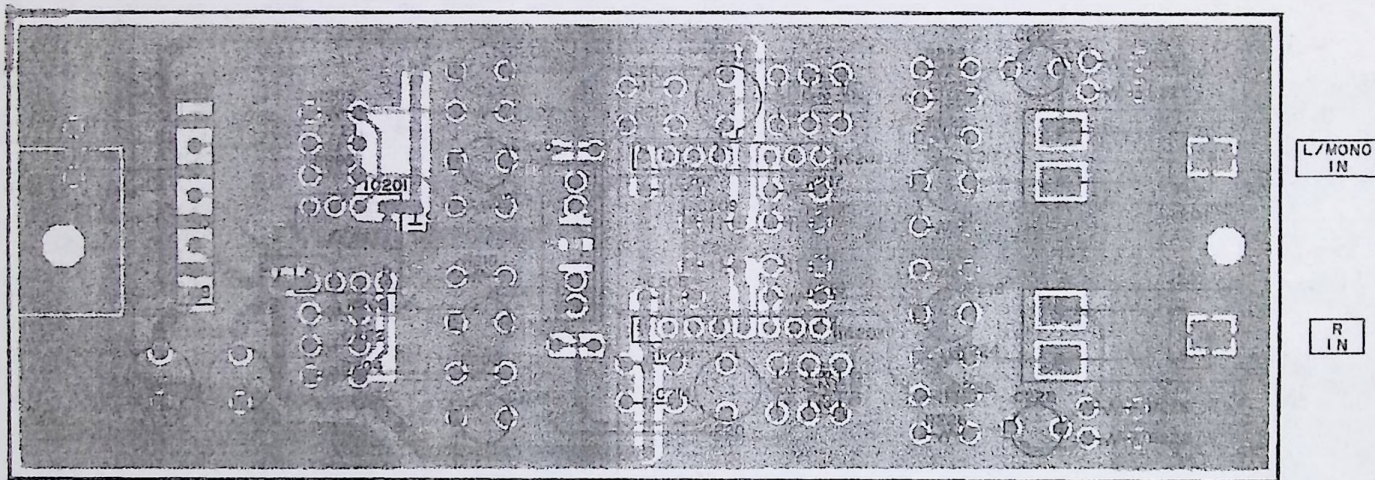



ANALOG IN PCB L6036A501B

NAME OF IC	FUNCTION
18CV8PC-15	E ² C-MOS programmable logic device
AK5328-VP	18 bit dual A/D convertor with 64 fs oversampling digital filter
AK5339-VP	16 bit dual A/D convertor with 64 fs oversampling digital filter
AM27C040-150DC	4 M bit (524,288 x 8 bit) C-MOS E-P ROM
AM27C256-150DC	256 K bit (32,768 x 8 bit) C-MOS E-P ROM
AV9173-01-CN8	Generator locked PLL
BR6216B-10LL	16 K bit (2,048 x 8 bit) static RAM
CS8402-CP	Digital audio transmitter
HD74AC04P/MC74HCU04N /TC74AC04P	Hex inverters
HD74AC244P/HD74HC244P	Octal 3 state buffer
HD74HC00P	Quad 2 input NAND gate
HD74HC02P	Quad 2 input NOR gate
HD74HC32P	Quad 2 input OR gate
HD74HC86P	Quad exclusive OR gate
HD74HC123AP	Dual retriggerable monostable multivibrator
HD74HC138P	3 to 8 line decoder
HD74HC154P	4 to 16 line decoder
HD74HC245P	Octal 3 state transceiver
HD74HC273P	Octal D-FFs with clear
HD74HC367P	Hex 3 state buffer
HD74HC595P	8 bit shift registers with output latches
HM514260AZ-8	4 M bit (262,144 x 16 bit) dynamic RAM
ICS2008V	SMPTE time code receiver/generator
L7A0986 L6029 DFL	Digital filter
L7A1045 L6028 DSP-A	Digital signal processor
L7A1414 L6038 DFX	Digital filter
LC7981	LCD controller
LM2940CT-15	+15 V regulator
LM2990T-15	-15 V regulator
M51953BL	System reset pulse generator
M51957AL	System reset pulse generator
M51958AL	System reset pulse generator
M5216L	High output level OP-AMP
M5216P	High output level OP-AMP
M5218AP	Dual low noise OP-AMP
M5220L	Dual low noise voltage amplifier
M5220P	Dual low noise voltage amplifier
M5230L	Regulator (variable output)
M5237L	Regulator (variable output)
M5238AP	Dual low noise J-FET input OP-AMP
MB81C4256A-80PSZ-G	1M bit (256 K x 4 bit) D-RAM
MB89255-PFS-G-BND	Parallel data I/O interface
MB89255A-P-G	Parallel data I/O interface
MB89255B-PFS-G-BND	Parallel data I/O interface
MB89352A-P-G	SCSI protocol controller
NJM5532D-D	Low noise OP-AMP
NJM7805FA	+5 V regulator
NJM78L05A	+5 V regulator
NJM78L12A	+12 V regulator
NJM78M05FA	+5 V regulator
NJM79L05A	-5 V regulator
NJM79M05FA	-5 V regulator
PALCE16V8Q-15PC	E ² C-MOS programmable logic device
PALCE20V8Q-15PC	E ² C-MOS programmable logic device
PCM61P	18 bit serial input D/A convertor
PCM63P-J	20 bit serial input D/A convertor
PCM69AP-4	Dual 18 bit serial input D/A convertor
PQ30RV1	Variable regulator (2.85 V for SCSI use)


NAME OF IC	FUNCTION
SM5840EP	8 fs oversampling digital filter (16/18 bit input)
TC74AC257P	Quad 2 channel 3 state line multiplexer
μPC812C	Dual low drift J-FET input OP-AMP
μPD5200C	Dual analog switch
μPD4217400G3-70-7JD	16 M bit (4,194,304 x 4 bit) dynamic RAM
μPD42426G5-70-7JF	4 M bit (262,144 x 16 bit) dynamic RAM
μPD424400GS-60-9JD	4 M bit (1,048,576 x 4 bit) dynamic RAM
μPD431000AGW-85L	1 M bit (131,072 x 8 bit) static RAM
μPD70236AGD-16-5BB	16 bit micro processor
μPD72069GF-38A	FDD controller
YM3623B	Receiver for digital audio interface formatted signal

18CV8PC-15 (E²C-MOS programmable logic device)

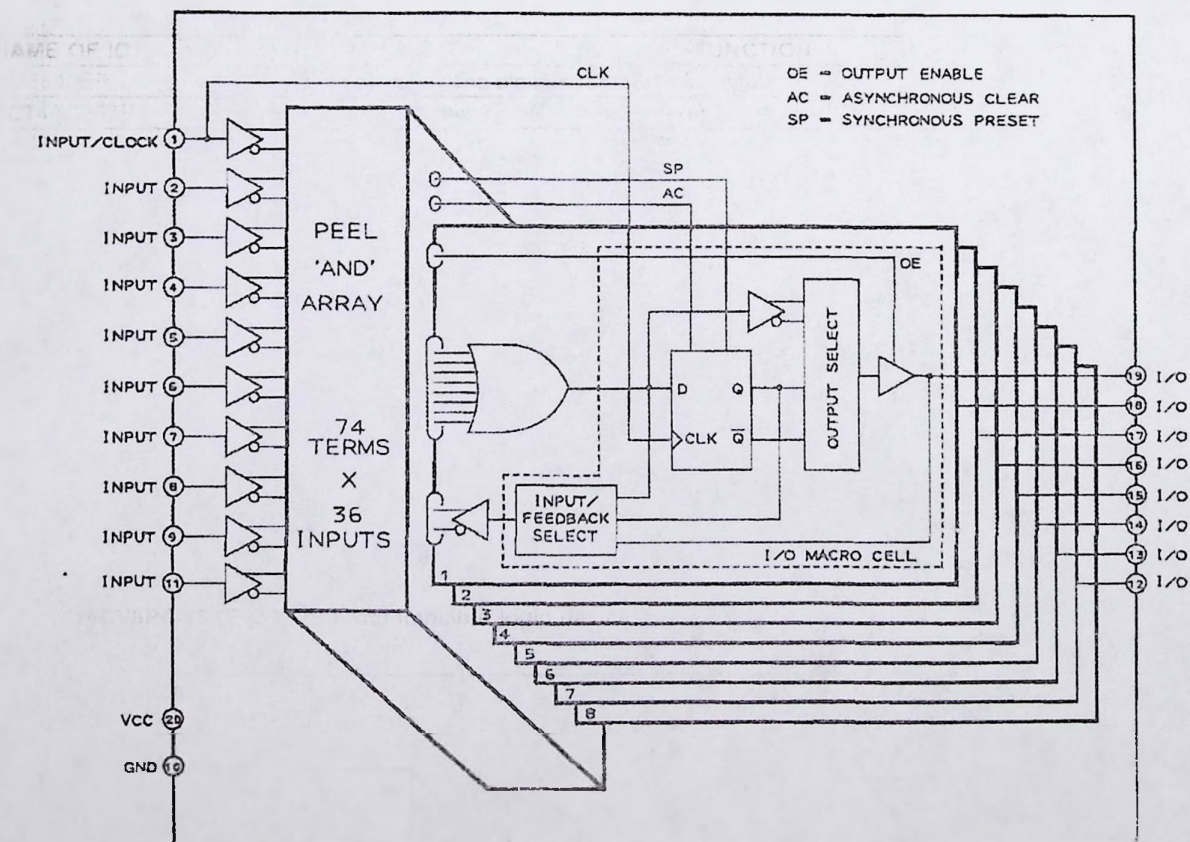

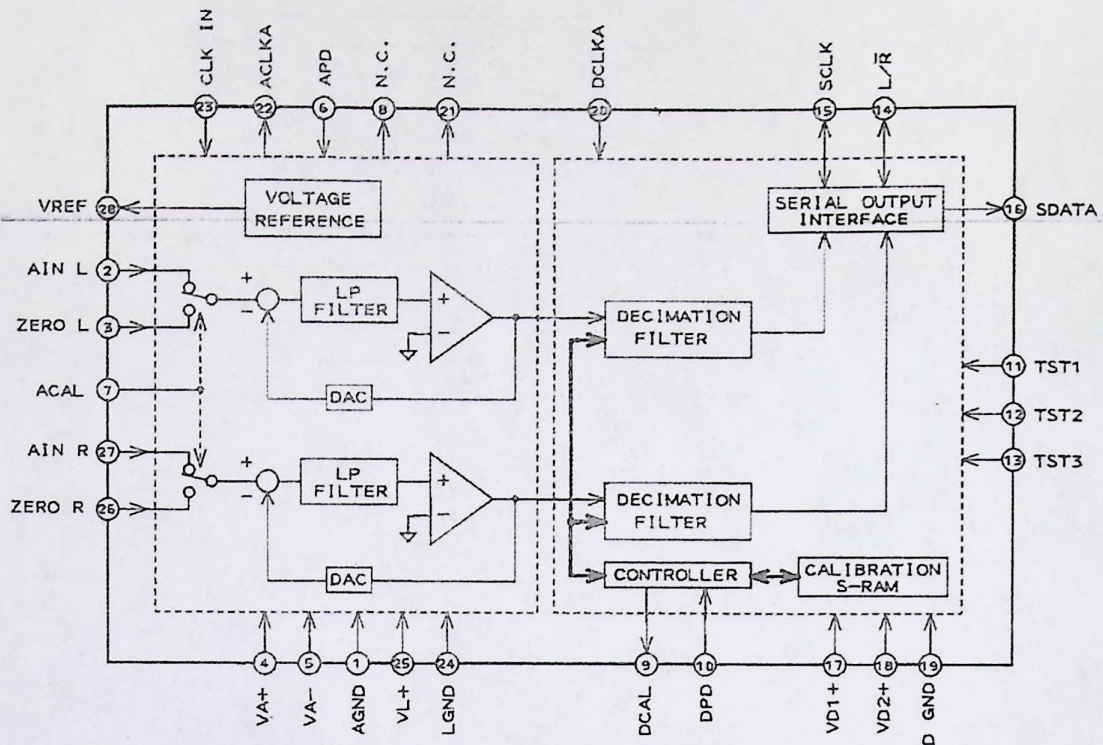


AM27C256-150DC (256 K bit (32,768 x 8 bit) C-MOS E-P ROM)

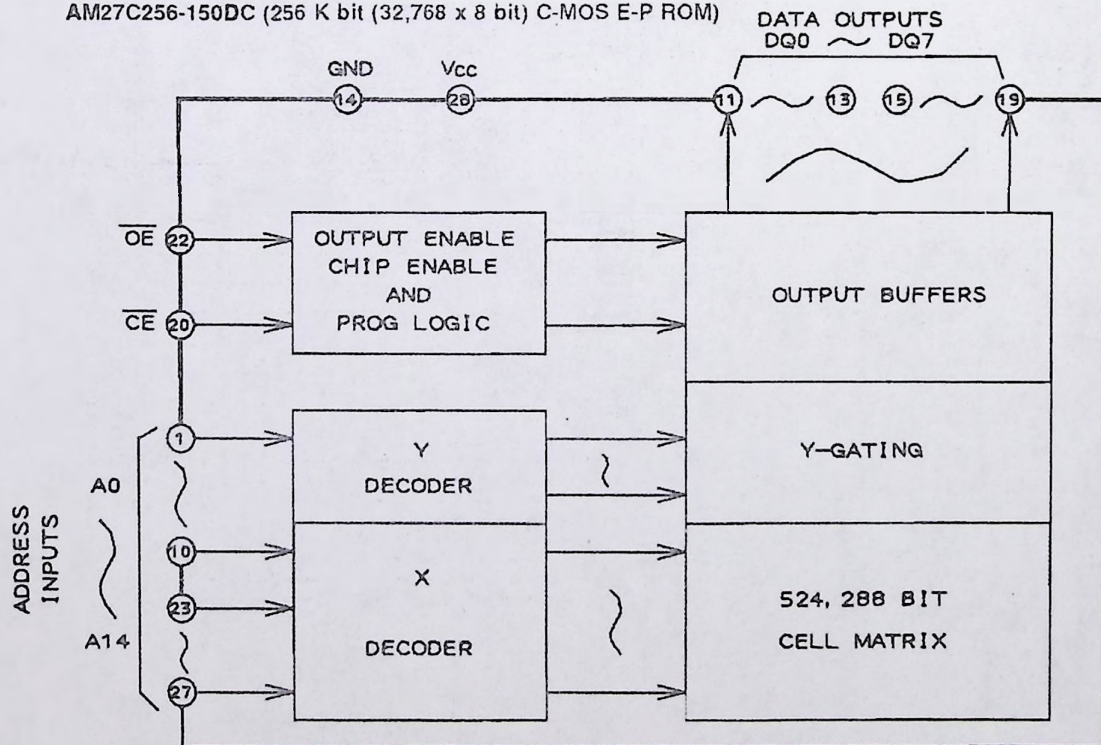


AV9173-01-CN8 (Generator locked PLL)

PIN No.	PORT NAME	I/O	FUNCTION
1	FBIN	I	Feedback input.
2	IN	I	Input for reference sync pulse.
3	GND	-	Ground.
4	FS0	I	Frequency select 0 input.
5	OE	I	Output enable.
6	CLK1	O	Clock output 1.
7	VDD	-	+5 V power supply.
8	CLK2	O	Clock output 2.

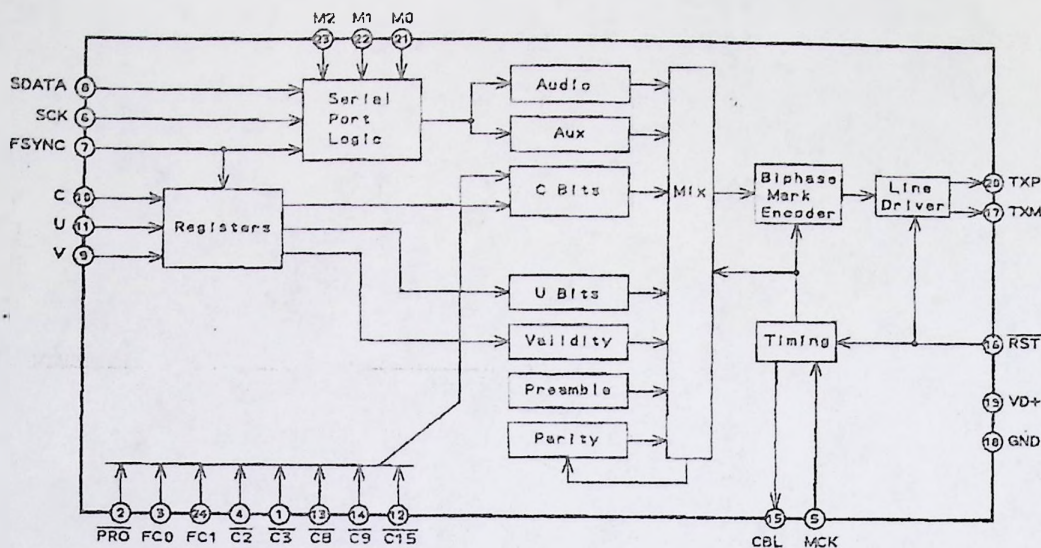


PIN No.	PORT NAME	I/O	FUNCTION
1	C7/C3	I	C7 is the inverse of channel status bit 7 (in professional mode). C3 is the inverse of channel status bit 3 (in consumer mode).
2	PRO	I	Select the professional mode (low) and consumer mode (high). C1 is the inverse of channel status bit 1 (in professional mode).
3	C1/FC0	I	FC0 and FC1 are encoded versions of channel status bits 24 and 25 (bits 0 and 1 of byte 3). When FC0 and FC1 are both high, CD mode is selected.
4	C6/C2	I	C6 is the inverse of channel status bit 6 (in professional mode). C2 is the inverse of channel status bit 2 (in consumer mode).
5	MCK	I	Master clock input pin.
6	SCK	I	Serial clock input pin.
7	FSYNC	I	Frame sync input pin.
8	SDATA	I	Audio data serial input pin.
9	V	I	Validity bit serial input port.
10	C/SBF	I	C is the channel status serial input port (in professional & consumer modes). This pin inputs the CD subcode frame clock (CD mode).
11	U	I	User bit serial input port.
12	C9/C15	I	C9 is the inverse of channel status bit 9 (in professional mode). C15 is the inverse of channel status bit 15 (in consumer mode).
13	EM1/C8	I	Emphasis 0,1 (in professional mode, EM0 and EM1 encode channel status bits 2,3 and 4).
14	EM0/C9	I	C8 and C9 are inverse of channel status bits 8 and 9. In professional and consumer modes, the channel status block output is high
15	CBL/SBC	O	for the first four bytes of channel status. In CD mode, this pin outputs the subcode bit clock.
16	RST	I	Master reset pin.
17	TXN	O	RS422 compatible differential line driver.
18	GND	-	Ground pin.
19	VD+	-	Positive side of the power supply pin.
20	TXP	O	RS422 compatible differential line driver.
21 - 23	M0 to M2	I	Serial port mode select pins. (Select the format of F SYNC and the sample edge of SCK with respect to SDATA.)
24	CRE/FC1	I	If CRE is high, the channel status local sample address and reliability flag are internally generated (in professional mode). FC0 and FC1 are encoded versions of channel status bits 24 and 25 (bits 0 and 1 of byte 3). When FC0 and FC1 are both high, CD mode is selected.

HD74AC04P/MC74HCU04N/TC74AC04P (Hex inverters)

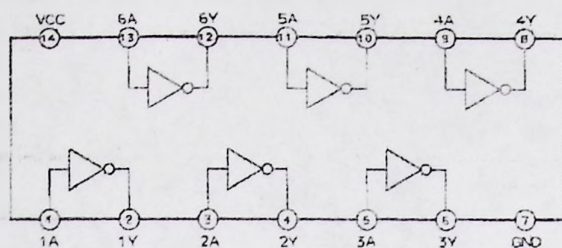


HD74HC00P (Quad 2 input NAND gate)

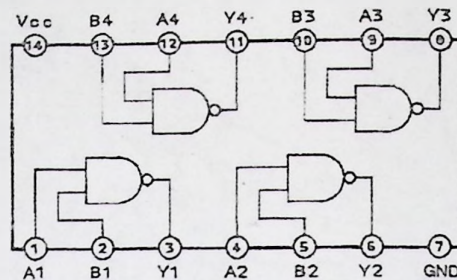


TRUTH TABLE

INPUTS		OUTPUTS
A	B	Y
L	L	H
L	H	H
H	L	H
H	H	L

HD74AC244P/HD74HC244P (Octal 3 state buffer)

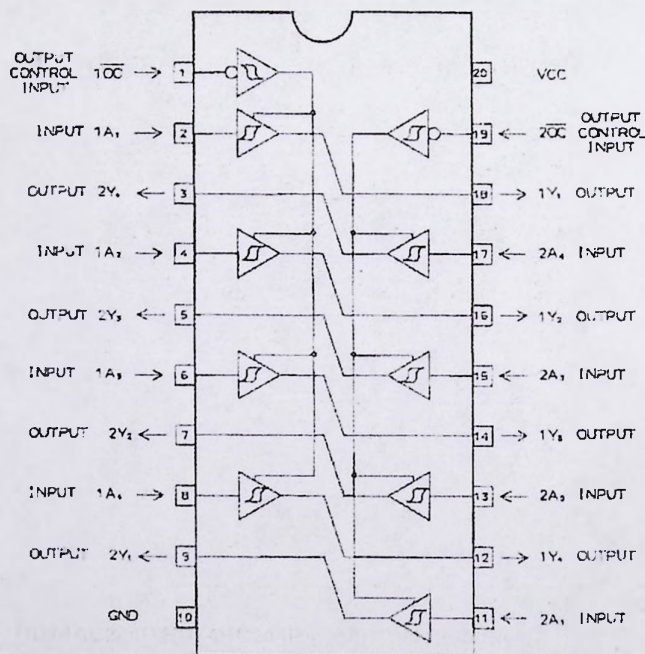


HD74HC02P (Quad 2 input NOR gate)

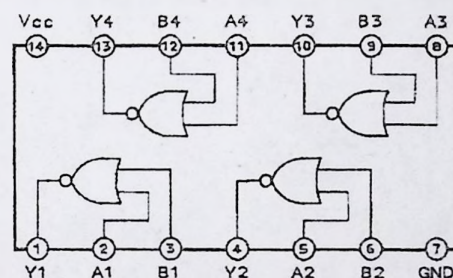

TRUTH TABLE

INPUTS		OUTPUTS
A	B	Y
L	L	H
L	H	L
H	L	L
H	H	L


HD74HC86P (Quad exclusive OR gate)

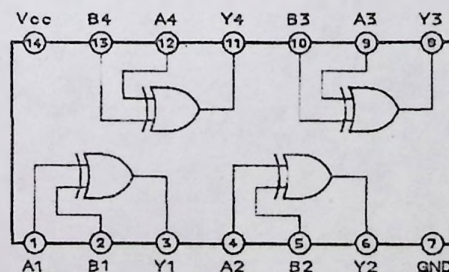


TRUTH TABLE

INPUTS		OUTPUTS
A	B	Y
L	L	L
L	H	H
H	L	H
H	H	L

HD74HC32P (Quad 2 input OR gate)

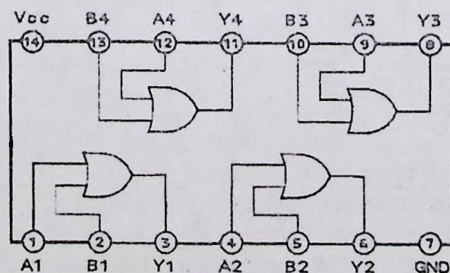


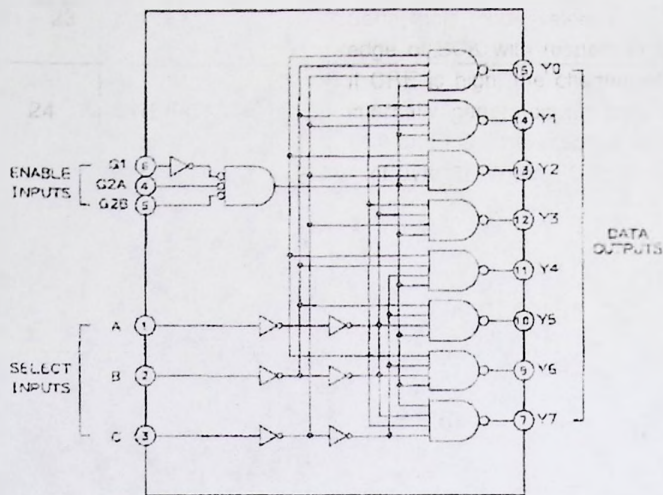

TRUTH TABLE

INPUTS					OUTPUTS							
ENABLE		SELECT										
G1	G2	C	B	A	Y0	Y1	Y2	Y3	Y4	Y5	Y6	Y7
X	H	X	X	X	H	H	H	H	H	H	H	H
L	H	X	X	X	H	H	H	H	H	H	H	H
H	L	L	L	L	L	H	H	H	H	H	H	H
H	L	L	L	H	H	L	H	H	H	H	H	H
X	H	X	X	X	H	H	L	H	H	H	H	H
H	L	L	H	L	H	H	H	L	H	H	H	H
H	L	L	H	H	H	H	X	H	L	H	H	H
H	L	L	L	L	H	H	H	H	H	L	H	H
H	L	H	H	L	H	H	H	H	H	H	L	H
H	L	H	H	H	H	H	H	H	H	H	L	H
H	L	H	H	H	H	H	H	H	H	H	H	L


HD74HC245P (Octal 3 state transceiver)

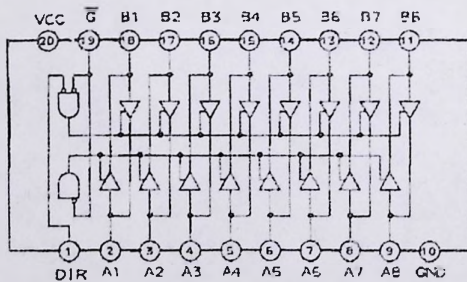


FUNCTION TABLE

CONTROL INPUTS		OPERATION
G	DIR	
L	L	B DATA TO A BUS
L	H	A DATA TO B BUS
H	X	ISOLATION


HD74HC367P (Hex 3-state bus buffers)

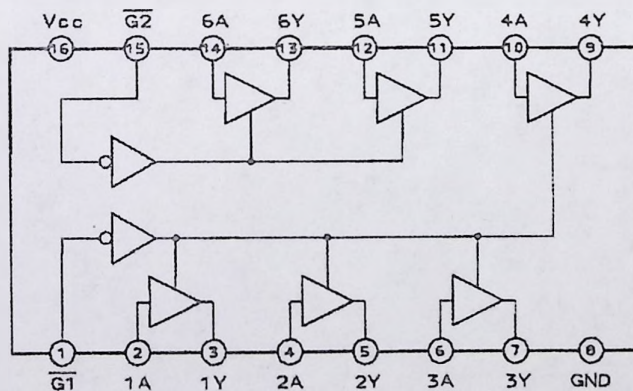


PIN No.	PORT NAME	I/O	FUNCTION
1,15,25,30,31,44 60,61,71,81,90,91 100,111,120	Vdd	—	+5 V power supply pin.
2	LSIGN	I	Chip select input.
3~5	CA3~CA1	I	Host CPU address bus.
6,16,27,35,45,54 62,75,88,106,110	Vss	—	To be grounded.
7~14,17~24	C15~C0	I/O	Host CPU, DMA data bus.
26	DMARQF	O	DMA request output (High active).
28	DMAKFN	I	DMA acknowledge input (low active).
29	TEST	I	To be used for function test.
32	I0GN	I	Host CPU, DMA read input (low active).
33	I0WN	I	Host CPU, DMA write input (low active).
34	RST	I	System reset signal input (low active).
36	RDYFN	O	Host CPU read/write ready output (low active).
37	ROUT	O	Serial data output for D/A converter.
38	LOUT	O	Serial data output for D/A converter and digital audio transmitter.
39	LRWDKN	O	DAC word clock output for left-mix and right-mix.
40	123WDKN	O	DAC word clock output for individual 2 and 3.
41	101WDKN	O	DAC word clock output for individual 0 and 1.
42	BTCK	O	Data catch clock output for DAC and digital audio transmitter.
43	DAWDK	O	Word clock output for digital audio transmitter.
46~53,63~70 72~74,76~80	A23~A0	O	Address outputs for the wave memory (RAM/ROM).
55	ZTN	I	test pin for tri-state test. (Connect to Vdd in normal condition.)
56~59	TA0~TA3	I	Input pin for the function test. (Connect to the Vss in normal condition.)
82	CASN	O	Column address strobe output for the wave memory (RAM) (low active).
83	RASN	O	Row address strobe output for the wave memory (RAM) (low active).
84	MEMWGN	O	Output enable out for the wave memory. (low active)
85	WRAMWN	O	Read/write output for the wave memory. (low active)
86	ROMWGN	O	Chip enable output for the wave memory (ROM). (low active)
87	TEST OUT	O	Output pin for parametric test. (Open in normal condition.)
89	TG	I	Input pin for the function test.
92~99,101~105 112~114	W0~W15	I/O	Data bus for the wave memory.
107	CLK	I	System clock input (768 times of the sampling-rate).
108	U0IN	I	Serial data input for the second LSI.
109	U1IN		
115	U0OUT	O	
116	U1OUT		Serial data output for the second LSI.
117	USYNC	O	
118	RSTON	O	
119	T0B1	O	System clock output for the second LSI.

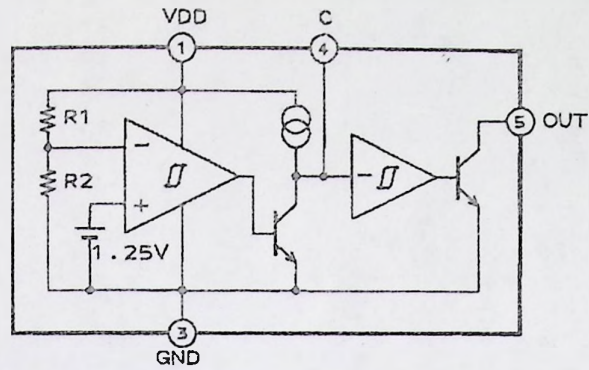



MB89255A-P-G (Parallel data I/O interface)

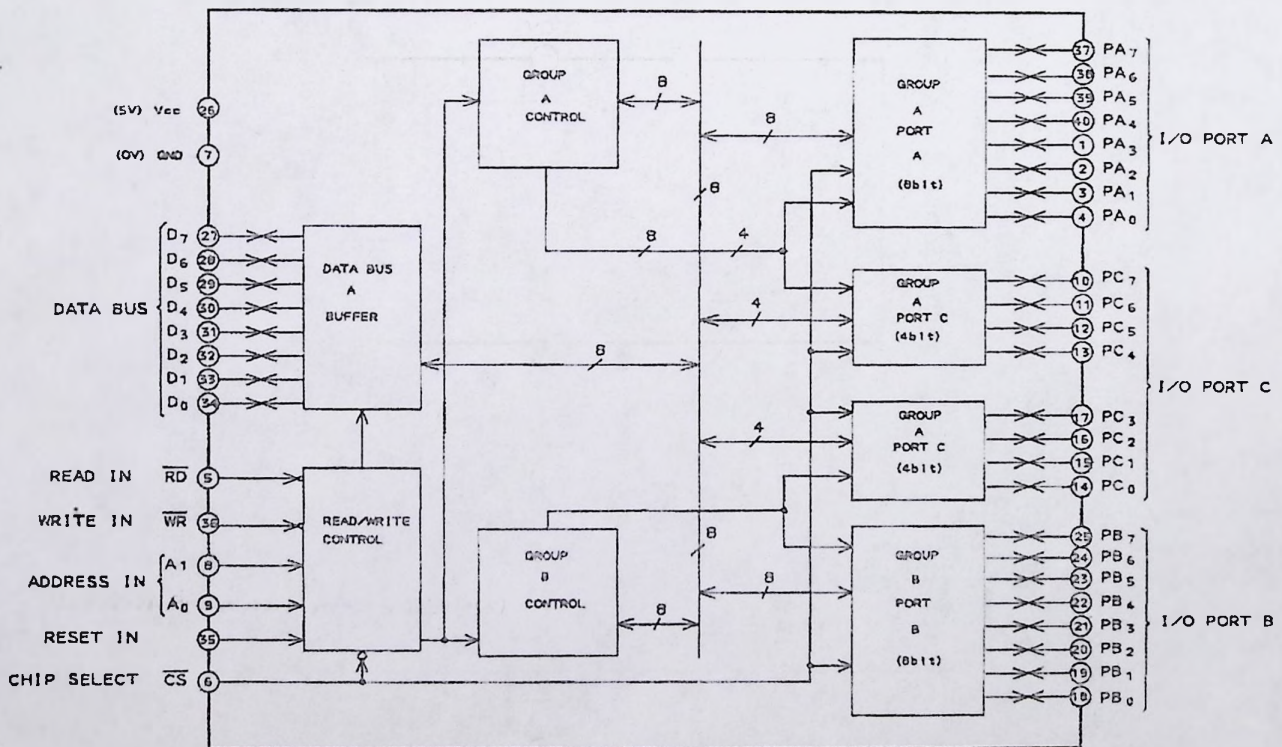

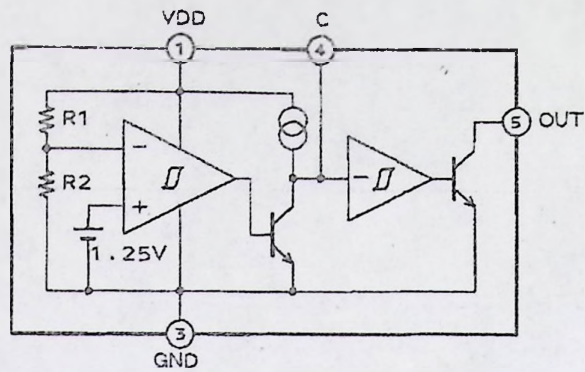

MB89255A-P-G (Parallel data I/O interface)

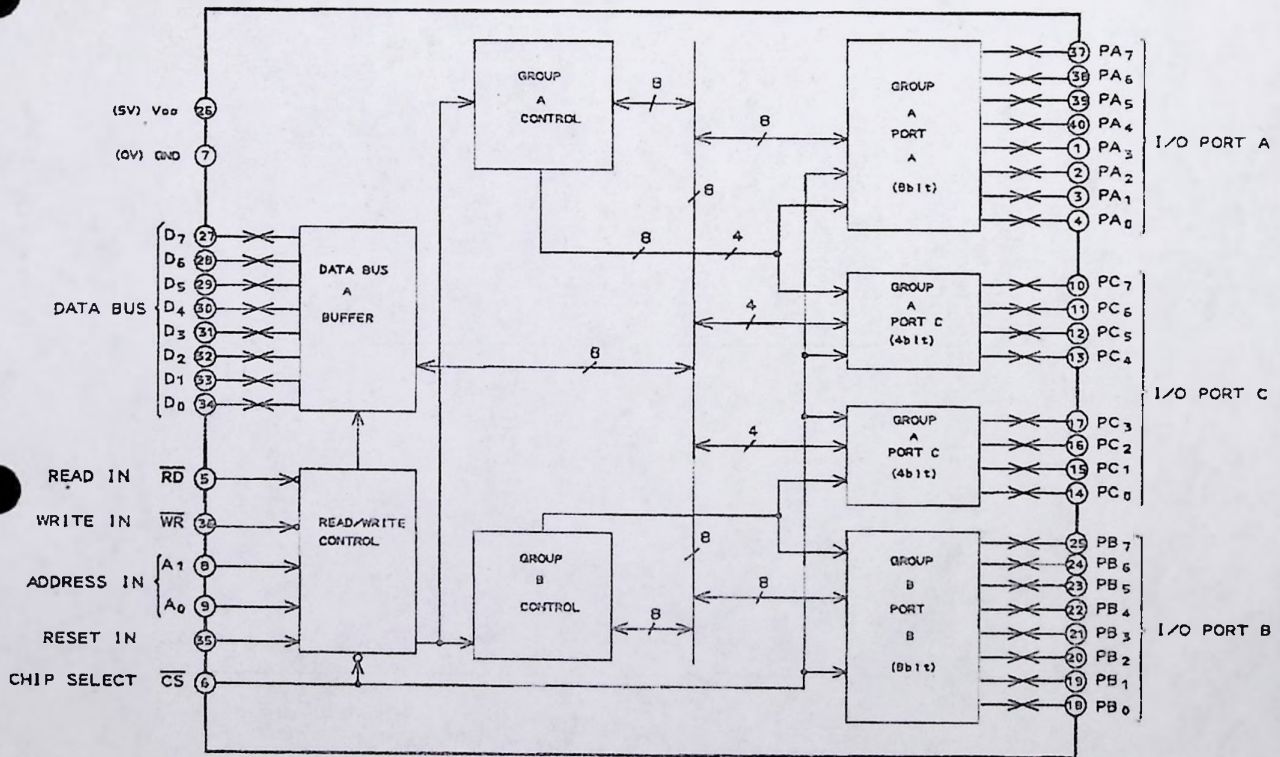

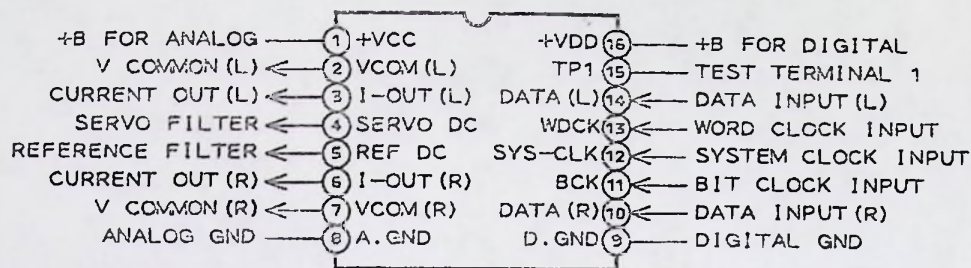


YM3623B (Receiver for digital audio interface formatted signal)

PIN No.	PORT NAME	I/O	FUNCTION
1	Vdd1	-	+5 V power supply pin for system.
2	ADJ	I	VCO oscillating frequency adjusting pin.
3	VCO	I/O	Capacitor connecting pin for the VCO circuit.
4	Vss2	-	Ground pin for the VCO circuit.
5	XO	O	Crystal connecting pin.
6	XI	I	
7	KMODE	I	H : PLL circuit will operate when DIN pin receives input signal. System uses crystal oscillator when DIN pin has no input signal. L : System uses crystal oscillator whichever DIN pin receives signal or not.
8	ΦA	O	16.9344 MHz output (when the crystal oscillator is used). Output frequency varies according to the DIN input when the PLL circuit is operating.
9	ΦB	O	1/3 frequency of the ΦA (when the crystal oscillator is used). Output frequency varies according to the DIN input when the PLL circuit is operating.
10,11	T1,T2	I	Internal circuit check pins.
12	BCO	O	Timing clock for the output signal from DO pin.
13	SYNC	O	Synchronization signal.
14	Vss1	O	Ground pin for system.
15	L/R	O	Identification signal between L-ch and R-ch. (H : L-ch, L : R-ch)
16	DEF	O	H indicates that the input data is emphasised. L indicates that the input data is not emphasised.
17	DO	O	16 bit data output.
18	WC	O	This pin indicates that the output data is being output from the DO pin.
19	DIGR	O	signal out for R-ch deglitching.
20	DIGL	O	signal out for L-ch deglitching.
21	ERR	O	H indicates parity error or crystal oscillator is operating. L indicates there is no error.
22	SEL	I	
23	S1	O	Refer to the "NOTE"
24	S2	O	
25	SCK	O	Clock out for subcode output.
26	SSYNC	O	Signal for subcode.
27	SDO	O	Subcode data output pin.
28	DIN	I	Data input pin.


*NOTE : Relations between the SEL, S1 and S2

INPUT	OUTPUT		OUTPUT	
SEL	S1	Function	S2	Function
L	L	Copy prohibited	L	CD (except DAT)
	H	Copy possible	H	DAT
H	L		L	The sampling frequency of the DIN signal is 44.1 kHz
	L		H	48 kHz
	H		H	32 kHz
	H		L	-



PIN No.	PORT NAME	I/O	FUNCTION
1,3,15,17,19 25,28,29,44, 52~54,64,66, 77,79,84,88, 2,6,9,12,37,40 61,81,92,95,98	NC	—	No Connection.
	GND3	—	Ground 3
4,5,7,100	EM0~3	O	Enable Motor.
8	DIR	O	Direction.
10	STEP	O	Step.
11	WDATA	O	Write data.
13	WE	O	Write Enable.
14	ENIDX	I	Enable Index.
16	VDD2	—	+5 V.
18,20	CGP1,2	O	Charge Pump.
21	GND2	—	Ground 2.
22,23	LPF1,2	O	Low Pass Filter.
24	TRKO	I	Track 0.
26	WPRT	I	Write Protected.
27	RDATA	I	Read Data.
30	READY	I	Ready.
31	2SIDE	I	Two Side.
32	FLT	I	Fault.
33	ENPCS	I	Enable Pre-Compensation.
34	ACTL	I	Active Level.
35	MSEL	I	Mode Select.
36	SIDE	O	Side Select.
38	FLTR	O	Fault Reset.
39	HOLD	O	Head Load.
41	LCT	O	Low Current.
42,43	VDD1	—	+5 V.
45	RESET	I	Reset.
46	RD	I	Read.
47	WR	I	Write.
48	ENRW	I	Enable Read, Write.
49	RSEL	I	Registers Select.
50	CS	I	Chip Select.
51	A0	I	Address 0.
55,56,85,89,90	GND1	—	Ground 1.
57~60 62,63,65,67	D0~D7	I/O	Data Bus.
68	DMARQ	O	DMA Request.
69	DMAAK	I	DMA Acknowledge.
70	TC	I	Terminal Count.
71	INT	O	Interrupt Request.
72	FMT	I	Format.
73~75	DR0~DR2	I	Data Rate.
76	INDEX	I	Index.
78,80	PCS0,PCS1	I	Pre-Compensation.
82,83	XA1,XA2	—	Crystal A connecting terminals.
86,87	XB1,XB2	—	Crystal B connecting terminals.
91,93	DEN0,DEN1	O	Density.
94,96,97,99	DS0~DS3	O	Drive Select.

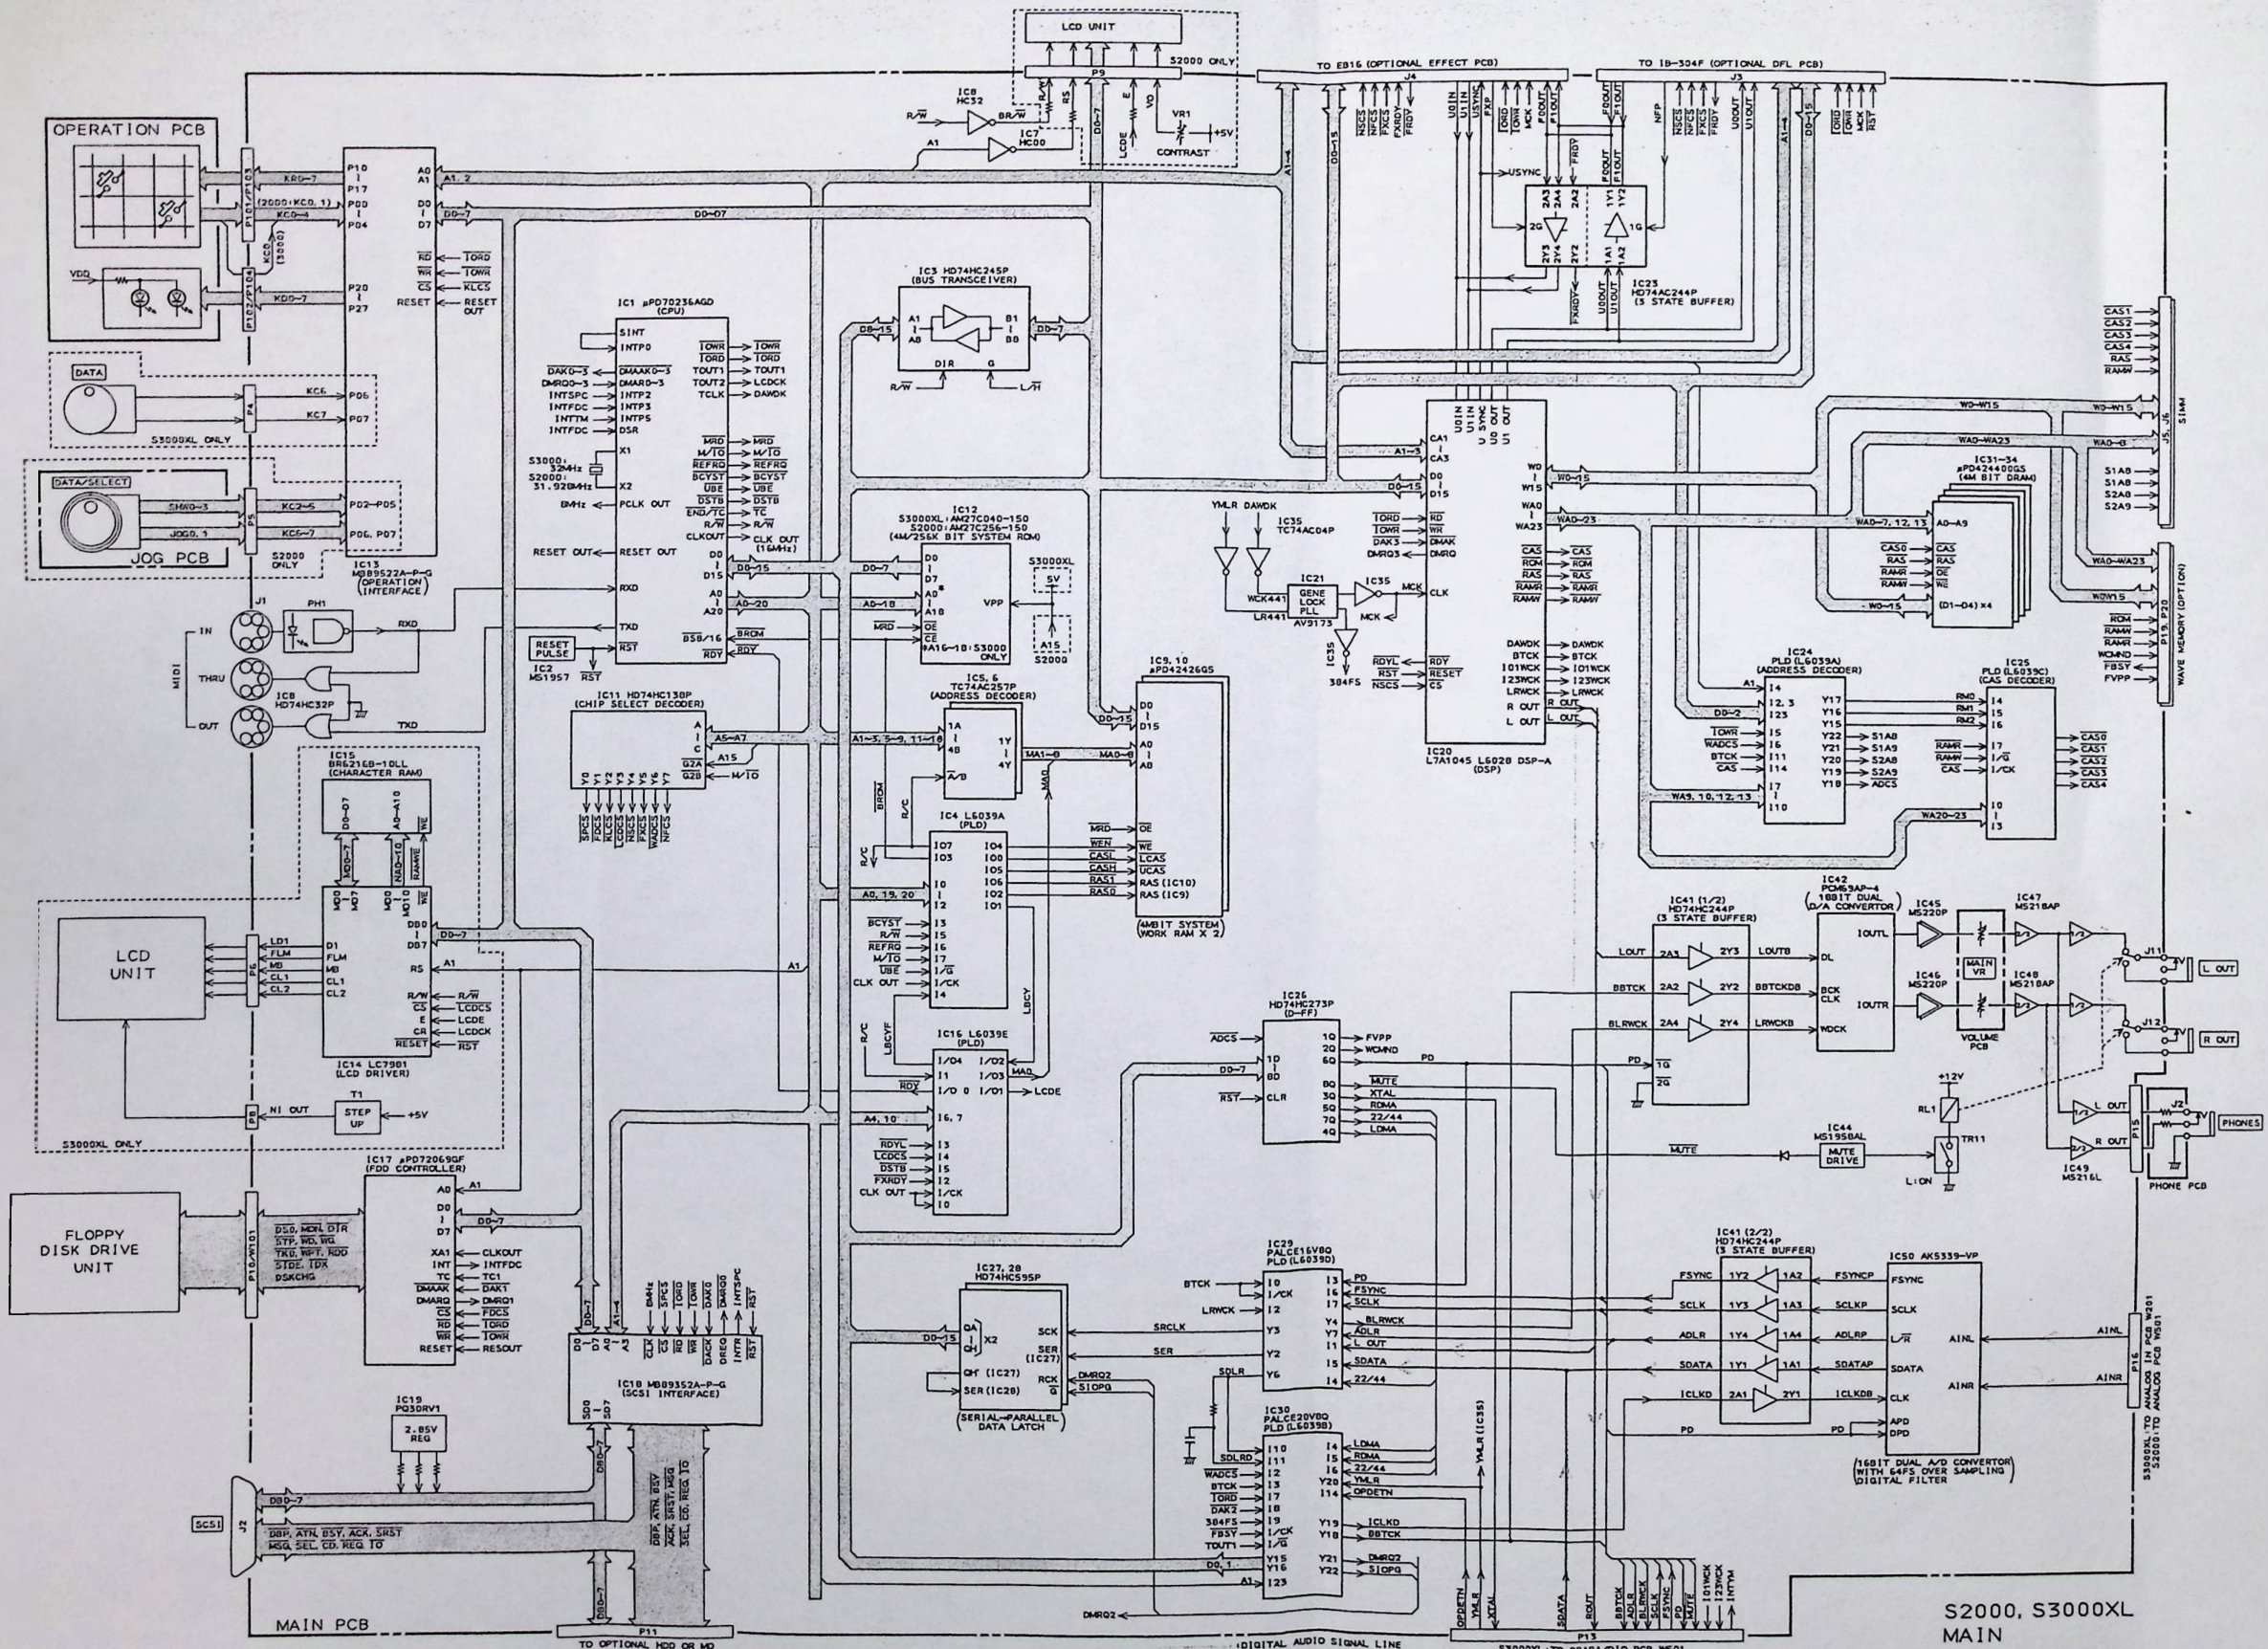


S2000, S3000XL
MAIN
BLOCK DIAGRAM
No. 4-1 L603951M

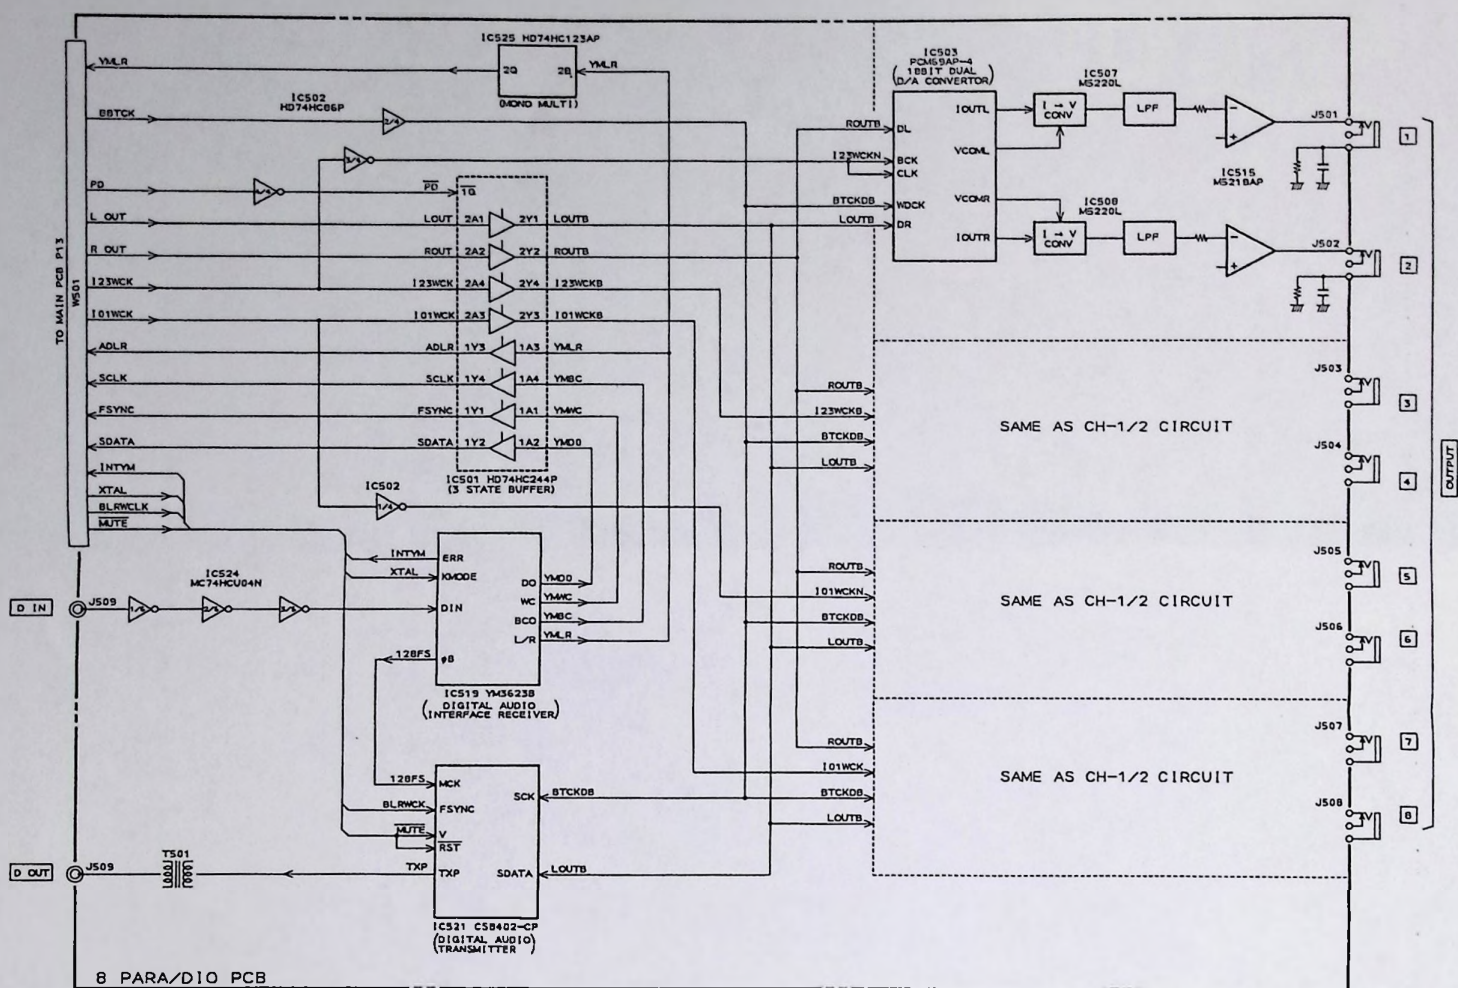

S3000XL
8 PARA/DIO (1B-208P)
BLOCK DIAGRAM
No.4-2 L603952M_{A2}

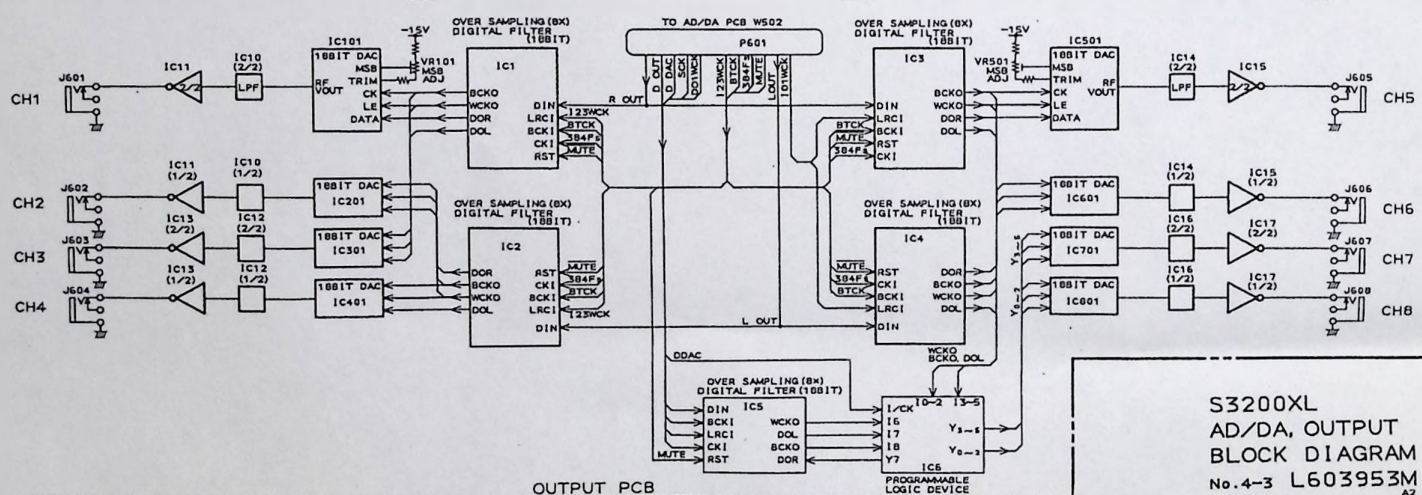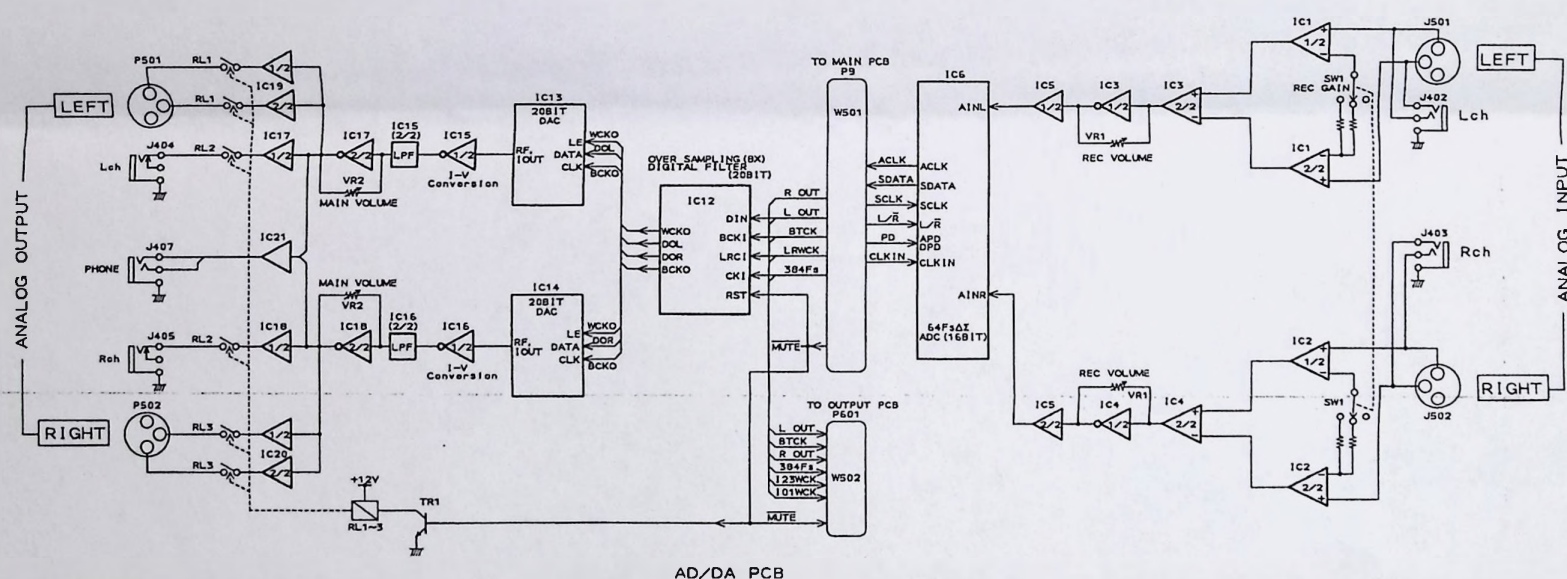

S3200XL
AD/DA, OUTPUT
BLOCK DIAGRAM
No.4-3 L603953M_{A2}

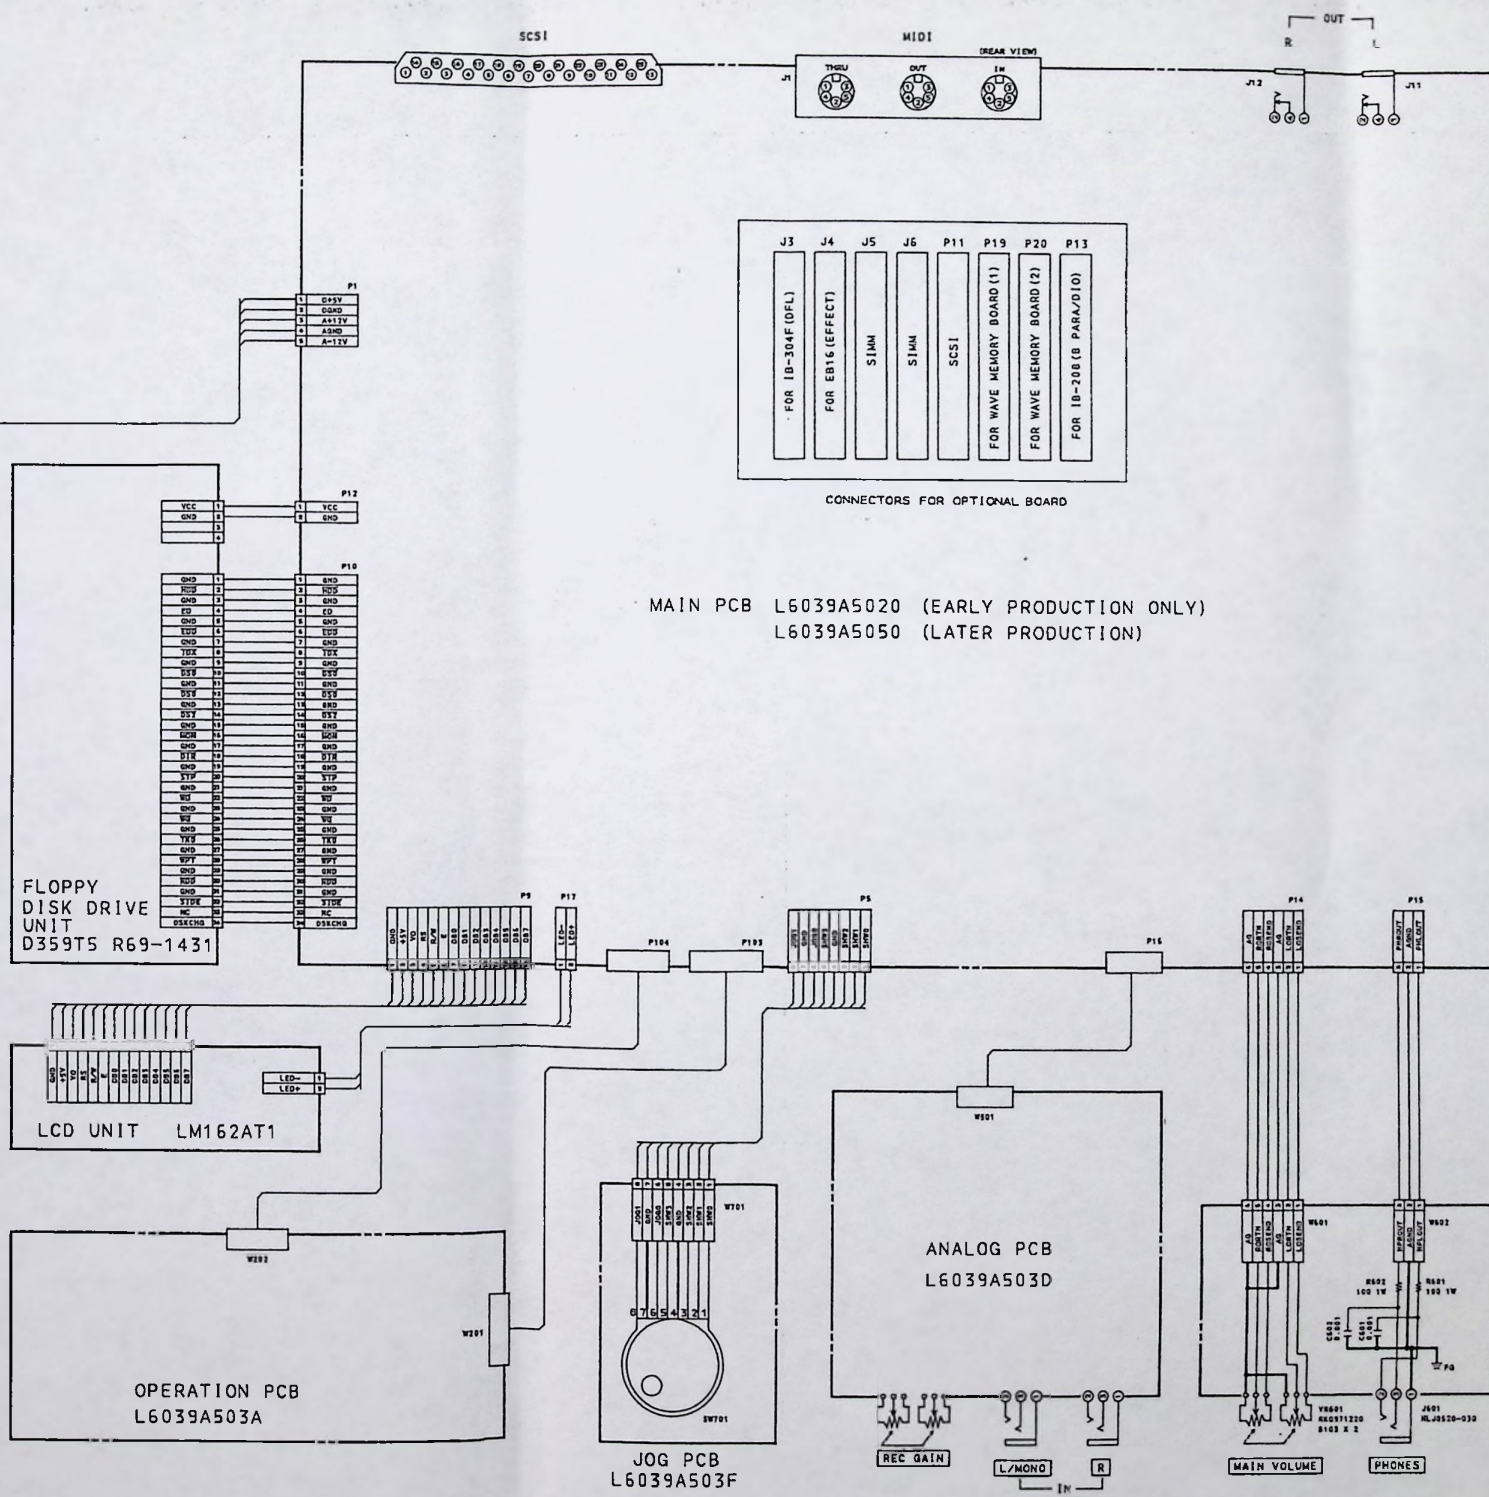

	J	A. C	E. V. B
F1	250V 1.6A	125V 1.6A	250V T1.25A
F2	250V 5A	125V 5A	250V T4A
F3	250V 1A	125V 1A	250V T800mA
F4	250V 1A	125V 1A	250V T800mA


WARNING:  INDICATES SAFETY CRITICAL COMPONENTS FOR CONTINUED SAFETY.
REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S
RECOMMENDED PARTS

AVERTISSEMENT:  IL INDIQUE LES COMPOSANTS CRITIQUES DE SÉCURITÉ
POUR MAINTENIR LE DEGRÉ DE SÉCURITÉ DE L'APPAREIL.
NE REMPLACEZ QUE DES PIÈCES RECOMMANDÉES PAR LE FABRICANT


NOTE:
UNLESS OTHERWISE SPECIFIED
ALL RESISTORS IN OHMS 1/6W(J)
ALL CAPACITORS IN μ F (P=PPF)
ALL ELECTROLYTIC CAPACITORS IN μ F/WV

POWER SW PCB
L6039A503G


S2000
CONNECTION DIAGRAM
NO.18-1 L603901M

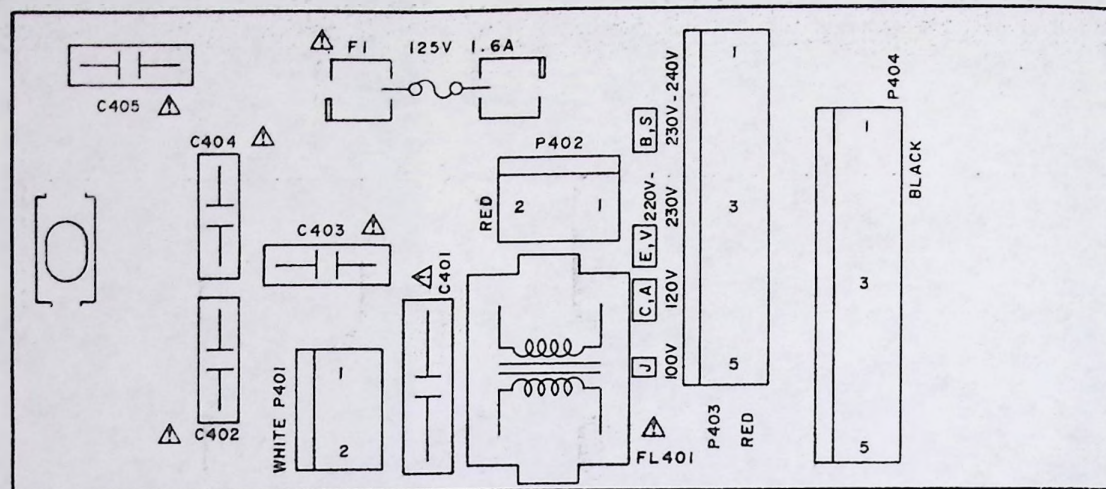


FILTER PCB L6039A503C

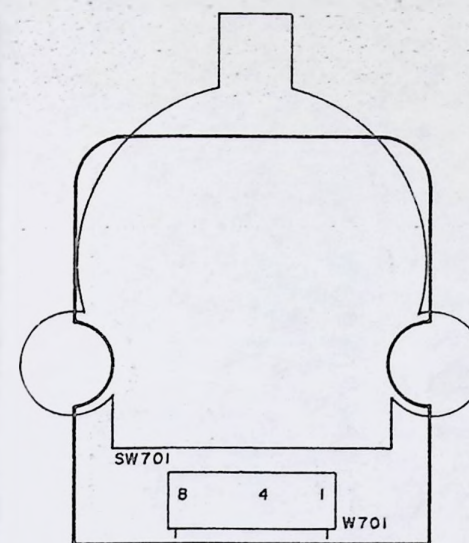


JOG PCB
L6039A503F

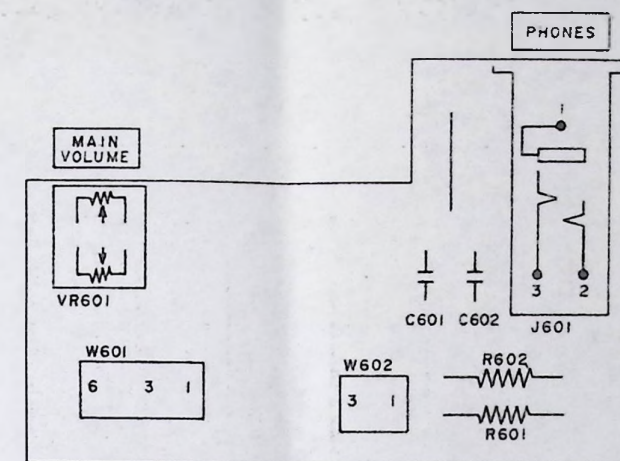

VR PCB L6039A503E

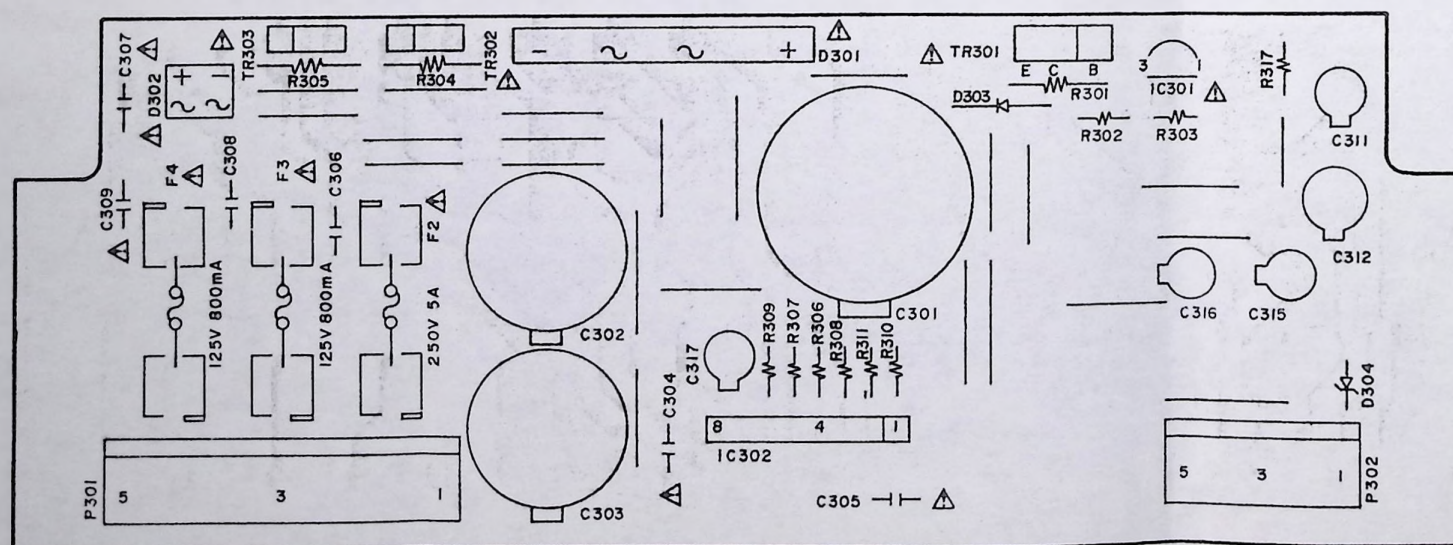


POWER SUPPLY PCB L6039A503B

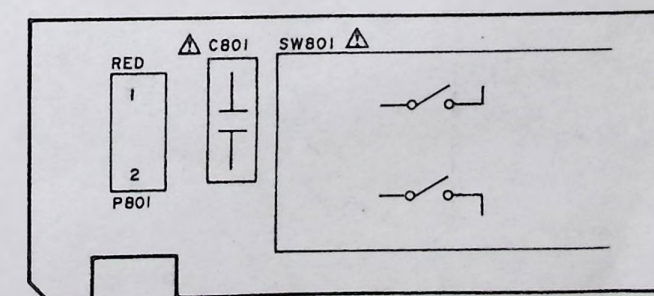

POWER SW PCB L6039A503G

WARNING: Δ INDICATES SAFETY CRITICAL COMPONENTS FOR CONTINUED SAFETY.
REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S
RECOMMENDED PARTS

AVERTISSEMENT: Δ IL INDIQUE LES COMPOSANTS CRITIQUES DE SÉCURITÉ
POUR MAINTENIR LE DEGRÉ DE SÉCURITÉ DE L'APPAREIL.
NE REMPLACER QUE DES PIÈCES RECOMMANDÉES PAR LE FABRICANT

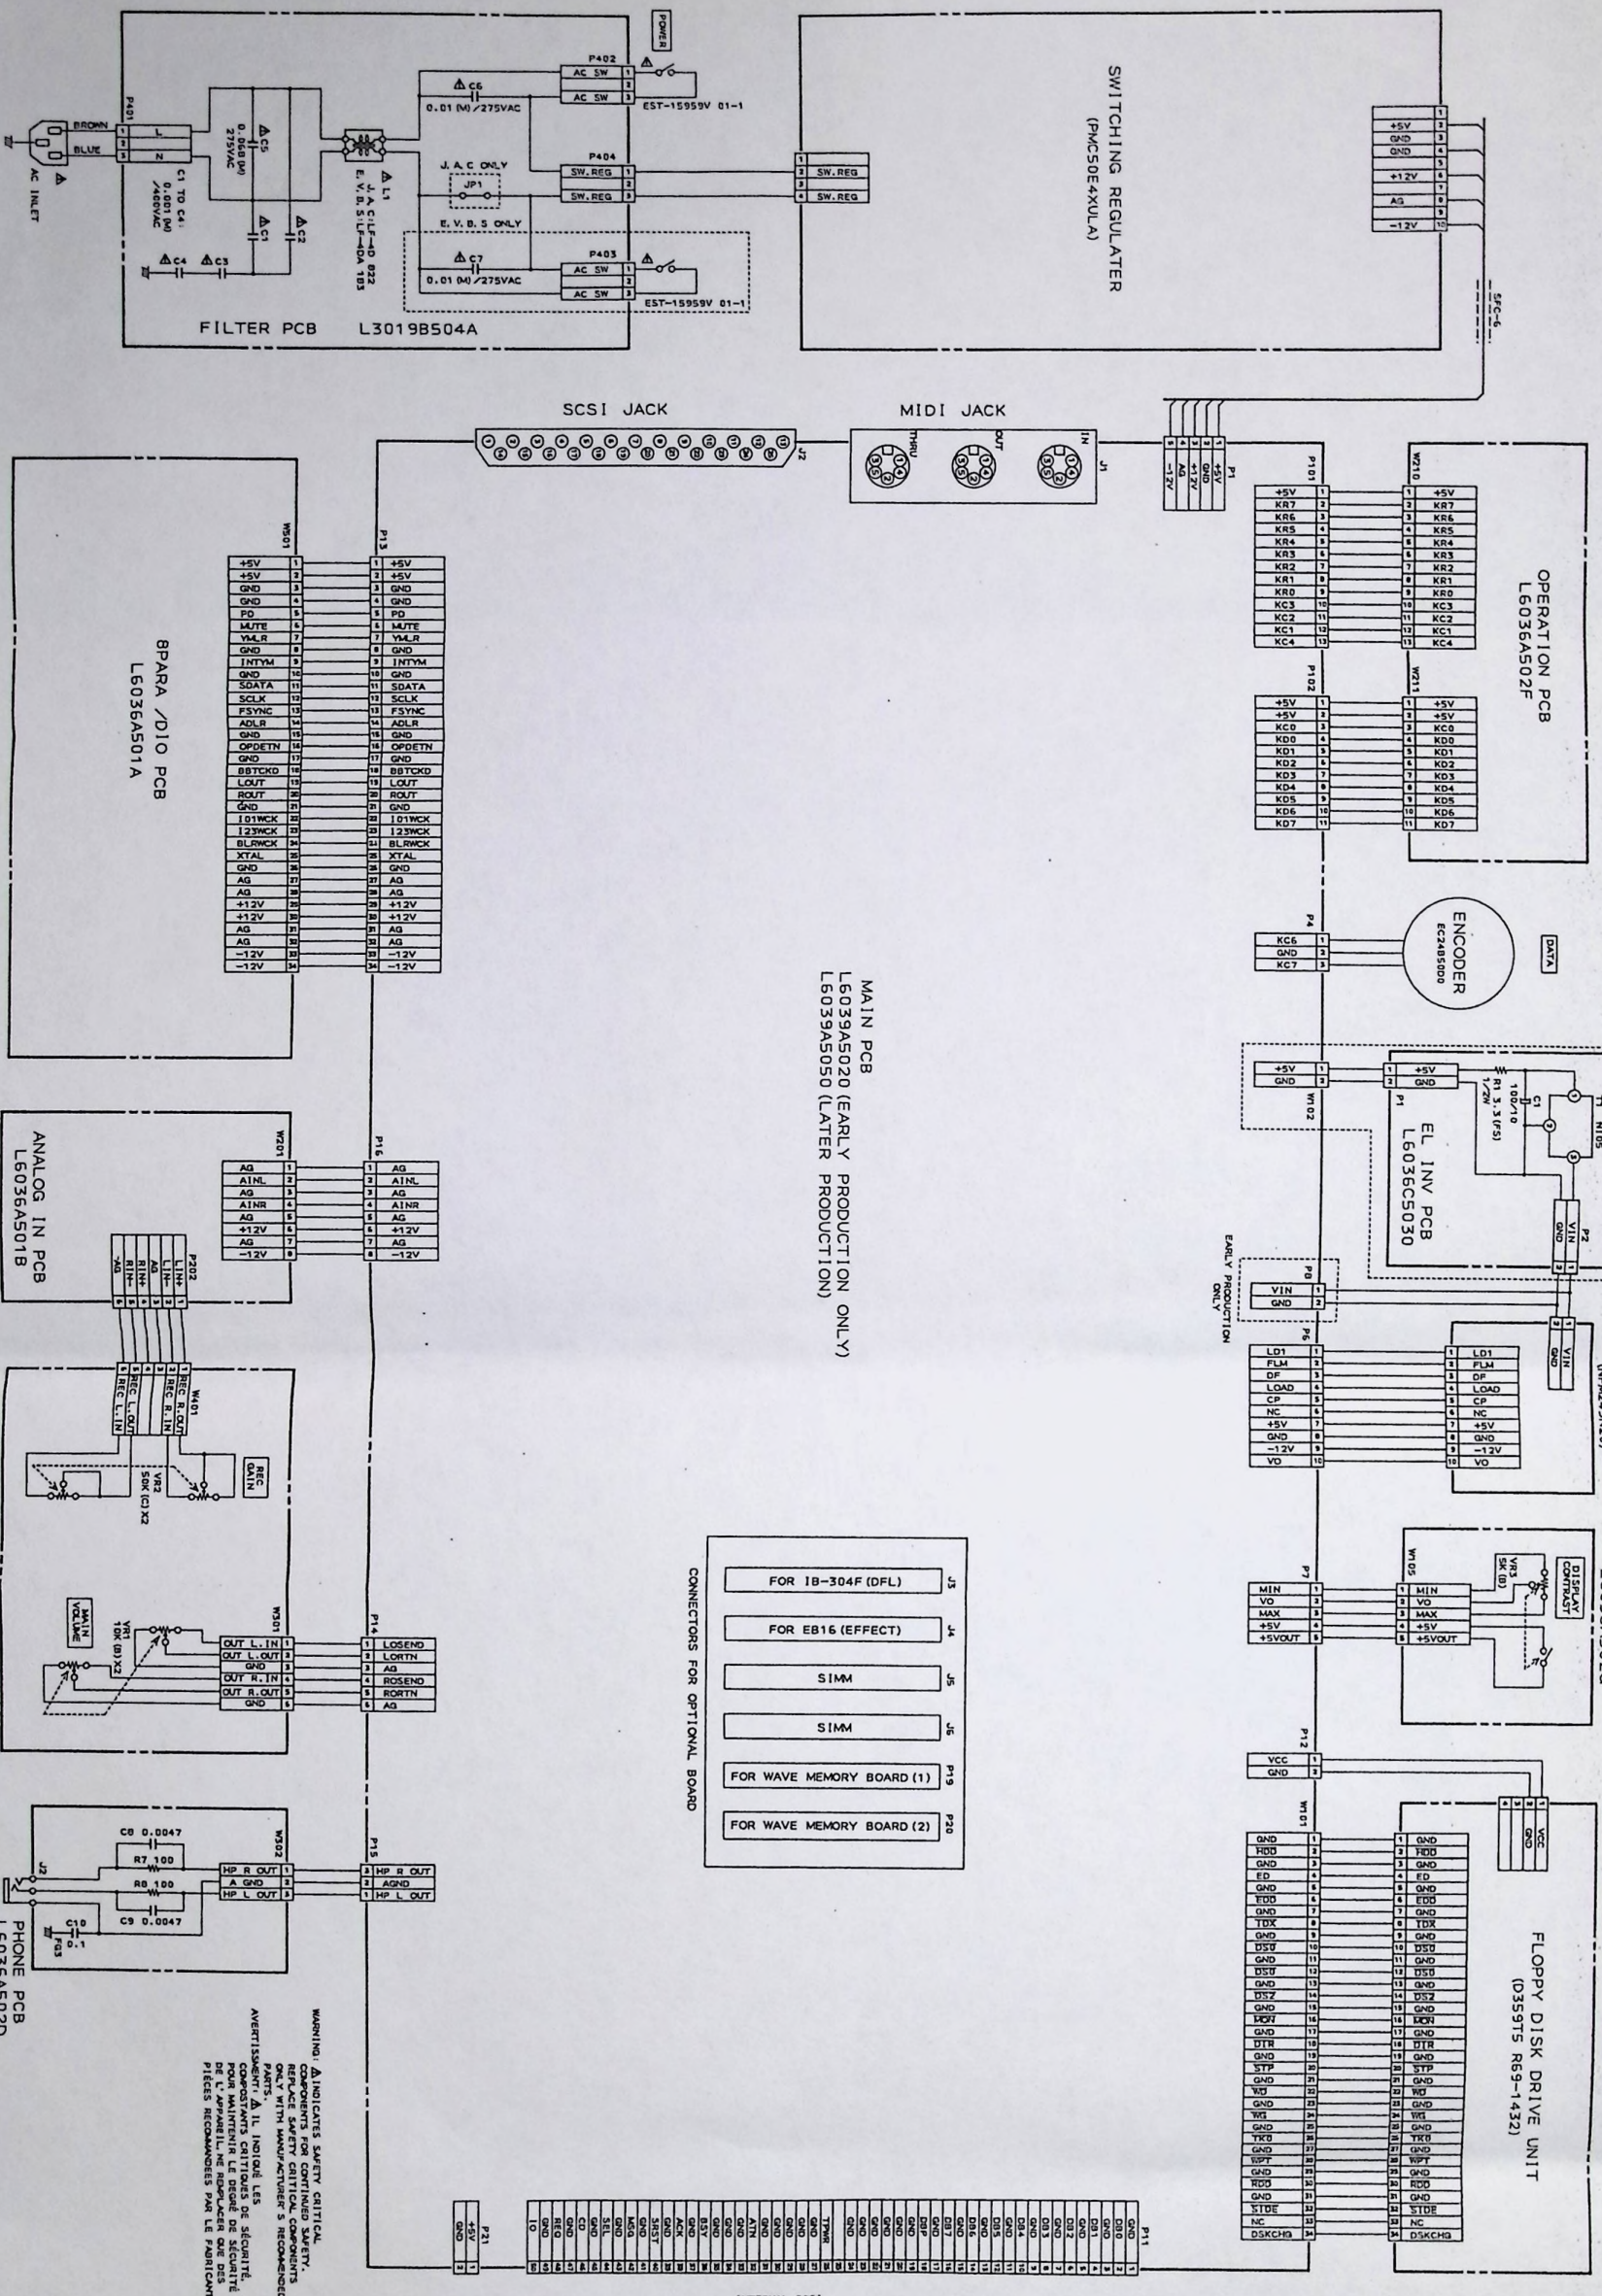

MAIN PCB
L6039A5020 (EARLY PRODUCTION ONLY)
L6039A5050 (LATER PRODUCTION)

FOR 1B-304F (DFL)
FOR EB16 (EFFECT)
SIMM
SIMM
FOR WAVE MEMORY BOARD (1)
FOR WAVE MEMORY BOARD (2)

CONNECTORS FOR OPTIONAL BOARD

INTERNAL SCSI


WARNING: INDICATES SAFETY CRITICAL
REPLACE SAFETY CRITICAL COMPONENTS
ONLY WITH MANUFACTURER'S RECOMMENDED
PARTS.
AVERTISSEMENT: IL INDIQUE LES
PIECES RECOMMANDEES PAR LE FABRICANT
DE L'APPAREIL. NE REMPLACEZ QUE DES
PIECES RECOMMANDEES PAR LE FABRICANT

S3000XL
CONNECTION DIAGRAM
NO. 18-2 L603601M

IC9, 10
#P0424605-70

1A	AD	01	2
1B	AD	01	2
1C	AD	01	2
1D	AD	01	2
1E	AD	01	2
1F	AD	01	2
1G	AD	01	2
1H	AD	01	2
1I	AD	01	2
1J	AD	01	2
1K	AD	01	2
1L	AD	01	2
1M	AD	01	2
1N	AD	01	2
1O	AD	01	2
1P	AD	01	2
1Q	AD	01	2
1R	AD	01	2
1S	AD	01	2
1T	AD	01	2
1U	AD	01	2
1V	AD	01	2
1W	AD	01	2
1X	AD	01	2
1Y	AD	01	2
1Z	AD	01	2

LATER PRODUCTION

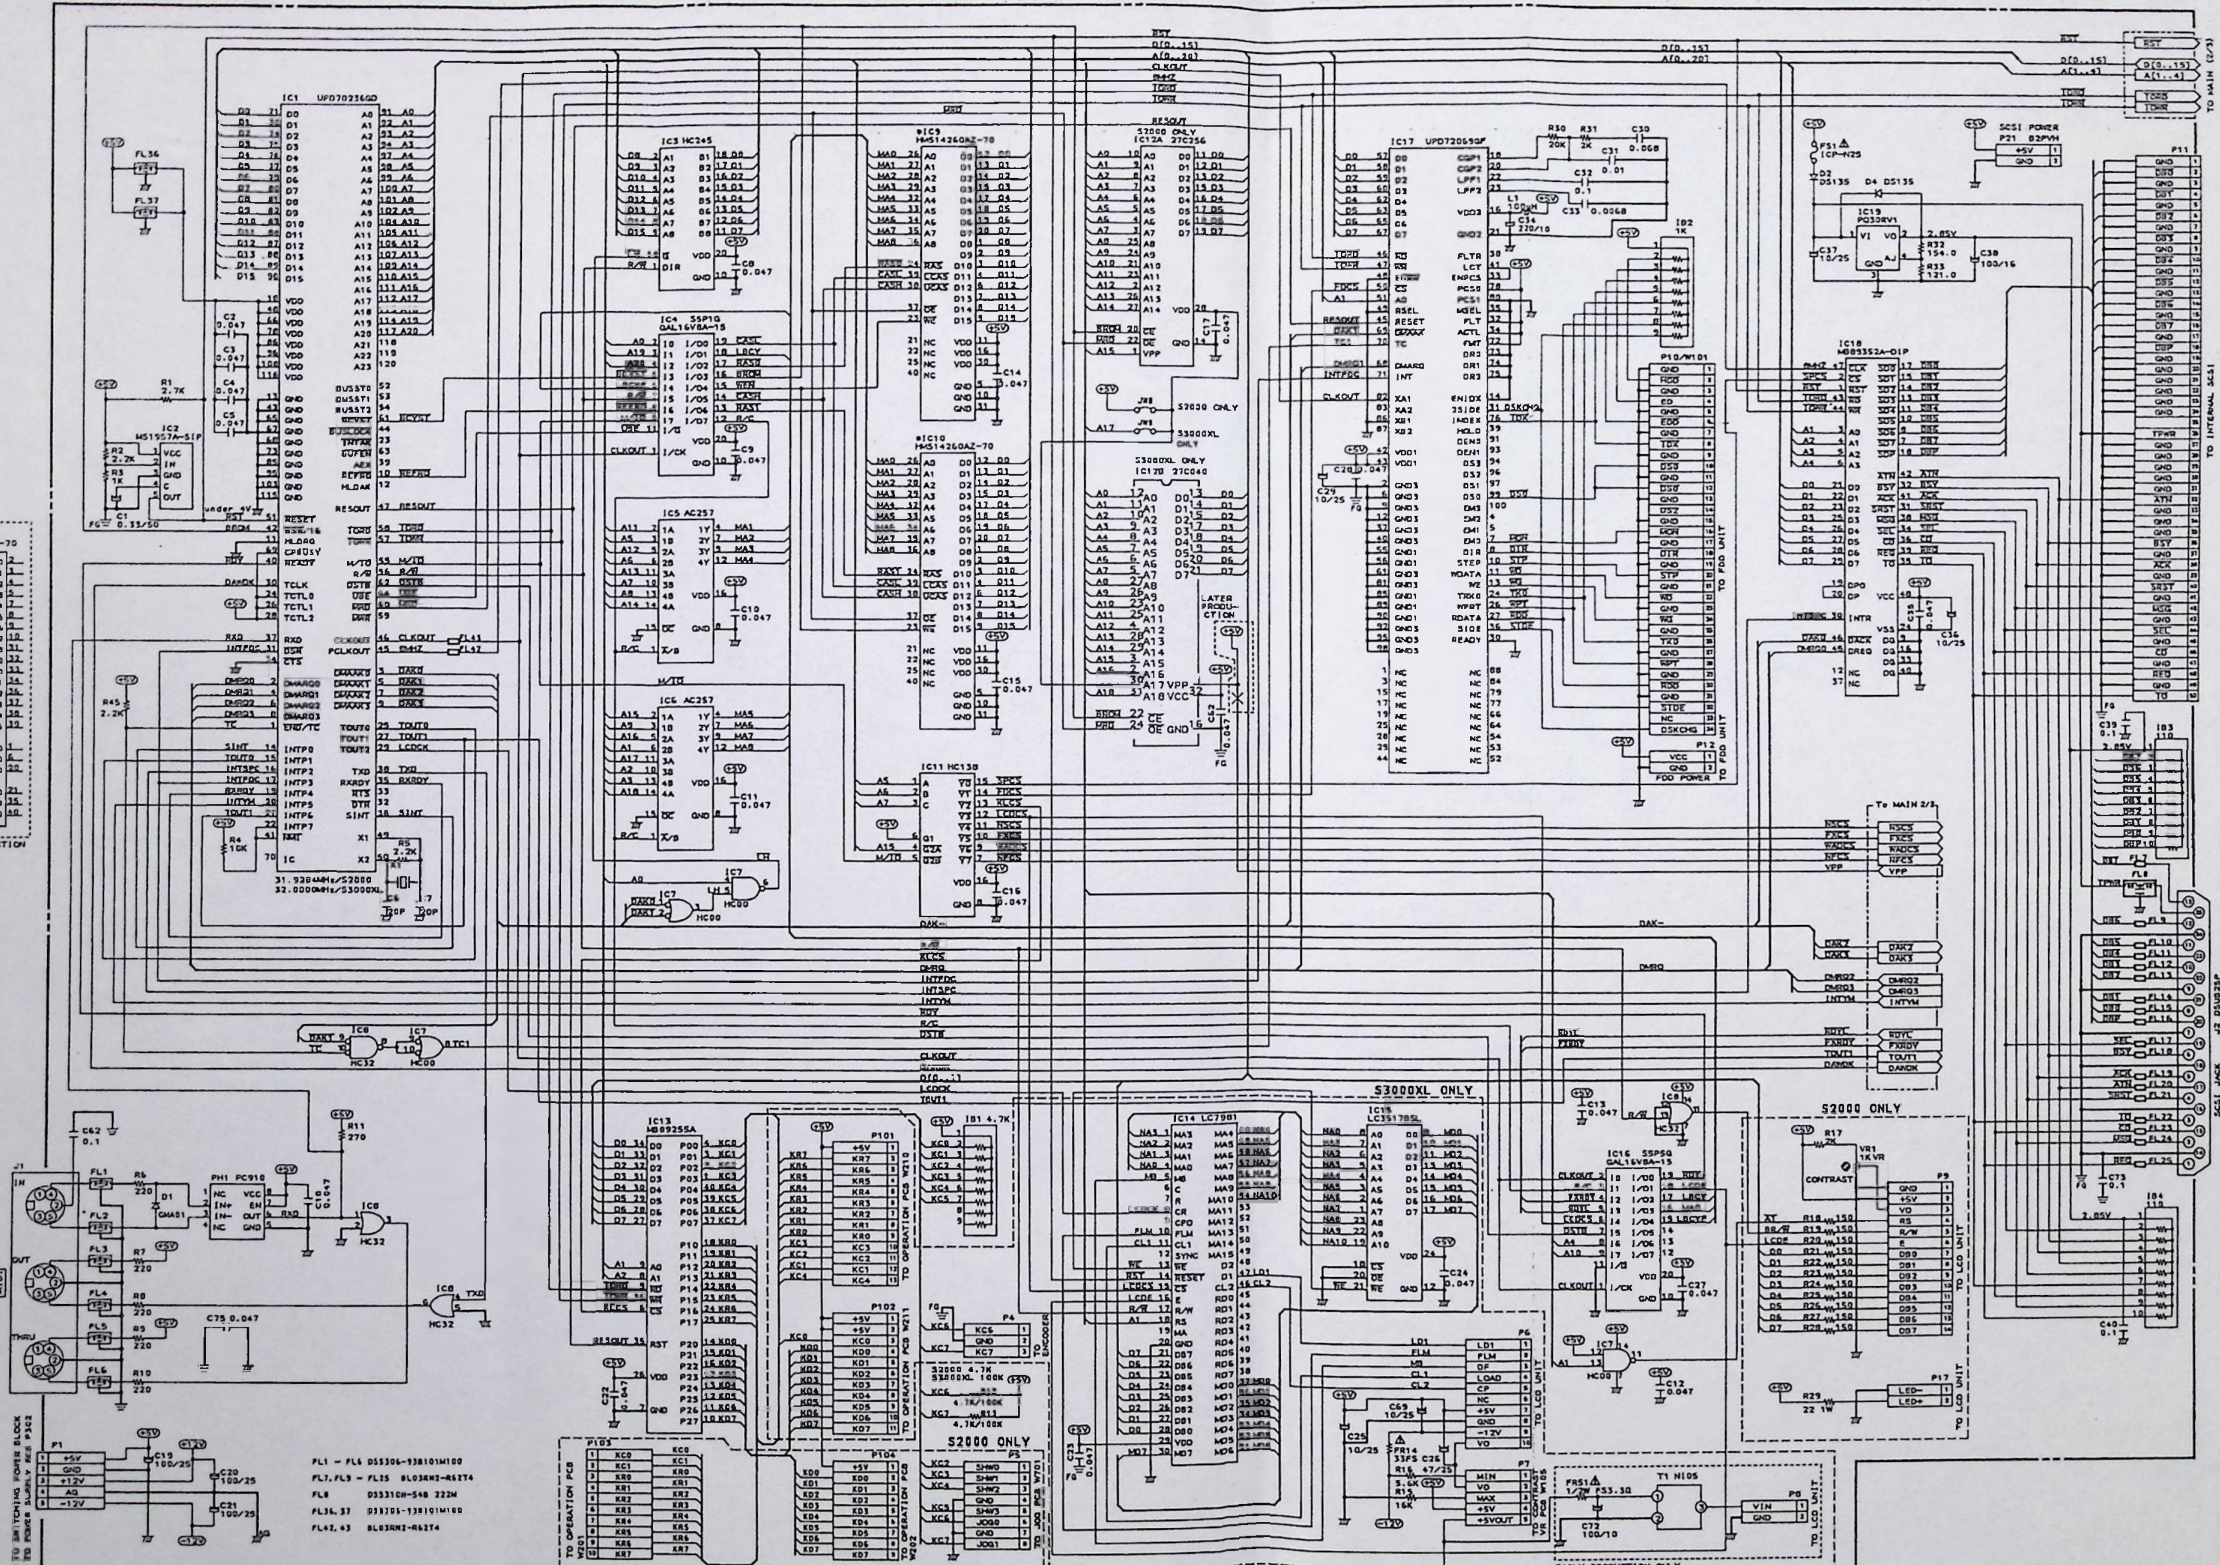


MAIN PCB L6039A5020/L6039A5050


NOTE:
UNLESS OTHERWISE SPECIFIED 1/4W(1)
ALL RESISTORS IN OHMS
ALL CAPACITORS IN μ F (P-PF)
ALL ELECTROLYTIC CAPACITORS IN μ F/PPM

WARNING: Δ INDICATES SAFETY CRITICAL COMPONENTS FOR CONTINUED SAFETY. REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS.

AVERTISSEMENT: Δ IL INDIQUE LES COMPOSANTS CRITIQUES DE SECURITE. POUR MAINTENIR LE DEGRÉ DE SECURITE DE L'APPAREIL, NE REMPLACEZ QUE DES PIÉCES RECOMMANDÉES PAR LE FABRICANT.

S2000, S3000XL
MAIN 1/3
(CPU, DISK BLOCK)
SCHEMATIC DIAGRAM
NO.18-3 L603902M
A1

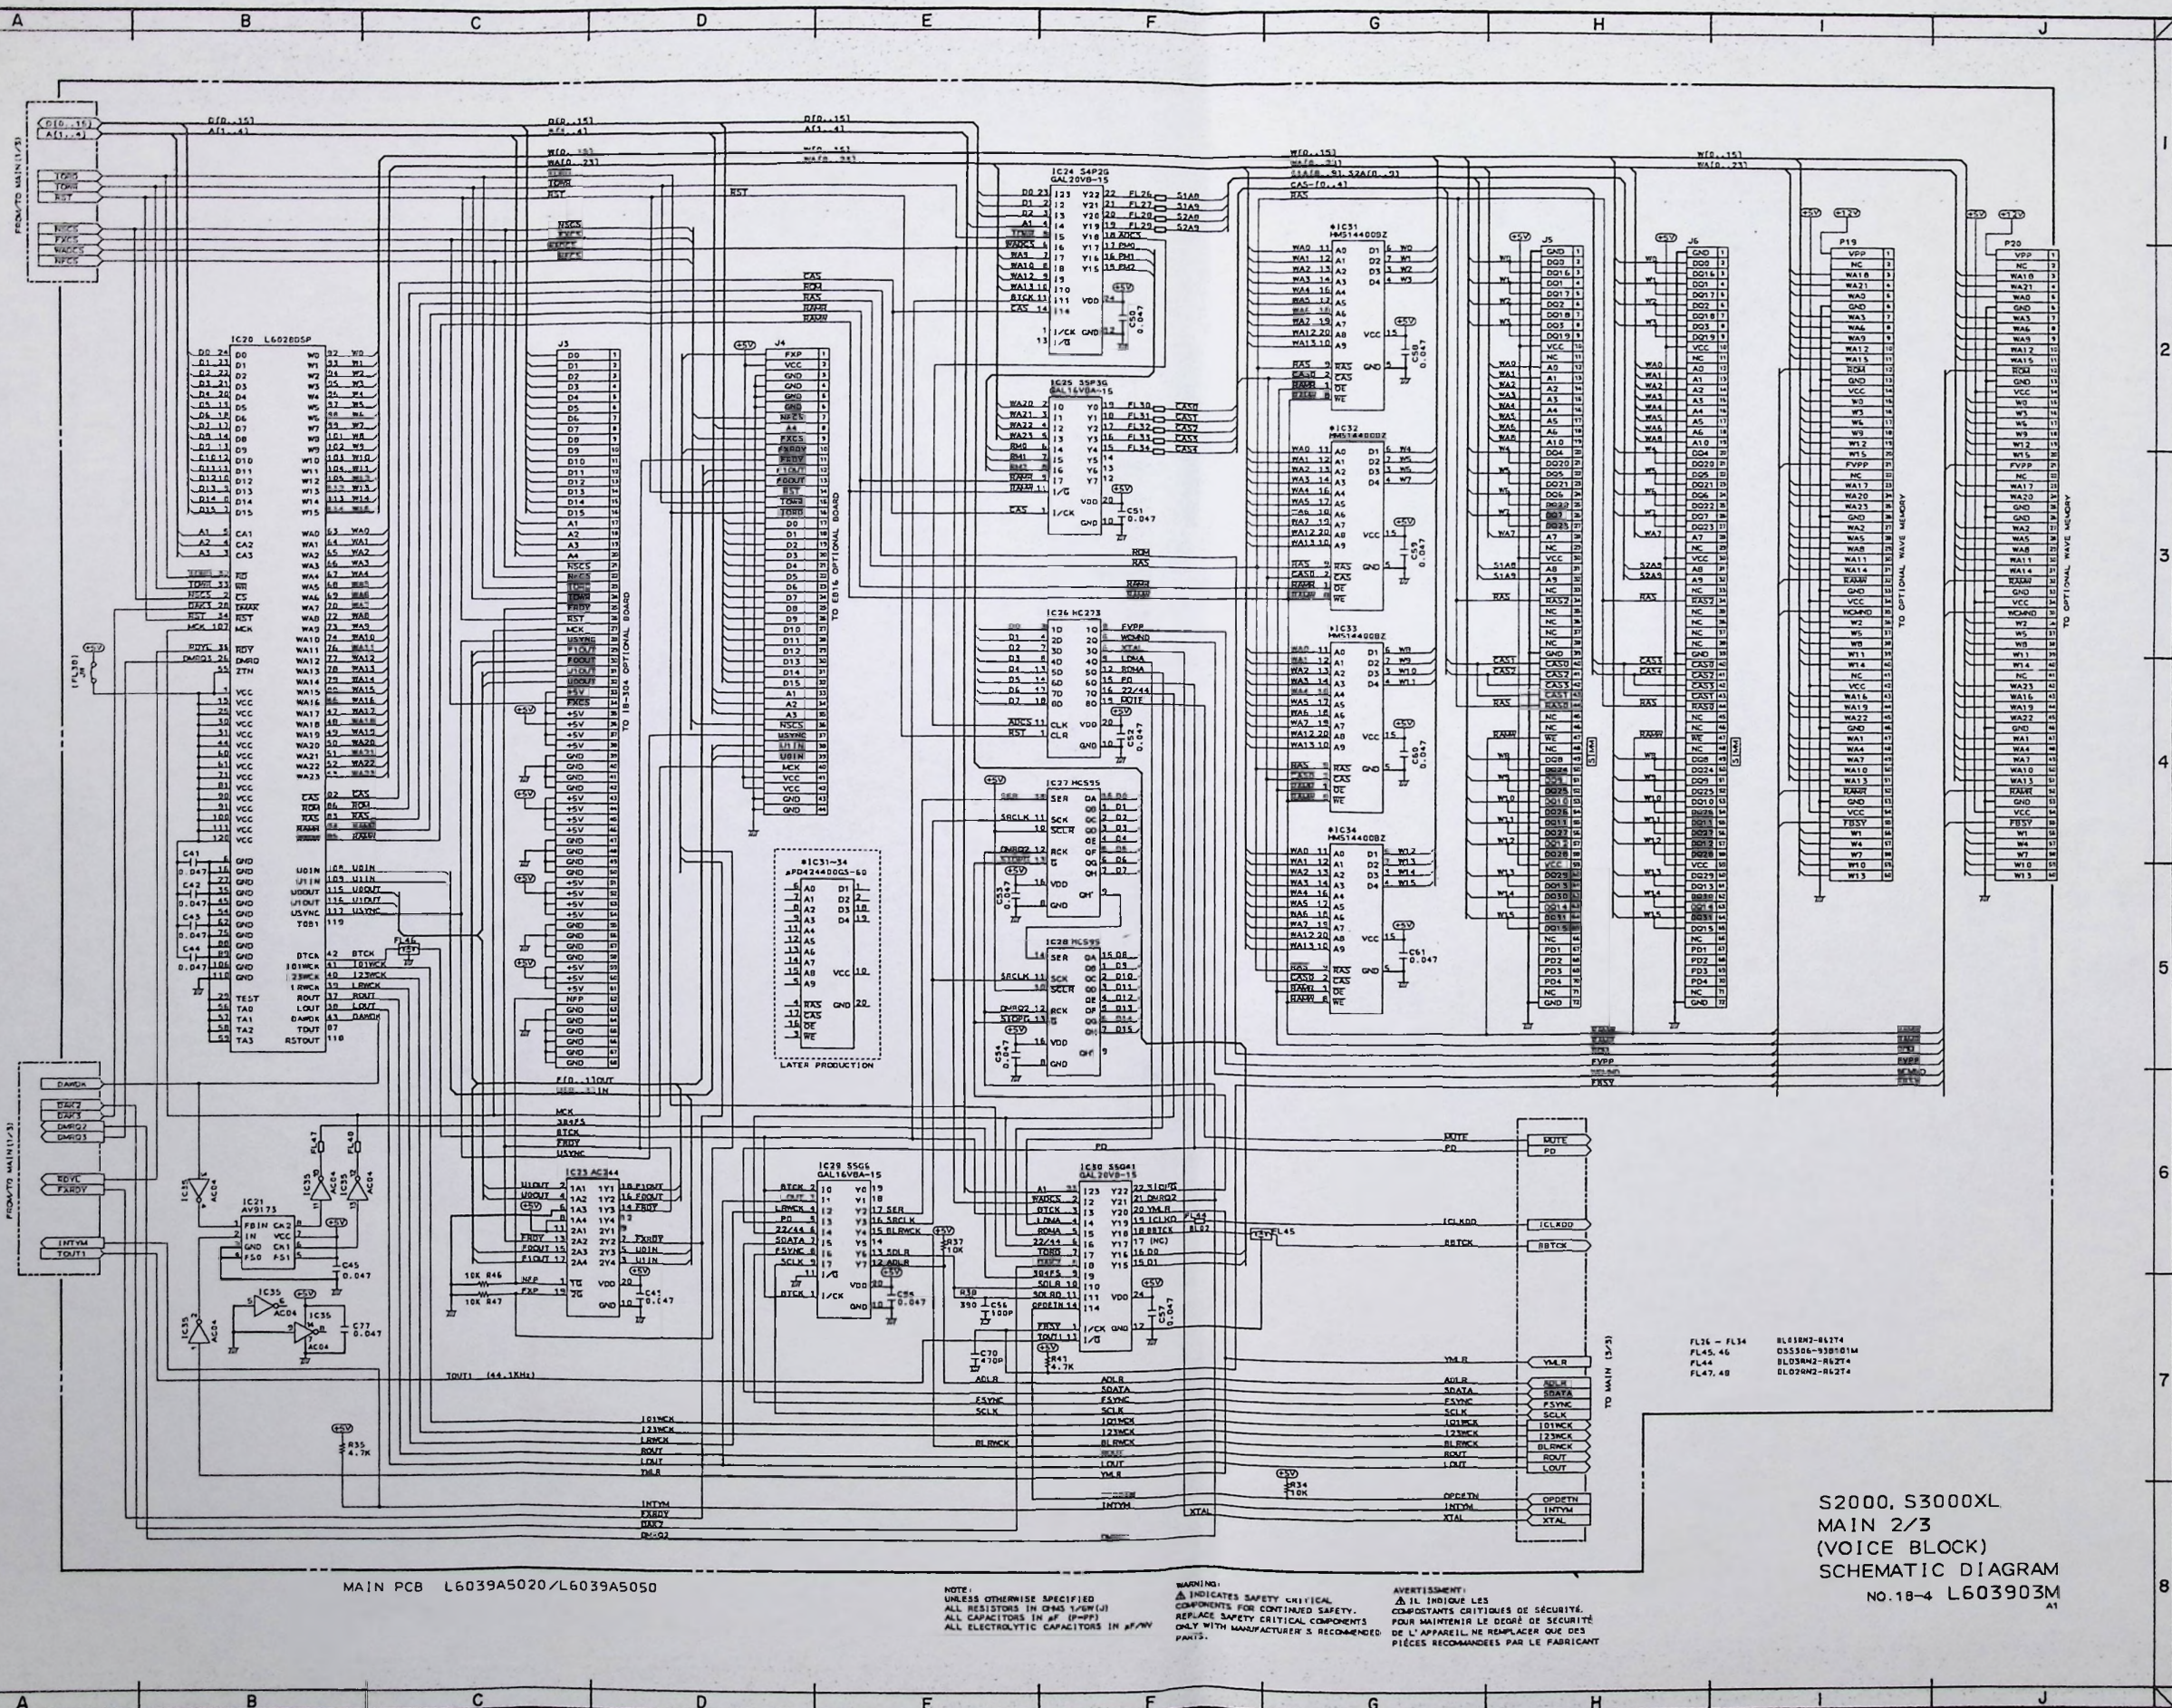

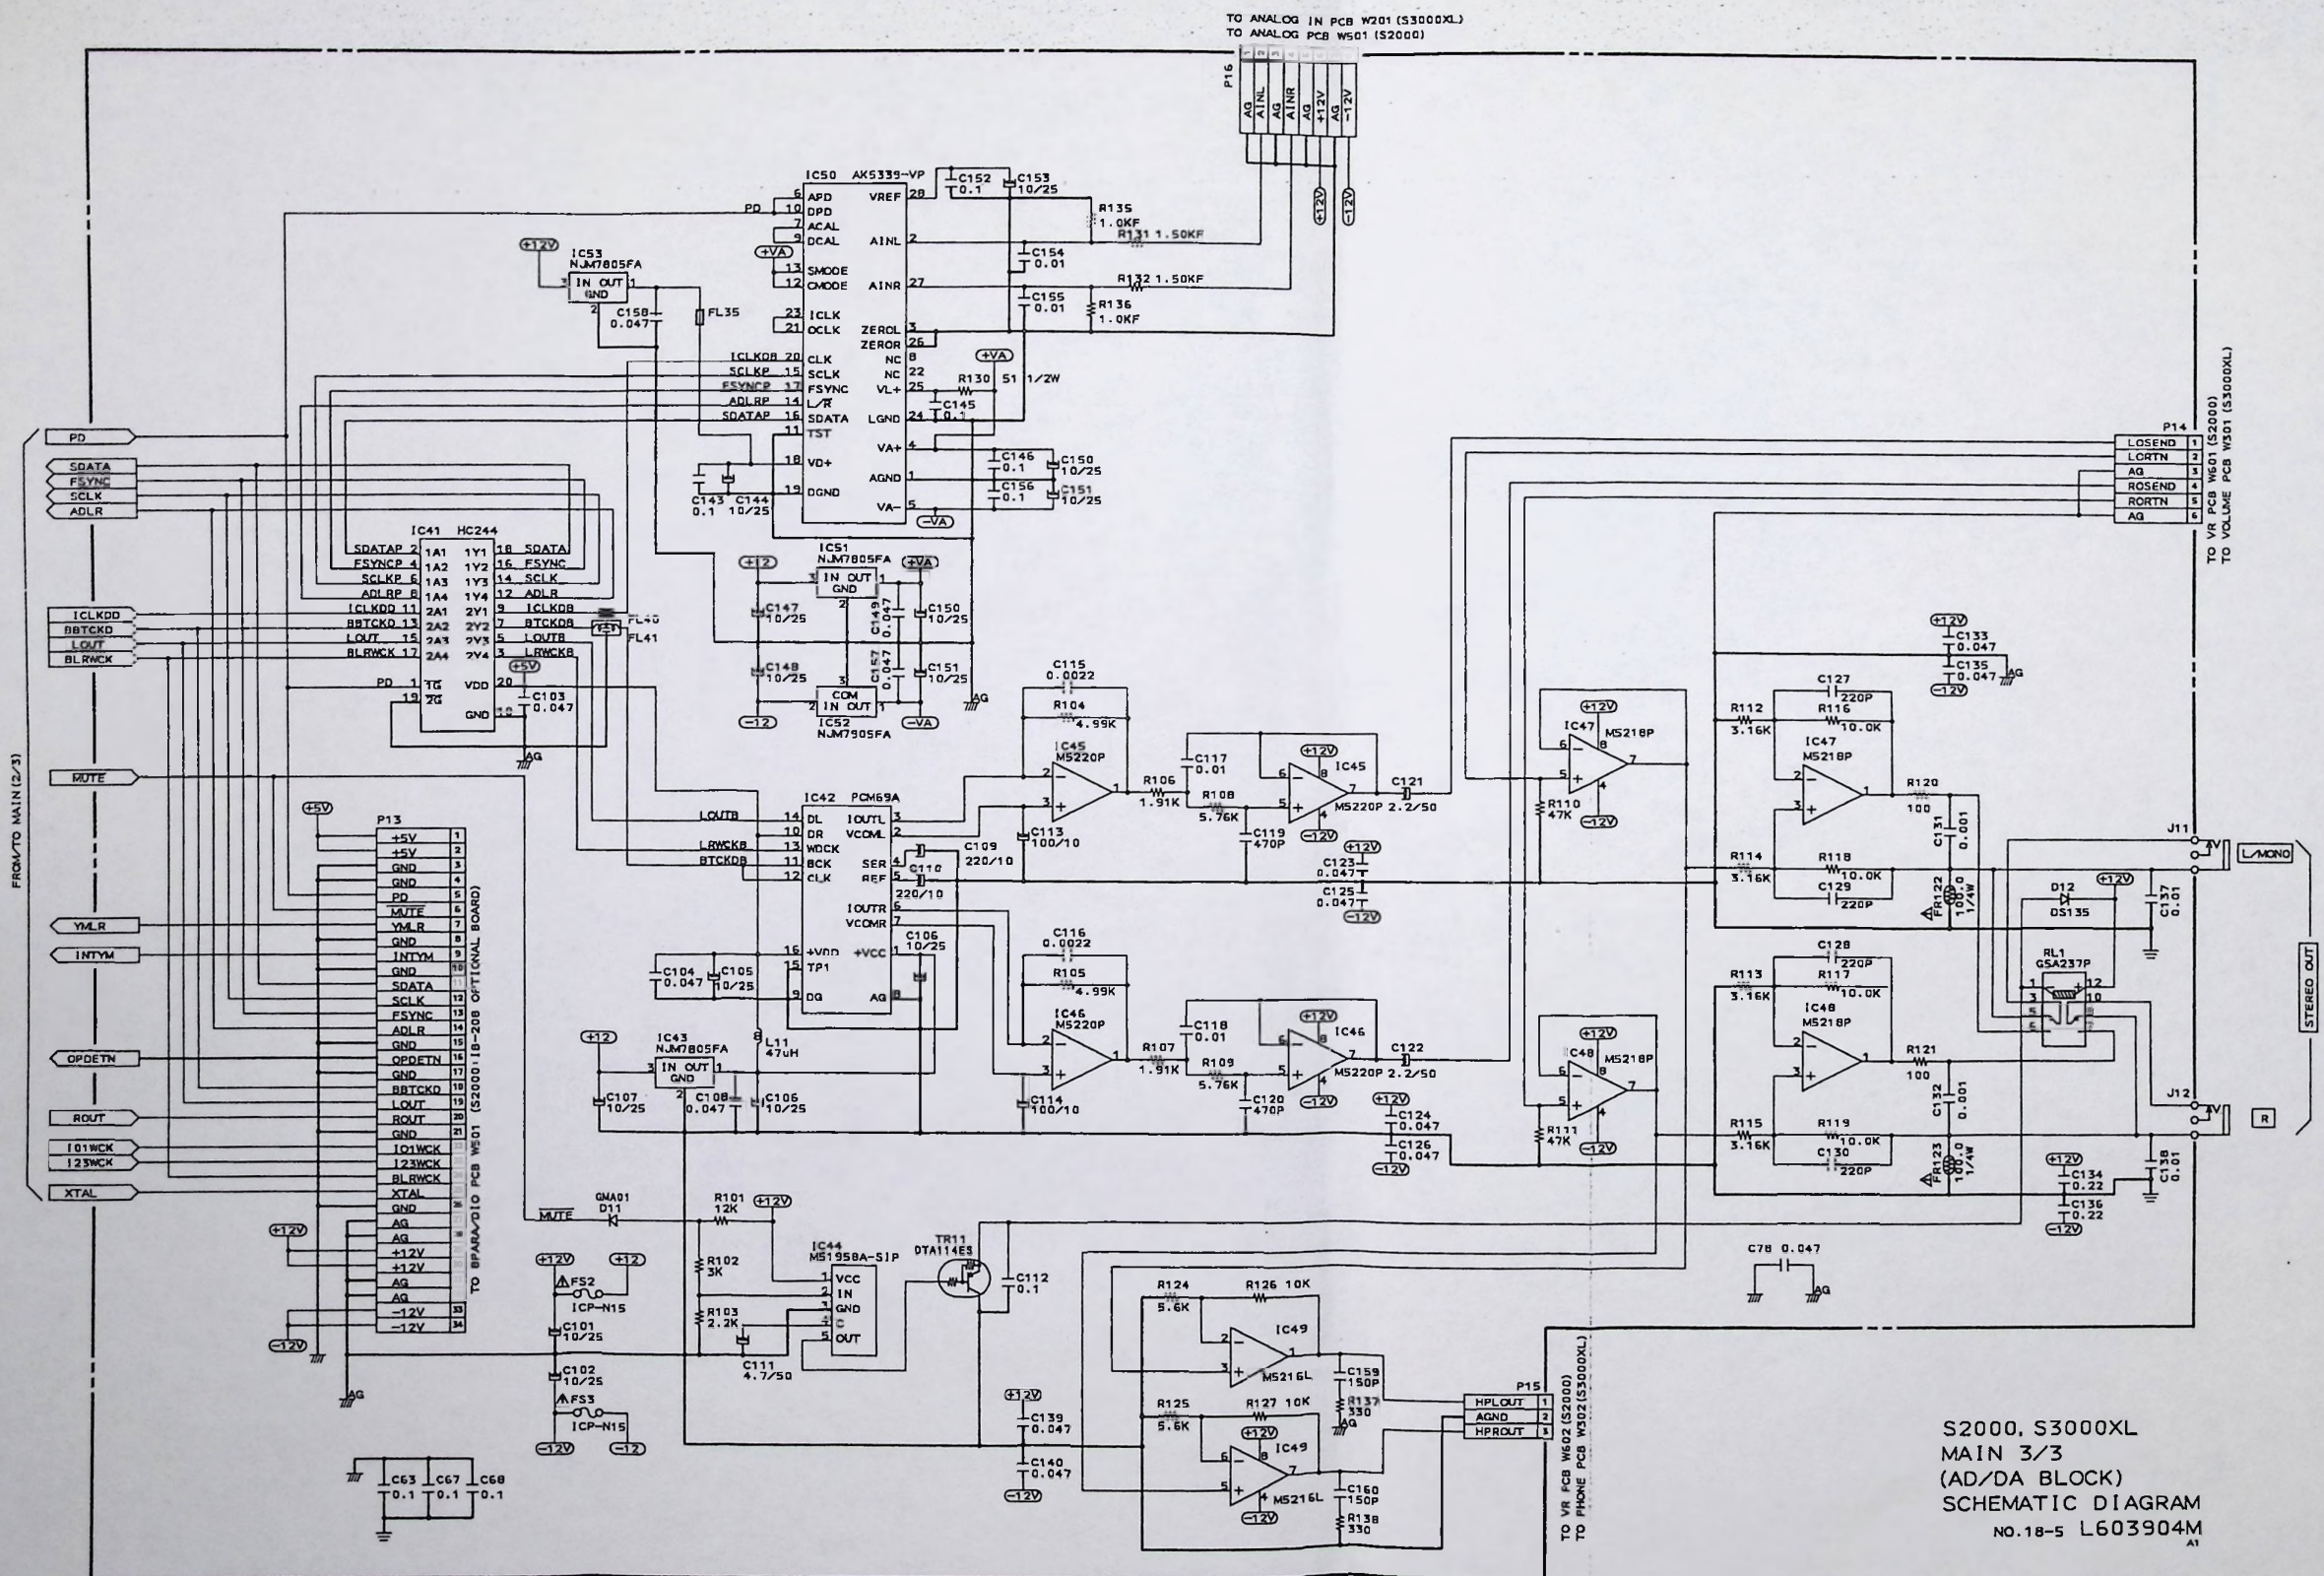

PRINCIPAL PARTS LOCATION

CONNECTORS

J1	A3,4	IC6	B,C5
J2	A4,5	IC7	B3
J3	F2,3	IC8	B3
J4	F1,2	IC9	C5
J5	D2	IC10	C5
J6	D2	IC11	D4
J11	A1	IC12	D4
J12	A2	IC13	E3,4
P1	C2,3	IC14	D,E4
P4	F3	IC15	D,E5
P5	F3	IC16	E4
P6	E4	IC17	E,F5
P7	E5	IC18	B4,5
P8	D,E5	IC19	A4
P9	F5	IC20	E1
P10	F5	IC21	E3
P11	A,B5	IC23	E2
P12	E5	IC24	E2,3
P13	C3	IC25	E2,3
P14	F1	IC26	F2,3
P15	F1	IC27	D3
P16	F1	IC28	D3
P17	F4	IC29	B,C3
P19	D1,2	IC30	E2,3
P20	E1,2	IC31	C1
P21	B5	IC32	C1,2
P101	F3,4	IC33	C2
P102	F4	IC34	C2
P103	F4	IC35	D3
P104	F4,5	IC41	B,C3
		IC42	B2
		IC43	C2
		IC44	B2
		IC45	B1
		IC46	B1
		IC47	A,B1
		IC48	A,B2
		IC49	B1
		IC50	A,B2,3
		IC51	A2
		IC52	A2
		IC53	B3

FUSE RESISTORS/FUSEs


FR14	E5	IC46	B1
FR51	E5	IC47	A,B1
FR122	A1	IC48	A,B2
FR123	A1	IC49	B1
FS1	A4	IC50	A,B2,3
FS2	B2	IC51	A2
FS3	B2	IC52	A2
		IC53	B3

ICs

IC1	C4
IC2	B3
IC3	C,D5
IC4	B4,5
IC5	C5

TRANSISTORS

TR1	C3
TR2	C3
TR11	B1

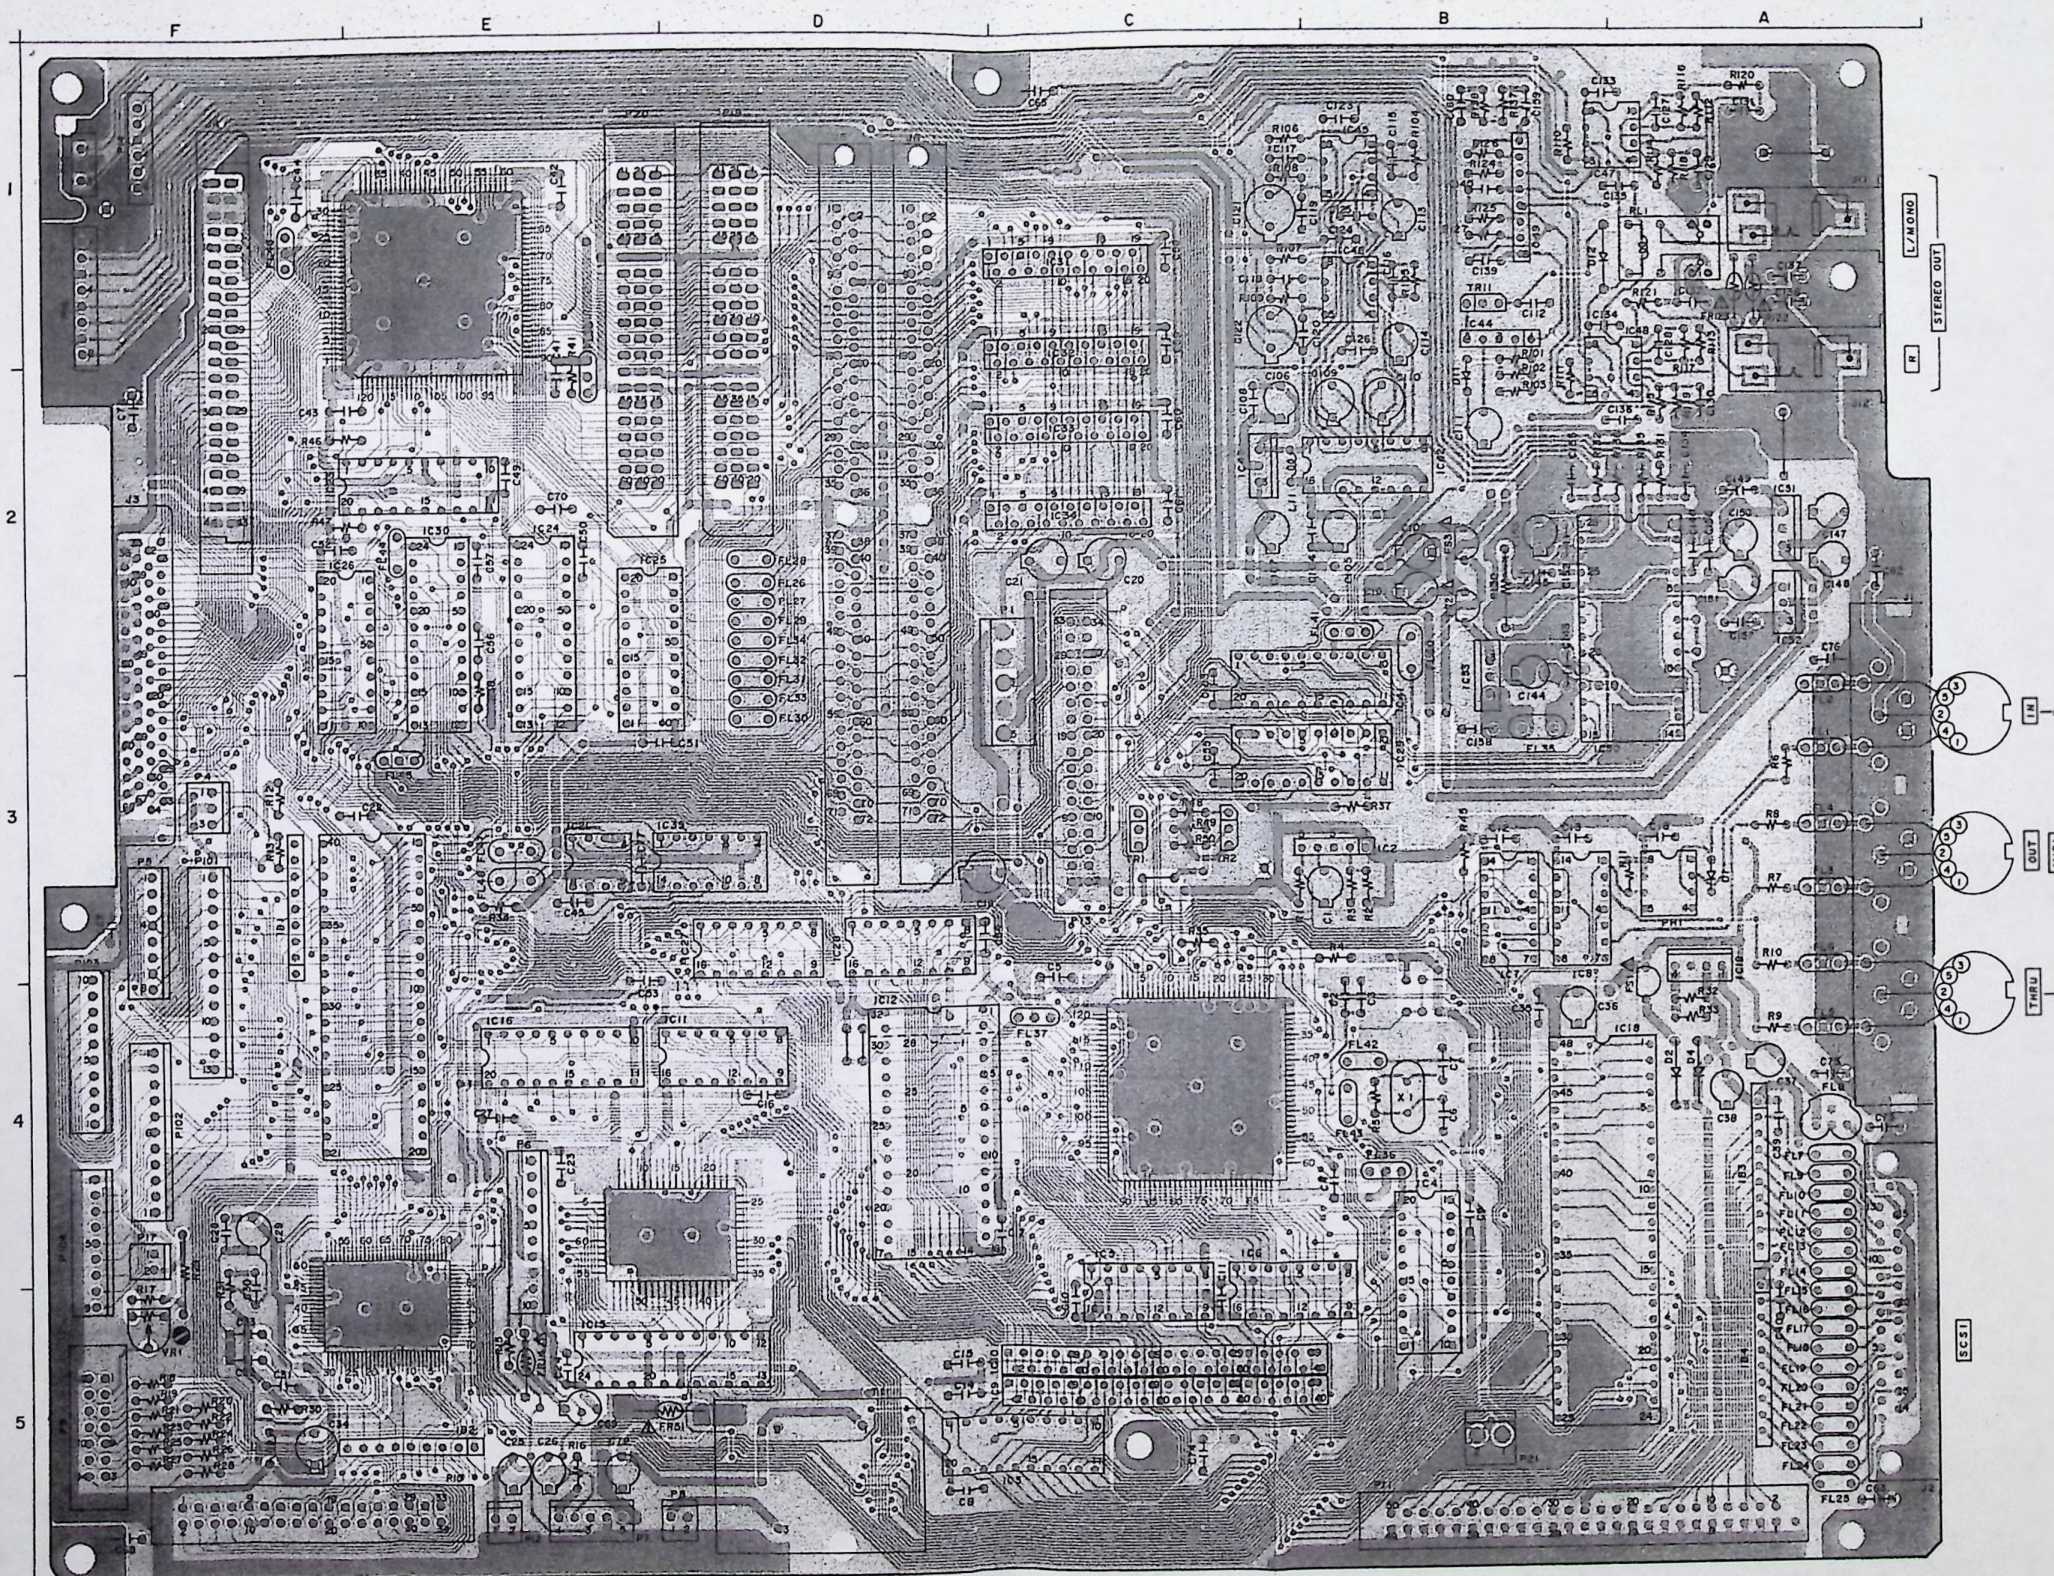


MAIN PCB L6039A5020

WARNING: ⚠ INDICATES SAFETY CRITICAL COMPONENTS. FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS.

AVERTISSEMENT: ⚠ IL INDIQUE LES COMPOSANTS CRITIQUES DE SÉCURITÉ. POUR MAINTENIR LE DEGRÉ DE SÉCURITÉ DE L'APPAREIL, NE REMPLACER QUE DES PIÈCES RECOMMANDÉES PAR LE FABRICANT.

PRINCIPAL PARTS LOCATION


CONNECTORS		IC7	B3
J1	A3,4	IC8	B3
J2	A4,5	IC9A	C5
J3	F2,3	IC9B	D5
J4	F1,2	IC10A	D5
J5	D2	IC10B	D5
J6	D2	IC11	D4
J11	A1	IC12	D4
J12	A2	IC13	E3,4
P1	C2,3	IC14	D,E4
P4	F3	IC15	D,E5
P5	F3	IC16	E4
P6	E4	IC17	E,F5
P7	E5	IC18	B4,5
P9	F5	IC19	A4
P10	F5	IC20	E1
P11	A,B5	IC21	E3
P12	E5	IC23	E2
P13	C3	IC24	E2,3
P14	F1	IC25	E2,3
P15	F1	IC26	F2,3
P16	F1	IC27	D3
P17	F4	IC28	D3
P19	D1,2	IC29	B,C3
P20	E1,2	IC30	E2,3
P21	B5	IC31	C1
P101	F3,4	IC32	C1,2
P102	F4	IC33	C2
P103	F4	IC34	C2
P104	F4,5	IC35	D3
WIRE		IC41	B,C3
W102	D,E5	IC42	B2
FUSE RESISTORS/FUSES		IC43	C2
FR14	E5	IC44	B2
FR122	A1	IC45	B1
FR123	A1	IC46	B1
FS1	A4	IC47	A,B1
FS2	B2	IC48	A,B2
FS3	B2	IC49	B1
ICs		IC50	A,B2,3
IC1	C4	IC51	A2
IC2	B3	IC52	A2
IC3	E5	IC53	B3
IC4	B4,5	TRANSISTORS	
IC5	C5	TR1	C3
IC6	B,C5	TR2	C3
		TR11	B1

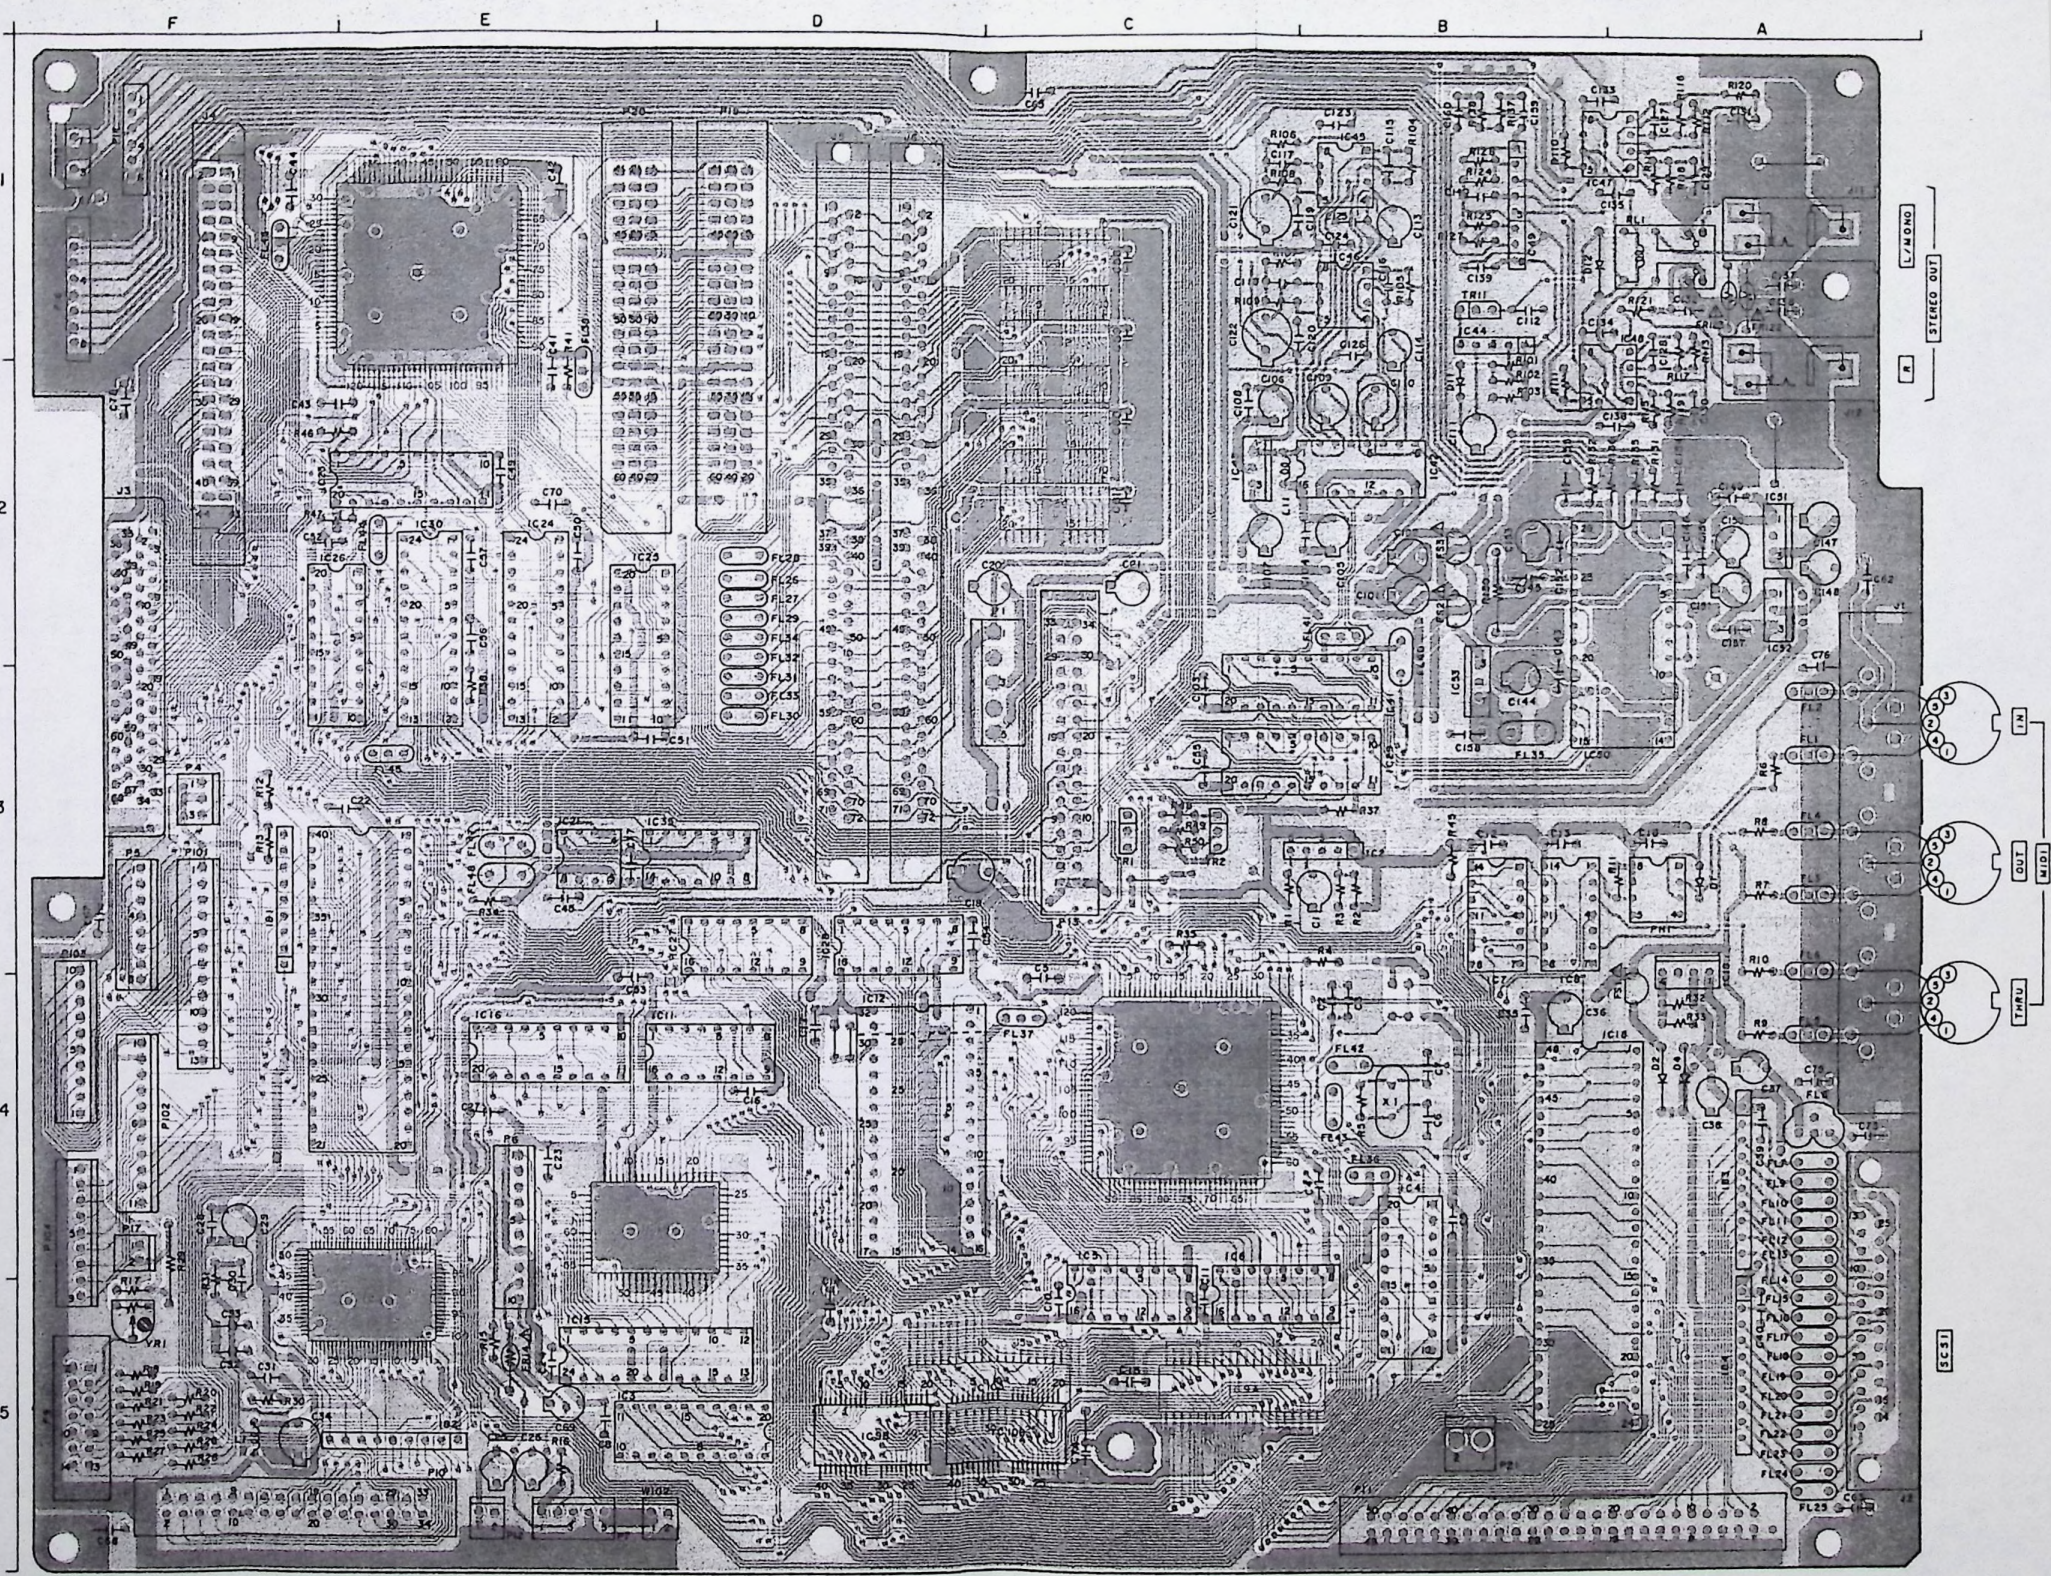

MAIN PCB L6039A5050

WARNING: Δ INDICATES SAFETY CRITICAL COMPONENTS FOR CONTINUED SAFETY. REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS.


AVERTISSEMENT: Δ IL INDIQUE LES COMPOSANTS CRITIQUES DE SÉCURITÉ. POUR MAINTENIR LE DEGRÉ DE SÉCURITÉ DE L'APPAREIL, NE REMPLACER QUE DES PIÈCES RECOMMANDÉES PAR LE FABRICANT.

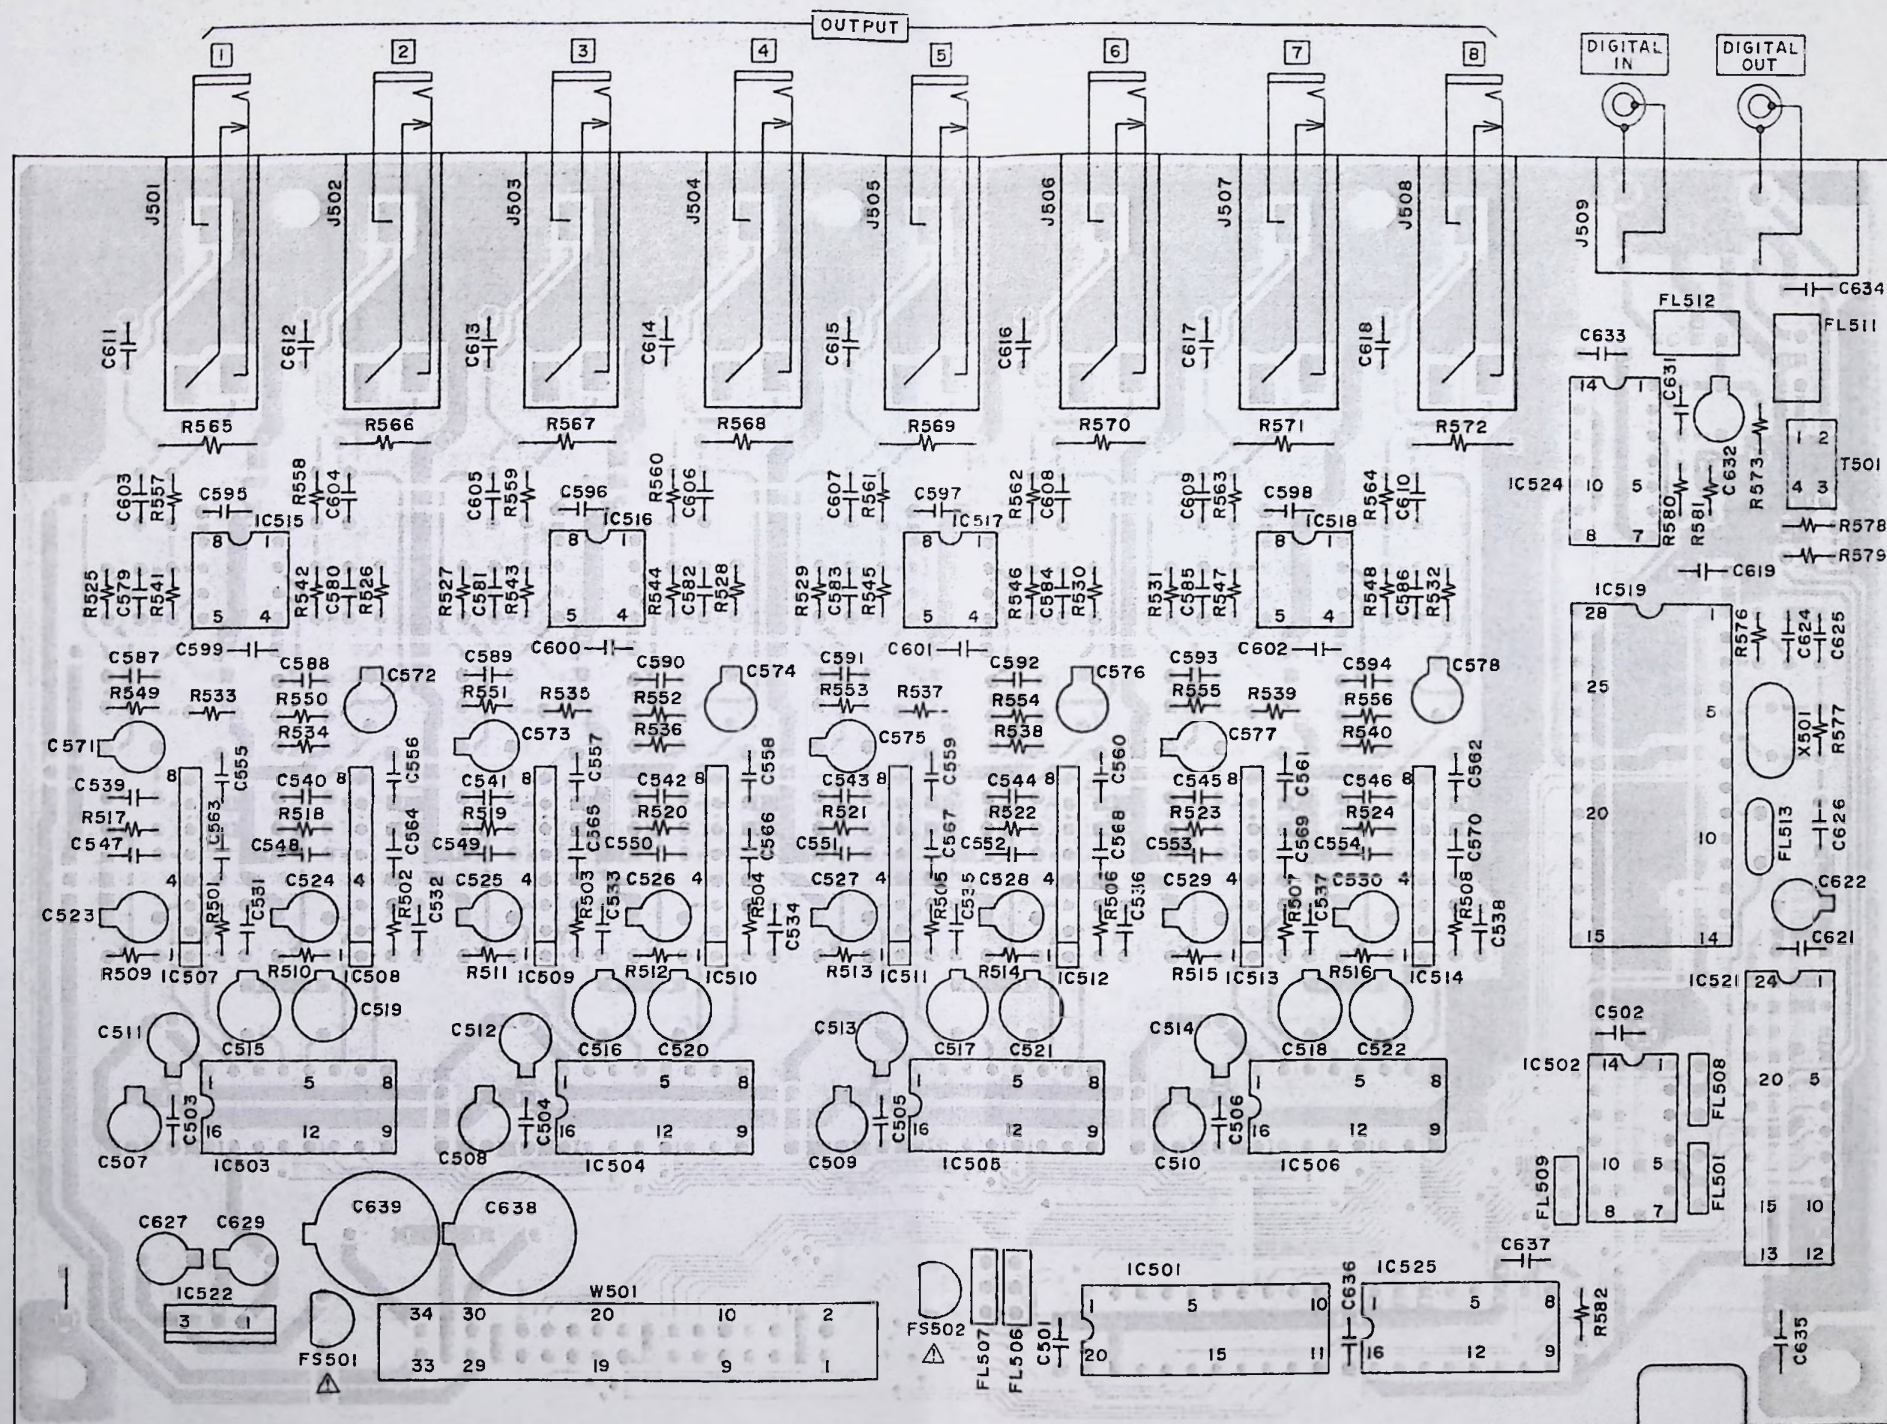

8 PARA/DIO PCB L6036A501A

WARNING Δ INDICATES SAFETY CRITICAL COMPONENTS FOR CONTINUED SAFETY
REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S
RECOMMENDED PARTS


AVERTISSEMENT: Δ IL INDIQUE LES COMPOSANTS CRITIQUES DE SECURITE
POUR MAINTENIR LE DEGRE DE SECURITE DE L'APPAREIL
NE REMPLACER QUE DES PIECES RECOMMANDEES PAR LE FABRICANT

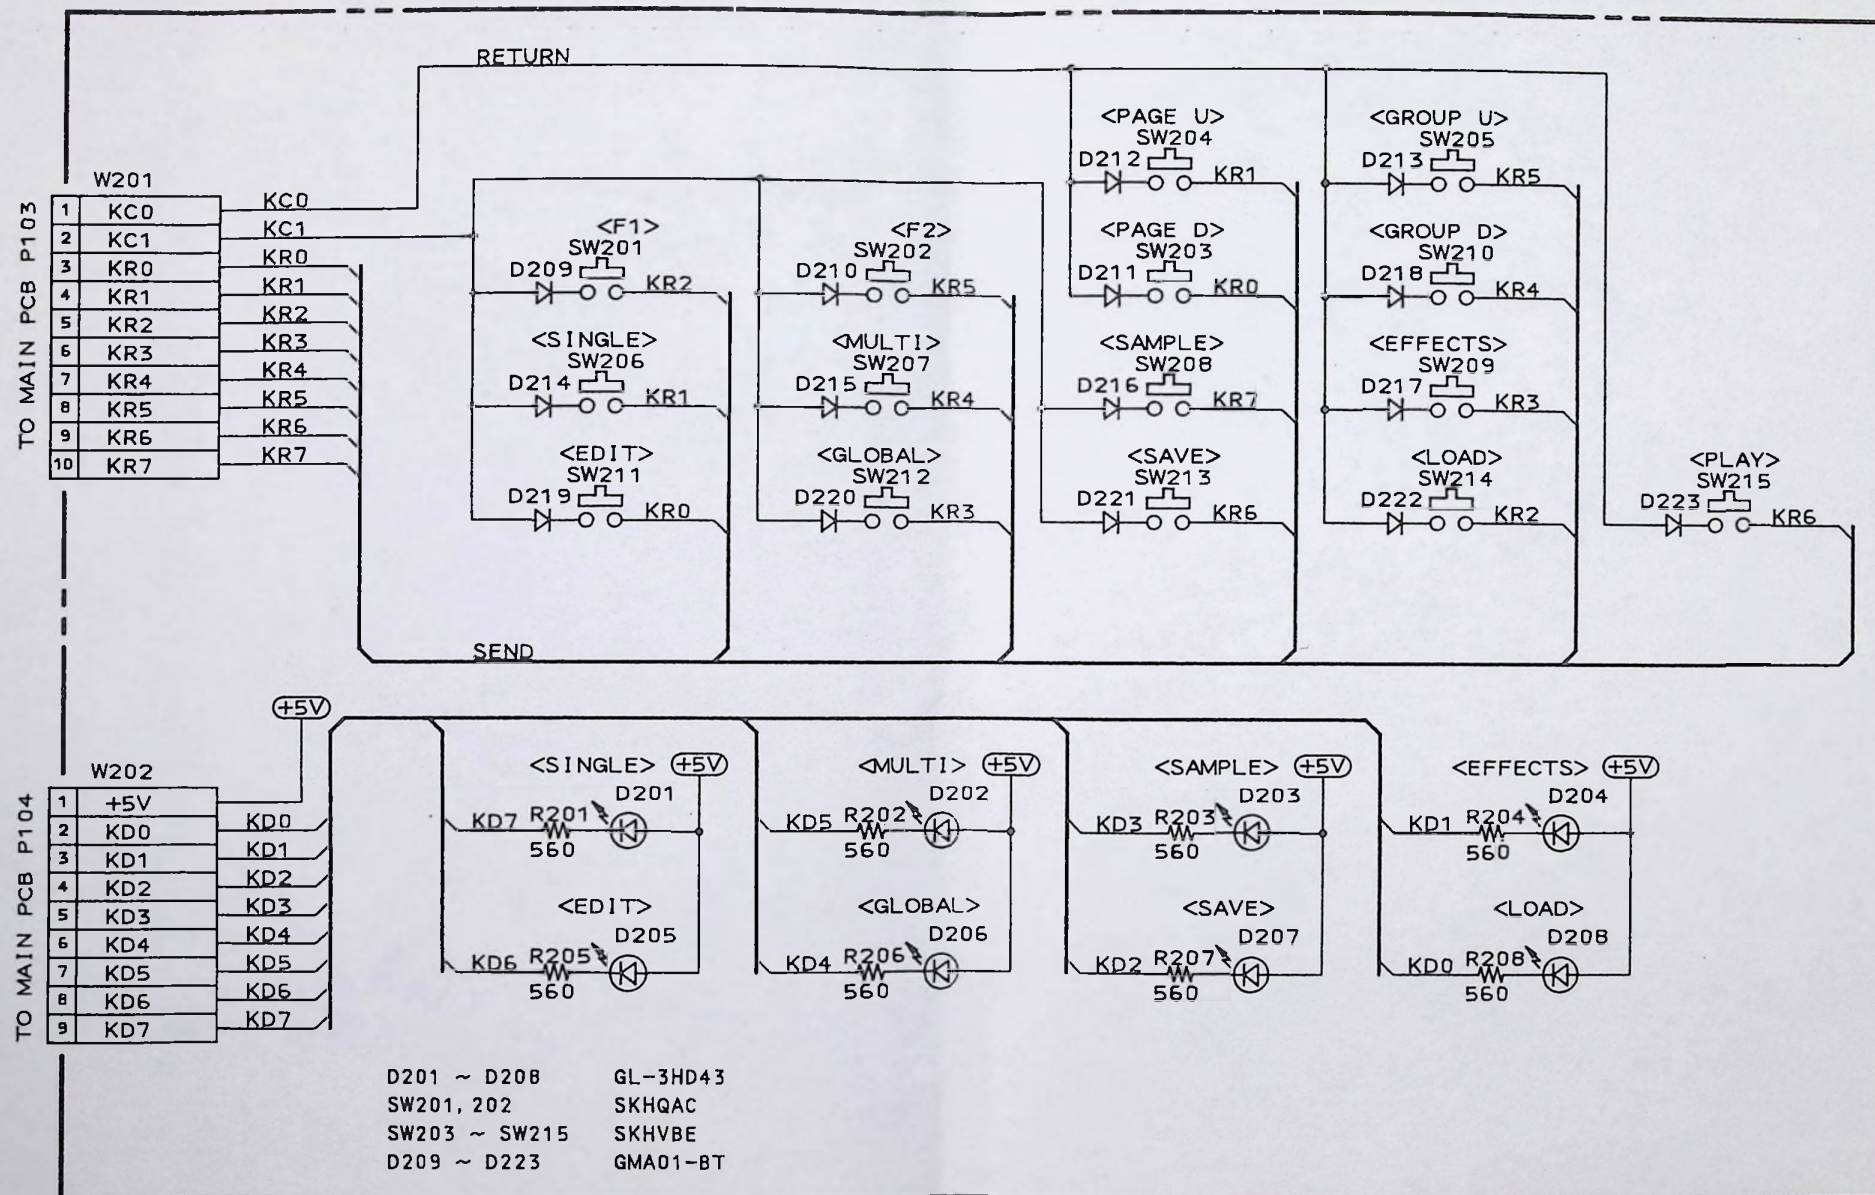

OPERATION PCB L6039A503A

NOTE:
 UNLESS OTHERWISE SPECIFIED
 ALL RESISTORS IN OHMS 1/6W(J)
 ALL CAPACITORS IN μ F (P=PF)
 ALL ELECTROLYTIC CAPACITORS IN μ F/WV


S2000
 OPERATION
 SCHEMATIC DIAGRAM
 NO.18-7 L603905M
 A3

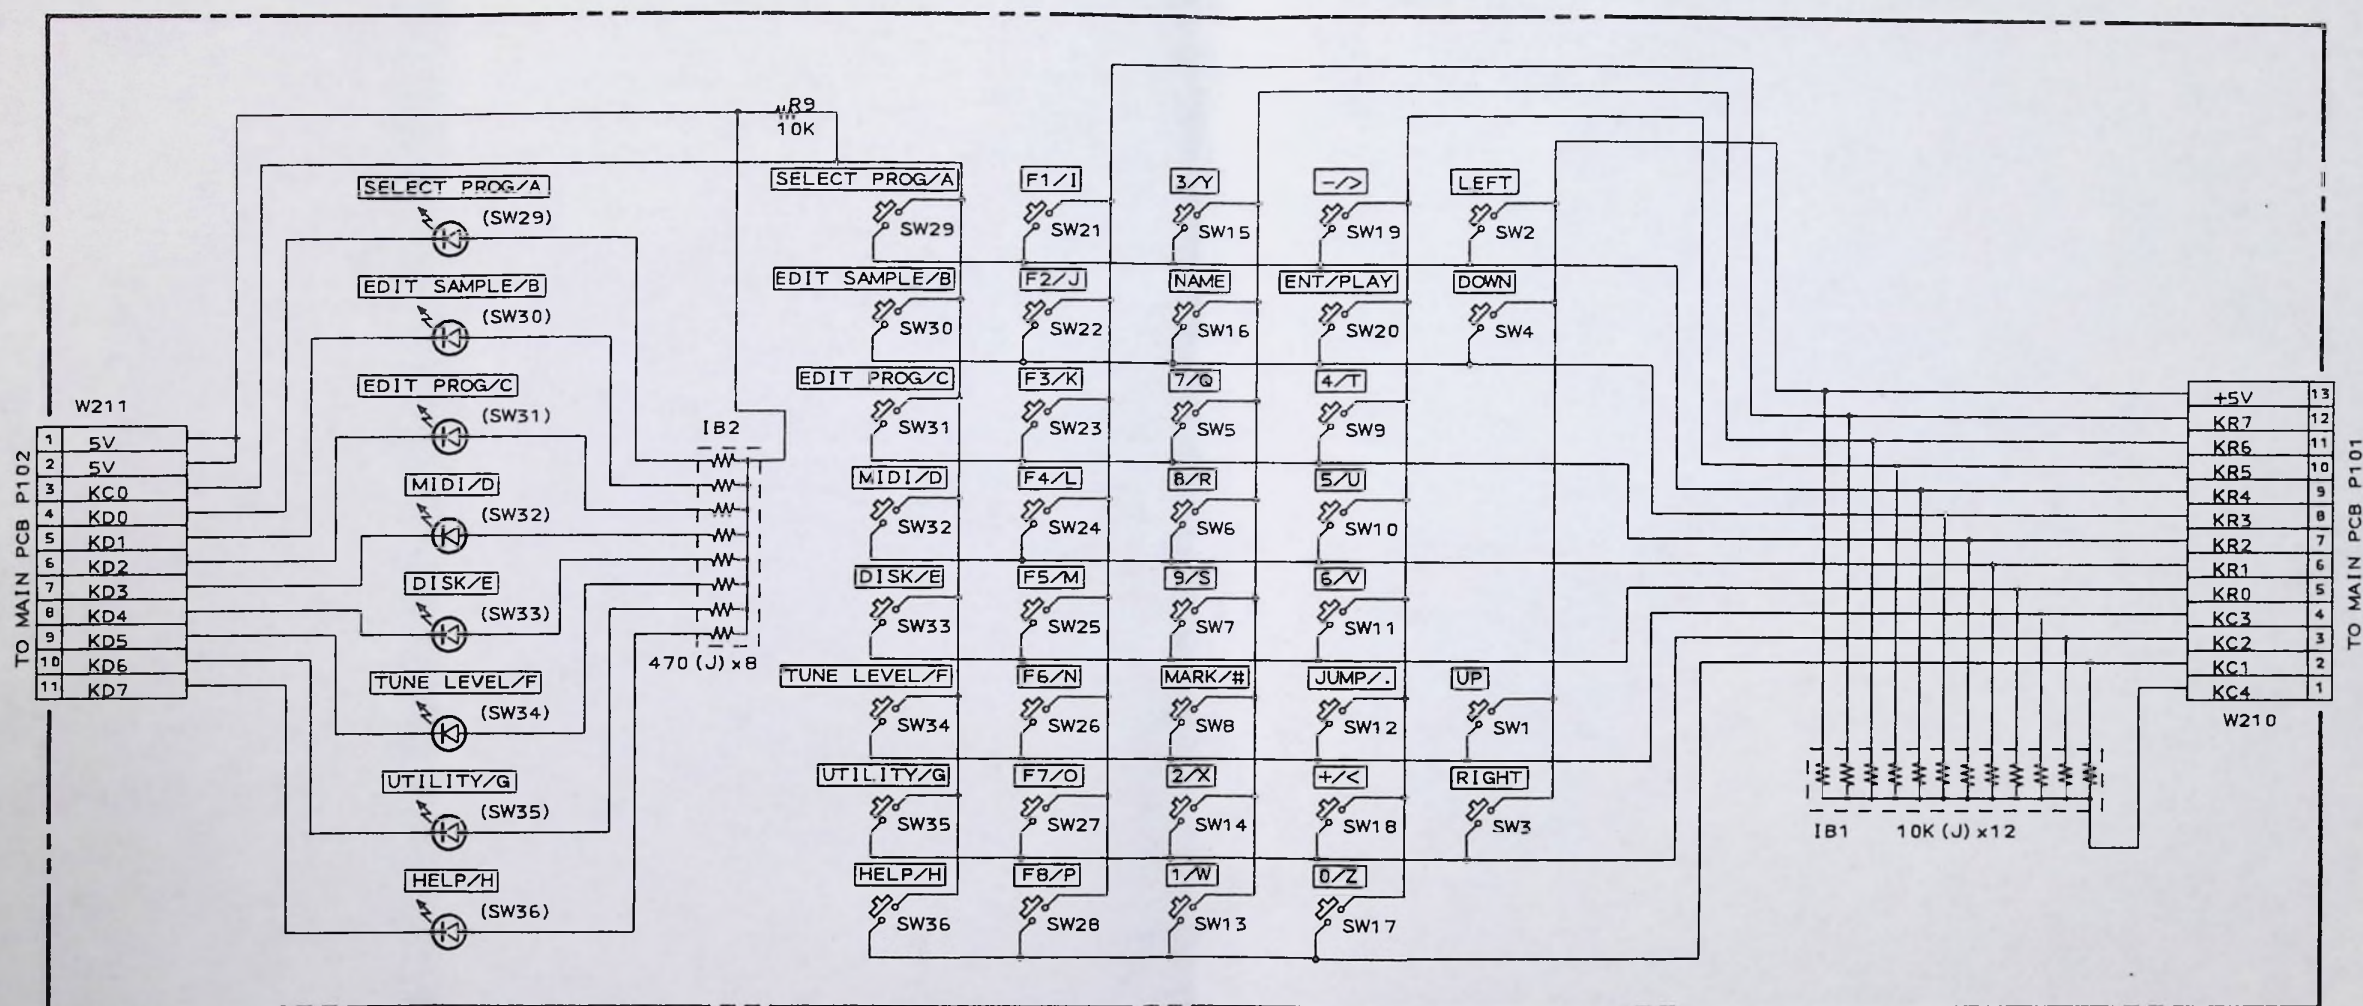


OPERATION PCB L6036A502F

NOTE:
UNLESS OTHERWISE SPECIFIED
ALL RESISTORS IN OHMS
ALL CAPACITORS IN μ F (P=PF)
ALL ELECTROLYTIC CAPACITORS IN μ F/WV

S3000XL
OPERATION
SCHEMATIC DIAGRAM
NO.18-8 L603604M
A3

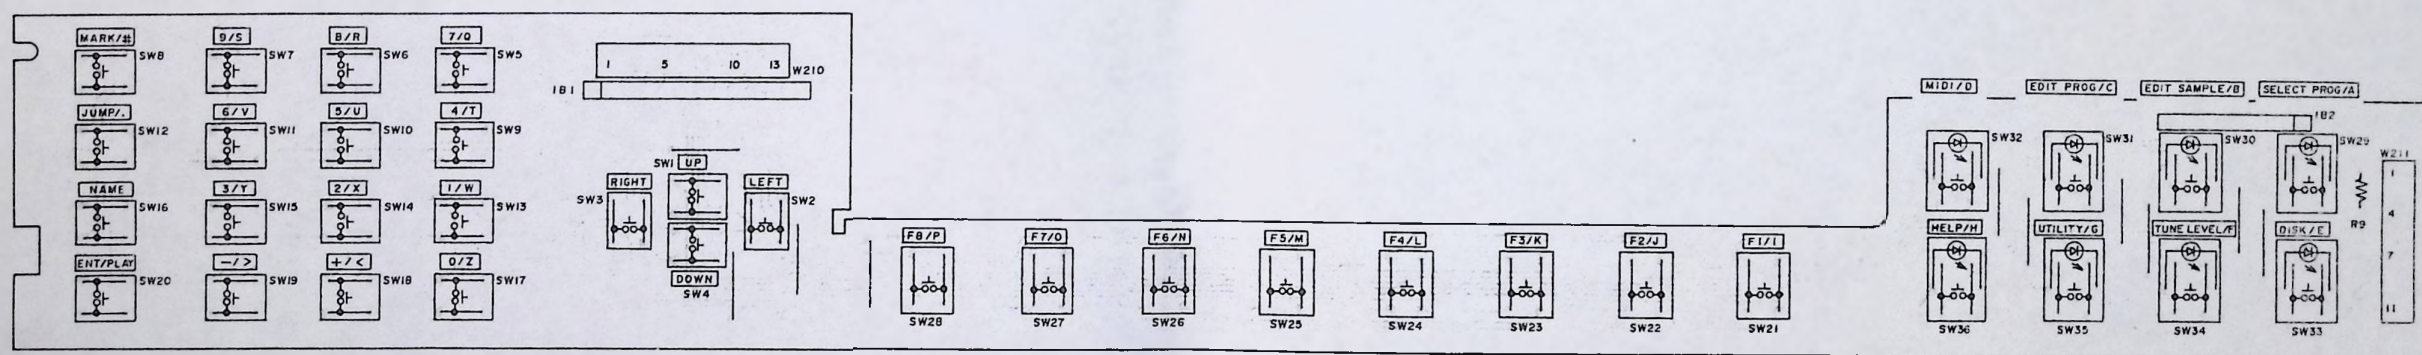


OPERATION PCB L6036A502F

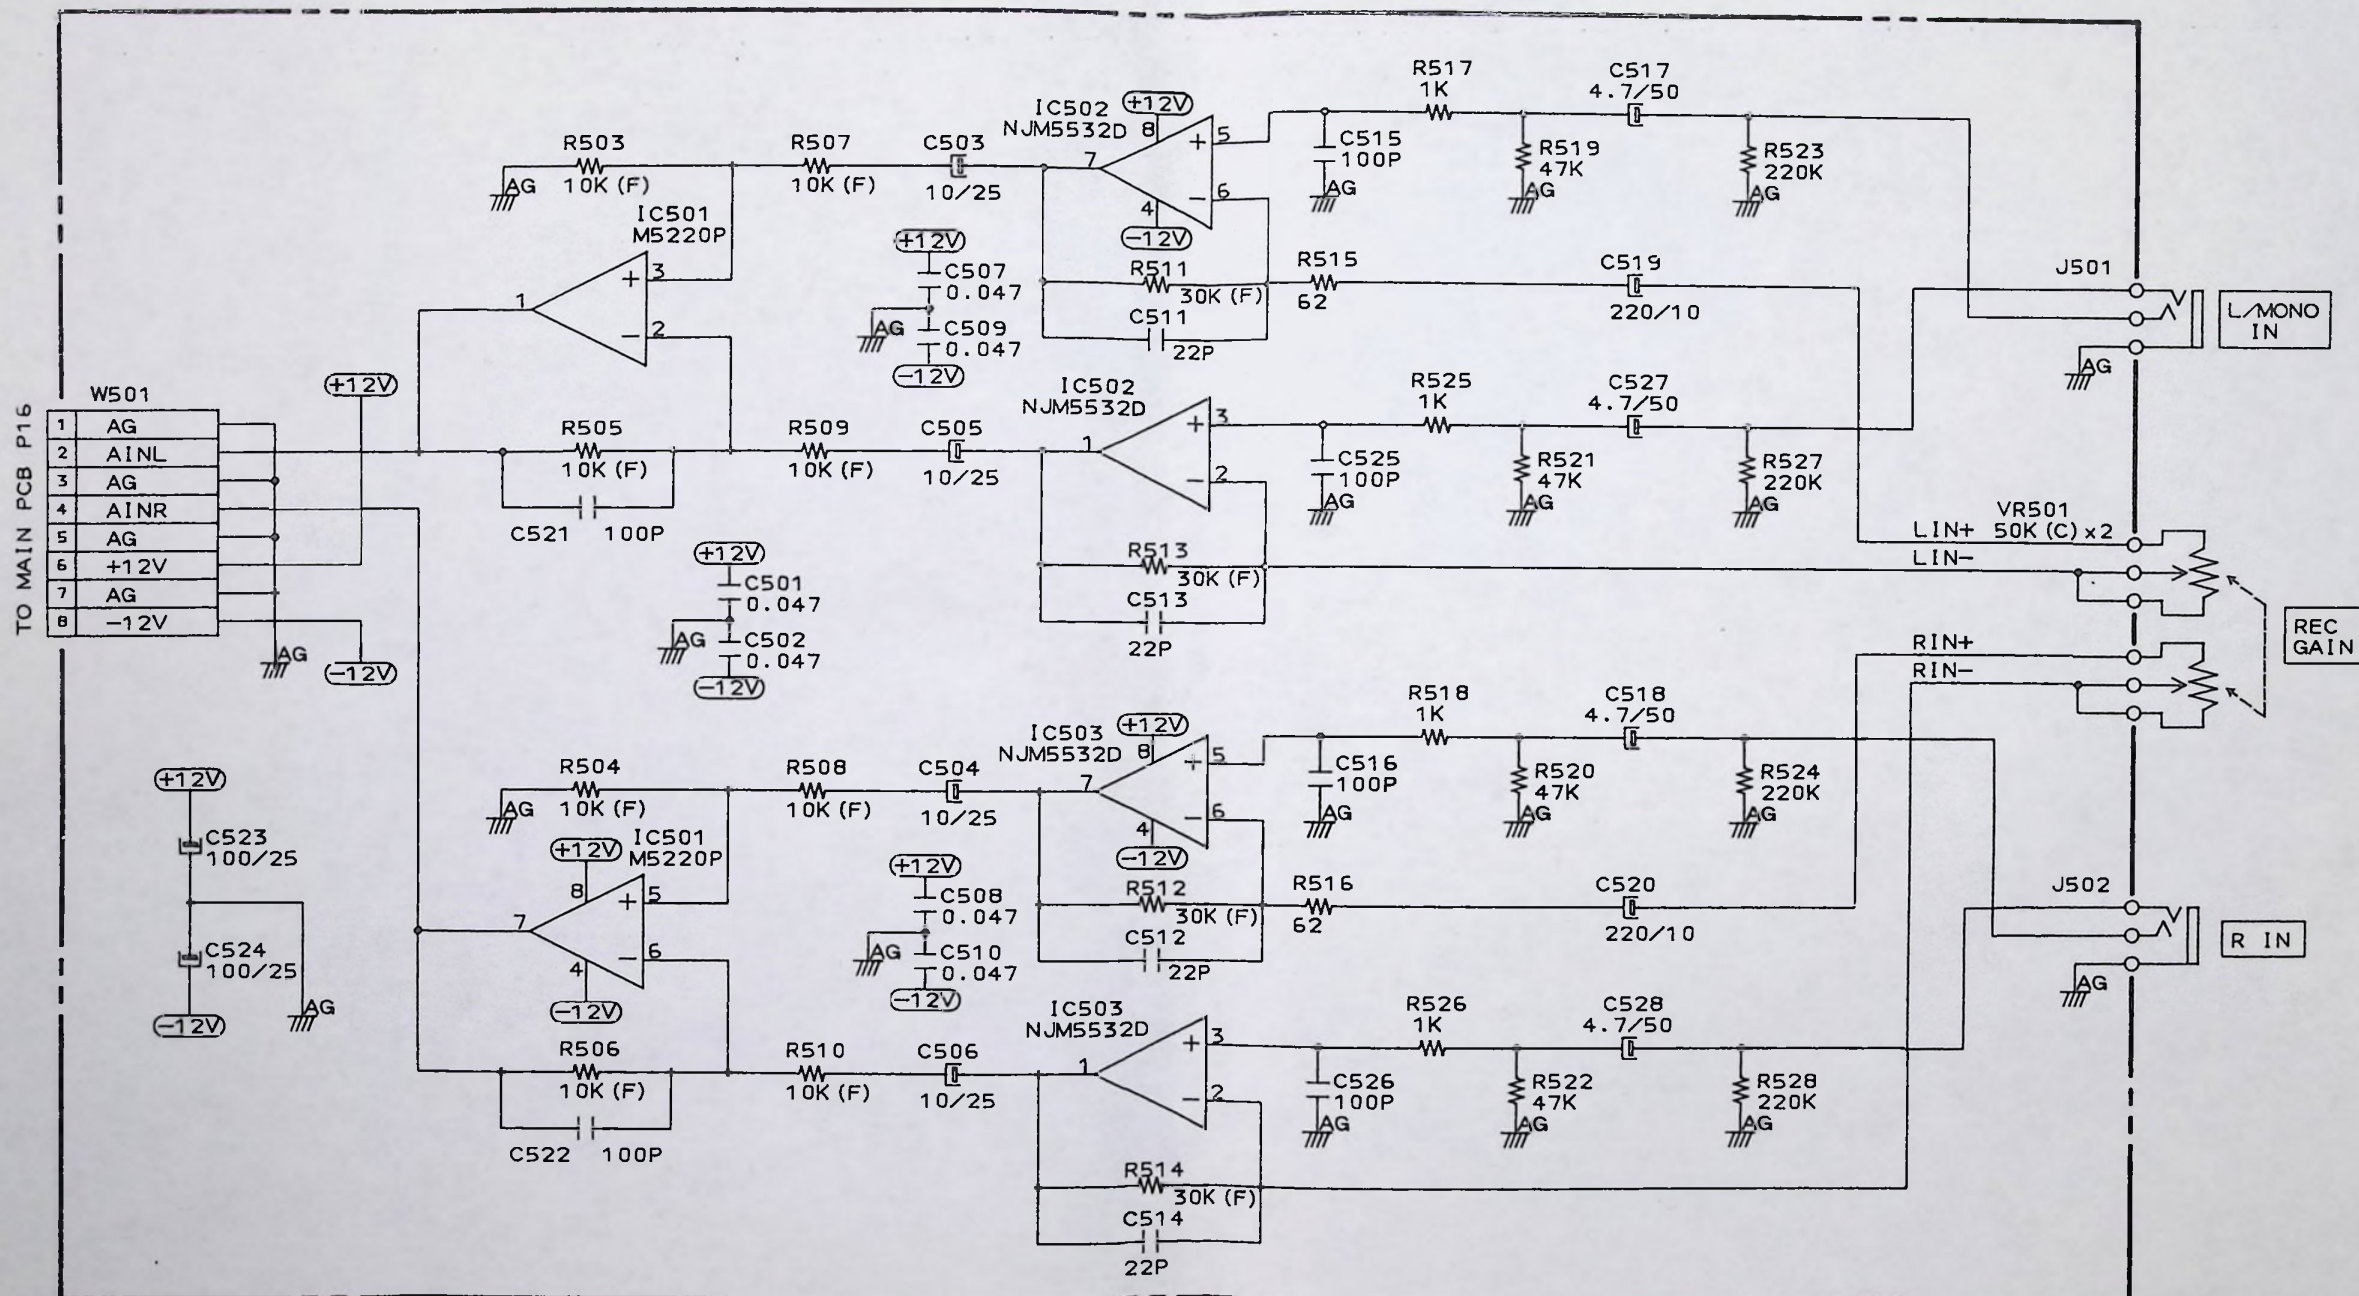

ANALOG PCB L6039A503D

NOTE:
UNLESS OTHERWISE SPECIFIED
ALL RESISTORS IN OHMS 1/6W(J)
ALL CAPACITORS IN μ F (P=PF)
ALL ELECTROLYTIC CAPACITORS IN μ F/WV


S2000
ANALOG
SCHEMATIC DIAGRAM
NO.18-9 L603906M
A3

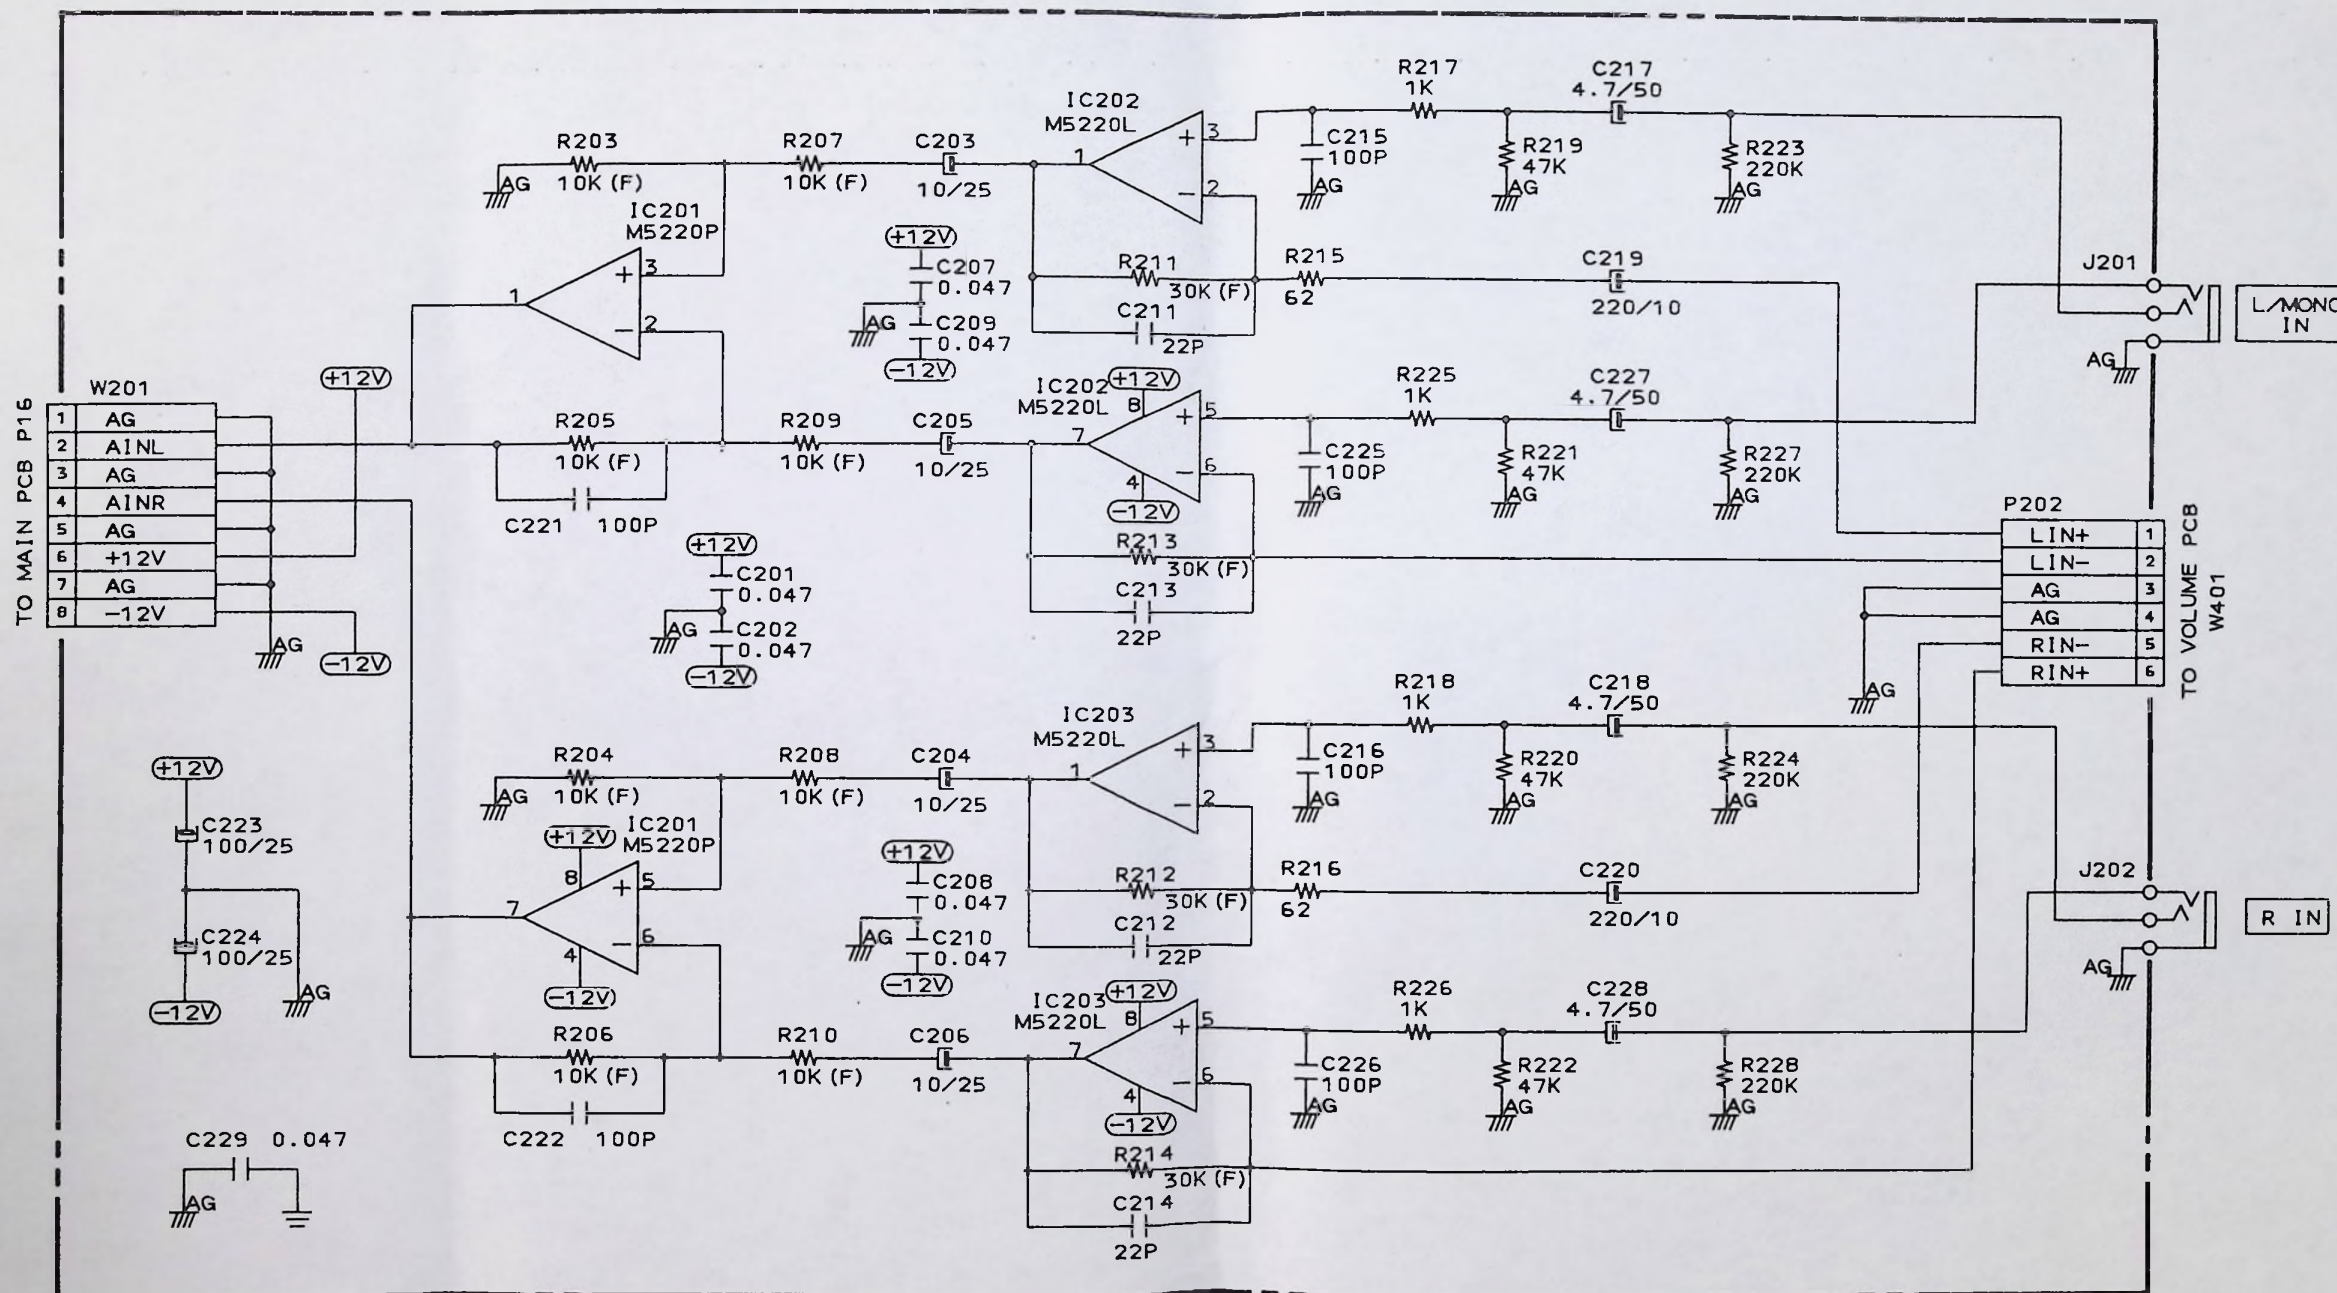


ANALOG IN PCB L6036A501B

NOTE:
 UNLESS OTHERWISE SPECIFIED
 ALL RESISTORS IN OHMS 1/6W(J)
 ALL CAPACITORS IN μ F (P=PF)
 ALL ELECTROLYTIC CAPACITORS IN μ F/WV


S3000XL
 ANALOG INPUT
 SCHEMATIC DIAGRAM
 NO.18-10 L603603M
 A3

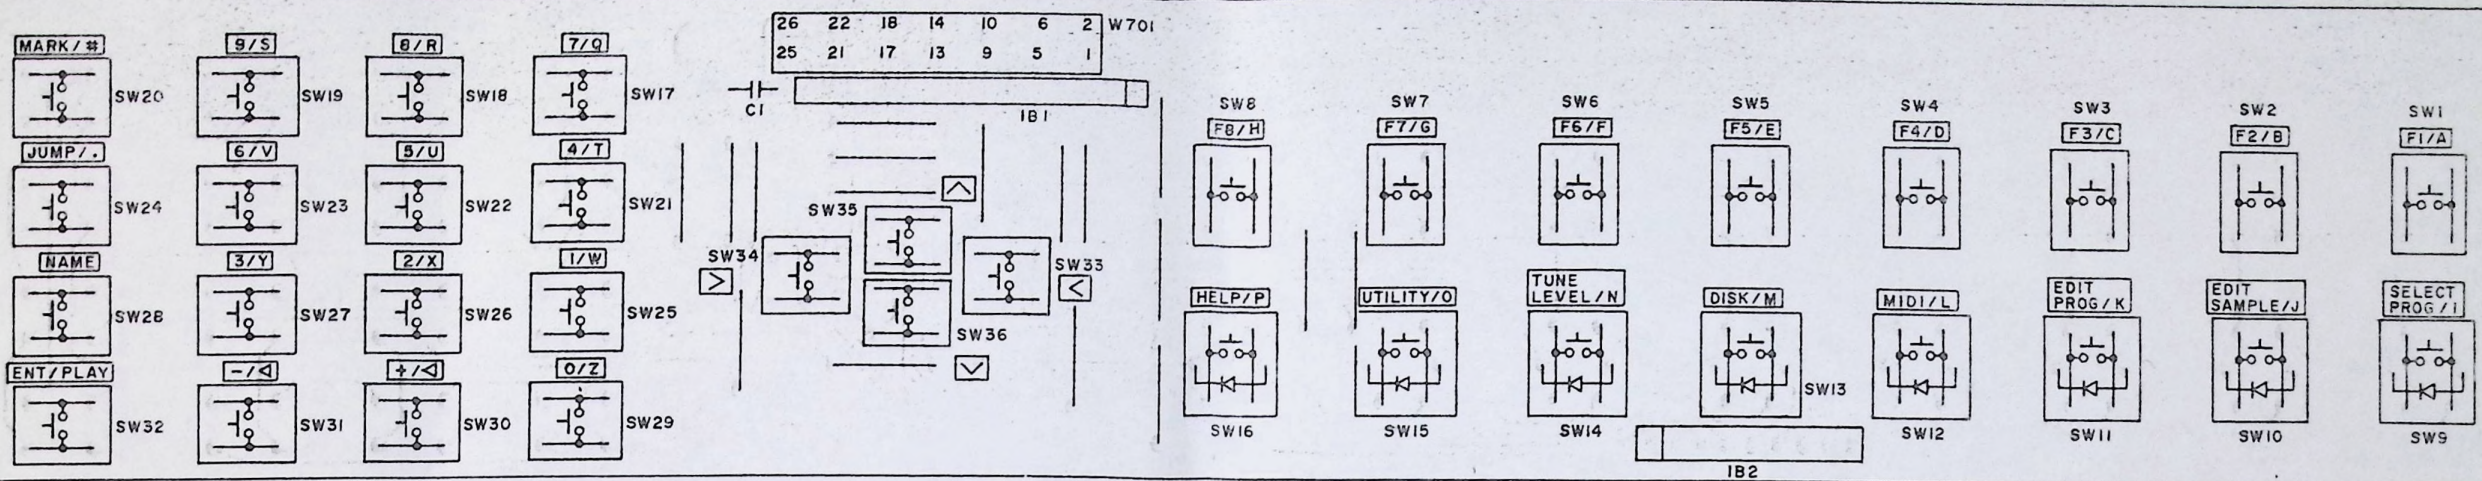


OPERATION PCB L6028A5070

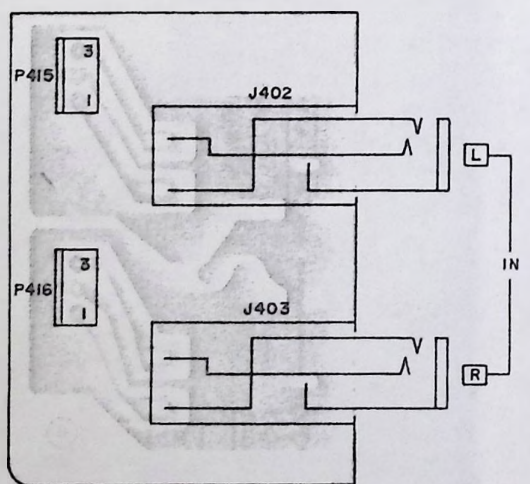


JACK(1) PCB L6028B504E(J1)

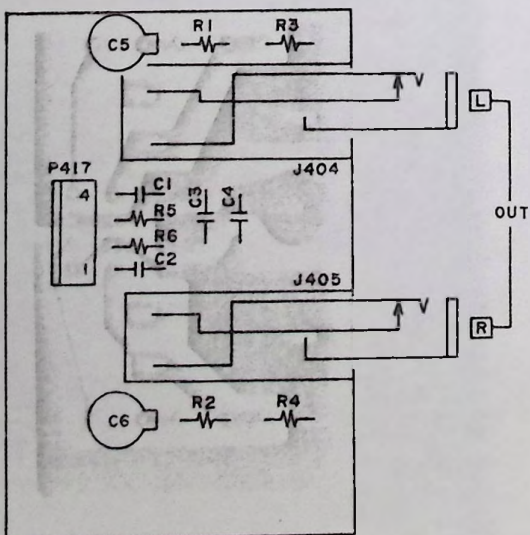

JACK(2) PCB L6028B504F(J1)

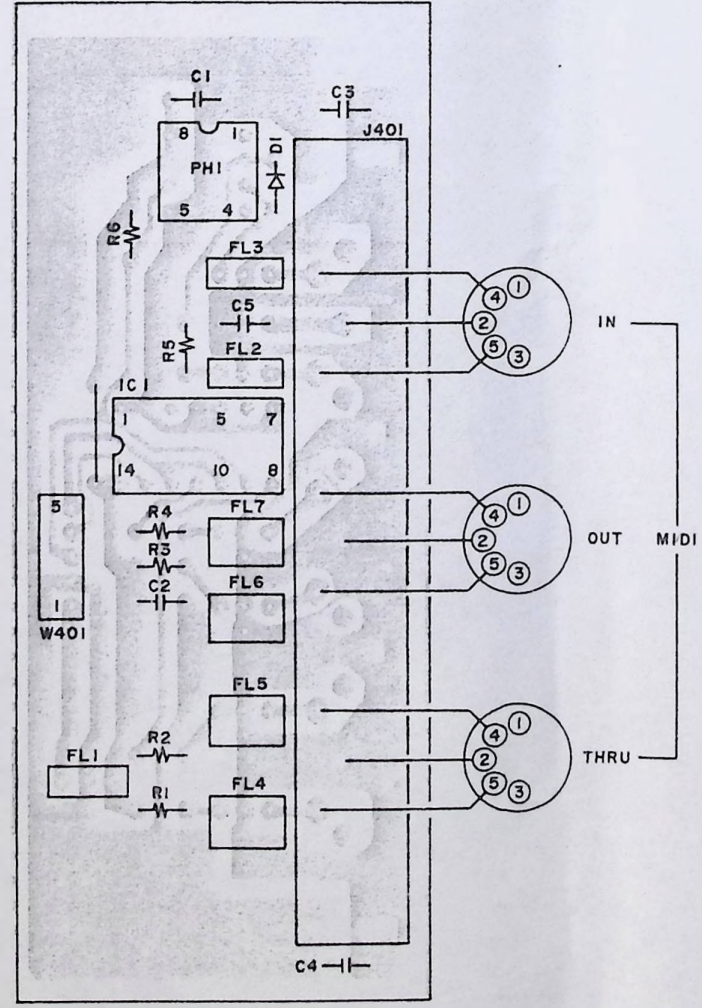

MIDI PCB L6028B504C(J1)

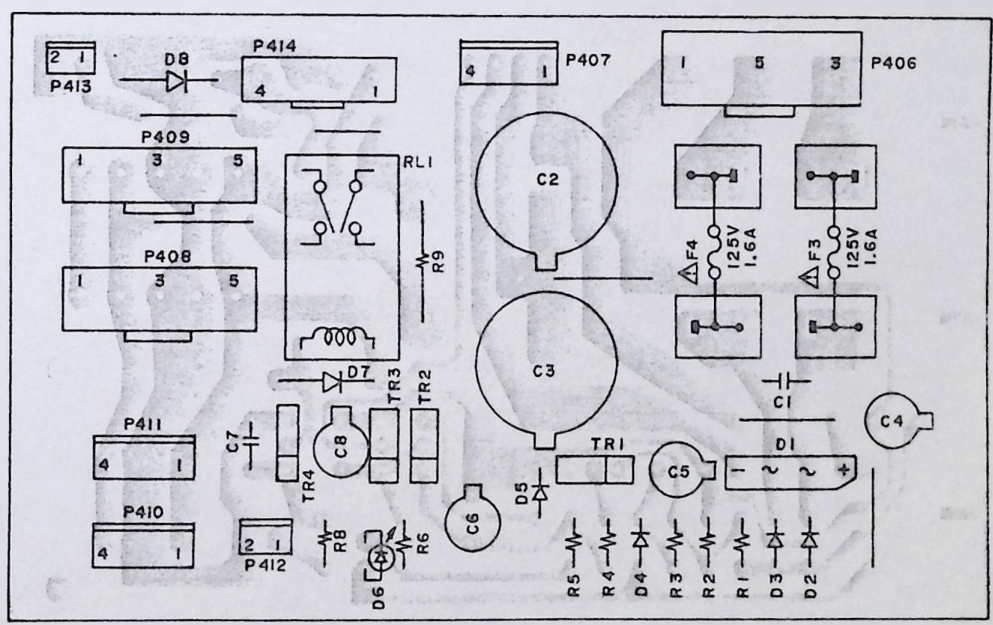


POWER SUPPLY PCB L6028B504B(J1)


WARNING: Δ INDICATES SAFETY CRITICAL COMPONENTS FOR CONTINUED SAFETY. REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS.

AVERTISSEMENT: Δ IL INDIQUE LES COMPOSANTS CRITIQUES DE SÉCURITÉ POUR MAINTENIR LE DEGRÉ DE SÉCURITÉ DE L'APPAREIL. NE REMPLACER QUE DES PIÈCES RECOMMANDÉES PAR LE FABRICANT.


NOTE: PARTS DIFFER DEPENDING ON MODEL NUMBER. REFER TO SCHEMATIC DIAGRAMS FOR PERTINENT PARTS INFORMATION.

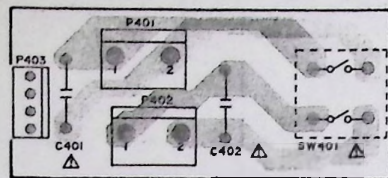

POWER SW PCB L6038A502D

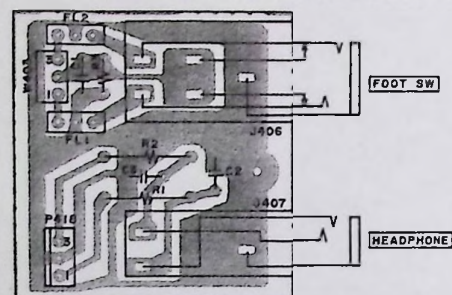


JACK(3) PCB L6028B504G(J1)

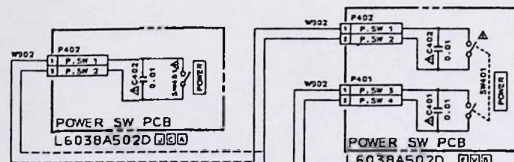


POWER SW PCB L6038A502D

POWER SW PCB L6038A502D

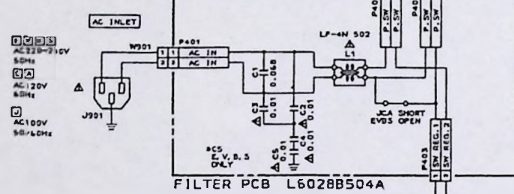


FILTER PCB L6028B504A

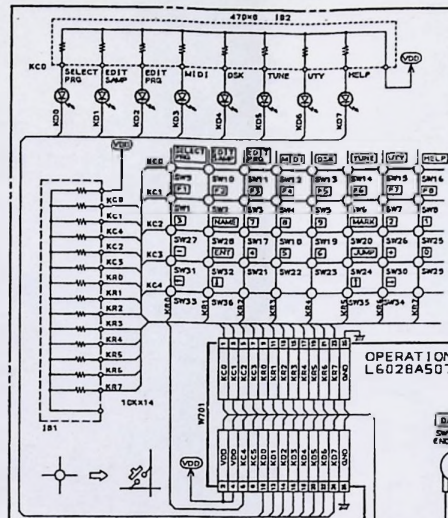


OPERATION PCB L6028A5070


CONTRAST VR PCB L6028B504D




CONTRAST VR PCB L6028B504D(J1)

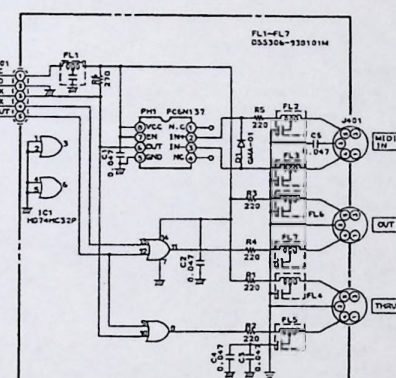


MIDI PCB L6028B504C




EFFECT PCB L6038B5030

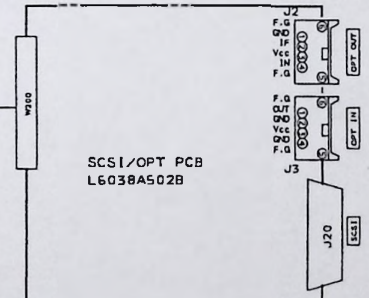


SCSI/OPT PCB L6038A502B

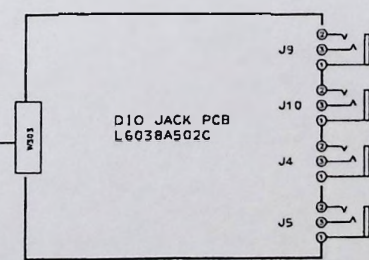


DIO JACK PCB L6038A502C

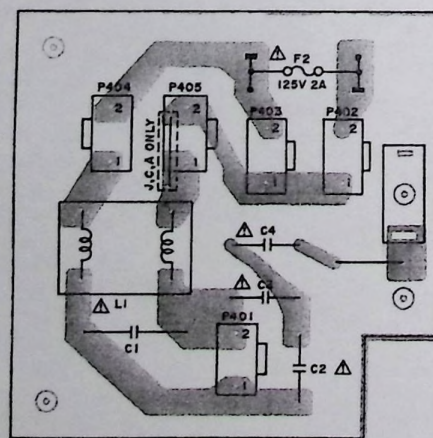


FILTER PCB L6028B504A(J1)

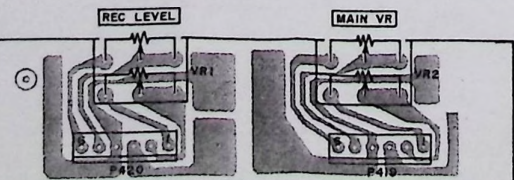


VR PCB L6028B504H(J1)

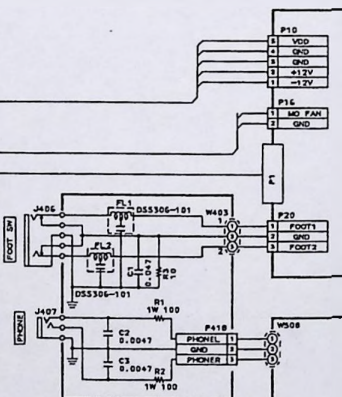


JACK(3) PCB L6028B504G

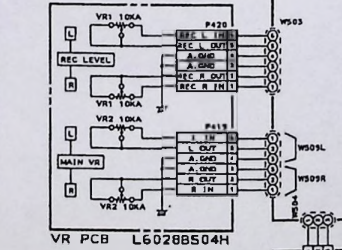


AD/DA PCB L6028A5050

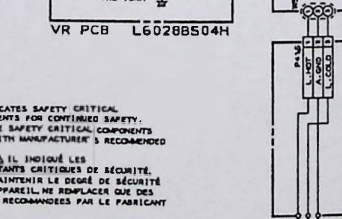

VR PCB L6028B504H

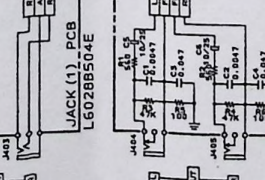

JACK(1) PCB L6028B504E

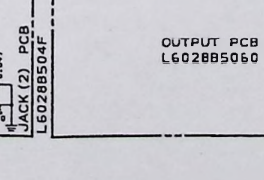

JACK(2) PCB L6028B504F


OUTPUT PCB L6028B5060

NOTE: PARTS DIFFER DEPENDING ON MODEL NUMBER. REFER TO SCHEMATIC DIAGRAMS FOR PERTINENT PARTS INFORMATION.

WARNING: INDICATES SAFETY CRITICAL COMPONENTS FOR CONTINUED SAFETY. REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS.

AVERTISSEMENT: IL INDIQUE LES COMPOSANTS CRITIQUES DE SÉCURITÉ. POUR MAINTENIR LE DEGRÉ DE SÉCURITÉ DE L'APPAREIL, NE REMPLACEZ QUE DES PIÈCES RECOMMANDÉES PAR LE FABRICANT.

S3200XL
CONNECTION DIAGRAM
NO.18-11 L603801M
A1

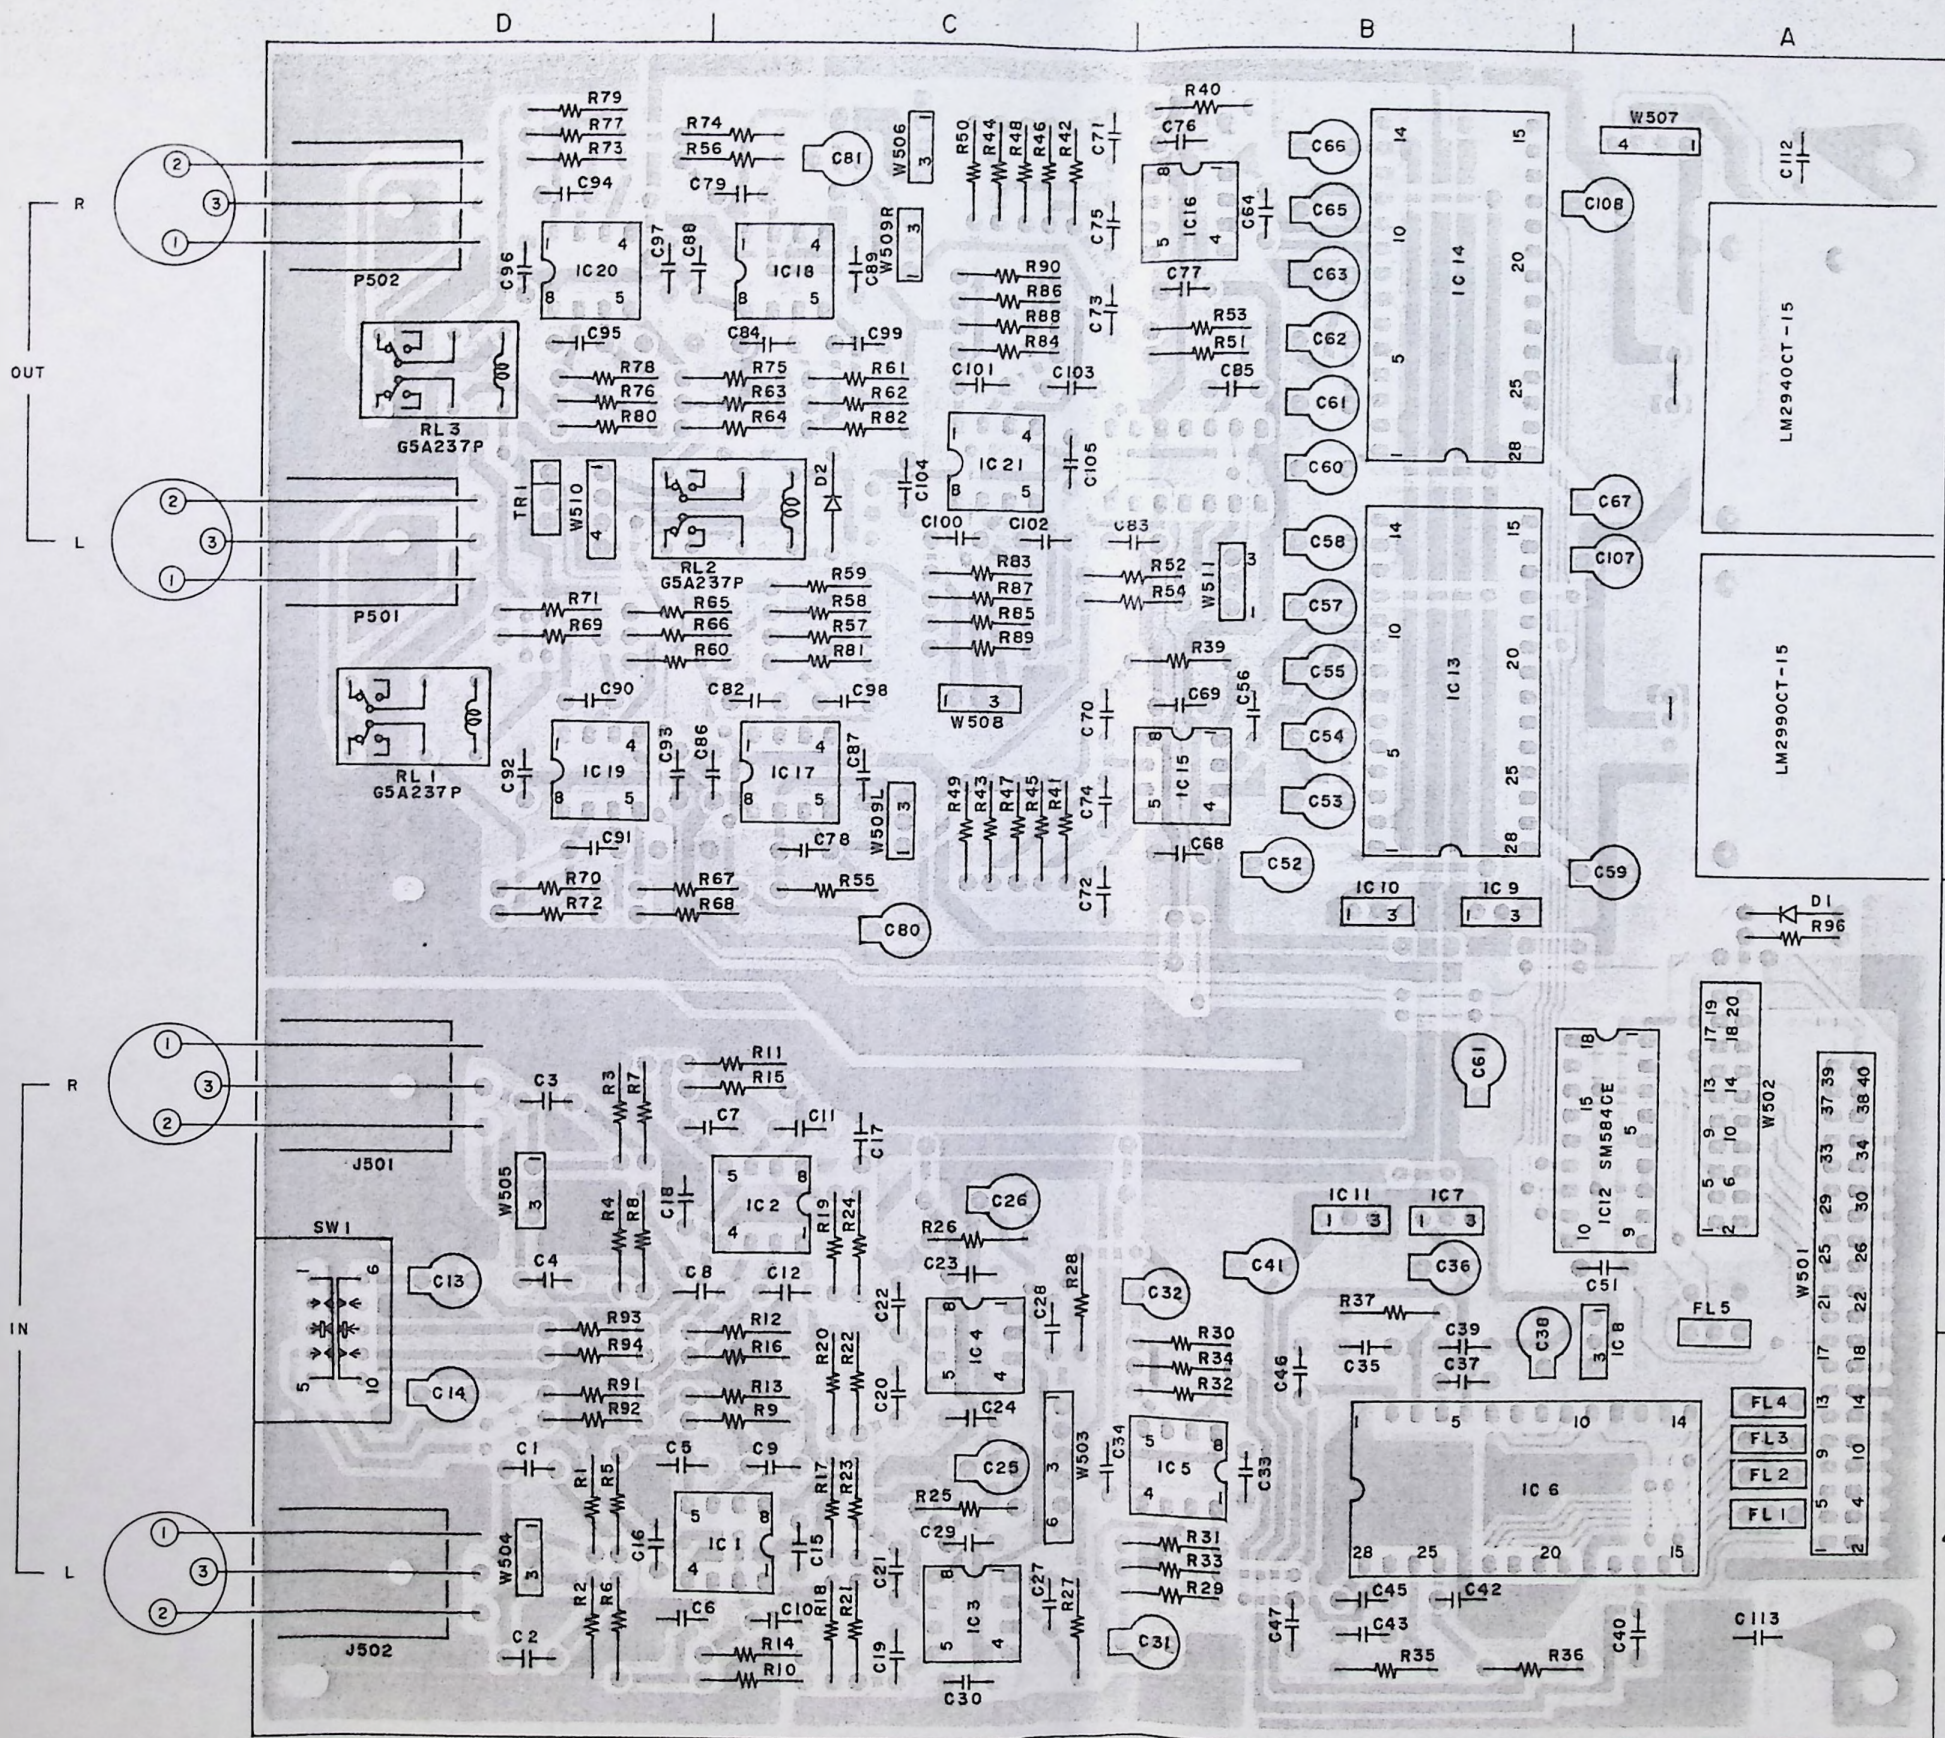


AD/DA PCB L6028A5050(J1)

PRINCIPAL PARTS LOCATION

ICs	
IC1.....	C4
IC2.....	C3
IC3.....	C4
IC4.....	C3,4
IC5.....	B4
IC6.....	A,B4
IC7.....	B3
IC8.....	A3,4
IC9.....	B3
IC10.....	B3
IC11.....	B3
IC12.....	A3
IC13.....	B2
IC14.....	B1
IC15.....	B2
IC16.....	B1
IC17.....	C2
IC18.....	C1
IC19.....	D2
IC20.....	D1
IC21.....	C1,2

TRANSISTOR TR1 D2

CONNECTORS	
W501.....	A3,4
W502.....	A3
W503.....	C4
W504.....	D4
W505.....	D3
W506.....	C1
W507.....	A1
W508.....	C2
W509(L).....	C2
W509(R).....	C1
W510.....	D2
W511.....	B2

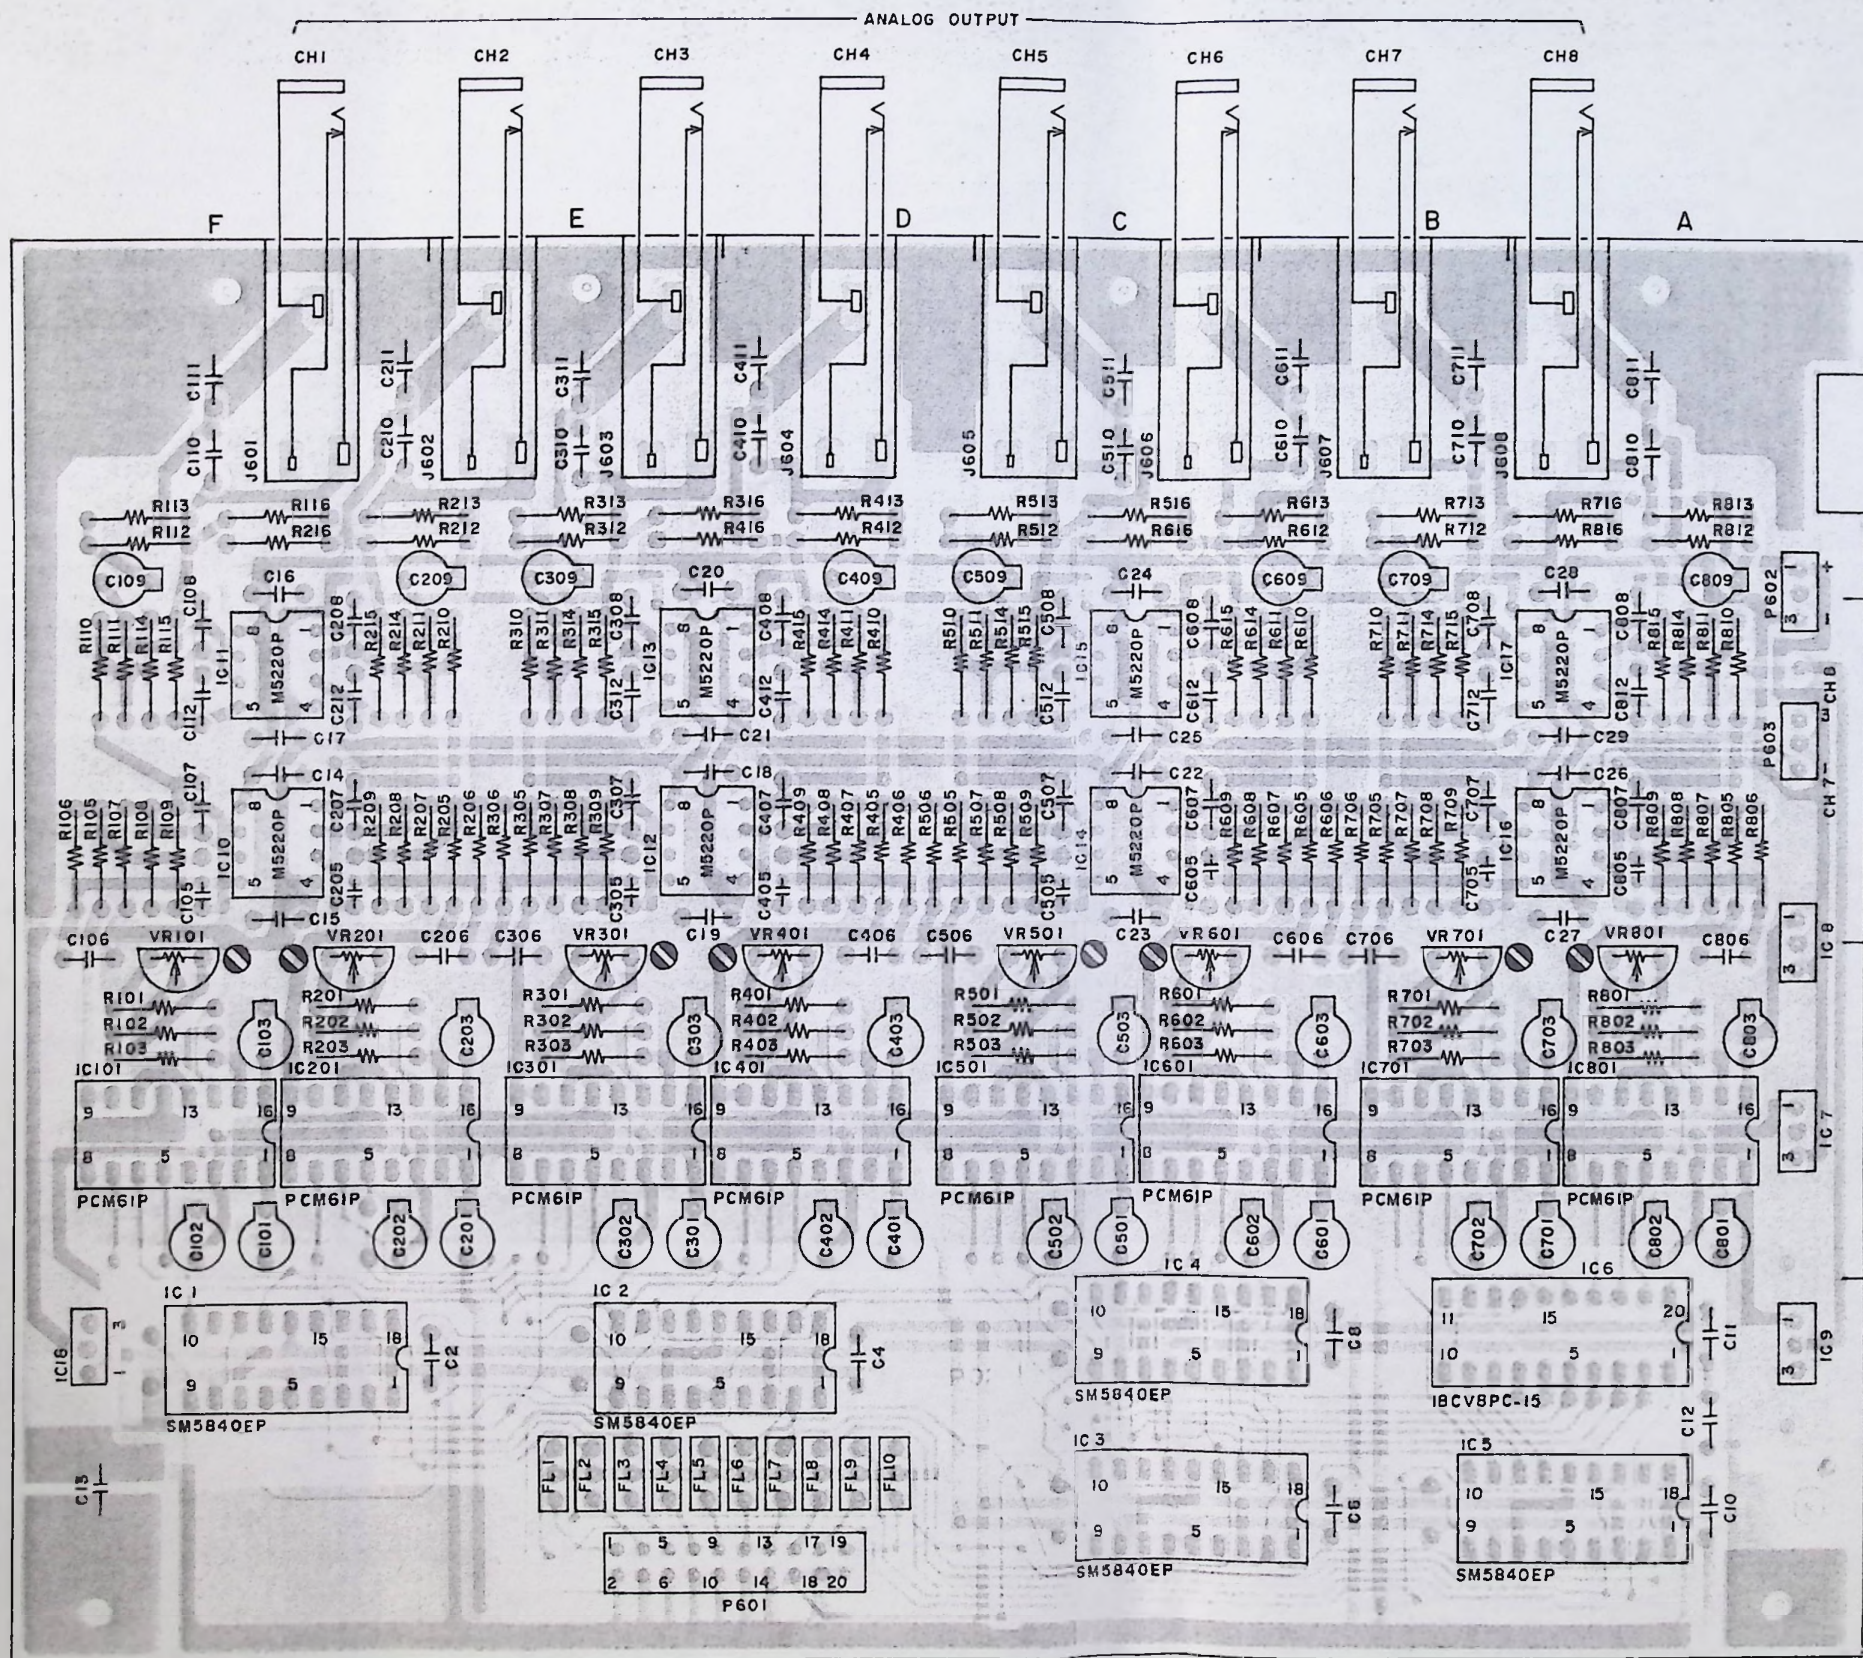


PRINCIPAL PARTS LOCATION

ICs	
IC1	F4
IC2	D,E4
IC3	C4
IC4	C4
IC7	A3
IC8	A2,3
IC9	A4
IC10	F2
IC11	F2
IC12	D,E2
IC13	D,E2
IC14	C2
IC15	C2
IC16	A2
IC17	A2
IC18	F4
IC101	F3
IC201	F3
IC301	E3
IC401	D3
IC501	C3
IC601	B,C3
IC701	B3
IC801	A3

CONNECTORS	
P601	D,E4
P602	A1,2
P603	A2

OUTPUT PCB L6028B5060(J1)


NOTE : PARTS DIFFER DEPENDING ON MODEL NUMBER
REFER TO SCHEMATIC DIAGRAMS FOR PERTINENT
PARTS INFORMATION

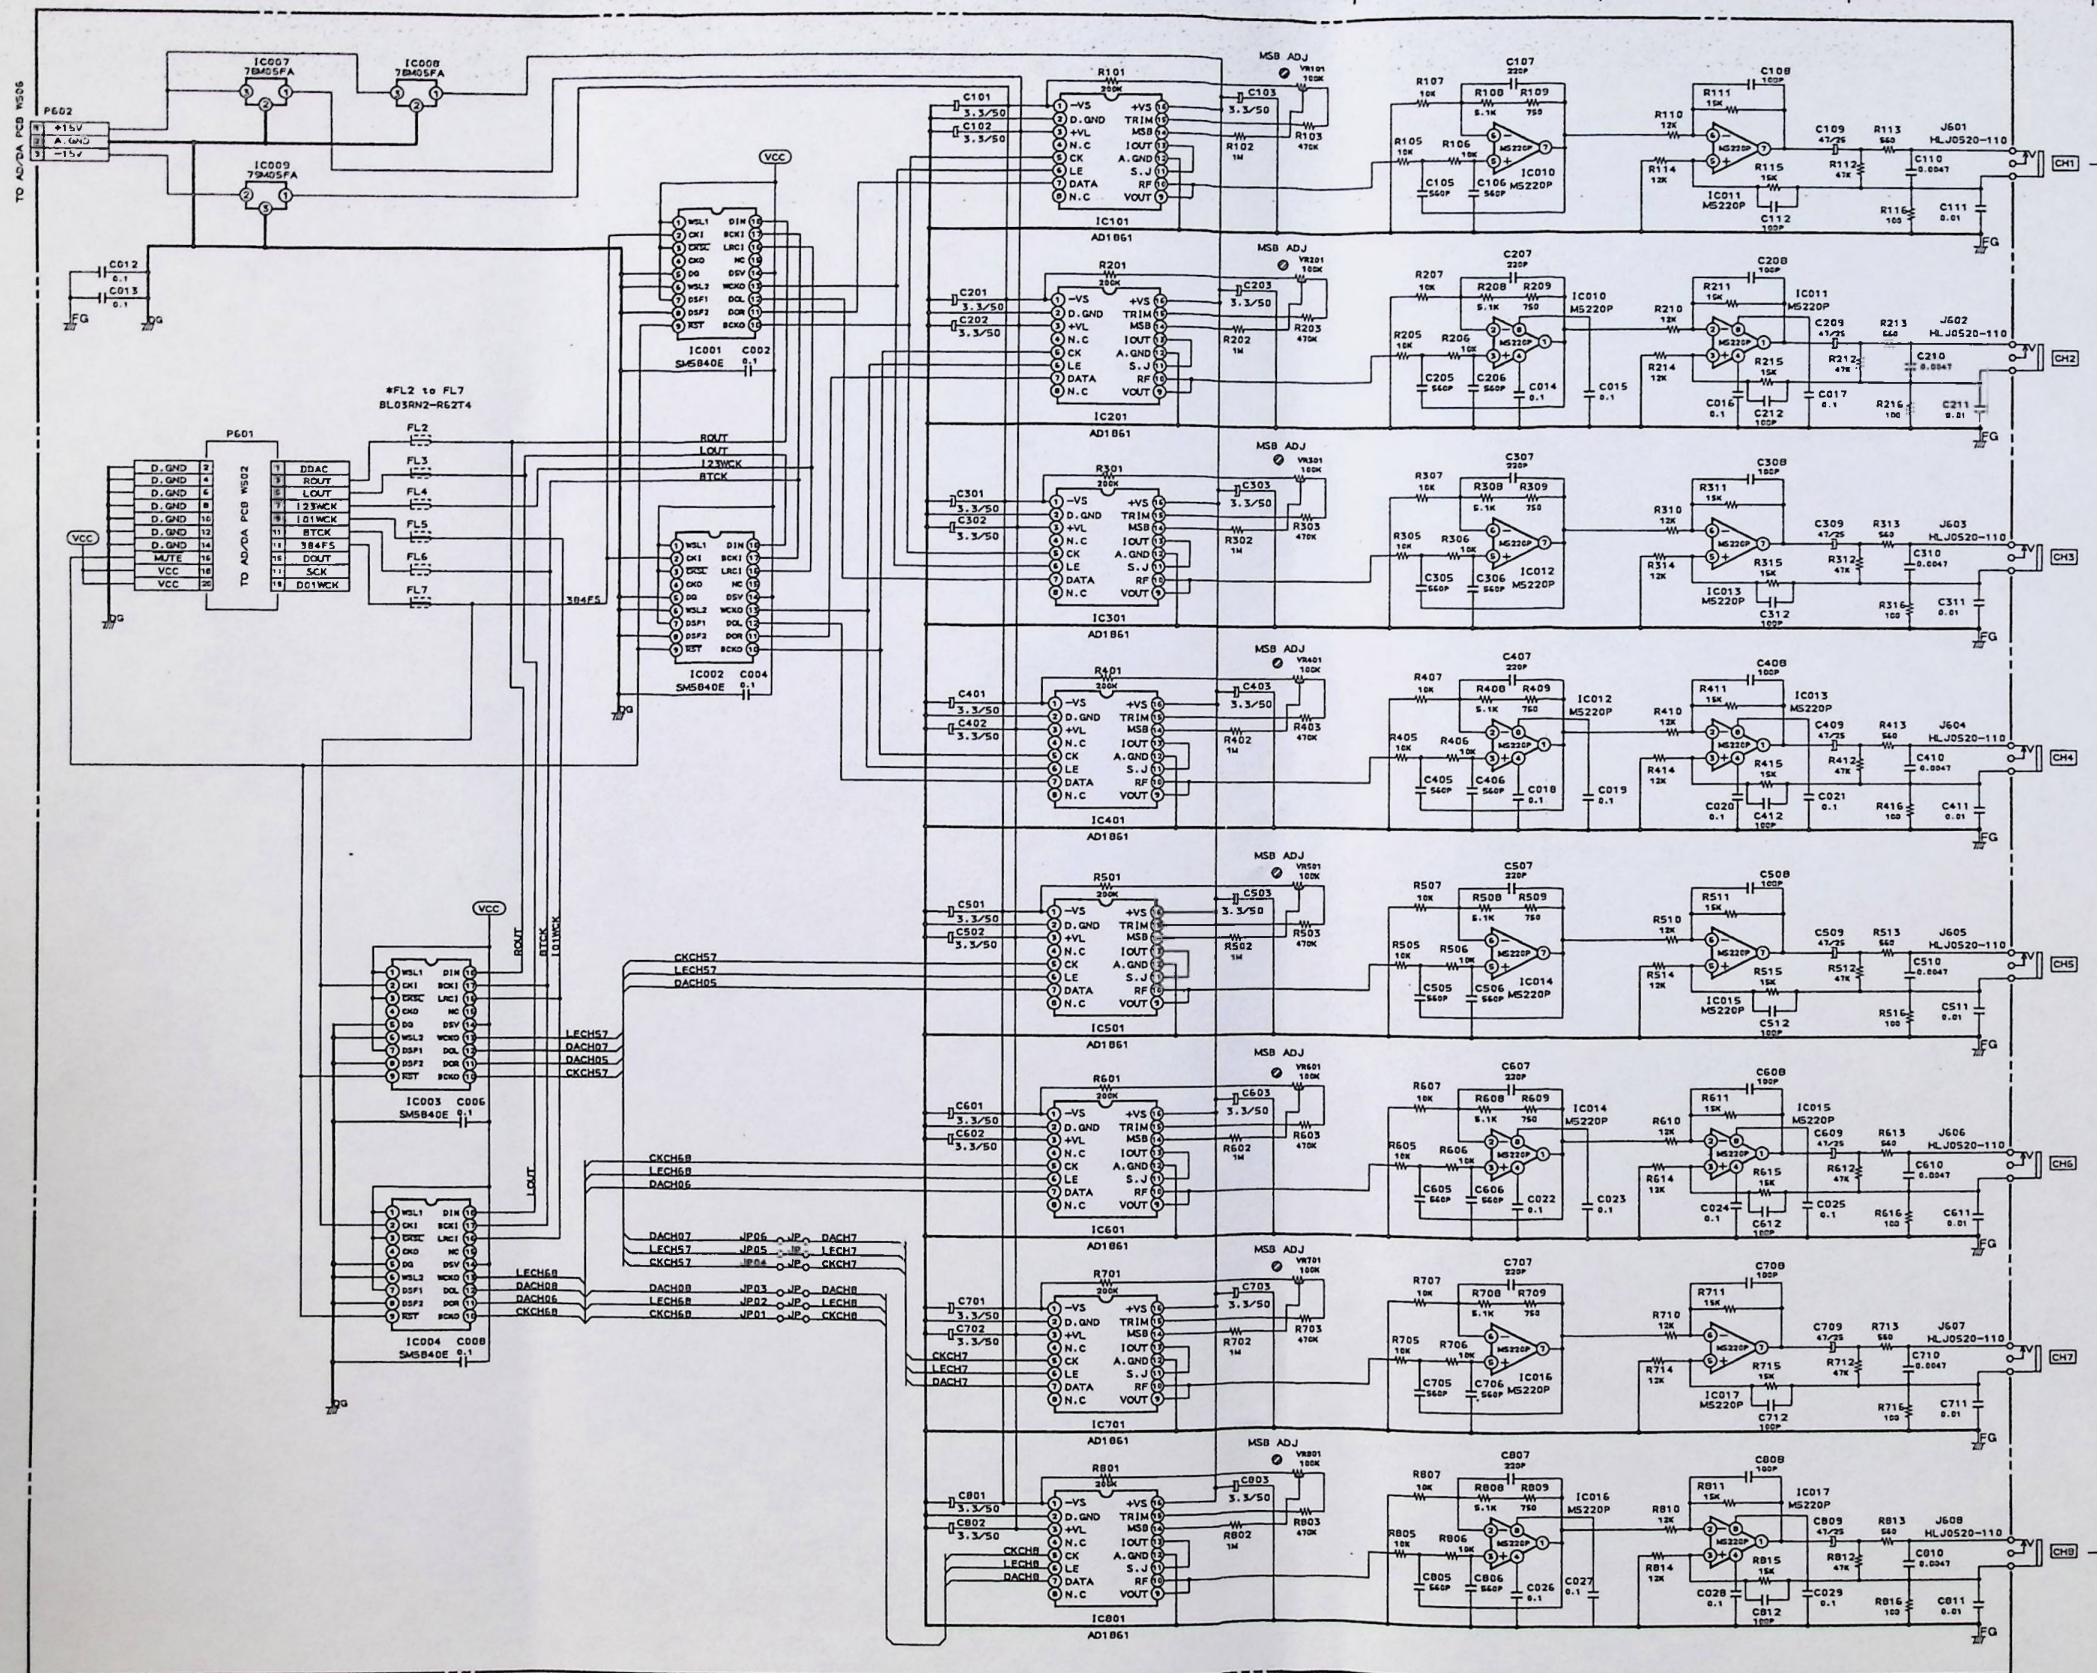

OUTPUT PCB L6028B5060


NOTE:
UNLESS OTHERWISE SPECIFIED
ALL RESISTORS IN OHMS 1/4W
ALL CAPACITORS IN pF (P=PPF)
ALL ELECTROLYTIC CAPACITORS IN pF/W

S3200XL
OUTPUT
SCHEMATIC DIAGRAM
NO.18-13 L602803M
A1

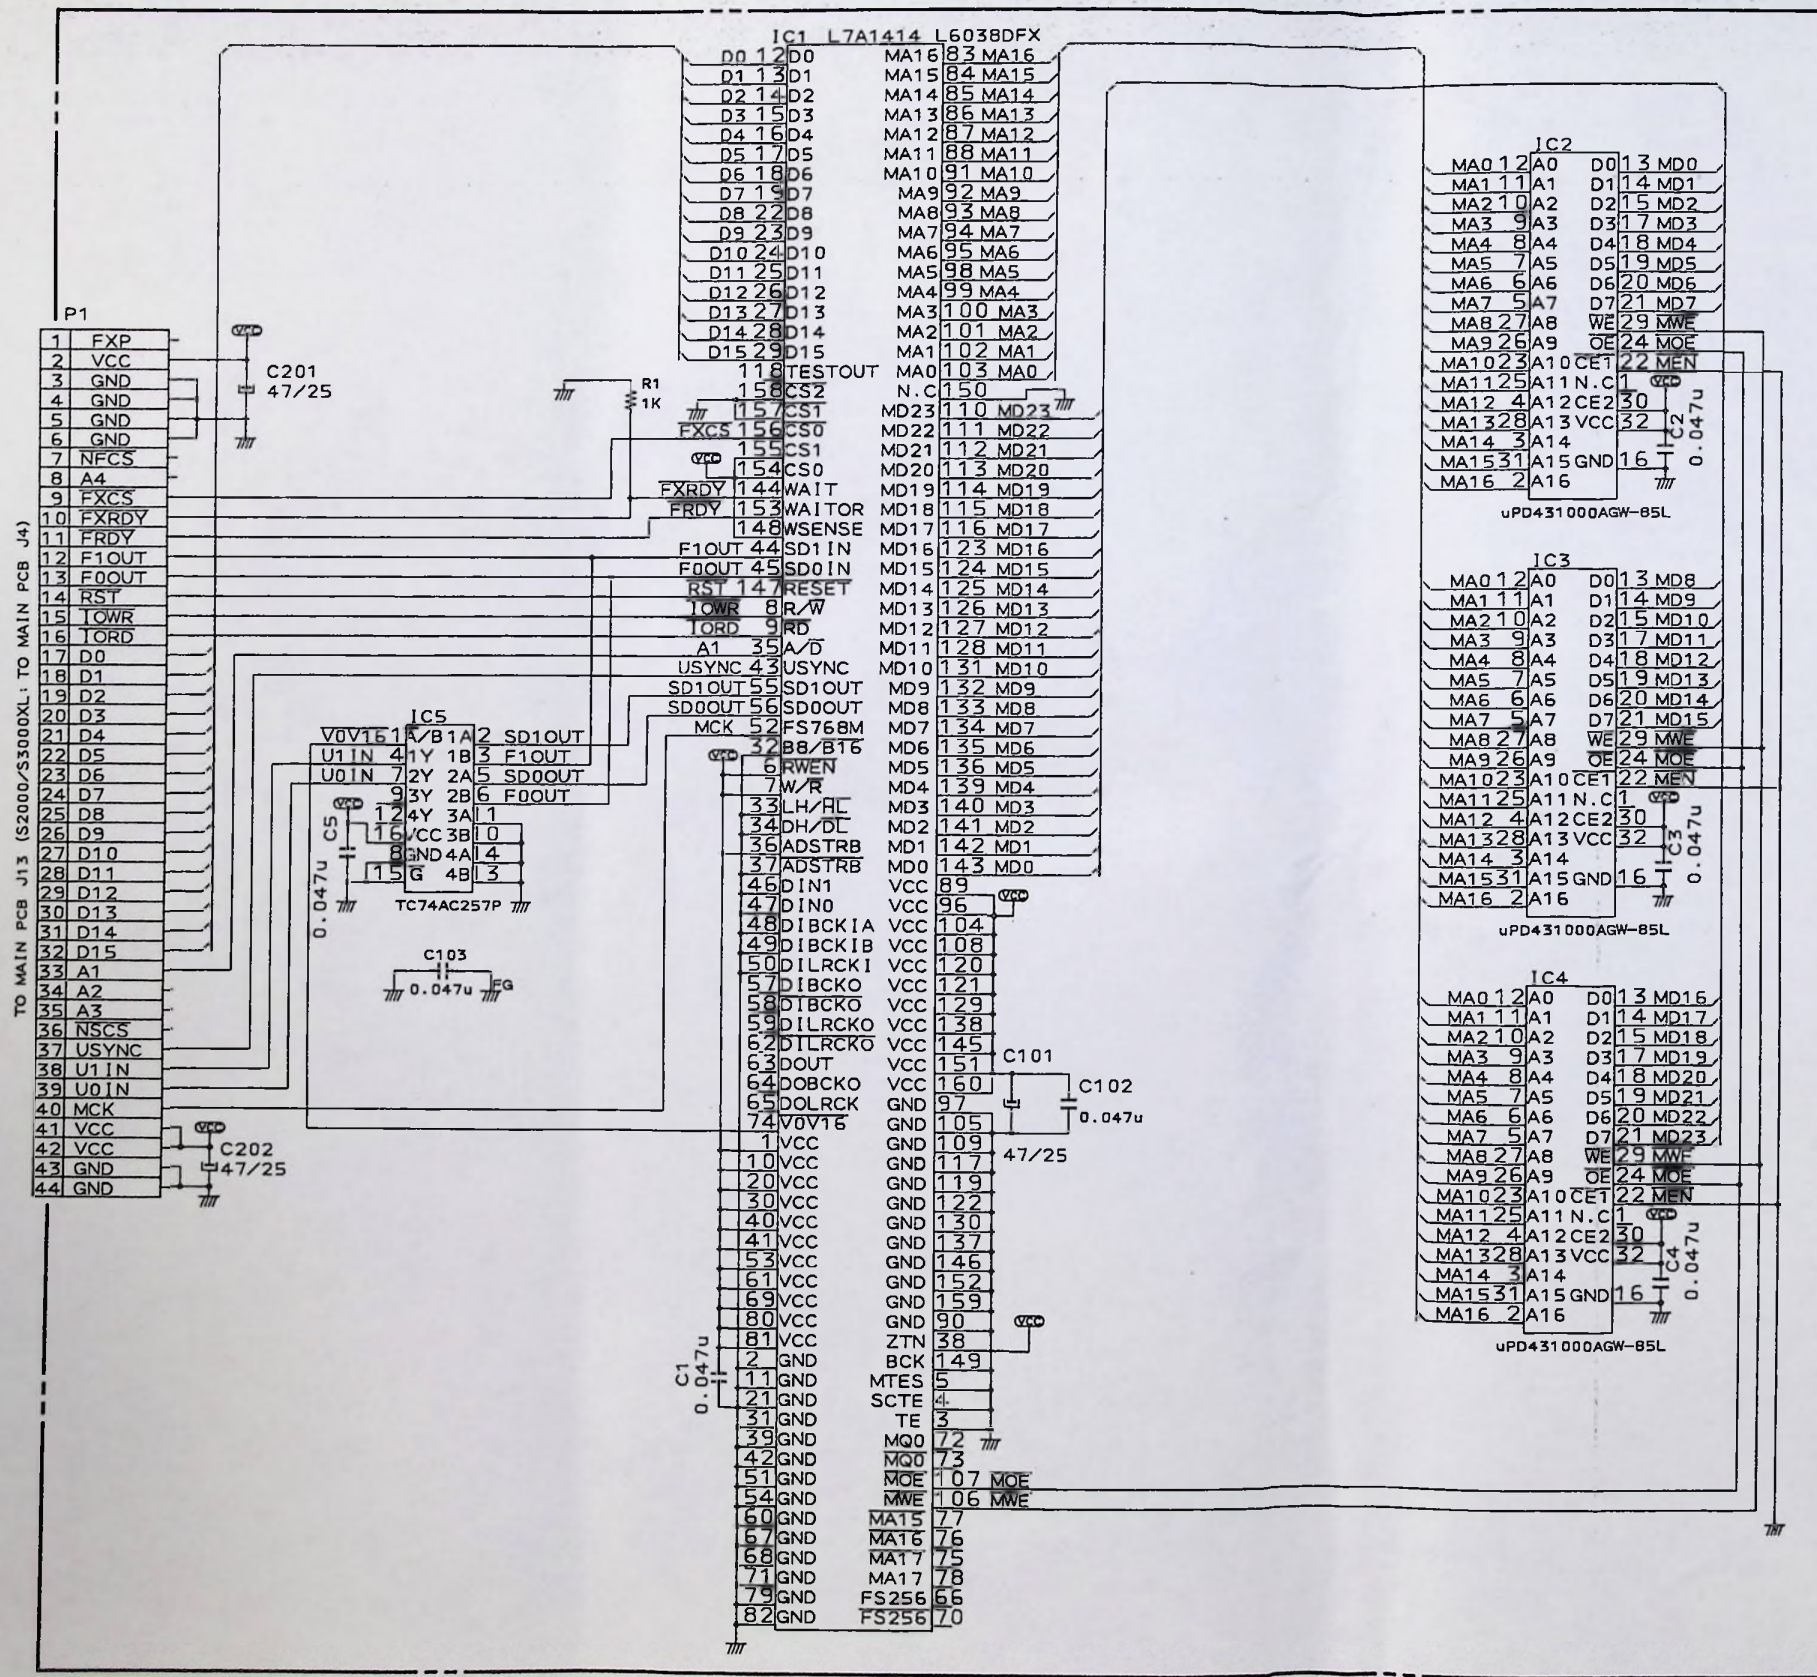


NOTE:
UNLESS OTHERWISE SPECIFIED
ALL RESISTORS IN OHMS
ALL CAPACITORS IN μ F (P-PF)
ALL ELECTROLYTIC CAPACITORS IN μ F/WV


S3200XL
EFFECT
S2000, S3000XL
EB16 (OPTION)
SCHEMATIC DIAGRAM
NO.18-14 L603803M

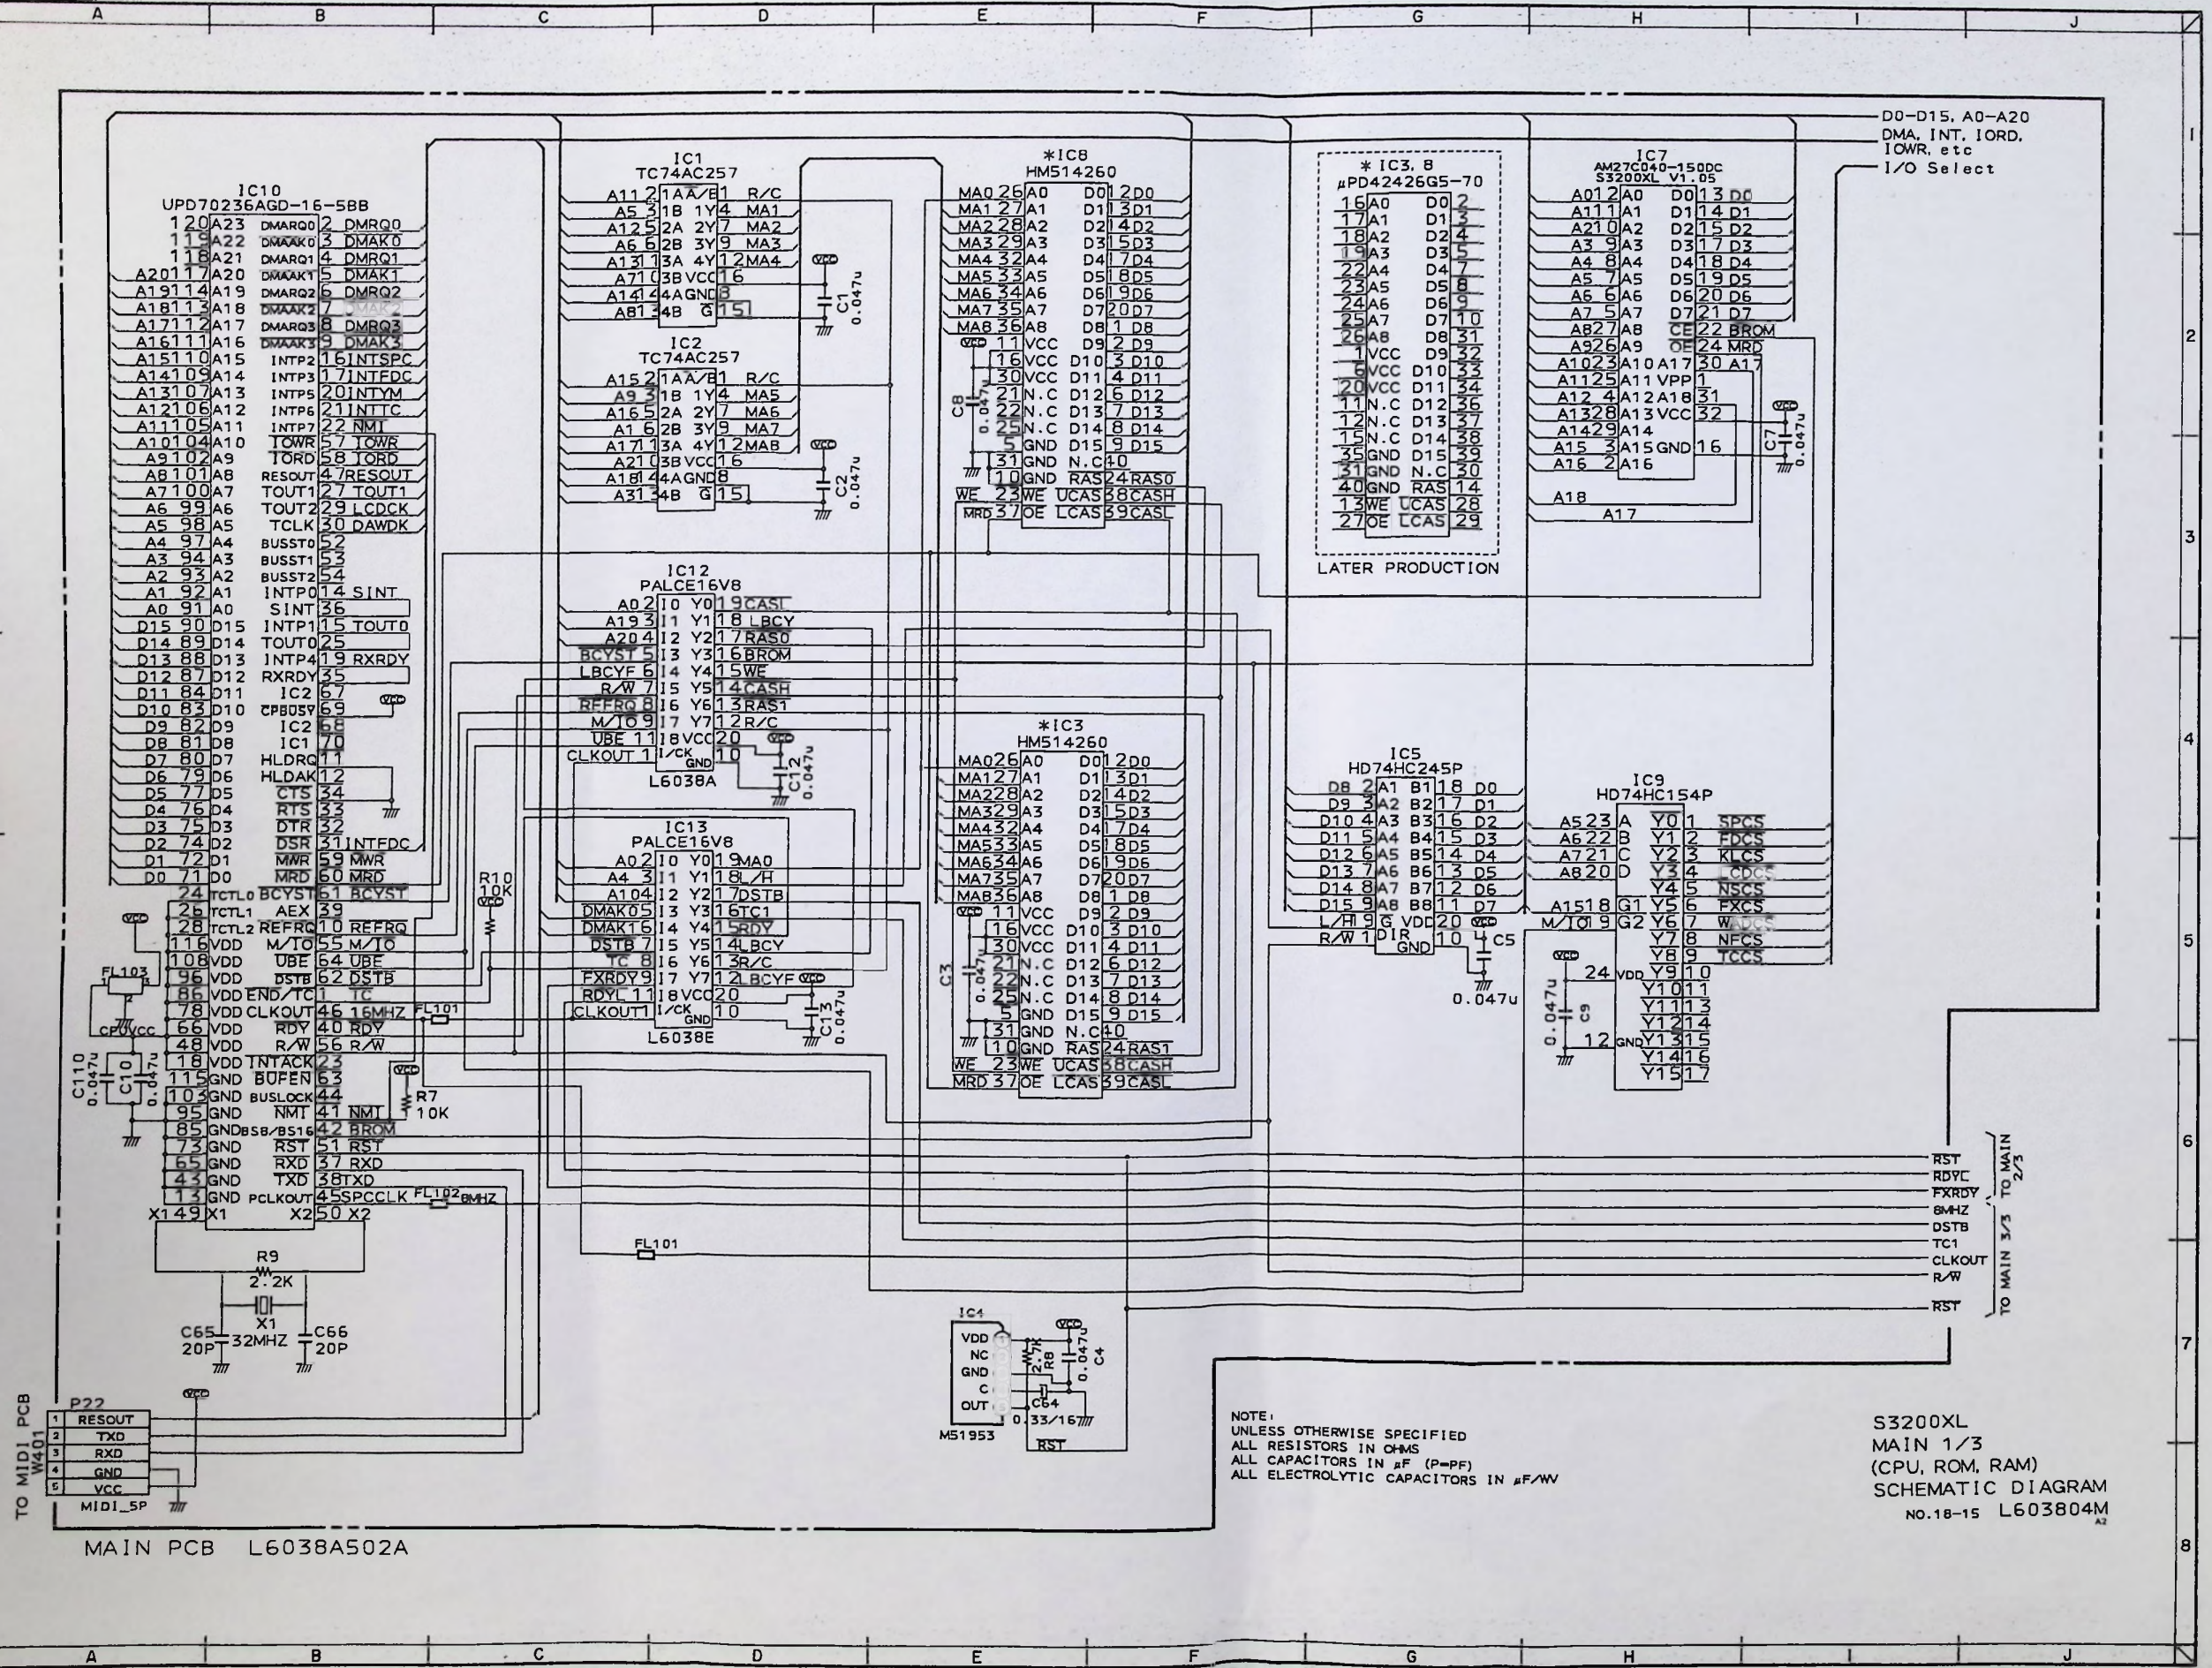

D0-D15, A0-A20
DMA, INT, IORD,
IOWR, etc
I/O Select

* IC3, B
μPD42426G5-70
16A0 D0 2
17A1 D1 3
18A2 D2 4
19A3 D3 5
20A4 D4 6
21A5 D5 7
22A6 D6 8
23A7 D7 9
24A8 D8 10
25A9 D9 11
26A10 D10 12
27A11 D11 13
28A12 D12 14
29A13 D13 15
30A14 D14 16
31A15 D15 17
32A16 D16 18
33A17 D17 19
34A18 D18 20
35A19 D19 21
36A20 D20 22
37A21 D21 23
38A22 D22 24
39A23 D23 25
40A24 D24 26
41A25 D25 27
42A26 D26 28
43A27 D27 29
44A28 D28 30
45A29 D29 31
46A30 D30 32
47A31 D31 33
48A32 D32 34
49A33 D33 35
50A34 D34 36
51A35 D35 37
52A36 D36 38
53A37 D37 39
54A38 D38 40
55A39 D39 41
56A40 D40 42
57A41 D41 43
58A42 D42 44
59A43 D43 45
60A44 D44 46
61A45 D45 47
62A46 D46 48
63A47 D47 49
64A48 D48 50
65A49 D49 51
66A50 D50 52
67A51 D51 53
68A52 D52 54
69A53 D53 55
70A54 D54 56
71A55 D55 57
72A56 D56 58
73A57 D57 59
74A58 D58 60
75A59 D59 61
76A60 D60 62
77A61 D61 63
78A62 D62 64
79A63 D63 65
80A64 D64 66
81A65 D65 67
82A66 D66 68
83A67 D67 69
84A68 D68 70
85A69 D69 71
86A70 D70 72
87A71 D71 73
88A72 D72 74
89A73 D73 75
90A74 D74 76
91A75 D75 77
92A76 D76 78
93A77 D77 79
94A78 D78 80
95A79 D79 81
96A80 D80 82
97A81 D81 83
98A82 D82 84
99A83 D83 85
100A84 D84 86
101A85 D85 87
102A86 D86 88
103A87 D87 89
104A88 D88 90
105A89 D89 91
106A90 D90 92
107A91 D91 93
108A92 D92 94
109A93 D93 95
110A94 D94 96
111A95 D95 97
112A96 D96 98
113A97 D97 99
114A98 D98 100
115A99 D99 101
116A100 D100 102
117A101 D101 103
118A102 D102 104
119A103 D103 105
120A104 D104 106
121A105 D105 107
122A106 D106 108
123A107 D107 109
124A108 D108 110
125A109 D109 111
126A110 D110 112
127A111 D111 113
128A112 D112 114
129A113 D113 115
130A114 D114 116
131A115 D115 117
132A116 D116 118
133A117 D117 119
134A118 D118 120
135A119 D119 121
136A120 D120 122
137A121 D121 123
138A122 D122 124
139A123 D123 125
140A124 D124 126
141A125 D125 127
142A126 D126 128
143A127 D127 129
144A128 D128 130
145A129 D129 131
146A130 D130 132
147A131 D131 133
148A132 D132 134
149A133 D133 135
150A134 D134 136
151A135 D135 137
152A136 D136 138
153A137 D137 139
154A138 D138 140
155A139 D139 141
156A140 D140 142
157A141 D141 143
158A142 D142 144
159A143 D143 145
160A144 D144 146
161A145 D145 147
162A146 D146 148
163A147 D147 149
164A148 D148 150
165A149 D149 151
166A150 D150 152
167A151 D151 153
168A152 D152 154
169A153 D153 155
170A154 D154 156
171A155 D155 157
172A156 D156 158
173A157 D157 159
174A158 D158 160
175A159 D159 161
176A160 D160 162
177A161 D161 163
178A162 D162 164
179A163 D163 165
180A164 D164 166
181A165 D165 167
182A166 D166 168
183A167 D167 169
184A168 D168 170
185A169 D169 171
186A170 D170 172
187A171 D171 173
188A172 D172 174
189A173 D173 175
190A174 D174 176
191A175 D175 177
192A176 D176 178
193A177 D177 179
194A178 D178 180
195A179 D179 181
196A180 D180 182
197A181 D181 183
198A182 D182 184
199A183 D183 185
200A184 D184 186
201A185 D185 187
202A186 D186 188
203A187 D187 189
204A188 D188 190
205A189 D189 191
206A190 D190 192
207A191 D191 193
208A192 D192 194
209A193 D193 195
210A194 D194 196
211A195 D195 197
212A196 D196 198
213A197 D197 199
214A198 D198 200
215A199 D199 201
216A200 D200 202
217A201 D201 203
218A202 D202 204
219A203 D203 205
220A204 D204 206
221A205 D205 207
222A206 D206 208
223A207 D207 209
224A208 D208 210
225A209 D209 211
226A210 D210 212
227A211 D211 213
228A212 D212 214
229A213 D213 215
230A214 D214 216
231A215 D215 217
232A216 D216 218
233A217 D217 219
234A218 D218 220
235A219 D219 221
236A220 D220 222
237A221 D221 223
238A222 D222 224
239A223 D223 225
240A224 D224 226
241A225 D225 227
242A226 D226 228
243A227 D227 229
244A228 D228 230
245A229 D229 231
246A230 D230 232
247A231 D231 233
248A232 D232 234
249A233 D233 235
250A234 D234 236
251A235 D235 237
252A236 D236 238
253A237 D237 239
254A238 D238 240
255A239 D239 241
256A240 D240 242
257A241 D241 243
258A242 D242 244
259A243 D243 245
260A244 D244 246
261A245 D245 247
262A246 D246 248
263A247 D247 249
264A248 D248 250
265A249 D249 251
266A250 D250 252
267A251 D251 253
268A252 D252 254
269A253 D253 255
270A254 D254 256
271A255 D255 257
272A256 D256 258
273A257 D257 259
274A258 D258 260
275A259 D259 261
276A260 D260 262
277A261 D261 263
278A262 D262 264
279A263 D263 265
280A264 D264 266
281A265 D265 267
282A266 D266 268
283A267 D267 269
284A268 D268 270
285A269 D269 271
286A270 D270 272
287A271 D271 273
288A272 D272 274
289A273 D273 275
290A274 D274 276
291A275 D275 277
292A276 D276 278
293A277 D277 279
294A278 D278 280
295A279 D279 281
296A280 D280 282
297A281 D281 283
298A282 D282 284
299A283 D283 285
300A284 D284 286
301A285 D285 287
302A286 D286 288
303A287 D287 289
304A288 D288 290
305A289 D289 291
306A290 D290 292
307A291 D291 293
308A292 D292 294
309A293 D293 295
310A294 D294 296
311A295 D295 297
312A296 D296 298
313A297 D297 299
314A298 D298 300
315A299 D299 301
316A300 D300 302
317A301 D301 303
318A302 D302 304
319A303 D303 305
320A304 D304 306
321A305 D305 307
322A306 D306 308
323A307 D307 309
324A308 D308 310
325A309 D309 311
326A310 D310 312
327A311 D311 313
328A312 D312 314
329A313 D313 315
330A314 D314 316
331A315 D315 317
332A316 D316 318
333A317 D317 319
334A318 D318 320
335A319 D319 321
336A320 D320 322
337A321 D321 323
338A322 D322 324
339A323 D323 325
340A324 D324 326
341A325 D325 327
342A326 D326 328
343A327 D327 329
344A328 D328 330
345A329 D329 331
346A330 D330 332
347A331 D331 333
348A332 D332 334
349A333 D333 335
350A334 D334 336
351A335 D335 337
352A336 D336 338
353A337 D337 339
354A338 D338 340
355A339 D339 341
356A340 D340 342
357A341 D341 343
358A342 D342 344
359A343 D343 345
360A344 D344 346
361A345 D345 347
362A346 D346 348
363A347 D347 349
364A348 D348 350
365A349 D349 351
366A350 D350 352
367A351 D351 353
368A352 D352 354
369A353 D353 355
370A354 D354 356
371A355 D355 357
372A356 D356 358
373A357 D357 359
374A358 D358 360
375A359 D359 361
376A360 D360 362
377A361 D361 363
378A362 D362 364
379A363 D363 365
380A364 D364 366
381A365 D365 367
382A366 D366 368
383A367 D367 369
384A368 D368 370
385A369 D369 371
386A370 D370 372
387A371 D371 373
388A372 D372 374
389A373 D373 375
390A374 D374 376
391A375 D375 377
392A376 D376 378
393A377 D377 379
394A378 D378 380
395A379 D379 381
396A380 D380 382
397A381 D381 383
398A382 D382 384
399A383 D383 385
400A384 D384 386
401A385 D385 387
402A386 D386 388
403A387 D387 389
404A388 D388 390
405A389 D389 391
406A390 D390 392
407A391 D391 393
408A392 D392 394
409A393 D393 395
410A394 D394 396
411A395 D395 397
412A396 D396 398
413A397 D397 399
414A398 D398 400
415A399 D399 401
416A400 D400 402
417A401 D401 403
418A402 D402 404
419A403 D403 405
420A404 D404 406
421A405 D405 407
422A406 D406 408
423A407 D407 409
424A408 D408 410
425A409 D409 411
426A410 D410 412
427A411 D411 413
428A412 D412 414
429A413 D413 415
430A414 D414 416
431A415 D415 417
432A416 D416 418
433A417 D417 419
434A418 D418 420
435A419 D419 421
436A420 D420 422
437A421 D421 423
438A422 D422 424
439A423 D423 425
440A424 D424 426
441A425 D425 427
442A426 D426 428
443A427 D427 429
444A428 D428 430
445A429 D429 431
446A430 D430 432
447A431 D431 433
448A432 D432 434
449A433 D433 435
450A434 D434 436
451A435 D435 437
452A436 D436 438
453A437 D437 439
454A438 D438 440
455A439 D439 441
456A440 D440 442
457A441 D441 443
458A442 D442 444
459A443 D443 445
460A444 D444 446
461A445 D445 447
462A446 D446 448
463A447 D447 449
464A448 D448 450
465A449 D449 451
466A450 D450 452
467A451 D451 453
468A452 D452 454
469A453 D453 455
470A454 D454 456
471A455 D455 457
472A456 D456 458
473A457 D457 459
474A458 D458 460
475A459 D459 461
476A460 D460 462
477A461 D461 463
478A462 D462 464
479A463 D463 465
480A464 D464 466
481A465 D465 467
482A466 D466 468
483A467 D467 469
484A468 D468 470
485A469 D469 471
486A470 D470 472
487A471 D471 473
488A472 D472 474
489A473 D473 475
490A474 D474 476
491A475 D475 477
492A476 D476 478
493A477 D477 479
494A478 D478 480
495A479 D479 481
496A480 D480 482
497A481 D481 483
498A482 D482 484
499A483 D483 485
500A484 D484 486
501A485 D485 487
502A486 D486 488
503A487 D487 489
504A488 D488 490
505A489 D489 491
506A490 D490 492
507A491 D491 493
508A492 D492 494
509A493 D493 495
510A494 D494 496
511A495 D495 497
512A496 D496 498
513A497 D497 499
514A498 D498 500
515A499 D499 501
516A500 D500 502
517A501 D501 503
518A502 D502 504
519A503 D503 505
520A504 D504 506
521A505 D505 507
522A506 D506 508
523A507 D507 509
524A508 D508 510
525A509 D509 511
526A510 D510 512
527A511 D511 513
528A512 D512 514
529A513 D513 515
530A514 D514 516
531A515 D515 517
532A516 D516 518
533A517 D517 519
534A518 D518 520
535A519 D519 521
536A520 D520 522
537A521 D521 523
538A522 D522 524
539A523 D523 525
540A524 D524 526
541A525 D525 527
542A526 D526 528
543A527 D527 529
544A528 D528 530
545A529 D529 531
546A530 D530 532
547A531 D531 533
548A532 D532 534
549A533 D533 535
550A534 D534 536
551A535 D535 537
552A536 D536 538
553A537 D537 539
554A538 D538 540
555A539 D539 541
556A540 D540 542
557A541 D541 543
558A542 D542 544
559A543 D543 545
560A544 D544 546
561A545 D545 547
562A546 D546 548
563A547 D547 549
564A548 D548 550
565A549 D549 551
566A550 D550 552
567A551 D551 553
568A552 D552 554
569A553 D553 555
570A554 D554 556
571A555 D555 557
572A556 D556 558
573A557 D557 559
574A558 D558 560
575A559 D559 561
576A560 D560 562
577A561 D561 563
578A562 D562 564
579A563 D563 565
580A564 D564 566
581A565 D565 567
582A566 D566 568
583A567 D567 569
584A568 D568 570
585A569 D569 571
586A570 D570 572
587A571 D571 573
588A572 D572 574
589A573 D573 575
590A574 D574 576
591A575 D575 577
592A576 D576 578
593A577 D577 579
594A578 D578 580
595A579 D579 581
596A580 D580 582
597A581 D581 583
598A582 D582 584
599A583 D583 585
600A584 D584 586
601A585 D585 587
602A586 D586 588
603A587 D587 589
604A588 D588 590
605A589 D589 591
606A590 D590 592
607A591 D591 593
608A592 D592 594
609A593 D593 595
610A594 D594 596
611A595 D595 597
612A596 D596 598
613A597 D597 599
614A598 D598 600
615A599 D599 601
616A600 D600 602
617A601 D601 603
618A602 D602 604
619A603 D603 605
620A604 D604 606
621A605 D605 607
622A606 D606 608
623A607 D607 609
624A608 D608 610
625A609 D609 611
626A610 D610 612
627A611 D611 613
628A612 D612 614
629A613 D613 615
630A614 D614 616
631A615 D615 617
632A616 D616 618
633A617 D617 619
634A618 D618 620
635A619 D619 621
636A620 D620 622
637A621 D621 623
638A622 D622 624
639A623 D623 625
640A624 D624 626
641A625 D625 627
642A626 D626 628
643A627 D627 629
644A628 D628 630
645A629 D629 631
646A630 D630 632
647A631 D631 633
648A632 D632 634
649A633 D633 635
650A634 D634 636
651A635 D635 637
652A636 D636 638
653A637 D637 639
654A638 D638 640
655A639 D639 641
656A640 D640 642
657A641 D641 643
658A642 D642 644
659A643 D643 645
660A644 D644 646
661A645 D645 647
662A646 D646 648
663A647 D647 649
664A648 D648 650
665A649 D649 651
666A650 D650 652
667A651 D651 653
668A652 D652 654
669A653 D653 655
670A654 D654 656
671A655 D655 657
672A656 D656 658
673A657 D657 659
674A658 D658 660
675A659 D659 661
676A660 D660 662
677A661 D661 663
678A662 D662 664
679A663 D663 665
680A664 D664 666
681A665 D665 667
682A666 D666 668
683A667 D667 669
684A668 D668 670
685A669 D669 671
686A670 D670 672
687A671 D671 673
688A672 D672 674
689A673 D673 675
690A674 D674 676
691A675 D675 677
692A676 D676 678
693A677 D677 679
694A678 D678 680
695A679 D679 681
696A680 D680 682
697A681 D681 683
698A682 D682 684
699A683 D683 685
700A684 D684 686
701A685 D685 687
702A686 D686 688
703A687 D687 689
704A688 D688 690
705A689 D689 691
706A690 D690 692
707A691 D691 693
708A692 D692 694
709A693 D693 695
710A694 D694 696
711A695 D695 697
712A696 D696 698
713A697 D697 699
714A698 D698 700
715A699 D699 701
716A700 D700 702
717A701 D701 703
718A702 D702 704
719A703 D703 705
720A704 D704 706
721A705 D705 707
722A706 D706 708
723A707 D707 709
724A708 D708 710
725A709 D709 711
726A710 D710 712
727A711 D711 713
728A712 D712 714
729A713 D713 715
730A714 D714 716
731A715 D715 717
732A716 D716 718
733A717 D717 719
734A718 D718 720
735A719 D719 721
736A720 D720 722
737A721 D721 723
738A722 D722 724
739A723 D723 725
740A724 D724 726
741A725 D725 727
742A726 D726 728
743A727 D727 729
744A728 D728 730
745A729 D729 731
746A730 D730 732
747A731 D731 733
748A732 D732 734
749A733 D733 735
750A734 D734 736



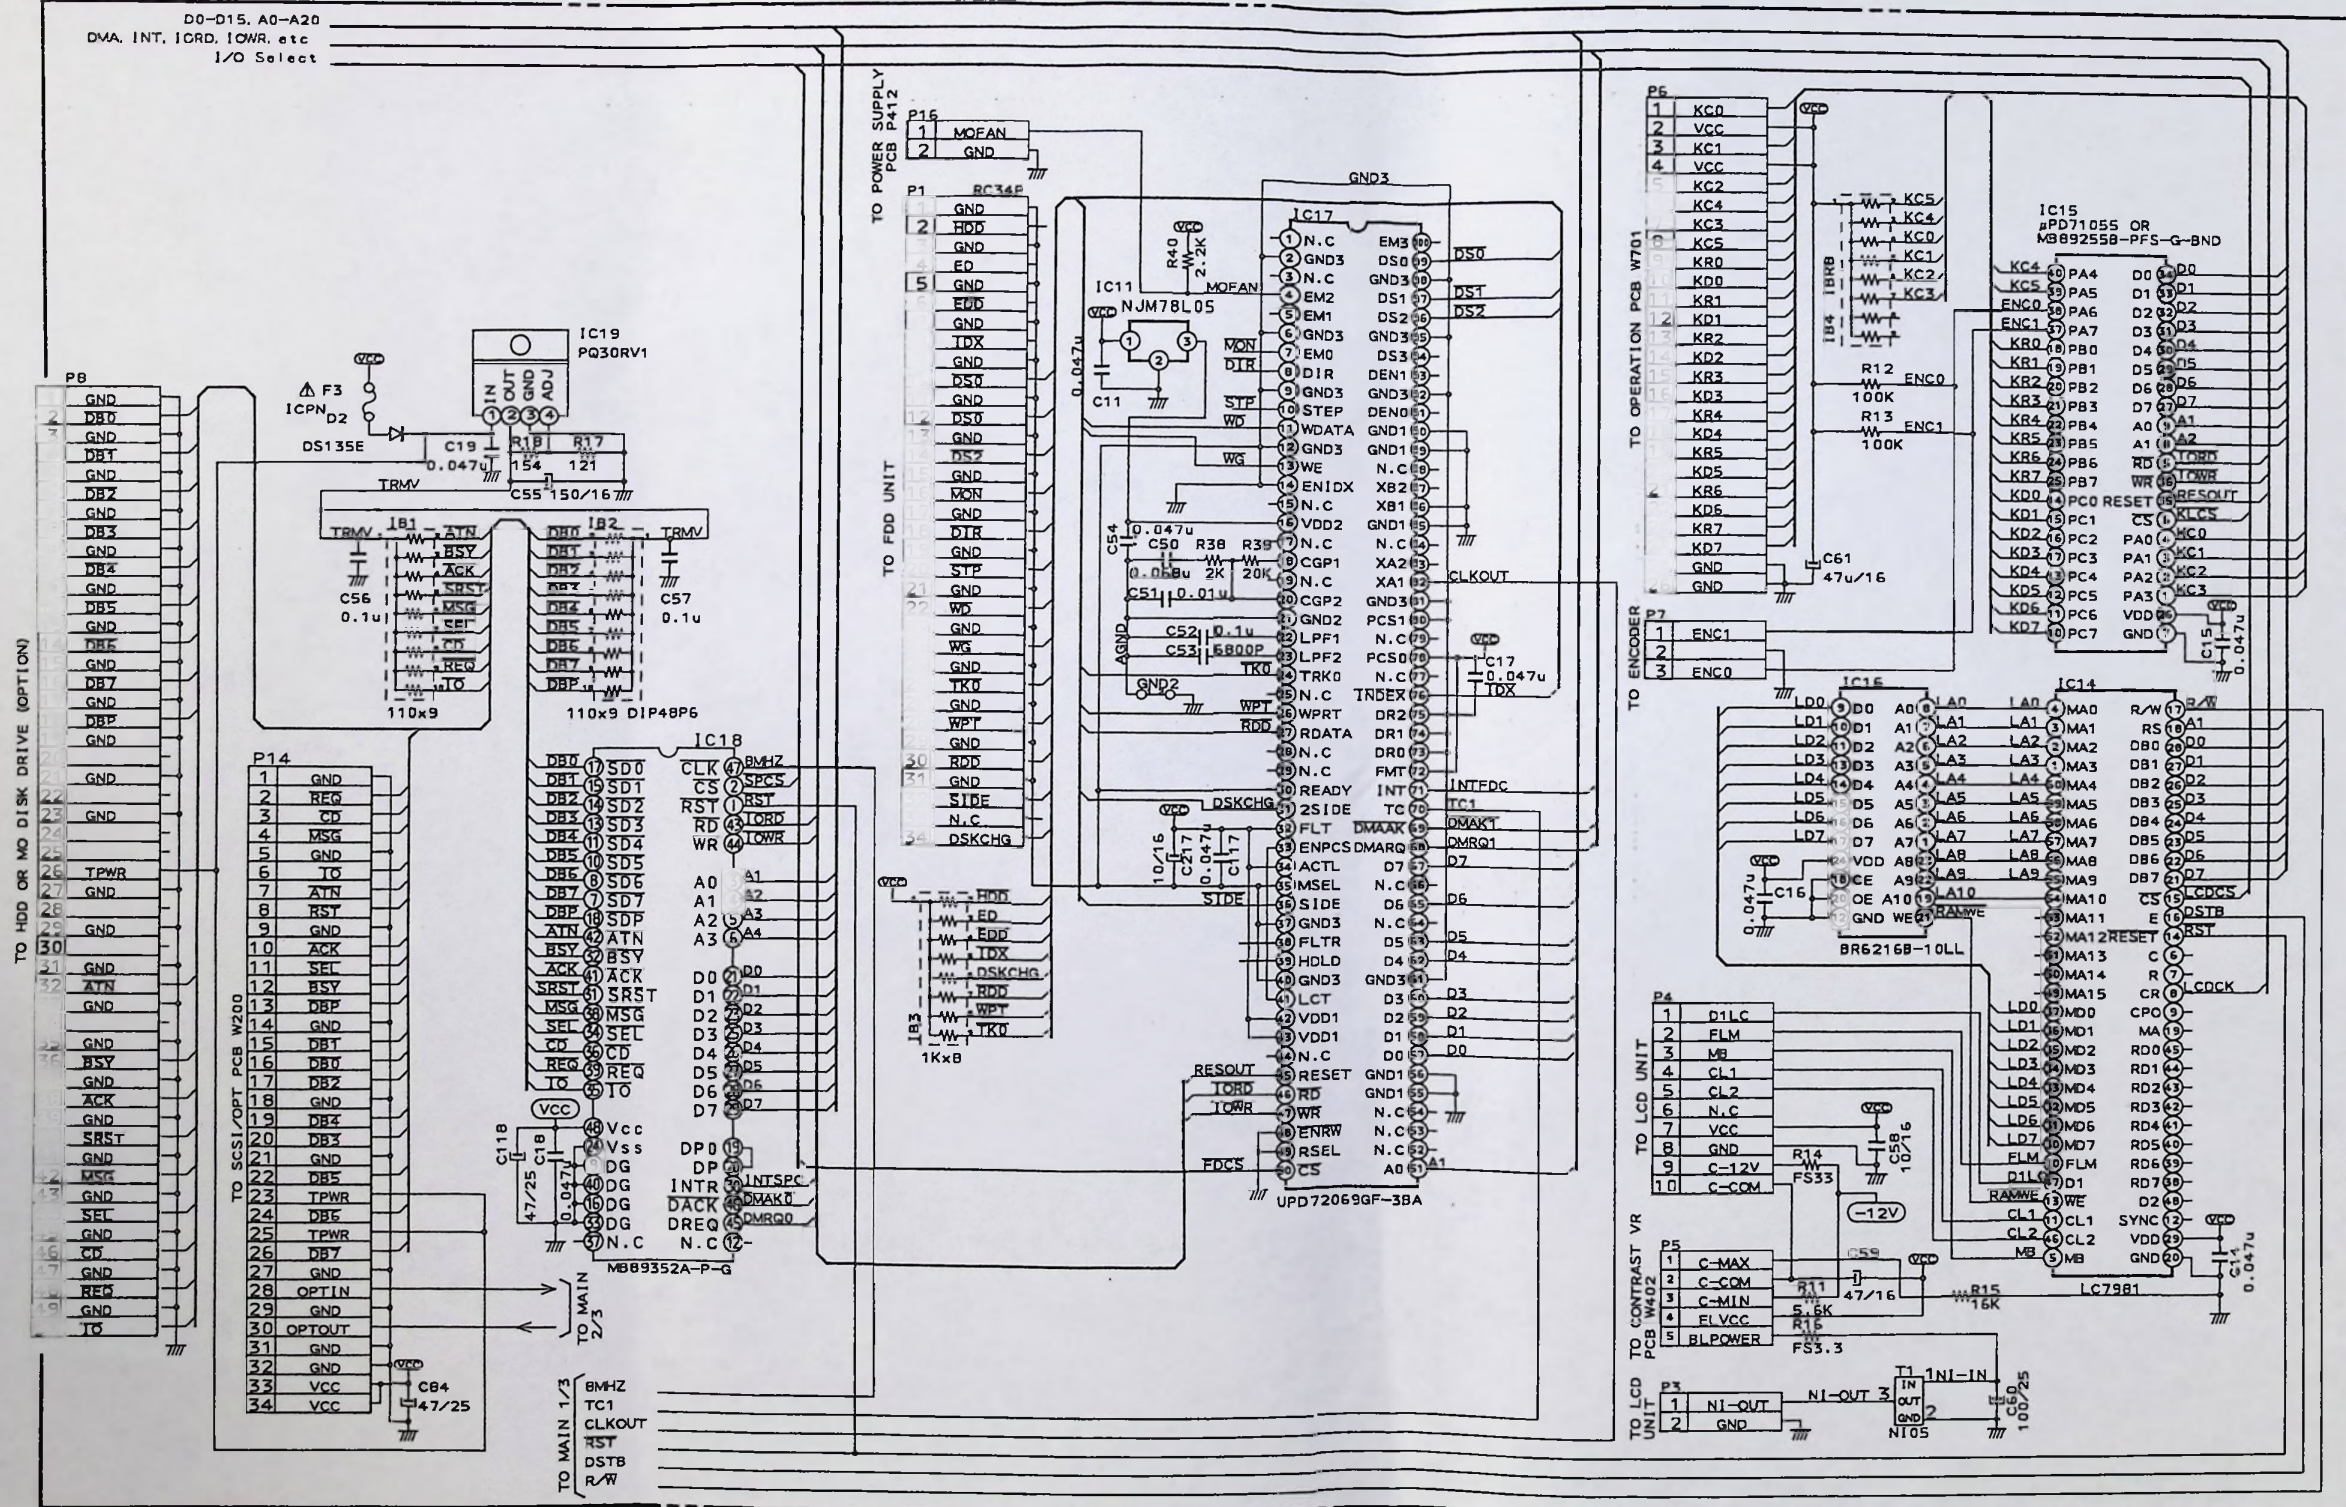

MAIN PCB L6038A502A

WARNING: Δ INDICATES SAFETY CRITICAL COMPONENTS FOR CONTINUED SAFETY. REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS.


AVERTISSEMENT: Δ IL INDIQUE LES COMPOSANTS CRITIQUES DE SÉCURITÉ. POUR MAINTENIR LE DEGRÉ DE SÉCURITÉ DE L'APPAREIL, NE REMPLACER QUE DES PIÈCES RECOMMANDÉES PAR LE FABRICANT

NOTE: UNLESS OTHERWISE SPECIFIED ALL RESISTORS IN ΩMS ALL CAPACITORS IN μF (P=PF) ALL ELECTROLYTIC CAPACITORS IN μF/W

S3200XL
MAIN 3/3
(PANEL, LCD, FDD, SCSI)
SCHEMATIC DIAGRAM
NO.18-17 L603806M

PRINCIPAL PARTS LOCATION

ICs			TRANSISTOR		
IC1	D4	IC16	A5	IC37	B3
IC2	D,E4	IC17	A4	IC38	B2
IC3	E4	IC18	A1,2	IC39	A3
IC4	C5	IC19	B1	IC40	E3
IC5	E4	IC20	E4	IC41	E3
IC6	D3	IC21	E4	IC42	C,D3
IC7	D4	IC22	F3	IC43	C3
IC8	E4	IC23	D3	IC301	B1
IC9	C,D4	IC24	F4	IC302	B2
IC10	C,D5	IC25	F3	IC303	B3
IC11	A4	IC26	B2	IC304	B3
IC12	D,E4	IC29	E3	IC305	B2
IC13	D,E4,5	IC30	E,F5	IC306	B2
IC14	B5	IC31	F3	IC307	B3
IC15	E,F5	IC32	F4	IC308	B3
			FUSE		
			F3	B1	
			CONNECTORS		
			J7	B2,3	
			J13	D3	
			P1	A4	
			P3	A5	
			P4	B5	
			P5	A,B5	
			P6	E5	
			P7	D5	
			P8	A1,2	
			P9	E,F1	
			P10	B4	
			P11	C3	
			P12	C3	
			P14	A,B1	
			P15	B4	
			P16	A3	
			P20	F5	
			P22	B1	
			P25	B2	

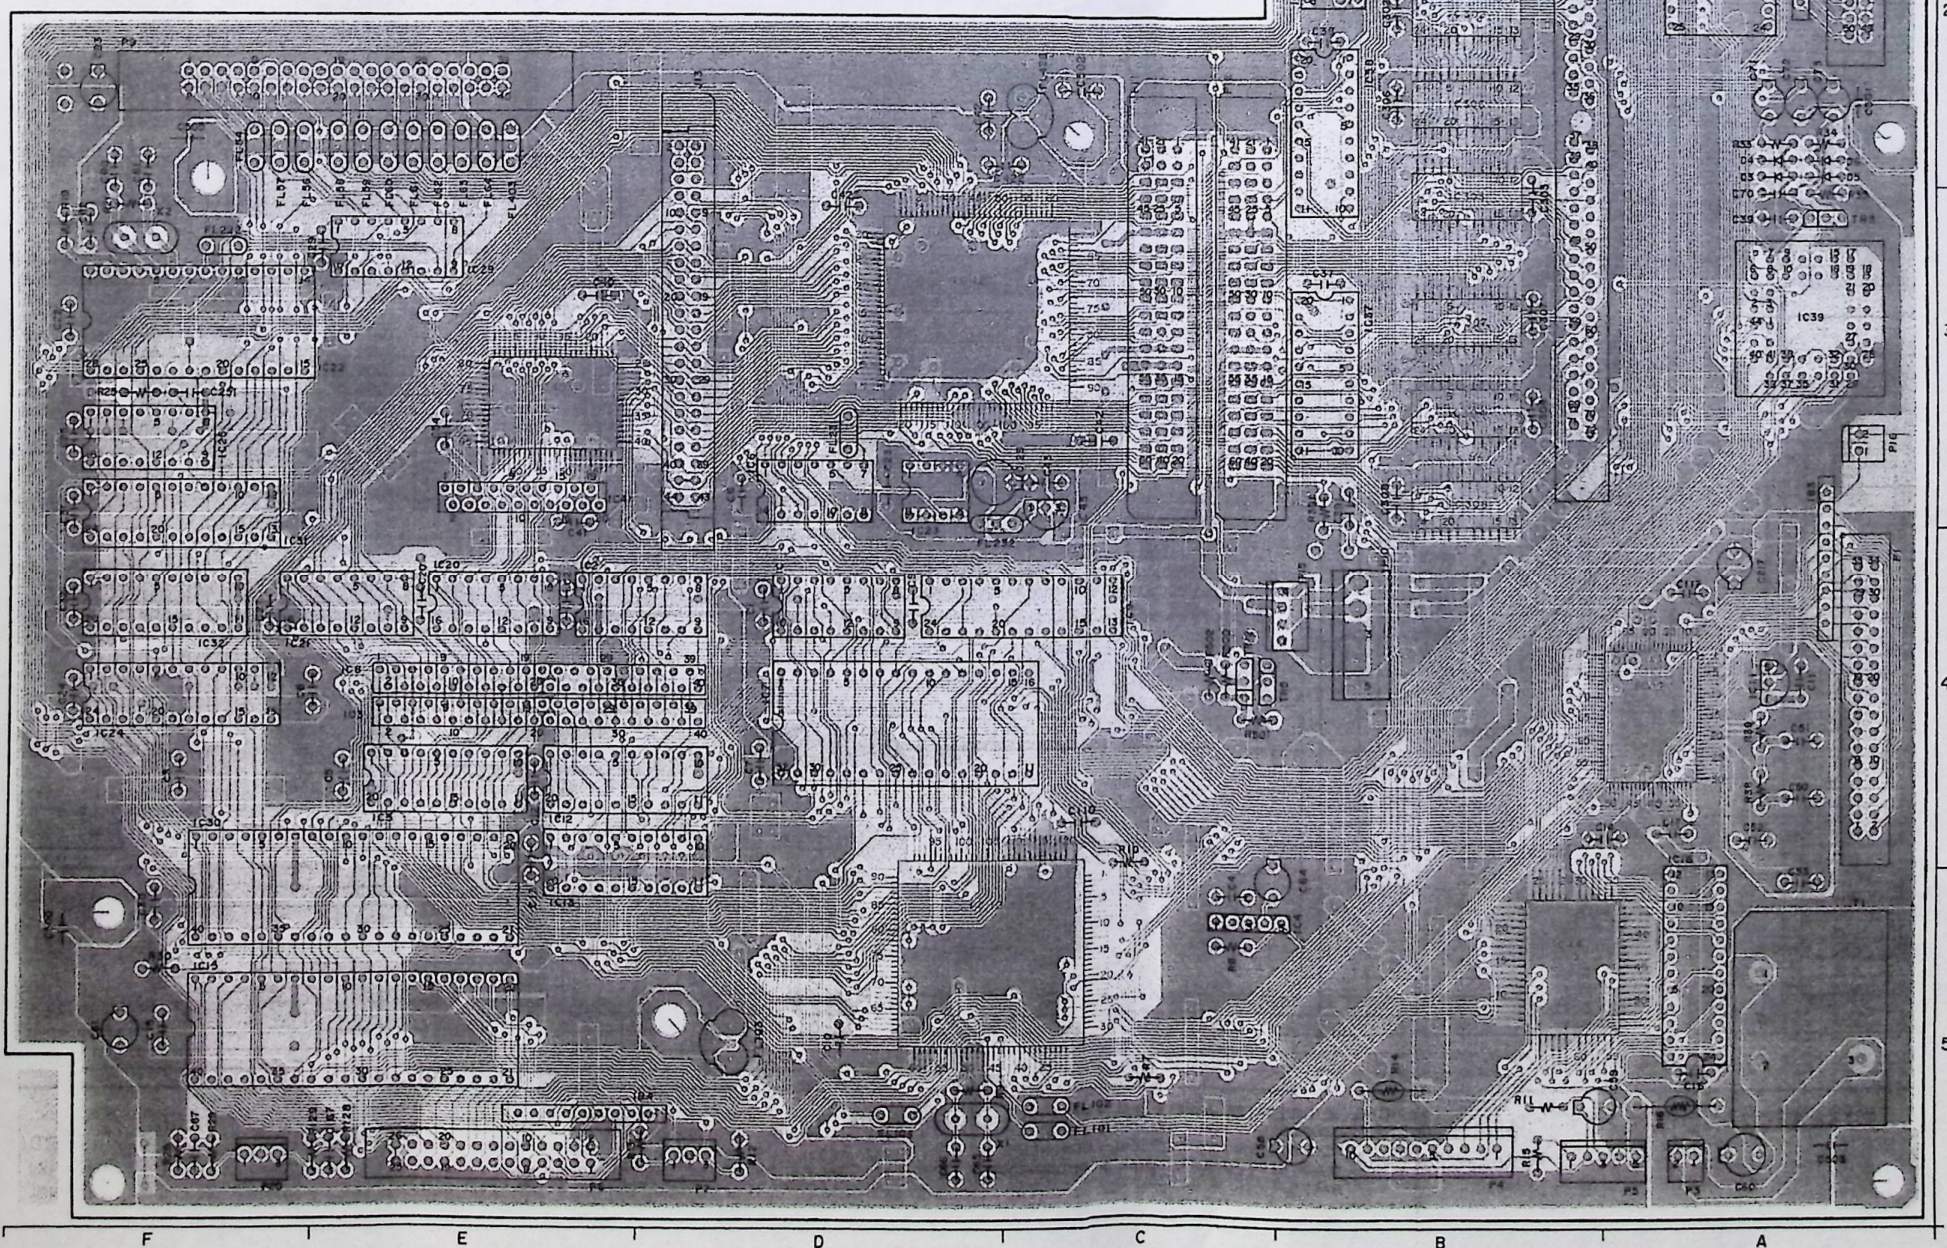


WARNING ⚠ INDICATES SAFETY CRITICAL COMPONENTS. FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS.

AVERTISSEMENT ⚠ IL INDIQUE LES COMPOSANTS CRITIQUES DE SÉCURITÉ. POUR MAINTENIR LE DEGRÉ DE SÉCURITÉ DE L'APPAREIL, NE REMPLACER QUE DES PIÈCES RECOMMANDÉES PAR LE FABRICANT.

MAIN PCB L6038A502A





NOTE : PARTS DIFFER DEPENDING ON MODEL NUMBER. REFER TO SCHEMATIC DIAGRAMS FOR PERTINENT PARTS INFORMATION.

ICs				CONNECTORS					
IC1	D4	IC16	A5	IC37	B3	J7	B2,3	P16	A3
IC2	D,E4	IC17	A4	IC38	B2	J13	D3	P20	F5
IC3	D,E5	IC18	A1,2	IC39	A3	P1	A4	P22	B1
IC4	C5	IC19	B1	IC40	E3	P3	A5	P25	B2
IC5	E4	IC20	E4	IC41	E3	P4	B5		
IC6	D3	IC21	E4	IC42	C,D3	P5	A,B5	TRANSISTOR	
IC7	D4	IC22	F3	IC43	C3	P6	E5	TR3	A3
IC8	E5	IC23	D3	IC301	B1	P7	D5		
IC9	C,D4	IC24	F4	IC302	B2	P8	A1,2	FUSE	
IC10	C,D5	IC25	F3	IC303	B3	P9	E,F1	F3	B1
IC11	A4	IC26	B2	IC304	B3	P10	B4		
IC12	D,E4	IC29	E3	IC305	B2	P11	C3		
IC13	D,E4	IC30	F4,5	IC306	B2	P12	C3		
IC14	B5	IC31	F3	IC307	B3	P14	A,B1		
IC15	F5	IC32	F4	IC308	B3	P15	B4		

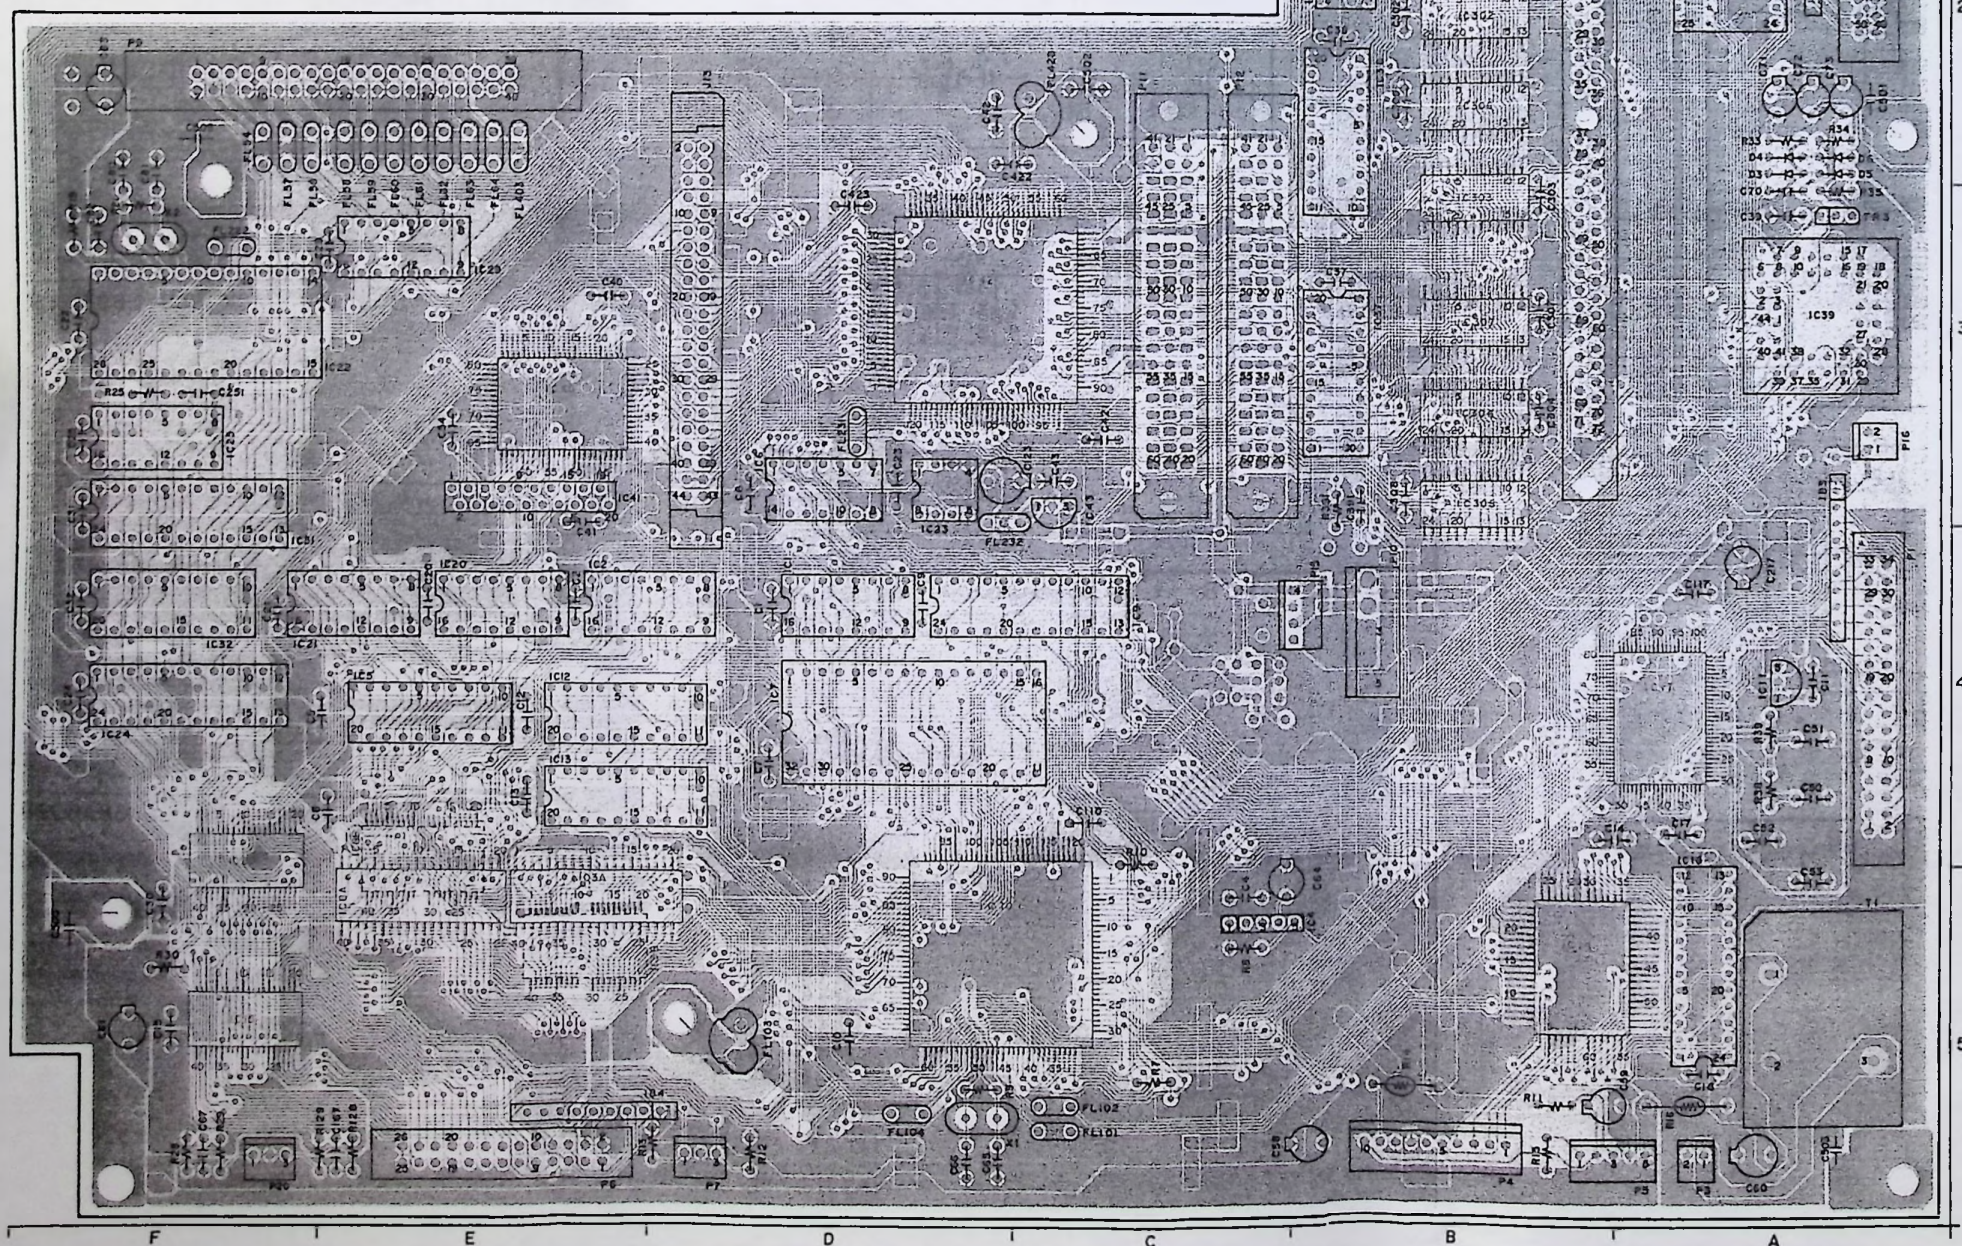

MAIN PCB L6038A502A(JI)

AVERTISSEMENT: Δ IL INDIQUE LES COMPOSANTS CRITIQUES DE SÉCURITÉ
POUR MAINTENIR LE DEGRÉ DE SÉCURITÉ DE L'APPAREIL.
NE REMPLACER QUE DES PIÈCES RECOMMANDÉES PAR LE FABRICANT

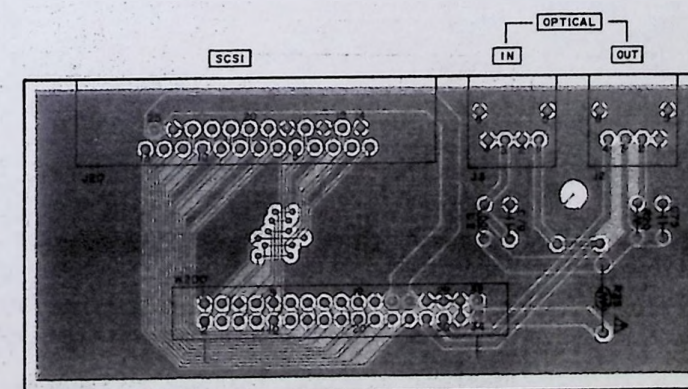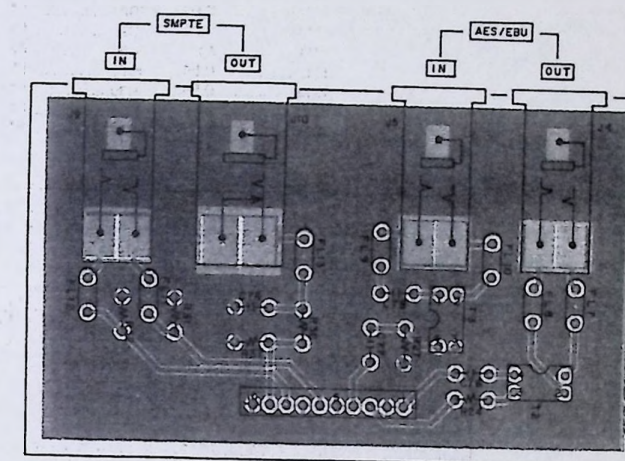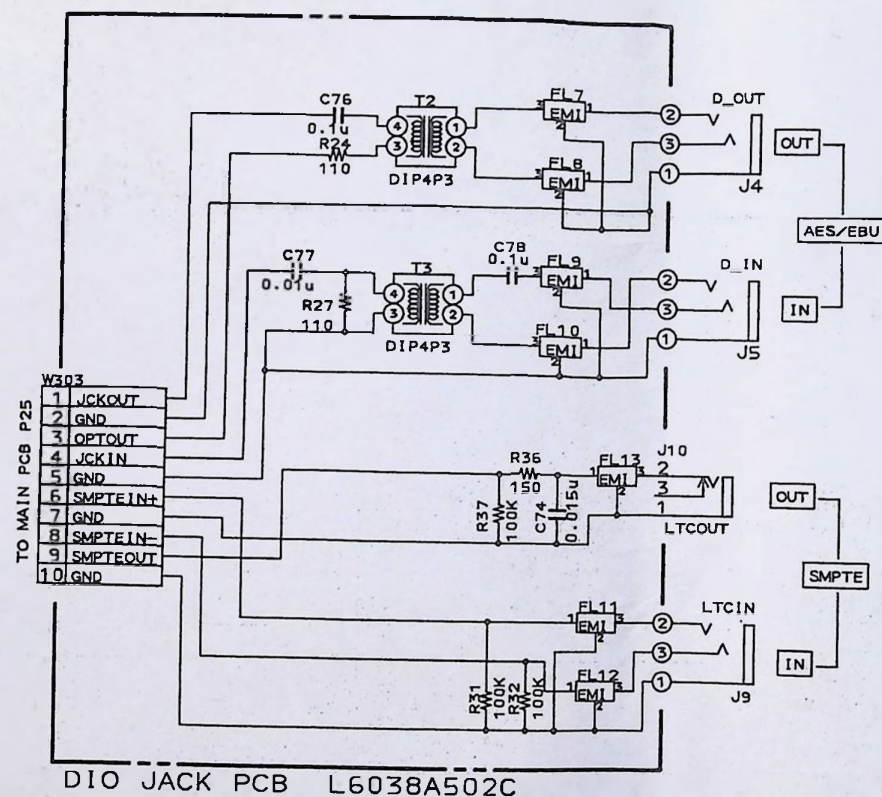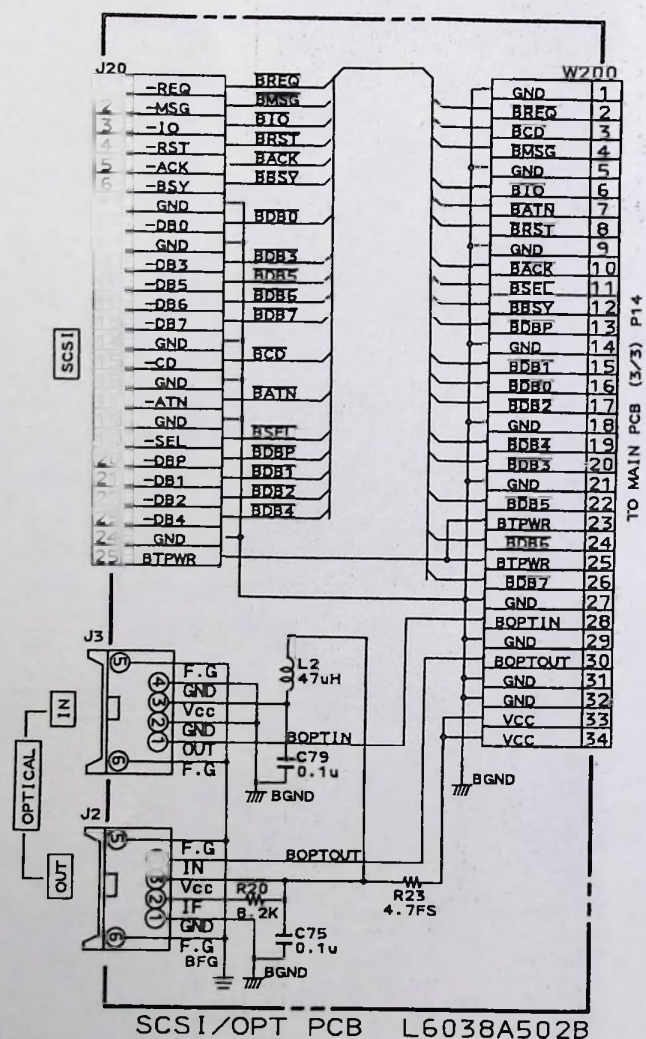

WARNING: ⚠ INDICATES SAFETY CRITICAL COMPONENTS FOR CONTINUED SAFETY. REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS.

AVERTISSEMENT: ⚠ IL INDIQUE LES COMPOSANTS CRITIQUES DE SÉCURITÉ. POUR MAINTENIR LE DEGRÉ DE SÉCURITÉ DE L'APPAREIL, NE REMPLACER QUE DES PIÈCES RECOMMANDÉES PAR LE FABRICANT.

S3200XL
CONNECTOR & JACK
SCHEMATIC DIAGRAMS
NO. 18-18 L603807M