

AKAI SERVICE MANUAL



PROGRAMMABLE MATRIX SYNTHESIZER

MODEL VX600

CAUTION: Before servicing, to protect customer's program data from being damaged, save all data to IC memory card.

SPECIFICATIONS


Model	Programmable matrix analog synthesizer	POWER SWITCH
Key board	37-key C-C scale(with dynamics velocity and key pressure functions)	MEMORY PROTECT SWITCH
Simultaneous sounds	6 voices	CONTRAST
Sound source	12 VCO/2 VCO group	
Display	40 characters x 8 lines,liquid crystal graphic display	Connection terminals
Internal memory	Battery back up type	INSTRUMENT
Packet	10x20 programs	Special multi-connector for AKAI EW11000/EV1000
Library	50 tones	EXTERNAL IN
Program	40 programs	LINE OUT
Chord	20 patterns	Standard phone jack x2
External memory	Compatible with IC memory card (AKAI BR-16/16K' bytes)	PHONES
Packet	10x20 programs x2	Standard stereo phone jack (monaural)
Library	50 tones x2	DIN /13 pin
Program	40 programs x2	VOICE OUT
Chord	20 patterns x2	PROGRAM
Function	BEND ADJUST/WIDTH	UP/DOWN
	GLIDE ADJUST/TIME	Standard stereo phone jack(for foot switch)
	BREATH ADJUST/SENSE	PEDAL 1
	VIBRATE	Standard stereo phone jack(for pedal switch)
	VOLUME	PEDAL 2
	CONTROL KNOB	Standard stereo phone jack(for pedal volume)
	CURSOR KEY(Δ ▽ ◀ ▶)	DIN /5 pin
	TEN KEY	MIDI IN/OUT/THRU
	MENU KEY	I/O PORT
	ENTER KEY	For expansion.(cover is currently installed)
	SOFT KEY	Power requiament
		AC 100V, 50/60Hz for japan
		AC 120V, 60Hz for USA and canada
		AC 220V, 50Hz for europe except UK
		AC 240V, 50Hz for UK and australia
		Power consumption
		21 W
		External dimensions
		602(W)x116(H) x305(D) mm
		Weight
		8.2 kg

* For improvement purposes, specifications and design are subject to change without notice.

★ SAFETY INSTRUCTIONS

PRECAUTIONS DURING SERVICING

1. Parts identified by the ⚠ (*) symbol parts are critical for safety. Replace only with parts number specified.
2. In addition to safety, other parts and assemblies are specified for conformance with such regulations as those applying to spurious radiation.
These must also be replaced only with specified replacements.
Examples: RF converters, tuner units, antenna selector switches, RF cables, noise blocking capacitors, noise blocking filters, etc.
3. Use specified internal wiring. Note especially:
 - 1) Wires covered with PVC tubing
 - 2) Double insulated wires
 - 3) High voltage leads
4. Use specified insulating materials for hazardous live parts. Note especially:
 - 1) Insulation Tape
 - 2) PVC tubing
 - 3) Spacers (Insulating Barriers)
 - 4) Insulation sheets for transistors
 - 5) Plastic screws for fixing microswitch (especially in turntable)
5. When replacing AC primary side components (transformers, power cords, noise blocking capacitors, etc.), wrap ends of wires securely about the terminals before soldering.



6. Observe that wires do not contact heat producing parts (heatsinks, oxide metal film resistors, fusible resistors, etc.).

7. Check that replaced wires do not contact sharp edged or pointed parts.
8. Also check areas surrounding repaired locations.
9. Use care that foreign objects (screws, solder droplets, etc.) do not remain inside the set.

SAFETY CHECK AFTER SERVICING

After servicing, make measurements of leakage-current or resistance in order to determine that exposed parts are acceptably insulated from the supply circuit.

The leakage-current measurement should be done between accessible metal parts (such as chassis, ground terminal, microphone jacks, signal-input/output connectors, etc.) and the earth ground through a resistor of 1500 ohms paralleled with a 0.15 μF capacitor, under the unit's normal working conditions. The leakage-current should be less than 0.5 mA rms AC.

The resistance measurement should be done between accessible exposed metal parts and power cord plug prongs with the power switch (if included) "ON". The resistance should be more than 2.2 Mohms.

PRECAUTIONS FOR LITHIUM BATTERY

The lithium battery may explode when heated excessively. [OBSERVE THE FOLLOWING WHEN REPLACING]

- Replace with the same make and type only.
- Use soldering iron in "recommended way" only.
- Place battery in correct polarity.
- Do not short the terminals.
- Do not recharge battery.
- Do not dispose of battery in fire.



[DANGER]



[RECOMMENDED WAY]

★ INFORMATION

SYMBOLS FOR PRIMARY DESTINATION


Alphabet indicates the destination of the units as listed below.

Symbols	Principal Destinations
[A]	USA
[B]	UK
[C]	Canada
[E]	Europe (except UK)
[J]	Japan
[S]	Australia
[V]	W. Germany only
[U]	Universal Area
[Y*]	Custom version

VOLTAGE CONVERSION

(E,V,B,S Model only)

Before connecting the power cord. Set the VOLTAGE SELECTOR located on the bottom plate with a screw-driver so that the correct voltage is indicated.



I. CONTROL

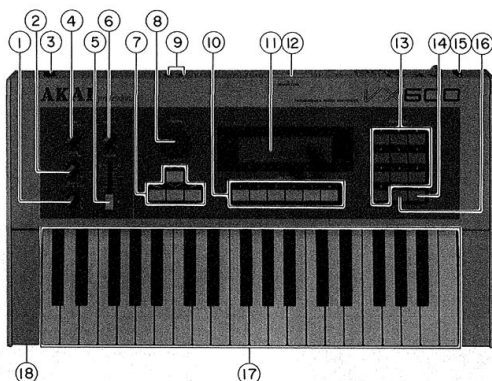


Fig. 1-1 View from the top

① BREATHER ADJUST/SENSE control

This is used when using with the AKAI electric wind/valve instrument model EWI1000/EVI1000. There is a knob(ADJUST) to adjust the sensitivity of the breath sensor and a knob(SENSE) to set the operation point appropriate for the players breath pressure.

② GLIDE ADJUST/TIME control

This is used when using with the AKAI electric wind/valve instrument model EWI1000/EVI1000. There is a knob(ADJUST) to adjust the sensitivity of the glide controllers, and a knob(TIME) to adjust the glide time.

③ INSTRUMENT connector

This terminal is used to connect the EWI1000 or EVI1000 unit when playing the AKAI electric wind/valve instrument. Use the connection cable included with the EWI1000 or EVI1000, or the AKAI EW-X70(for the EWI1000) or the AKAI EV-X70(for the EVI1000) extension cable.

④ BEND ADJUST/WIDTH control

This is used when using with the AKAI electric wind/valve instrument model EWI1000/EVI1000. There is a knob(ADJUST) to adjust the sensitivity of the bend controllers, and a knob(WIDTH) to adjust the bend width.

⑤ VOLUME control

This is used to adjust the output level of the VX600.

⑥ VIBRATE control

This knob is used to adjust vibrate and tremolo when using the AKAI electric wind/valve instrument.

⑦ CURSOR key

These keys are used to increase or decrease the "octave shift" and to move the "cursor".

⑧ CONTROL knob

This knob is used to set the "VALUE" of the various parameters, and scroll the "MENU". It is also used to "input characters" for tone names, library names, packet names, etc..

⑨ EXT IN

When playing with the external source such as a digital sampler, etc.. This external input terminal can be used to process the tone and volume of the external source with the VX600.

⑩ SOFT keys

These are "soft keys" which have different functions according to the screen which is displayed.

⑪ DISPLAY

This display is used to shows the program menu, and various program editing screens.

⑫ MEMORY CARD port

This is the port for the "memory card". Use the AKAI "BR-16" memory cards.

⑬ TEN key

These keys are used to set the "VALUE" of the various parameters, input "LIBRARY NUMBERS" and "PACKET NUMBERS".

⑭ ENTER key

This key is used to call the mode specified by the cursor, and register items.

⑮ POWER switch

This switch used to turn the power ON and OFF.

⑯ MENU key

This is used to call the "MENU WINDOW".

⑰ KEY BOARD

This is a 37 key keyboard(C-C scale) which has dynamic velocity and key pressure functions.


⑱ PHONES jack

A headphone set can be used to monitor. The volume output to the headphone is adjusted with "VOLUME" control.


II. DISASSEMBLY

In case of trouble, etc. necessitating dismantling, please dismantle in the order shown in the photographs. Reassemble in the reverse order.

1-1. HOW TO OPEN THE TOP(CONTROL) PANEL.

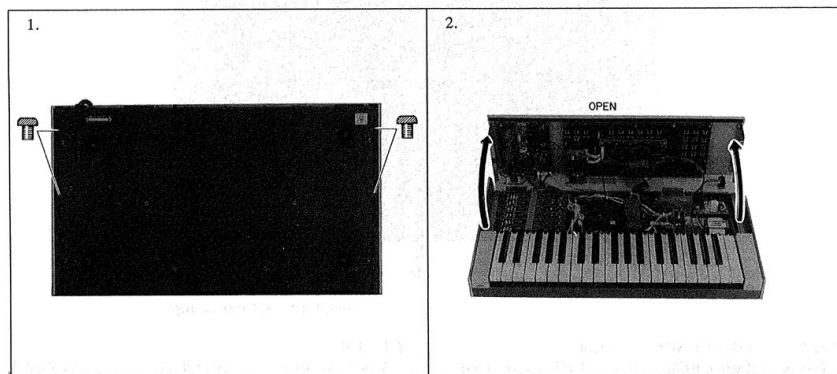

1-2. HOW TO DISMANTLE THE KEYBOARD BLOCK.

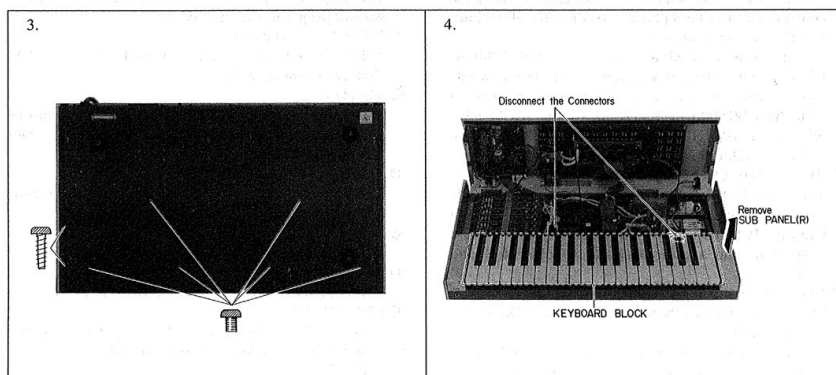

III. PRINCIPAL PARTS LOCATION

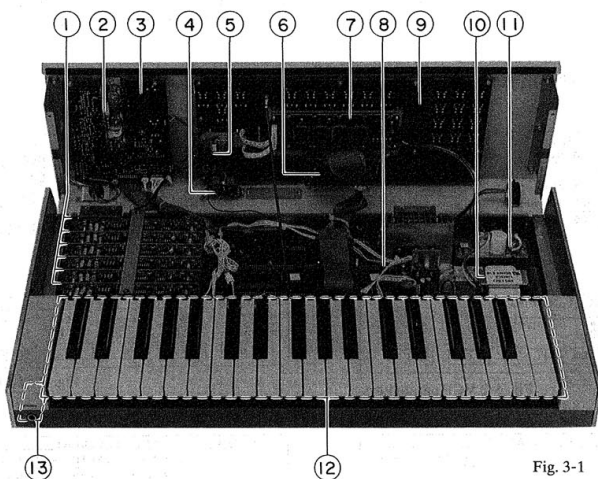


Fig. 3-1

- ① VOICE PCBs
- ② VR PCB
- ③ OPERATION (B) PCB
- ④ EXT IN JACK PCB
- ⑤ ENCODER PCB
- ⑥ MEMORY CARD PCB
- ⑦ LCD BLOCK

- ⑧ CPU PCB
- ⑨ OPERATION (A) PCB
- ⑩ POWER TRANSFORMER
- ⑪ FILTER PCB
- ⑫ KEYBOARD BLOCK
- ⑬ HEADPHONE PCB

IV. ELECTRICAL ADJUSTMENT

4-1. BEFOR ADJUSTMENT

When adjusting the model VX600, each adjustment requires a particular setting of parameters and modulation matrix. Before adjustment, edit the library which used for the adjustment according to the following procedure and save them to the memory card.

[L01: For VIBRATE OFF-SET adjustment]

CARD-B		L01 [E. VIBRAT]	
FREQ= 00	VCO-1	[SYNCOFF]	VCO-2 FREQ= 00
FINE= 00			FINE= 00
WAVE= [N]	BALANCE=50		
PW= 00	+++++		PW= 00
VCO	FM	EG	MOD QUIT

Fig. 4-1 VCO parameters

CARD-B		L01 [E. VIBRAT]	
CUTOFF= 99	VCF		HIGH PASS FILTER= 00
PITCH FOLLOW= 00			
VCO	FM	EG	LFO MOD QUIT

Fig. 4-2 VCF parameters

CARD-B		L01 [E. VIBRAT]	
FM	VCA		LEVEL=99
DEPTH=00	DESTINATION=		
UCO2=OFF			
VCO	VCF	EG	LFO MOD QUIT

Fig. 4-3 FM/VCA parameters

CARD-B		L01 [E. VIBRAT]	
<EG1>	00	00	80
<EG2>	00	00	80
<EG3>	00	00	80
VCO	VCF	FM	LFO MOD QUIT

Fig. 4-4 EG parameters

CARD-B		L01 [E. VIBRAT]	
<LFO1>	WAVE	SPEED	DELAY
<LFO2>	20	20	04
VCO	VCF	FM	EG LFO MOD QUIT

Fig. 4-5 LFO parameters

CARD-B		L01 [E. VIBRAT]	
---MOD---SOURCE---DEPTH---DESTINATION---			
01:	[KEY GATE]	+99	[VCA AMP]
03:	[E. VIBRATE]	+99	[VCO1. 2 FREQ]
VCO	VCF	FM	EG LFO QUIT

Fig. 4-6 MOD. matrix

[L02: For AFTER TOUCH adjustment]

CARD-B		L02 [PRESSURE]	
FREQ= 00	VCO-1	[SYNCOFF]	VCO-2 FREQ= 00
FINE= 00			FINE= 00
WAVE= [N]	BALANCE=50		
PW= 00	+++++		PW= 00
VCO	FM	EG	LFO MOD QUIT

Fig. 4-7 VCO parameters

CARD-B		L02 [PRESSURE]	
CUTOFF= 99	VCF		HIGH PASS FILTER= 00
PITCH FOLLOW= 00			
VCO	FM	EG	LFO MOD QUIT

Fig. 4-8 VCF parameters

CARD-B		L02 [PRESSURE]	
FM	VCA		LEVEL=99
DEPTH=00	DESTINATION=		
UCO2=OFF			
VCO	VCF	EG	LFO MOD QUIT

Fig. 4-9 FM/VCA parameters

CARD-B		L02 [PRESSURE]	
<EG1>	00	00	80
<EG2>	00	00	80
<EG3>	00	00	80
VCO	VCF	FM	LFO MOD QUIT

Fig. 4-10 EG parameters

CARD-B		L02 [PRESSURE]	
<LFO1>	WAVE	SPEED	DELAY
<LFO2>	20	20	04
VCO	VCF	FM	EG LFO MOD QUIT

Fig. 4-11 LFO parameters

CARD-B		L02 [PRESSURE]	
---MOD---SOURCE---DEPTH---DESTINATION---			
01:	[KEY GATE]	+99	[VCA AMP]
03:	[PRESSURE]	+99	[CUTOFF]
VCO	VCF	FM	EG LFO QUIT

Fig. 4-12 MOD. matrix

[L03: For DAC OUTPUT LEVEL adjustment]

CARD-B L03 [V1.]									
FREQ= 00	VCO-1	[SYNCOFF]	VCO-2	FREQ= 00					
FINE= 00					FINE= 00				
WAVE= [N]	BALANCE=50				FINE= 00				
PW= 00					PW= 00				
[VCO]	[FM]	[EQ]	[LFO]	[MOD]	[QUIT]				

Fig. 4-13 VCO parameters

CARD-B L03 [V1.]									
CUTOFF= 99	VCF				HIGH PASS FILTER= 00				
RESONANCE= 00					PITCH FOLLOW= 00				
[VCO]	[FM]	[EQ]	[LFO]	[MOD]	[QUIT]				

Fig. 4-14 VCF parameters

CARD-B L03 [V1.]									
FM= 00	VCA				LEVEL= 99				
DESTINATION= 00					UC02= 00				
[VCO]	[VCF]	[EQ]	[LFO]	[MOD]	[QUIT]				

Fig. 4-15 FM/VCA parameters

CARD-B L03 [V1.]									
AA	EG1>	DLY	ATK	DCY1	DCY2	SUS	RES	DEP	VEL
AA	EG2>	00	00	00	00	00	00	00	00
AA	EG3>	00	20	30	30	60	40	99	00
[VCO]	[VCF]	[FM]	[LFO]	[MOD]	[QUIT]				

Fig. 4-16 EG parameters

CARD-B L03 [V1.]									
<LFO1>	WAVE	SPEED	DELAY	DEPTH					
<LFO2>	[VCF]	20	00	99					
[VCO]	[VCF]	[FM]	[EQ]	[MOD]	[QUIT]				

Fig. 4-17 LFO parameters

CARD-B L03 [V1.]									
MOD=	SOURCE=	DEPTH=	DESTINATION=						
01: [KEY GATE]	+99	[VCA AMP]							
02: [KEY GATE]	00	[]							
[VCO]	[VCF]	[FM]	[EQ]	[LFO]	[QUIT]				

Fig. 4-18 MOD. matrix

[L04: For NOISE OUTPUT LEVEL adjustment]

CARD-B L04 [V2. NOISE]									
FREQ= 00	VCO-1	[SYNCOFF]	VCO-2	FREQ= 00					
FINE= 00					FINE= 00				
WAVE= [N]	BALANCE=50				FINE= 00				
PW= 00					PW= 00				
[VCO]	[FM]	[EQ]	[LFO]	[MOD]	[QUIT]				

Fig. 4-19 VCO parameters

CARD-B L04 [V2. NOISE]									
CUTOFF= 99	VCF				HIGH PASS FILTER= 00				
RESONANCE= 00					PITCH FOLLOW= 00				
[VCO]	[FM]	[EQ]	[LFO]	[MOD]	[QUIT]				

Fig. 4-20 VCF parameters

CARD-B L04 [V2. NOISE]									
FM= 00	VCA				LEVEL= 99				
DESTINATION= 00					UC02= 00				
[VCO]	[VCF]	[EQ]	[LFO]	[MOD]	[QUIT]				

Fig. 4-21 FM/VCA parameters

CARD-B L04 [V2. NOISE]									
AA	EG1>	DLY	ATK	DCY1	DCY2	SUS	RES	DEP	VEL
AA	EG2>	00	00	00	00	00	00	00	00
AA	EG3>	00	20	30	30	60	40	99	00
[VCO]	[VCF]	[FM]	[LFO]	[MOD]	[QUIT]				

Fig. 4-22 EG parameters

CARD-B L04 [V2. NOISE]									
<LFO1>	WAVE	SPEED	DELAY	DEPTH					
<LFO2>	[VCF]	20	00	99					
[VCO]	[VCF]	[FM]	[EQ]	[MOD]	[QUIT]				

Fig. 4-23 LFO parameters

CARD-B L04 [V2. NOISE]									
MOD=	SOURCE=	DEPTH=	DESTINATION=						
01: [KEY GATE]	+99	[VCA AMP]							
02: [KEY GATE]	00	[]							
[VCO]	[VCF]	[FM]	[EQ]	[LFO]	[QUIT]				

Fig. 4-24 MOD. matrix

4-2. INSTRUMENT CONNECTION


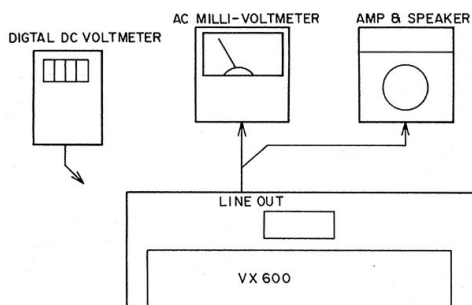


Fig. 4-25 Instrument connection

4-3. ADJUSTMENT OF THE OPERATION (B) PC BOARD.

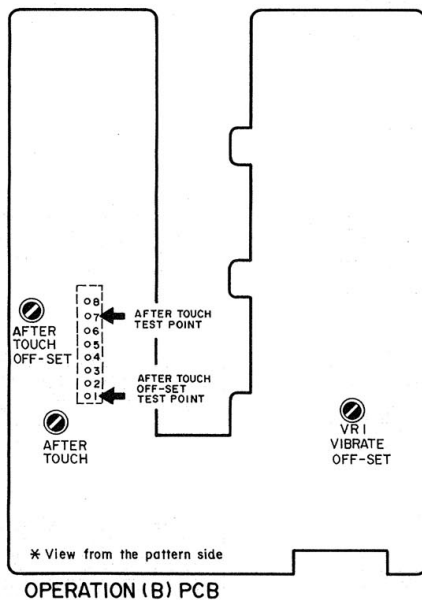

OPERATION (B) PCB

Fig. 4-26 Adjustment points of the OPERATION (B) PCB.

4-3-1. VIBRATE OFF-SET adjustment

- 1) Set the memory card which made in the step 4-1. BEFOR ADJUSTMENT, and select library to "L01 [E, VIBRATE]".
- 2) While pressing the "C5" key, turn the VIBRATE control knob fully clockwith and counter clockwith.
- 3) If the tone is changed, when the VIBRATE control knob is turning fully clockwith and counter clockwith, adjust VR1(VIBRATE OFF-SET) so that the tone is not changed.

4-3-2. AFTER TOUCH adjustment

- 1) Select the library to "L02 [PRESSURE]" and connect a digital DC voltmeter between pin ① of the IC1(M5218L) and GND.
- 2) Adjust VR3(AFTER TOUCH OFF-SET) so that the reading on the digital DC voltmeter is 0 V.
- 3) Connect a DC voltmeter between pin ② of the IC1(M5218L) and GND. At this time confirm that the reading voltage is more than 4.8 V.
- 4) While pressing the lightest key by about 200g presure, adjust VR2(AFTER TOUCH) so that the reading voltage is decreased to nearly 0 V.

4-4. ADJUSTMENT OF THE CPU PC BOARD

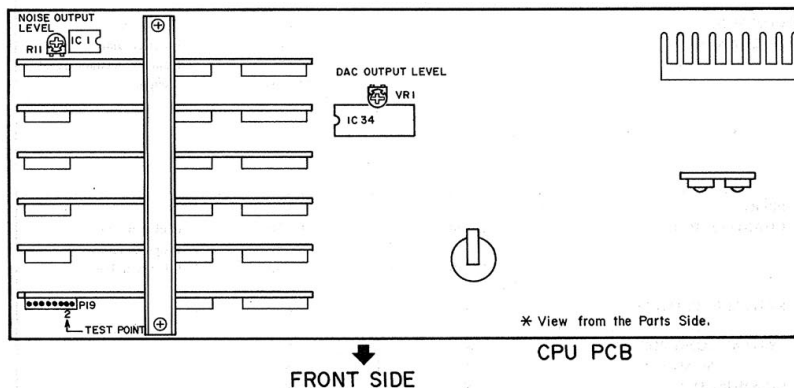


Fig. 4-27 Adjustment points of the CPU PCB

4-4-1. DAC OUTPUT LEVEL adjustment

- 1) Select the library to "L03 [V1,]" and connect a digital DC voltmeter between pin ② of the connector P19 and GND (refer to Fig. 4-27).
- 2) Adjust VR1(DAC OUTPUT LEVEL) so that the reading on the digital DC voltmeter is 2.5 V.

4-4-2. NOISE OUTPUT LEVEL adjustment

- 1) Select the library to "L04 [V2, NOISE]", and connect an AC milli-voltmeter to LINE OUT.
- 2) While pressing the any key, adjust R11(NOISE OUTPUT LEVEL) so that the reading on the AC milli-voltmeter is -8 dBm.

[NOTE]: Adjustment volume R11(NOISE OUTPUT LEVEL) is not included on some models.

V. MIDI IMPLEMENTAION CHART

[PROGRAMABLE MATRIX SYNTHESIZER]

Model VX600

MIDI Implementation Chart Version : 1.00

FUNCTION		TRANSMITTED	RECOGNIZED	REMARKS
BASIC	DEFAULT	1 - 16	1 - 16	Memorized
CHANEL	CHANGED	1 - 16	1 - 16	
MODE	DEFAULT	Mode 3	×	
	MESSAGES		×	
	ALTERED		×	
NOTE				
NUMBER :	True voice	24 - 108	24 - 108	Octave shift
VELOCITY	NOTE ON	9nH V=1 - 127	○	
	NOTE OFF	9nH V=0 ,8nH	○	
After	KEY'S	×	×	
Touch	CH'S	○	○	
PINCH	BENDER	○	○	
CONTROL	4	○	○	Foot pedal Main volume Damper, Sustain pedal Assignable
CHANGE	7	○	○	
	64	○	○	
			00 - 31	
PROG				
CHANGE :	TRUE #	1 - 20	1 - 20	Packet mode Program mode Library mdoe
		1 - 40	1 - 40	
		1 - 50	1 - 50	
SYSTEM	EXCLUSIVE	×	×	
SYSTEM :	SONG POS	×	×	
	SONG SEL	×	×	
COMMON:	TUNE	×	×	
SYSTEM :	CLOCK	×	×	
REAL TIME :	COMMANDS	×	×	
AUX :	LOCAL ON/OFF	×	×	
	ALL NOTES OFF	○	○	
MES- :	ACTIVE SENSE	×	×	
SAGES :	RESTE	×	×	
Notes				

MODE 1 : OMNI ON, POLY
MONE 3 : OMNI OFF, POLY

MODE 2 : MONI ON, MONO
MODE 4 : 4MONI OFF, MONO

○=YES
×=NO

SERVICE MANUAL

VI. PARTS LIST

ATTENTION

1. When placing an order for parts, be sure to list Part No., Model No. and the description of eachpart. Otherwise, the non-delivery of the part or the delivery of a wrong part may result.
2. Please make sure that Part No. is correct when ordering.
If not, a part different from the one you ordered may be delivered.
3. Since the parts shown in Parts List of Preliminary Service Manual may have been the subject of changes, please use this Parts List for all future reference.

HOW TO USE THIS PARTS LIST

1. This Parts List lists those parts which are considered necessary for repairs. Other common parts, such as resistors and capacitors, are listed in the "Common List for Service Parts" from which these parts should be selected and stocked.
2. The Recommended Spare Parts List shows those parts in the Parts List which are considered particularly important for service.
3. Parts not shown in the Parts List and "Common List for Service Parts" will not in principle be supplied.
4. How to read the Parts List.

a) Mechanism Block

2. HEAD BASE BLOCK

REF. NO.	PART NO.	DESCRIPTION
1	BH-T2023A320A	HEAD BASE BLOCK
2	HP-H2206A010A	HEAD R/P PR4-8FU C
3	ZS-477876	PAN20X03STL CMT
4	ZS-536488	BID20X08STL CMT
5	ZG-402895	SP CS ANGLE ADJUST

SP (Service Parts) Classification
This number corresponds with the individual parts index number in that figure.

b) PC Board

6. MAIN PC BOARD

REF. NO.	PART NO.	DESCRIPTION
IC1	EI-324536	IC HD14049BP
IC2	EI-336801	IC MB8841-564M
C1A	EC-338399	C MMY V 223M 250AC [U,E,B,S]
C1B	EC-350949	C MMY V 223M 250DC [J]
C1C	EC-338397	C MMY V 223M 125AC [C,A]
X1	EI-318384	OSC XTAL NC-18C

Symbols for primary destination
[A]: AAL (U.S.A) [S]: SAA (Australia)
[B]: BEAB (England) [U]: U/T (Universa Area)
[C]: CSA (Canada)
[E]: CEE (Europe) [V]: VDE (W. Germany)
[J]: JPN (Japan) [Y]: Custom Version

SP (Service Parts) Classification
These reference symbols correspond with component symbols in the Schematic Diagrams.

The available PC Board Blocks are listed separately.

5. When Part No. is known, Parts Index at end of Parts List can be used to locate where that part is shown in Parts List by its Reference No. listed at right of Part No.

WARNING

△(*) INDICATES SAFETY CRITICAL COMPONENTS. FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURE'S RECOMMENDED PARTS.

AVERTISSEMENT

△(*) IL INDIQUE LES COMPOSANTS CRITIQUES DE SÉCURITÉ. POUR MAINTENIR LE DEGRÉ DE SÉCURITÉ DE L'APPAREIL, NE REMPLACER QUE DES PIÈCES RECOMMANDÉES PAR LE FABRICANT.

1. RECOMMENDED SPARE PARTS

We suggest you to stock the following Recommended Spare Part items listed below since they can cover most of the routine service.

Ref. No.	Part No.	Description
1	*BT-383927J	TRANS POW L1023 C,A [C.A,Y1]
2	*BT-383928J	TRANS POW L1023 E,V,B,S [E,V,B,S]
3	*BT-383926J	TRANS POW L1023 J [J]
4	*BT-383935J	TRANS PULSE 2E16-1001-01
5	ED-376335	D SCHOTTKY SB02-03 T05
6	*ED-357036	D SILICON DBA20B-K15 100/ 2.0A
7	*ED-357038	D SILICON DBB10B 100/ 1.0A
8	ED-301911	D SILICON H DS448
9	ED-344280	D SILICON H GMA-01-FY2 F05
10	ED-346536	D ZENER H HZ7C3L
11	*EF-355385	FUSE BET T 250V 315MA [B]
12	*EF-355374	FUSE BET T 250V 500MA [B]
13	*EF-358974	FUSE BET T 250V 630MA [B]
14	*EF-695766	FUSE SEMKO T 250V 315MA [E,V,S]
15	*EF-593706	FUSE SEMKO T 250V 500MA [E,V,S]
16	*EF-601942	FUSE SEMKO T 250V 630MA [E,V,S]
17	*EF-306124	FUSE TSC A 250V 630MA [J]
18	*EF-309388	FUSE TSC A 250V 800MA [J]
19	*EF-305703	FUSE TSC 125V 630MA [C.A,Y1]
20	*EF-309391	FUSE TSC 125V 800MA [C.A,Y1]
21	EH-370520	COMP C EXF-P8102ZW
22	EH-351973	COMP R RKCI/884 472J
23	EH-353789	COMP R RKCI/886 103J
24	EH-359185	COMP R RKCI/888 103J
25	EH-379500	FILTER EMI EXC-EMT102BC
26	*EI-380920J	IC AN6531
27	*EI-380921J	IC AN6535
28	*EI-380919J	IC AN79L12
29	EI-380918J	IC CEM3374
30	EI-385445J	IC CEM3378
31	EI-389660	IC CXK5816PN-12L
32	EI-375437	IC LC3864NL-10
33	EI-378276	IC LC7981
34	EI-375347	IC MM74HC14N
35	EI-375345	IC MM74HC373N
36	EI-375439	IC M5206P
37	EI-353227	IC M5216L
38	EI-346071	IC M5218L-21
39	EI-349719	IC M5218P
40	*EI-359552	IC M5238L
41	EI-362588	IC M5239P
42	EI-364275	IC M74LS05P
43	EI-364247	IC NJM13600
44	EI-385444J	IC NMC27C256Q200 [BLANK ROM]
45	EI-389670J5	IC NMC27C256Q200 Vx600-1-V1.15 (PROGRAMMED ROM)
46	EI-380948J	IC NMC27C64Q200 [BLANK ROM]
47	EI-388249J2	IC NMC27C64Q200 Vx600-2-V1.12 (PROGRAMMED ROM)
48	EI-378297	IC PCM54HP
49	EI-364253	IC PST520D-2
50	EI-376178	IC SSM2300
51	EI-302233	IC TC4051BP
52	EI-200573	IC TC4053BP
53	EI-310036	IC TC4068BP
54	EI-380040	IC TC74HC04P
55	EI-380037J1	IC TC74HC00AP
56	EI-380026J1	IC TC74HC04AP
57	EI-375222	IC TC74HC125P

Ref. No.	Part No.	Description
58	EI-356049	IC TC74HC139P
59	EI-375220	IC TC74HC154P
60	EI-360053	IC TC74HC175P
61	EI-360029	IC TC74HC244P
62	EI-360032J1	IC TC74HC245AP
63	EI-360047	IC TC74HC374P
64	EI-370487	IC TC74HC42P
65	EI-360028	IC TC74HC74P
66	EI-371671	IC UPD78C119-044-36
67	EI-380998J	IC UPD78310G-36
68	EI-354146	IC UPD8255C-2
69	EI-364257	OSC XTAL NR-18
70	EM-382317J	IND LCD EDMIG245633B
71	*EO-360068	COIL LF LF-2 B
72	*ER-200972	R FUSE H S10 ERD2FC 1/4W 33R0G
73	*ER-360725	R OMF H S12 FS 1W 212J
74	ES-380946J	ROTARY ENCODER EC16B25D
75	ES-364255	SW SLIDE SSP322 [MEMORY PROTECT SW] SW TACT SKHAM004A VOLTAGE SELECTOR SW DETECTOR PC900V TR 25B1142 TR 25C324S D/E TR 25C330 U/V F05 TR 25C3400 F05
76	ES-349474	VR ROTARY EWJCGAS22364B103B503 [BEND]
77	ES-306430	VR ROTARY V012LPH B202 L=20 [CONTRAST VR]
78	ET-354167	VR SLIDE V4513-2PVNB5 103 [VOLUME]
79	*ET-375446	BATTERY LITHIUM BR2032-1HF
80	ET-349883	
81	ET-360137	
82	ET-349592	
83	EV-385801J	
84	EV-365865	
85	EV-365876	
86	EZ-358816	

2. P.C BOARD BLOCK

Ref. No.	Part No.	Description
1	BA-L1023A020A	PC CPU BLK Vx600
2	BA-L1023A030A	PC VOICE BLK Vx600
3	BA-L1023A040A	PC(4)OPERATION BLK Vx600

PC (#) OPERATION BLK CONSISTS OF FOLLOWING P.C BOARD.

- * OPERATION (A) P.C BOARD
- * OPERATION (B) P.C BOARD
- * VR P.C BOARD
- * OPERATION (D) P.C BOARD
- * HEADPHONE P.C BOARD
- * ENCORDER P.C BOARD
- * OPERATION (G) P.C BOARD

3. CPU P.C BOARD

Ref. No.	Part No.	Description
BT1	EZ-358816	BATTERY LITHIUM BR2032-1HF
C122	EC-368716	C EC V CUT SR-AKY 102M 25.00C
C123	EC-368716	C EC V CUT SR-AKY 102M 25.00C
C126	EC-368719	C EC V CUT SR-TIK 472M 16.00C
CR1	EH-370520	COMP C EXF-P81022W
CR2	EH-359185	COMP R RKC1/8B8 103J
CR3	EH-353789	COMP R RKC1/8B8 103J
CR4	EH-351973	COMP R RKC1/8B4 472J
D1	*ED-357038	D SILICON DBB10B 100/ 1.0A
D2	*ED-357038	D SILICON DBA20B-K15 100/ 2.0A
D4	ED-344280	D SILICON H GMA-01-FY2 F05
D5	ED-344280	D SILICON H GMA-01-FY2 F05
D6	ED-344280	D SILICON H GMA-01-FY2 F05
D7	ED-344280	D SILICON H GMA-01-FY2 F05
D8	ED-344280	D SILICON H GMA-01-FY2 F05
D9	ED-344280	D SILICON H GMA-01-FY2 F05
D10	ED-344280	D SILICON H GMA-01-FY2 F05
D11	ED-344280	D SILICON H GMA-01-FY2 F05
D12	ED-346536	D ZENER H HZ7C3L
D13	ED-301911	D SILICON H DS448
D14	ED-344280	D SILICON H GMA-01-FY2 F05
D15	ED-301911	D SILICON H DS448
D19	ED-344280	D SILICON H GMA-01-FY2 F05
D17	ED-344280	D SILICON H GMA-01-FY2 F05
D18	ED-344280	D SILICON H GMA-01-FY2 F05
D19	ED-344280	D SILICON H GMA-01-FY2 F05
D20	ED-344280	D SILICON H GMA-01-FY2 F05
D21	ED-301911	D SILICON H DS448
FL1	EH-379500	FILTER EMI EXC-EMT102BC
FL2	EH-379500	FILTER EMI EXC-EMT102BC
FL3	EH-379500	FILTER EMI EXC-EMT102BC
FL4	EH-379500	FILTER EMI EXC-EMT102BC
FL5	EH-379500	FILTER EMI EXC-EMT102BC
FL6	EH-379500	FILTER EMI EXC-EMT102BC
FL7	EH-379500	FILTER EMI EXC-EMT102BC
FL8	EH-379500	FILTER EMI EXC-EMT102BC
FL9	EH-379500	FILTER EMI EXC-EMT102BC
FL10	EH-379500	FILTER EMI EXC-EMT102BC
FL11	EH-379500	FILTER EMI EXC-EMT102BC
IC1	EJ-349719	IC M5218P
IC2	EJ-349719	IC M5218P
IC3	EJ-310036	IC TC4066BP
IC4	EJ-353227	IC M5216L
IC5	EJ-362588	IC M5238P
IC6	EJ-364247	IC NJM13600
IC7	EJ-362588	IC M5238P
IC8	EJ-360047	IC TC74HC374P
IC9	EJ-360047	IC TC74HC374P
IC10	EJ-376178	IC SSM2300
IC11	EJ-376178	IC SSM2300
IC12	EJ-376178	IC SSM2300
IC13	EJ-376178	IC SSM2300
IC14	EJ-376178	IC SSM2300
IC15	EJ-362588	IC M5238P
IC16	EJ-364247	IC NJM13600
IC17	EJ-362588	IC M5238P
IC18	EJ-360047	IC TC74HC374P
IC19	EJ-360047	IC TC74HC374P
IC20	EJ-376178	IC SSM2300
IC21	EJ-376178	IC SSM2300
IC22	EJ-376178	IC SSM2300
IC23	EJ-376178	IC SSM2300
IC24	EJ-362588	IC M5238P
IC25	EJ-364247	IC NJM13600
IC26	EJ-362588	IC M5238P
IC27	EJ-360047	IC TC74HC374P
IC28	EJ-360047	IC TC74HC374P
IC29	EJ-349719	IC M5218P
IC31	EJ-360053	IC TC74HC175P
IC32	EJ-364275	IC M74LS05P
IC33	EJ-360037J1	IC TC74HC00AP
IC34	EJ-378297	IC PCN454P
IC35	EJ-360047	IC TC74HC374P
IC36	EJ-360032J1	IC TC74HC245AP
IC37	EJ-375222	IC TC74HC125P
IC38	EJ-360029	IC TC74HC244P

Ref. No.	Part No.	Description
IC39	EJ-360029	IC TC74HC244P
IC40	EJ-302233	IC TC4051BP
IC41	EJ-375345	IC MM74HC373N
IC42	EJ-375345	IC MM74HC373N
IC43	EJ-360053	IC TC74HC175P
IC44	EJ-380939J	IC UPD78310G-36
IC45	EJ-389670J5	IC NMC27C256Q200 VX600-1-V1.15 [PROGRAMMED ROM] IC NMC27C256Q200 [BLANK ROM]
*IC45	EJ-385444J	IC UPD78311G-044-36
IC46	EJ-371671	IC NMC27C64Q200 VX600-2-V1.12 [PROGRAMMED ROM]
IC47	EJ-389240J2	IC NMC27C64Q200 [BLANK ROM]
*IC47	EJ-380948J	IC NMC27C64Q200 [BLANK ROM]
IC48	EJ-360026J1	IC TC74HC00AP
IC49	EJ-356049	IC TC74HC139P
IC50	EJ-360028	IC TC74HC74P
IC51	EJ-375437	IC LC3664NL-10
IC52	EJ-370487	IC TC74HC42P
IC53	EJ-370487	IC TC74HC42P
IC54	EJ-360040	IC TC74HC00AP
IC55	EJ-360047	IC TC74HC374P
IC56	EJ-360037J1	IC TC74HC00AP
IC57	EJ-375437	IC LC3664NL-10
IC58	EJ-369660	IC CXK5816PN-12L
IC59	EJ-375220	IC TC74HC154P
IC60	EJ-375220	IC TC74HC154P
IC61	EJ-354146	IC UPD8283C-2
IC62	EJ-375347	IC MM74HC14N
IC63	EJ-378276	IC LC7981
IC64	*EJ-359552	IC M5236L
IC65	*EJ-380920J	IC AN6531
IC66	*EJ-380921J	IC AN6535
IC67	*EJ-380920J	IC AN6531
IC68	*EJ-380921J	IC AN6535
IC69	EJ-364253	IC PST520D-2
IC70	*EJ-380919J	IC AN791L
IC71	EJ-346071	IC M5218L-21
J1	EJ-360771	DIN J TC5037-01-241 13P [VOICE OUT]
J2	EJ-354105	PHONE J 2P HLJ0520-110 6.3 [LINE OUT]
J3	EJ-379523	PHONE J 3P HLJ4305-3080 S.NUT [PROTECT SW]
J4	EJ-354105	PHONE J 2P HLJ0520-110 6.3 [UP/DOWN]
J5	EJ-379523	PHONE J 3P HLJ4305-3080 S.NUT [PRG]
J6	EJ-364256	DIN J M1704 3P [MIDI]
L1	EO-318365	COIL FIX 1 LAL04 102K
L2	EO-318365	COIL FIX 1 LAL04 102K
PH1	ET-354167	DETECTOR PC800V
P28	EJ-365834	PLUG RK-H341TD-0190 34P
P29	EJ-365891	OLUG RA-H261TD-0190 26P
R29	ER-306805	R CB H S15 FS RDS 1/2W 101J
R30	ER-306805	R CB H S15 FS RDS 1/2W 101J
R152	*ER-360725	R CMF H S12 FS 1W 221J
R165	*ER-200972	R FUSE H S10 ERFDC2 1/4W 33R0G
RL1	EQ-348929	RELAY SIG G5A-237P 2TR 12V
SW1	ES-364255	SW SLIDE SSP32 [MEMORY PROTECT SW]
T1	*BT-383935J	TRANS PULSE ZE16-1001-01
TR1	ET-360137	TR 25C3330 U/V F05
TR2	ET-360137	TR 25C3330 U/V F05
TR3	ET-349883	TR 25C3243 D/E
TR4	*ET-375446	TR 2S81142
TR5	ET-360137	TR 25C3330 U/V F05
TR6	ET-360137	TR 25C3330 U/V F05
TR7	ET-349592	TR 25C3400 F05
TR8	ET-349592	TR 25C3400 F05
TR9	ET-349592	TR 25C3400 F05
TR10	ET-349592	TR 25C3400 F05
TR11	ET-349592	TR 25C3400 F05
TR12	ET-349592	TR 25C3400 F05

PARTS LIST

Ref. No.	Part No.	Description
VR1	EV-365865	VR ROTARY V012LPH B202 L=20 [CONTRAST VR]
VR2	EV-390045J	R S-FIX H RH0421C 0.20W 332
VR3	EV-390046J	R S-FIX H RH0421C 0.20W 224
X1	EI-364257	OSC XTAL NR-18
W201	EW-380934J	WIRE ASSY VX600 W201 26P
1	EZ-200473	SILICON RUBBER SHEET TC-30
F2	*EF-306124	FUSE TSC A 250V 630MA [J]
F3	*EF-309388	FUSE TSC A 250V 800MA [J]
F4	*EF-309388	FUSE TSC A 250V 800MA [J]
F2A	*EF-305703	FUSE TSC 125V 630MA [CA.Y1]
F3A	*EF-309391	FUSE TSC 125V 800MA [CA.Y1]
F4A	*EF-309391	FUSE TSC 125V 800MA [CA.Y1]
F2B	*EF-593706	FUSE SEMKO T 250V 500MA [E.V.S]
F3B	*EF-601942	FUSE SEMKO T 250V 630MA [E.V.S]
F4B	*EF-601942	FUSE SEMKO T 250V 630MA [E.V.S]
F2C	*EF-355374	FUSE BET T 250V 500MA [B]
F3C	*EF-358974	FUSE BET T 250V 630MA [B]
F4C	*EF-358974	FUSE BET T 250V 630MA [B]

4. VOICE P.C BOARD

Ref. No.	Part No.	Description
C25	EC-306445	C MC V FM 221J 500DC
C26	EC-427948	C MC V FM 100J 500DC
C29	EC-306445	C MC V FM 221J 500DC
C31	EC-306445	C MC V FM 221J 500DC
D2	ED-344280	D SILICON H GMA-01-FY2 F05
D3	ED-344280	D SILICON H GMA-01-FY2 F05
D4	ED-344280	D SILICON H GMA-01-FY2 F05
D5	ED-344280	D SILICON H GMA-01-FY2 F05
IC1	EI-380916J	IC CEM3374
IC2	EI-349719	IC M5218P
IC3	EI-310036	IC TC4066BP
IC4	EI-200573	IC TC4053BP
IC5	EI-385445J	IC CEM3378
IC6	EI-349719	IC M5218P
IC7	EI-375439	IC M5206P
IC8	EI-349719	IC M5218P

5. OPERATION (A) P.C BOARD

Ref. No.	Part No.	Description
D1	ED-301911	D SILICON H DS448
D2	ED-301911	D SILICON H DS448
D3	ED-301911	D SILICON H DS448
D4	ED-301911	D SILICON H DS448
D5	ED-301911	D SILICON H DS448
D6	ED-301911	D SILICON H DS448
D7	ED-301911	D SILICON H DS448
D8	ED-301911	D SILICON H DS448
D9	ED-301911	D SILICON H DS448
D10	ED-301911	D SILICON H DS448
D11	ED-301911	D SILICON H DS448
D12	ED-301911	D SILICON H DS448
D13	ED-301911	D SILICON H DS448
D14	ED-301911	D SILICON H DS448
D15	ED-301911	D SILICON H DS448
D16	ED-301911	D SILICON H DS448
D17	ED-301911	D SILICON H DS448
D18	ED-301911	D SILICON H DS448
D19	ED-301911	D SILICON H DS448
D20	ED-301911	D SILICON H DS448
D21	ED-301911	D SILICON H DS448
D22	ED-301911	D SILICON H DS448
SW1	ES-349474	SW TACT SKH-HAM004A
SW2	ES-349474	SW TACT SKH-HAM004A
SW3	ES-349474	SW TACT SKH-HAM004A
SW4	ES-349474	SW TACT SKH-HAM004A
SW5	ES-349474	SW TACT SKH-HAM004A
SW6	ES-349474	SW TACT SKH-HAM004A
SW7	ES-349474	SW TACT SKH-HAM004A
SW8	ES-349474	SW TACT SKH-HAM004A
SW9	ES-349474	SW TACT SKH-HAM004A
SW10	ES-349474	SW TACT SKH-HAM004A
SW11	ES-349474	SW TACT SKH-HAM004A
SW12	ES-349474	SW TACT SKH-HAM004A
SW13	ES-349474	SW TACT SKH-HAM004A
SW14	ES-349474	SW TACT SKH-HAM004A
SW15	ES-349474	SW TACT SKH-HAM004A
SW16	ES-349474	SW TACT SKH-HAM004A
SW17	ES-349474	SW TACT SKH-HAM004A
SW18	ES-349474	SW TACT SKH-HAM004A
SW19	ES-349474	SW TACT SKH-HAM004A
SW20	ES-349474	SW TACT SKH-HAM004A
SW21	ES-349474	SW TACT SKH-HAM004A
SW22	ES-349474	SW TACT SKH-HAM004A
TR1	ET-349592	TR 2SC3400 F05
TR2	ET-349592	TR 2SC3400 F05
TR3	ET-349592	TR 2SC3400 F05

PARTS LIST

6. OPERATION (B) P.C BOARD

Ref. No.	Part No.	Description
D1	ED-376335	D SCHOTTKY SB02-03 T05
D2	ED-376335	D SCHOTTKY SB02-03 T05
D3	ED-344280	D SILICON H GMA-01-FY2 F05
D4	ED-344280	D SILICON H GMA-01-FY2 F05
D5	ED-376335	D SCHOTTKY SB02-03 T05
D6	ED-376335	D SCHOTTKY SB02-03 T05
D7	ED-376335	D SCHOTTKY SB02-03 T05
D8	ED-376335	D SCHOTTKY SB02-03 T05
D9	ED-376335	D SCHOTTKY SB02-03 T05
D10	ED-376335	D SCHOTTKY SB02-03 T05
D11	ED-376335	D SCHOTTKY SB02-03 T05
D12	ED-376335	D SCHOTTKY SB02-03 T05
D13	ED-376335	D SCHOTTKY SB02-03 T05
D14	ED-376335	D SCHOTTKY SB02-03 T05
D15	ED-376335	D SCHOTTKY SB02-03 T05
D16	ED-376335	D SCHOTTKY SB02-03 T05
D17	ED-359863	D LED LN81CV(LF) AK ORANGE
D18	ED-359863	D LED LN81CV(LF) AK ORANGE
D19	ED-359863	D LED LN81CV(LF) AK ORANGE
IC1	EI-346071	IC M5218L-21
IC2	EI-346071	IC M5218L-21
IC3	EI-346071	IC M5218L-21
IC4	EI-346071	IC M5218L-21
L1	EO-318365	COIL FIX 1 LAL04 102K
L2	EO-318365	COIL FIX 1 LAL04 102K
VR1	EV-387796J	VR ROTARY EVJ-2KA056B14 B103 [VIBRATE]
VR2	EV-356592	R S-FIX H RH0615C 0.10W 473
VR3	EV-356592	R S-FIX H RH0615C 0.10W 473
VR4	EV-356592	R S-FIX H RH0615C 0.10W 473
VR5	EV-365876	VR SLIDE VJ4513-2PVNB5 103 [VOLUME]
W101	EW-380936J	WIRE ASSY VX600 W101 26P

7. VR P.C BOARD

Ref. No.	Part No.	Description
VR1	EV-385801J	VR ROTARY EWJCGAS22364B103B503 [BEND]
VR2	EV-385801J	VR ROTARY EWJCGAS22364B103B503 [GLIDE]
VR3	EV-385801J	VR ROTARY EWJCGAS22364B103B503 [BREATHE]

8. OPERATION (D) P.C BOARD

Ref. No.	Part No.	Description
J1	EJ-380944J	SOCKET 75080950 34P
W109	EW-380947J	WIRE ASSY VX600 W109 34P

9. HEAD PHONE P.C BOARD

Ref. No.	Part No.	Description
J1	EJ-348846	PHONE J 3P HLJ0540-010 6.3

10. ENCODER P.C BOARD

Ref. No.	Part No.	Description
VR1	ES-380946J	ROTARY ENCODER EC16B250


11. OPERATION (G) P.C BOARD

Ref. No.	Part No.	Description
J1	EJ-354105	PHONE J 2P HLJ0520-110 6.3
J2	EJ-354105	PHONE J 2P HLJ0520-110 6.3


12. FILTER P.C BOARD

Ref. No.	Part No.	Description
C2	*EC-358450	C CE V DNS102MBE B 102M 400AC
C3	*EC-358450	C CE V DNS102MBE B 102M 400AC
C4	*EC-338411	C CE V DE7 FZ 103P 400AC [EXCEPT J]
C5	*EC-358450	C CE V DNS102MBE B 102M 400AC
FL1	*EO-360068	COIL LF LF-2 B
F1	*EF-306124	FUSE TSC A 250V 630MA [J]
F1A	*EF-305703	FUSE TSC 125V 630MA [C.A.Y1]
F1B	*EF-695766	FUSE SEMKO T 250V 315MA [E.V.S]
F1C	*EF-355385	FUSE BET T 250V 315MA [B]

FINAL ASSEMBLY BLOCK

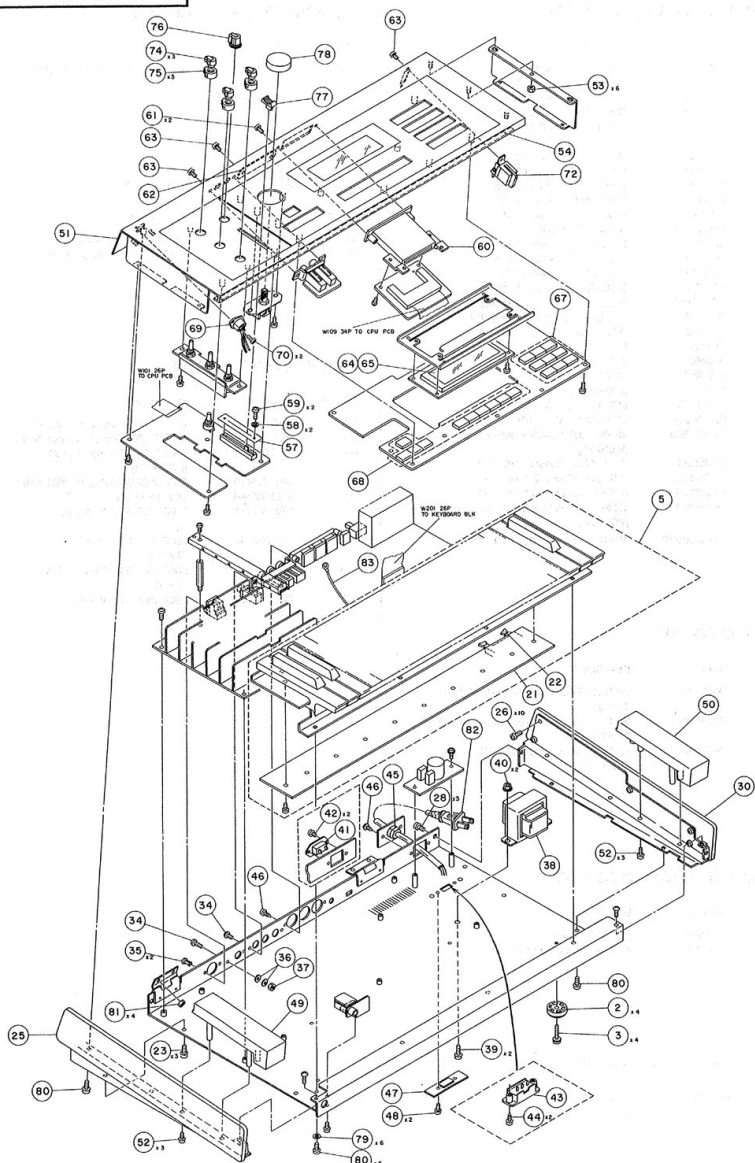

PARTS LIST

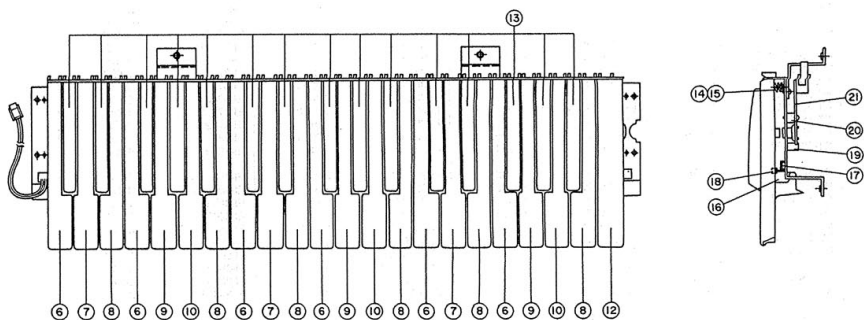

NOTE:
Parts will not be supplied if they are not listed in the parts list, even if they appear on the assembling illustrations with reference No.

13. FINAL ASSEMBLY BLOCK

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
2	SA-332850	FOOT ROUND SHAPED	49	SP-384038J	PANEL SUB(L)
3	ZS-362533	ST PAN30X05STL CMT C080	50	SP-384039J	PANEL SUB(R)
		[FOOT FIX]	51	SP-383787J	PANEL FRONT PART
5	BK-383936J	KEYBOARD BLK ESK-832 37KEY	52	ZS-331532	PT BID30X08STL BNI
6	SK-726278J	KEY WHITE CF K80	53	ZW-413188	N40STL CMT 1
7	SK-726279J	KEY WHITE D K80	54	SZ-384036J	MASK KEYBOARD
8	SK-726280J	KEY WHITE BE K80	57	SE-362389A-A	MASK VOLUME(A)
9	SK-726281J	KEY WHITE G K80	58	ZW-321317	PW21X04X05SPSL
10	SK-726282J	KEY WHITE A K80	59	ZS-362266	PAN20X02STL BNI
12	SK-726277J	KEY WHITE CC K80	60	SE-383777J	ESCUTCHEON IC CARD
13	SK-726283J	KEY BLACK E K80	61	ZS-383937J	PT PAN30X08STL NI3
14	ZG-728369J	SP KEY BLACK K70BN27	62	SC-388713J	COVER CONNECTOR
15	ZG-728370J	SP KEY WHITE K70BN6	63	ZS-593908	PAN30X06STL NI3
16	MZ-728371J	DAMPER K60DP79	64	EM-382317J	IND LCD EDMIG245633B
17	MZ-728372J	DAMPER K90DP27	65	EL-728382J	EDMIG245633B EL BACK LIGHT
18	MB-727158J	K10 GUID GUM A	67	SK-383388J	KNOB PUSH
19	MZ-728374J	ANGLE K30AG136			[DATA KNTRY]
20	ZW-728375J	SPEACER K30SS135	68	SK-384037J	KNOB PUSH(B)
21	BA-728376J	PC K60PB165			[SOFT/CURSQR KEY]
22	EJ-365891	PLUG RA-H261TD-0190 26P	69	EJ-375424	PLUG EMC-TM
23	ZS-388071J	ST BID40X05STL BNI	70	ZS-3955818	ST BR26X04STL CMT
25	SP-383776J	COVER(L)	72	ES-364478	SW SEESA/W SDOA1 T8.5 01-1
26	ZS-417137	BID30X04STL CMT			[SW POWER]
28	ZS-341960	ST BID40X06STL BNI	74	SK-383789J	KNOB DOUBLE(UPPER) PART
30	SP-383786J	COVER SIDE(R)			[BEND/GLIDE/BREATH]
34	ZS-355511	BID30X06STL BNI	75	SK-383781J	KNOB DOUBLE(LOWER)
35	ZW-698308	RV NYL30X055 BL	76	SK-383790J	KNOB SINGLE PART
36	ZW-273802	TW30			[VIBRATE]
37	ZW-516993	N30STL CMT 1	77	SK-383390J	KNOB SLIDE
38	*BT-383926J	TRANS POW L1023 J			[VOLUME]
		[J]	78	SK-382429J	KNOB UPPER PART
38A	*BT-383927J	TRANS POW L1023 C,A			[CONTROL]
		[C,A,Y1]	79	ZW-273914	SW40
38B	*BT-383928J	TRANS POW L1023 E,V,B,S	80	ZS-537074	BID40X06STL BNI
		[E,V,B,S]			[KEYBOARD FIX]
39	ZS-378447	ST BID40X10STL BNI	81	ZW-516993	N30STL CMT 1
		[TRANS POWER FIX]	82	*EW-365947	AC CORD 250 SKP210KS17B A
40	ZW-413267	N FRANGE 40STL CMT			[J]
41	*EJ-358633	SOCKET INLET SOT-17 2P [J,E,V,B,S,Y.]	82A	*EW-357931	AC CORD 3 CORES VM0033A SJT18A
42	ZS-311746	T2CTS30X08STL BNI			[C,Y1]
43	*ES-306430	SW SLIDE J-S4013 #01 01-2	82B	*EW-366055	AC CORD 250 KP11WSJ718 UC
		[VOLTAGE SELECTOR SW] [E,V,B,S]			[A]
44	ZS-350934	PT BR30X08STL BNI	82C	*EW-358629	AC CORD 2C KP4819C KS-17Y
45	EZ-302906	STRAIN RELIEF SR-6N-4 [C,A,Y.]			[E,V]
46	ZS-447761	T2BR30X06STL BNI	82D	*EW-358631	AC CORD 2C KS-17 LTBS2F BS
47	SC-383644J	COVER VOLTAGE SELECTOR [J,C,A,Y.]			[B]
48	ZS-463353	T2BR30X08STL BNI	82E	*EW-368630	AC CORD 2C KP560 LTS2AF KS17 S
					[S]
			83	EW-362290	WIRE EARTH LUG 260MM 18AWG

PARTS LIST

INDEX

Part No.	Ref. No.	Part No.	Ref. No.	Part No.	Ref. No.	Part No.	Ref. No.
BA-728376J	13-21	ED-376335	1-5	EI-349719	4-IC8	EI-376178	3-IC20
BA-L1023A020A	2-1	ED-376335	6-D1	EI-353227	1-37	EI-376178	3-IC21
BA-L1023A030A	2-2	ED-376335	6-D2	EI-353227	3-IC4	EI-376178	3-IC22
BA-L1023A040A	2-3	ED-376335	6-D3	EI-354146	1-68	EI-376178	3-IC23
BK-383936J	13-5	ED-376335	6-D6	EI-354146	3-IC61	EI-378276	1-33
BT-383926J	1-3	ED-376335	6-D7	EI-356049	1-58	EI-378276	3-IC63
BT-383926J	13-38	ED-376335	6-D8	EI-356049	3-IC49	EI-378297	1-48
BT-383927J	1-1	ED-376335	6-D9	EI-359552	1-40	EI-378297	3-IC24
BT-383927J	13-38A	ED-376335	6-D10	EI-359552	3-IC64	EI-380918J	1-29
BT-383928J	1-2	ED-376335	6-D11	EI-360026J1	1-56	EI-380918J	4-IC1
BT-383928J	13-38B	ED-376335	6-D12	EI-360026J1	3-IC48	EI-380919J	1-28
BT-383935J	1-4	ED-376335	6-D13	EI-360028	1-65	EI-380919J	3-IC70
BT-383935J	3-71	ED-376335	6-D14	EI-360028	3-IC50	EI-380920J	1-44
EC-306445	4-C25	ED-376335	6-D15	EI-360029	1-61	EI-380920J	3-IC55
EC-306445	4-C29	ED-376335	6-D16	EI-360029	3-IC38	EI-380920J	3-IC67
EC-306445	4-C31	EF-305703	1-19	EI-360029	3-IC39	EI-380921J	1-27
EC-338411	12-C4	EF-305703	3-F2A	EI-360032J1	1-62	EI-380921J	3-IC66
EC-358450	12-C2	EF-305703	12-F1A	EI-360032J1	3-IC36	EI-380921J	3-IC68
EC-358450	12-C3	EF-306124	1-17	EI-360037J1	1-55	EI-380938J	1-67
EC-358450	12-C5	EF-306124	3-F2	EI-360037J1	3-IC33	EI-380938J	3-IC44
EC-368716	3-C122	EF-306124	12-F1	EI-360037J1	3-IC56	EI-380948J	1-46
EC-368716	3-C123	EF-309388	1-18	EI-360047	1-54	EI-380948J	3-IC47
EC-368716	3-C126	EF-309388	3-F4	EI-360047	3-IC54	EI-385444J	1-44
EC-427948	4-C26	EF-309388	3-F4	EI-360047	1-63	EI-385445J	3-IC45
ED-301911	1-8	EF-309391	1-20	EI-360047	3-IC8	EI-385445J	1-30
ED-301911	3-D13	EF-309391	3-F3A	EI-360047	3-IC9	EI-385445J	4-IC5
ED-301911	3-D15	EF-309391	3-F4A	EI-360047	3-IC18	EI-388249J2	1-47
ED-301911	3-D21	EF-355374	1-12	EI-360047	3-IC19	EI-388249J2	3-IC47
ED-301911	5-D1	EF-355374	3-F2C	EI-360047	3-IC27	EI-389670J3	1-45
ED-301911	5-D2	EF-355385	1-11	EI-360047	3-IC28	EI-389670J3	3-IC45
ED-301911	5-D3	EF-355385	12-F1C	EI-360047	3-IC35	EJ-348646	9-J1
ED-301911	5-D4	EF-58974	1-13	EI-360053	3-IC5	EJ-354105	3-2
ED-301911	5-D5	EF-58974	3-F3C	EI-360053	1-60	EJ-354105	3-4
ED-301911	5-D6	EF-58974	3-F4C	EI-360053	3-IC31	EJ-354105	11-J1
ED-301911	5-D7	EF-593706	1-15	EI-360053	3-IC43	EJ-354105	11-J2
ED-301911	5-D8	EF-593706	3-F2B	EI-362588	1-41	EJ-358633	13-41
ED-301911	5-D9	EF-601942	1-16	EI-362588	3-IC5	EJ-360771	3-1
ED-301911	5-D10	EF-601942	3-F3B	EI-362588	3-IC7	EJ-365456	3-8
ED-301911	5-D11	EF-601942	3-F4B	EI-362588	3-IC15	EJ-365834	3-P28
ED-301911	5-D12	EF-695766	1-14	EI-362588	3-IC17	EJ-365891	3-P29
ED-301911	5-D13	EF-695766	12-F1B	EI-362588	3-IC24	EJ-375424	13-69
ED-301911	5-D14	EH-351973	1-22	EI-364247	3-IC26	EJ-375529	3-9
ED-301911	5-D15	EH-351973	3-CR4	EI-364247	1-43	EJ-375523	3-5
ED-301911	5-D16	EH-353789	1-23	EI-364247	3-IC6	EJ-380944J	8-J1
ED-301911	5-D17	EH-353789	3-CR3	EI-364247	3-IC16	EJ-728377J	13-22
ED-301911	5-D18	EH-359185	1-24	EI-364247	3-IC25	EL-728382J	13-65
ED-301911	5-D19	EH-359185	3-CR2	EI-364253	1-49	EM-382317J	1-70
ED-301911	5-D20	EH-370520	1-21	EI-364253	3-IC69	EM-382317J	13-64
ED-301911	5-D21	EH-370520	3-CR1	EI-364257	1-69	EO-318365	3-L1
ED-301911	5-D22	EH-379500	1-25	EI-364257	3-X1	EO-318365	3-L2
ED-344280	3-04	EH-379500	3-FL1	EI-364275	1-42	EO-318365	6-L1
ED-344280	3-05	EH-379500	3-FL2	EI-364275	3-IC32	EO-318365	6-L2
ED-344280	3-06	EH-379500	3-FL3	EI-369660	1-31	EO-360068	1-71
ED-344280	3-07	EH-379500	3-FL4	EI-369660	3-IC58	EO-360068	12-F11
ED-344280	3-08	EH-379500	3-FL5	EI-370487	1-64	EO-348929	3-RL1
ED-344280	3-09	EH-379500	3-FL6	EI-370487	3-IC52	ER-200972	1-72
ED-344280	3-D10	EH-379500	3-FL7	EI-371671	3-IC53	ER-200972	3-RL5
ED-344280	3-D11	EH-379500	3-FL8	EI-371671	1-66	ER-306905	3-R29
ED-344280	3-D12	EH-379500	3-FL9	EI-371671	3-IC46	ER-306905	3-R30
ED-344280	3-D14	EH-379500	3-FL10	EI-375220	1-59	ER-306725	1-73
ED-344280	3-D16	EH-379500	3-FL11	EI-375220	3-IC59	ER-306725	3-R152
ED-344280	3-D17	EI-200573	1-52	EI-375220	3-IC60	ES-306430	15-43
ED-344280	3-D18	EI-200573	4-IC4	EI-375222	1-57	ES-349474	1-76
ED-344280	3-D19	EI-302223	1-51	EI-375222	3-IC37	ES-349474	5-SW1
ED-344280	3-D20	EI-302223	3-IC40	EI-375345	1-35	ES-349474	5-SW2
ED-344280	4-02	EI-310036	1-53	EI-375345	3-IC41	ES-349474	5-SW3
ED-344280	4-03	EI-310036	3-IC3	EI-375345	3-IC42	ES-349474	5-SW4
ED-344280	4-04	EI-310036	4-IC3	EI-375347	1-34	ES-349474	5-SW5
ED-344280	4-05	EI-346071	1-38	EI-375347	3-IC62	ES-349474	5-SW6
ED-344280	6-03	EI-346071	3-IC71	EI-375437	1-32	ES-349474	5-SW7
ED-344280	6-04	EI-346071	6-IC1	EI-375437	3-IC51	ES-349474	5-SW8
ED-346536	1-10	EI-346071	6-IC2	EI-375437	3-IC57	ES-349474	5-SW9
ED-346536	3-D12	EI-346071	6-IC3	EI-375439	1-36	ES-349474	5-SW10
ED-357036	1-6	EI-346071	6-IC4	EI-375439	4-IC7	ES-349474	5-SW11
ED-357036	3-02	EI-349719	1-39	EI-376178	1-50	ES-349474	5-SW12
ED-357036	3-01	EI-349719	3-IC1	EI-376178	3-IC10	ES-349474	5-SW13
ED-357036	6-D17	EI-349719	3-IC2	EI-376178	3-IC11	ES-349474	5-SW14
ED-359863	6-D17	EI-349719	3-IC29	EI-376178	3-IC12	ES-349474	5-SW15
ED-359863	6-D18	EI-349719	4-IC2	EI-376178	3-IC13	ES-349474	5-SW16
ED-359863	6-D19	EI-349719	4-IC6	EI-376178	3-IC14	ES-349474	5-SW17

PARTS LIST

Part No.	Ref. No.	Part No.	Ref. No.	Part No.	Ref. No.	Part No.	Ref. No.
ES-349474	5-SW18	SP-383776J	13-25				
ES-349474	5-SW19	SP-383785J	13-30				
ES-349474	5-SW20	SP-383787J	13-51				
ES-349474	5-SW21	SP-384036J	13-49				
ES-349474	5-SW22	SP-384039J	13-50				
ES-364255	1-75	SZ-384036J	13-54				
ES-364255	3-SW1	ZG-728389J	13-14				
ES-364478	13-72	ZG-728370J	13-15				
ES-380946J	1-74	ZS-311746	13-42				
ES-380946J	10-VR1	ZS-331532	13-52				
ET-349592	1-81	ZS-341960	13-28				
ET-349592	3-TR7	ZS-350834	13-44				
ET-349592	3-TR8	ZS-355511	13-34				
ET-349592	3-TR9	ZS-355818	13-70				
ET-349592	3-TR10	ZS-362266	13-59				
ET-349592	3-TR11	ZS-362533	13-3				
ET-349592	3-TR12	ZS-378447	13-39				
ET-349592	5-TR1	ZS-383937J	13-61				
ET-349592	5-TR2	ZS-388071J	13-23				
ET-349592	5-TR3	ZS-417137	13-26				
ET-349883	1-79	ZS-447761	13-46				
ET-349883	3-TR3	ZS-463353	13-48				
ET-354167	1-77	ZS-537074	13-80				
ET-354167	3-PH1	ZS-593908	13-63				
ET-360137	1-80	ZW-273802	13-36				
ET-360137	3-TR1	ZW-273914	13-79				
ET-360137	3-TR2	ZW-321317	13-58				
ET-360137	3-TR5	ZW-413188	13-53				
ET-360137	3-TR6	ZW-413267	13-40				
ET-375446	1-78	ZW-516993	13-37				
ET-375446	3-TR4	ZW-516993	13-81				
EV-356582	6-VR2	ZW-698308	13-35				
EV-356582	6-VR3	ZW-728375J	13-20				
EV-356582	6-VR4						
EV-356585	1-83						
EV-356585	3-VR1						
EV-356576	1-84						
EV-356576	6-VR5						
EV-385801J	1-82						
EV-385801J	7-VR1						
EV-385801J	7-VR2						
EV-385801J	7-VR3						
EV-387796J	6-VR1						
EV-390045J	3-VR2						
EV-390046J	3-VR3						
EW-357931	13-82A						
EW-358629	13-82C						
EW-358630	13-82E						
EW-358631	13-82D						
EW-362290	13-83						
EW-365947	13-82						
EW-366055	13-82B						
EW-380947J	8-W109						
EZ-200473	3-1						
EZ-302906	13-45						
EZ-358816	1-85						
EZ-358816	3-BT1						
MB-727158J	13-18						
MZ-728371J	13-16						
MZ-728372J	13-17						
MZ-728374J	13-19						
SA-332850	13-2						
SC-383644J	13-47						
SC-388713J	13-62						
SE-362389A-A	13-57						
SE-383777J	13-60						
SK-382429J	13-76						
SK-383388J	13-67						
SK-383390J	13-77						
SK-383781J	13-75						
SK-383789J	13-74						
SK-383790J	13-76						
SK-384037J	13-68						
SK-726277J	13-12						
SK-726278J	13-6						
SK-726279J	13-7						
SK-726280J	13-8						
SK-726281J	13-9						
SK-726282J	13-10						
SK-726283J	13-13						

ABBREVIATIONS FOR THE SERVICE MANUAL

ABBREVIATION	EXPLANATION	ABBREVIATION	EXPLANATION
ADC	Analogue to Digital Converter	MIDI	Musical Instrument Digital Interface
AMP (Amp)	AMPlifier	MINI	MINImum
BBD	Backet Brigade Diode	MIX	MIXer
BCD	Binary Code Decimal	MOD	MODulation
B.DOWN	Brak DOWN	M.WHEEL	MODulation WHEEL
B.UP	Back UP	OSC	OSCillator
CE	Chip Enable	RAM	Random Access Memory
CH	CHannel	RD	ReaD
COMP	COMParator	REG	REGulator
CONT	CONTRol	RESO	RESOnance
CV	Control Voltage	RL	ReLay
DAC	Digital to Analogue Converter	ROM	Read Only Memory
EG	Envelope Generator	S/H	Sample and Hold
EXT	EXTernal	SW	SWitch
FREQ	FREQuency	THRU	THRoUgh
HPF	High Pass Filter	TRANS	TRANSpose
INH	INHibit	U	Upper
INT	INTerrupt	VA	Voltage Analog
INV	INVerter	VCA	Voltage Controlled Amplifier
L	Lower	VCF	Voltage Controlled Filter
LFO	Low Frequency Oscillator	VR	Variable Resistor
MAX	MAXimum	VREF	REFerence Voltage
MEMO	MEMORy	WR	WRite

AKAI ELECTRIC CO., LTD.

12-14, 2-Chome, Higashi-Kojiya, Ohta-Ku, Tokyo, Japan
SERVICE DEPARTMENT TEL: Tokyo(745)9884 TOKYO TELEX: J26261

Printed No. 890321-A1-400

Printed Date: April 21, 1989
350 Printed in Japan

VX600