

BDV-E385/E390/T39

SERVICE MANUAL

Ver. 1.0 2012.03

US Model

BDV-E385/E390/T39

Canadian Model

BDV-E390

- BDV-E385/E390/T39 are composed of following models.
As service manuals are issued for each component model, please refer to them.

COMPONENT MODEL NAME

	BDV-E385	BDV-E390	BDV-T39
BLU-RAY DISC/ DVD receiver	HBD-E385	HBD-E390	HBD-T39
Front speaker	SS-TSB118	SS-TSB118	SS-TSB118
Center speaker	SS-CTB113	SS-CTB113	SS-CTB113
Surround speaker	SS-TSB118	SS-TSB118	SS-TSB118
Subwoofer	SS-WSB114	SS-WSB114	SS-WSB114

SPECIFICATIONS

Power requirements	120 V AC, 60 Hz
Power consumption	
BDV-E385/BDV-E390/ BDV-T39	On: 130 W Standby: 0.3 W (at the Power Saving mode)
Dimensions (approx.)	430 mm × 50 mm × 275 mm (17 in × 2 in × 10 7/8 in) (w/h/d) incl. projecting parts
Mass (approx.)	2.8 kg (6 lb 2 3/4 oz)

Design and specifications are subject to change without notice.

- Standby power consumption 0.3W.
- Over 85% power efficiency of amplifier block is achieved with the full digital amplifier, S-Master.

- iPhone, iPod, iPod classic, iPod nano, and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries.

Unpacking

- Front speakers (2)
- Surround speakers (2)
- Center speakers (1)
- Subwoofer (1)
- FM wire antenna (aerial) (1)
- Remote commander (remote) (1)
- R6 (size AA) batteries (2)
- Dock for iPod/iPhone (TDM-iP30) (1) (BDV-E390/BDV-T39)
- USB cable (1) (BDV-E390/BDV-T39)
- Video cord (1)
- High Speed HDMI cable (1) (BDV-T39)
- Operating Instructions
- Quick Setup Guide
- Speaker Installation Guide

– Refer to next page for accessories list –

BLU-RAY DISC/DVD HOME THEATRE SYSTEM

9-890-583-01

2012C80-1

© 2012.03

Sony Corporation

Published by Sony EMCS (Malaysia) PG Tec


SONY®

ACCESSORIES

Ref. No.	Part No.	Description	Remark
1	4-418-859-12	MANUAL, INSTRUCTION (ENGLISH (US))	
	4-418-859-22	MANUAL, INSTRUCTION (FRENCH) (CND)	
	4-418-859-32	MANUAL, INSTRUCTION (SPANISH) (E385)	
	A-1797-336-A	OVERALL ASSY (Dock for iPod/iPhone: TDM-iP30) (E390/T39)	
2	1-489-949-11	REMOTE COMMANDER (including BATTERY LID) (RM-ADP072)	
3	1-793-184-41	CONNECTOR (F TYPE ADAPTOR) (FM wire antenna (aerial))	
4	1-756-988-21	BATTERY, MANGANESE (R6)	
5	1-835-855-31	CORD WITH CONNECTOR (1.5m) (HDMI CAB (High Speed HDMI cable) (T39)	
6	1-838-669-11	CORD, CONNECTION (1.2m) (Video cord)	
7	1-839-590-11	CORD, CONNECTION (USB5P) (0.5m) (USB cable) (E390/T39)	

- Abbreviation
CND : Canadian model


1 Dock for iPod/iPhone (TDM-iP30) (1) (E390/T39)



2 Remote commander (remote) (1)




3 FM wire antenna (aerial) (1)



4 R6 (size AA) batteries (2)



5 High Speed HDMI cable (1) (T39)



6 Video cord (1)



7 USB cable (1) (E390/T39)



MEMO

REVISION HISTORY

Checking the version allows you to jump to the revised page.

Also, clicking the version at the top of the revised page allows you to jump to the next revised page.

[illegible]

HBD-E385/E390/T39

SERVICE MANUAL

Ver. 1.0 2012.03

US Model
HBD-E385/E390/T39

Canadian Model
HBD-E390



Photo: HBD-E390

- HBD-E385 is the amplifier, video, HDMI, BD/DVD/CD system, USB, LAN, wireless LAN and FM tuner section in BDV-E385.
- HBD-E390 is the amplifier, video, HDMI, BD/DVD/CD system, USB, LAN, wireless LAN and FM tuner section in BDV-E390.
- HBD-T39 is the amplifier, video, HDMI, BD/DVD/CD system, USB, LAN, wireless LAN and FM tuner section in BDV-T39.

Model Name Using Similar Mechanism	BDP-S390
Mechanism Type	BPX-7
Optical Pick-up Block Name	KEM480AAA

SPECIFICATIONS

Amplifier Section

BDV-E385/BDV-E390/BDV-T39

US models:

AUDIO POWER SPECIFICATIONS

POWER OUTPUT AND TOTAL HARMONIC

DISTORTION:
(FTC)

Front L + Front R: With 3 ohms loads, both channels driven, from 180 Hz - 20 kHz; rated 50 watts per channel minimum RMS power, with no more than 1% total harmonic distortion from 250 milli watts to rated output.

Other models:

POWER OUTPUT (rated)

Front L/Front R: 75 W + 75 W (at 3 ohms, 1 kHz, 1% THD)

POWER OUTPUT (reference)

Front L/Front R/Surround L/Surround R:
125 W (per channel at 3 ohms, 1 kHz)

Center: 250 W (at 6 ohms, 1 kHz)

Subwoofer: 250 W (at 6 ohms, 80 Hz)

Inputs (Analog)

AUDIO (AUDIO IN) Sensitivity: 1 V/400 mV

Inputs (Digital)

TV (Audio Return Channel/OPTICAL)

Supported formats: LPCM
2CH (up to 48 kHz), Dolby
Digital, DTS

Video Section

Outputs VIDEO: 1 Vp-p 75 ohms

HDMI Section

Connector Type A (19pin)

BD/DVD/Super Audio CD/CD System

Signal format system NTSC

USB Section

➡ (USB) port: Type A (For connecting USB memory, memory card reader, digital still camera, and digital video camera)

LAN Section

LAN (100) terminal 100BASE-TX Terminal

Wireless LAN Section

Blu-ray Disc/DVD receiver (HBD-E390/HBD-E385/HBD-T39)

Standards Compliance IEEE 802.11 b/g/n
Frequency and Channel 2.4 GHz - 2.4835 GHz
[CH1 -11]

FM Tuner Section

System PLL quartz-locked digital synthesizer

Tuning range 87.5 MHz - 108.0 MHz
(100 kHz step)

Antenna (aerial) FM wire antenna (aerial)

Antenna (aerial) terminals 75 ohms, unbalanced

General

Power requirements 120 V AC, 60 Hz

Power consumption
BDV-E385/BDV-E390/
BDV-T39

On: 130 W
Standby: 0.3 W (at the
Power Saving mode)
430 mm × 50 mm × 275
mm (17 in × 2 in ×
10 7/8 in) (w/h/d) incl.
projecting parts
2.8 kg (6 lb 2 3/4 oz)

Dimensions (approx.)

Mass (approx.)

Design and specifications are subject to change without notice.

- Standby power consumption 0.3W.
- Over 85% power efficiency of amplifier block is achieved with the full digital amplifier, S-Master.

BLU-RAY DISC/DVD RECEIVER

9-890-584-01

2012C80-1

© 2012.03

Sony Corporation

Published by Sony EMCS (Malaysia) PG Tec

SONY®

HBD-E385/E390/T39

- This system incorporates with Dolby® Digital and Dolby Pro Logic adaptive matrix surround decoder and the DTS® Digital Surround System.
 - * Manufactured under license from Dolby Laboratories.
 - Dolby, Pro Logic, and the double-D symbol are trademarks of Dolby Laboratories.
 - ** Manufactured under license under U.S. Patent Nos: 5,956,674; 5,974,380; 6,226,616; 6,487,535; 7,212,872; 7,333,929; 7,392,195; 7,272,567 & other U.S. and worldwide patents issued & pending.
 - DTS-HD, the Symbol, & DTS-HD and the Symbol together are registered trademarks of DTS, Inc. Product includes software. © DTS, Inc. All Rights Reserved.
- This system incorporates High-Definition Multimedia Interface (HDMI™) technology. HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.
- Java is a trademark of Oracle and/or its affiliates.
- “BD-LIVE” and “BONUSVIEW” are trademarks of Blu-ray Disc Association.
- “Blu-ray Disc” is a trademark.
- “Blu-ray Disc,” “DVD+RW,” “DVD-RW,” “DVD+R,” “DVD-R,” “DVD VIDEO,” and “CD” logos are trademarks.
- “Blu-ray 3D” and “Blu-ray 3D” logo are trademarks of Blu-ray Disc Association.
- “BRAVIA” is a trademark of Sony Corporation.
- “AVCHD” and the “AVCHD” logo are trademarks of Panasonic Corporation and Sony Corporation.
- “XMB,” “XMB,” and “xross media bar” are trademarks of Sony Corporation and Sony Computer Entertainment Inc.
- “PlayStation” is a registered trademark of Sony Computer Entertainment Inc.
- Music and video recognition technology and related data are provided by Gracenote®. Gracenote is the industry standard in music recognition technology and related content delivery. For more information, please visit www.gracenote.com. CD, DVD, Blu-ray Disc, and music and video-related data from Gracenote, Inc., copyright © 2000-present Gracenote. Gracenote Software, copyright © 2000-present Gracenote. One or more patents owned by Gracenote apply to this product and service. See the Gracenote website for a nonexhaustive list of applicable Gracenote patents. Gracenote, CDDb, MusicID, MediaVOCs, the Gracenote logo and logotype, and the “Powered by Gracenote” logo are either registered trademarks or trademarks of Gracenote in the United States and/or other countries.



- Wi-Fi®, Wi-Fi Protected Access®, and Wi-Fi Alliance® are registered marks of the Wi-Fi Alliance.
- Wi-Fi CERTIFIED™, WPA™, WPA2™ and Wi-Fi Protected Setup™ are marks of the Wi-Fi Alliance (BDV-E390/BDV-E385/BDV-T39).
- WPA™, WPA2™ and Wi-Fi Protected Setup™ are marks of the Wi-Fi Alliance (BDV-E490/BDV-E290/BDV-E290/BDV-E190).
- The Wi-Fi CERTIFIED Logo is a certification mark of the Wi-Fi Alliance (BDV-E390/BDV-E385/BDV-T39).
- The Wi-Fi Protected Setup Mark is a mark of the Wi-Fi Alliance (BDV-E390/BDV-E385/BDV-T39).
- “PhotoTV HD” and the “PhotoTV HD” logo are trademarks of Sony Corporation.
- MPEG Layer-3 audio coding technology and patents licensed from Fraunhofer IIS and Thomson.
- This product incorporates proprietary technology under license from Verance Corporation and is protected by U.S. Patent 7,369,677 and other U.S. and worldwide patents issued and pending as well as copyright and trade secret protection for certain aspects of such technology. Cinavia is a trademark of Verance Corporation. Copyright 2004-2010 Verance Corporation. All rights reserved by Verance. Reverse engineering or disassembly is prohibited.
- iPhone, iPod, iPod classic, iPod nano, and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries.



- “Made for iPod,” and “Made for iPhone” mean that an electronic accessory has been designed to connect specifically to iPod or iPhone, respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Please note that the use of this accessory with iPod or iPhone may affect wireless performance.
- Windows Media is either a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries. This product contains technology subject to certain intellectual property rights of Microsoft. Use or distribution of this technology outside of this product is prohibited without the appropriate license(s) from Microsoft. Content owners use Microsoft® PlayReady™ content access technology to protect their intellectual property, including copyrighted content. This device uses PlayReady technology to access PlayReady-protected content and/or WMDRM-protected content. If the device fails to properly enforce restrictions on content usage, content owners may require Microsoft to revoke the device’s ability to consume PlayReady-protected content. Revocation should not affect unprotected content or content protected by other content access technologies. Content owners may require you to upgrade PlayReady to access their content. If you decline an upgrade, you will not be able to access content that requires the upgrade.
- DLNA®, the DLNA Logo and DLNA CERTIFIED™ are trademarks, service marks, or certification marks of the Digital Living Network Alliance.
- Opera® Browser from Opera Software ASA. Copyright 1995-2010 Opera Software ASA. All rights reserved.

SAFETY-RELATED COMPONENT WARNING!

COMPONENTS IDENTIFIED BY MARK  OR DOTTED LINE WITH MARK  ON THE SCHEMATIC DIAGRAMS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY.



- All other trademarks are trademarks of their respective owners.
- Other system and product names are generally trademarks or registered trademarks of the manufacturers. ™ and ® marks are not indicated in this document.

End User License Information

Gracenote® End User License Agreement

This application or device contains software from Gracenote, Inc. of Emeryville, California (“Gracenote”). The software from Gracenote (the “Gracenote Software”) enables this application to perform disc and/or file identification and obtain music-related information, including name, artist, track, and title information (“Gracenote Data”) from online servers or embedded databases (collectively, “Gracenote Servers”) and to perform other functions. You may use Gracenote Data only by means of the intended End-User functions of this application or device.

You agree that you will use Gracenote Data, the Gracenote Software, and Gracenote Servers for your own personal non-commercial use only. You agree not to assign, copy, transfer or transmit the Gracenote Software or any Gracenote Data to any third party. YOU AGREE NOT TO USE OR EXPLOIT GRACENOTE DATA, THE GRACENOTE SOFTWARE, OR GRACENOTE SERVERS, EXCEPT AS EXPRESSLY PERMITTED HEREIN.

You agree that your non-exclusive license to use the Gracenote Data, the Gracenote Software, and Gracenote Servers will terminate if you violate these restrictions. If your license terminates, you agree to cease any and all use of the Gracenote Data, the Gracenote Software, and Gracenote Servers. Gracenote reserves all rights in Gracenote Data, the Gracenote Software, and the Gracenote Servers, including all ownership rights. Under no circumstances will Gracenote become liable for any payment to you for any information that you provide. You agree that Gracenote, Inc. may enforce its rights under this Agreement against you directly in its own name.

The Gracenote service uses a unique identifier to track queries for statistical purposes. The purpose of a randomly assigned numeric identifier is to allow the Gracenote service to count queries without knowing anything about who you are. For more information, see the web page for the Gracenote Privacy Policy for the Gracenote service.

The Gracenote Software and each item of Gracenote Data are licensed to you “AS IS.” Gracenote makes no representations or warranties, express or implied, regarding the accuracy of any Gracenote Data from in the Gracenote Servers. Gracenote reserves the right to delete data from the Gracenote Servers or to change data categories for any cause that Gracenote deems sufficient. No warranty is made that the Gracenote Software or Gracenote Servers are error-free or that functioning of Gracenote Software or Gracenote Servers will be uninterrupted. Gracenote is not obligated to provide you with new enhanced or additional data types or categories that Gracenote may provide in the future and is free to discontinue its services at any time. GRACENOTE DISCLAIMS ALL WARRANTIES EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE, AND NON-INFRINGEMENT. GRACENOTE DOES NOT WARRANT THE RESULTS THAT WILL BE OBTAINED BY YOUR USE OF THE GRACENOTE SOFTWARE OR ANY GRACENOTE SERVER. IN NO CASE WILL GRACENOTE BE LIABLE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES OR FOR ANY LOST PROFITS OR LOST REVENUES.

© Gracenote, Inc. 2009

CAUTION

Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

ATTENTION AU COMPOSANT AYANT RAPPORT À LA SÉCURITÉ!

LES COMPOSANTS IDENTIFIÉS PAR UNE MARQUE  SUR LES DIAGRAMMES SCHÉMATIQUES ET LA LISTE DES PIÈCES SONT CRITIQUES POUR LA SÉCURITÉ DE FONCTIONNEMENT. NE REMPLACER CES COMPOSANTS QUE PAR DES PIÈCES SONY DONT LES NUMÉROS SONT DONNÉS DANS CE MANUEL OU DANS LES SUPPLÉMENTS PUBLIÉS PAR SONY.

SAFETY CHECK-OUT

After correcting the original service problem, perform the following safety check before releasing the set to the customer:

Check the antenna terminals, metal trim, “metallized” knobs, screws, and all other exposed metal parts for AC leakage.

Check leakage as described below.

LEAKAGE TEST

The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 0.5 mA (500 microamperes.). Leakage current can be measured by any one of three methods.

1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufacturers' instructions to use these instruments.
2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.
3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The “limit” indication is 0.75 V, so analog meters must have an accurate low-voltage scale. The Simpson 250 and Sanwa SH-63Trd are examples of a passive VOM that is suitable. Nearly all battery operated digital multimeters that have a 2 V AC range are suitable. (See Fig. A)

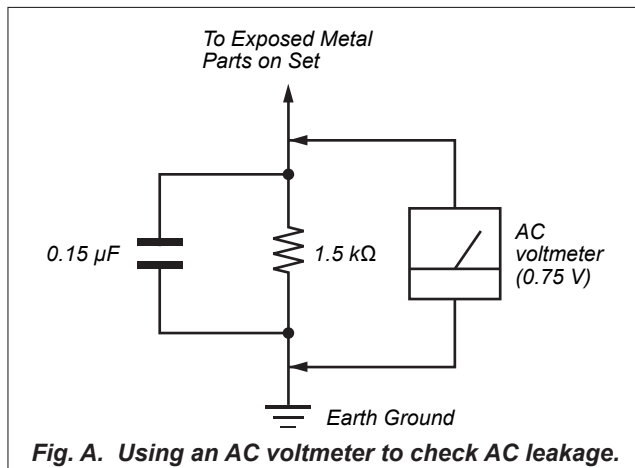


TABLE OF CONTENTS

1. SERVICING NOTES

2. DISASSEMBLY

3. TEST MODE

4. ELECTRICAL CHECK

5. DIAGRAMS

2-1. Disassembly Flow

2-2. How To Bend FFC

2-3. Left Panel, Right Panel

2-4. Loading Panel

2-5. Top Panel, Front Panel Assy

2-6. Top Chassis, Wireless LAN Card (WLC1), POWER KEY Board, PANEL Board

2-7. BD Drive (BPX-7)

2-8. MB148 Board

2-9. Switching Regulator (SWR1)

2-10. AMP Board

2-11. Optical Pick-up Block (KEM480AAA), Wire (Flat Type)

5

12

13

14

14

15

16

17

17

18

18

19

20

28

29

30

31

32

33

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

6. EXPLODED VIEWS

6-1. Panel Section

6-2. Front Panel Section

6-3. Chassis Bottom Section

6-4. Chassis Section

6-5. BD Drive Section (BPX-7)

7. ELECTRICAL PARTS LIST

79

80

81

82

83

84

CAUTION

CLASS 3R VISIBLE AND INVISIBLE LASER RADIATION
WHEN OPEN, AVOID DIRECT EYE EXPOSURE.

VORSICHT

KLASSE 3R SICHTBARE UND UNSICHTBARE
LASERSTRAHLUNG WENN GEÖFFNET.
UNMITTELBAREN AUGENKONTAKT VERMEIDEN.

ADVARSEL

SYNLIG OG USYNLIG LASERSTRÅLING ÅP KLASSE 3R
VED ÅPNING. UNNGÅ ÅT SE DIREKTE PÅ STRÅLEN.

ADVARSEL

SYNLIG OG USYNLIG LASERSTRÅLING I KLASSE 3R NÅR
DEKSEL ÅPNES. UNNGÅ DIREKTE EKSPONERING AV ØYENE.

VARNING

KLASS 3R SYNLIG OCH OSYNLIG LASERSTRÅLNING
NÅR DENNA DEL ÅR ÖPPNAD. UNDVIK ATT DIREKT
EXPONERAS ÖGONEN FÖR STRÅLNINGEN.

VARO!

AVATTUNA LUOKAN 3R NÄKYVÄÄ JA NÄKYMÄTÖNTÄ
LASERISÄTELYÄ. VÄLTÄ KATSEEN SUORAA ALTISTAMISTA.

警告

打开时会有3类可见和不可见激光辐射，避免眼睛受到直射的照射

注意

打開時有第3類可見及不可見雷射輻射，避免眼睛直接暴露。

CLASS 1 LASER PRODUCT

LUOKAN 1 LASERLAITE

KLASS 1 LASERAPPARAT

1类激光产品

第1類雷射產品

This appliance is classified as a CLASS 1 LASER product. This marking is located on the rear exterior.

This appliance is classified as a CLASS 3R LASER product. Visible and invisible laser radiation is emitted when the laser protective housing is opened, so be sure to avoid direct eye exposure. This marking is located on the laser protective housing inside the enclosure.

NOTES ON CHIP COMPONENT REPLACEMENT

- Never reuse a disconnected chip component.
- Notice that the minus side of a tantalum capacitor may be damaged by heat.

FLEXIBLE CIRCUIT BOARD REPAIRING

- Keep the temperature of soldering iron around 270 °C during repairing.
- Do not touch the soldering iron on the same conductor of the circuit board (within 3 times).
- Be careful not to apply force on the conductor when soldering or unsoldering.

SECTION 1

SERVICING NOTES

NOTES ON HANDLING THE OPTICAL PICK-UP BLOCK OR BASE UNIT

The laser diode in the optical pick-up block may suffer electrostatic break-down because of the potential difference generated by the charged electrostatic load, etc. on clothing and the human body. During repair, pay attention to electrostatic break-down and also use the procedure in the printed matter which is included in the repair parts.

The flexible board is easily damaged and should be handled with care.

NOTES ON LASER DIODE EMISSION CHECK

The laser beam on this model is concentrated so as to be focused on the disc reflective surface by the objective lens in the optical pickup block. Therefore, when checking the laser diode emission, observe from more than 30 cm away from the objective lens.

UNLEADED SOLDER

Boards requiring use of unleaded solder are printed with the lead-free mark (LF) indicating the solder contains no lead.

(Caution: Some printed circuit boards may not come printed with the lead free mark due to their particular size)



: LEAD FREE MARK

Unleaded solder has the following characteristics.

- Unleaded solder melts at a temperature about 40 °C higher than ordinary solder.
Ordinary soldering irons can be used but the iron tip has to be applied to the solder joint for a slightly longer time.
Soldering irons using a temperature regulator should be set to about 350 °C.
Caution: The printed pattern (copper foil) may peel away if the heated tip is applied for too long, so be careful!
- Strong viscosity
Unleaded solder is more viscous (sticky, less prone to flow) than ordinary solder so use caution not to let solder bridges occur such as on IC pins, etc.
- Usable with ordinary solder
It is best to use only unleaded solder but unleaded solder may also be added to ordinary solder.

RELEASING THE DISC TRAY LOCK

The disc tray lock function for the antitheft of an demonstration disc in the store is equipped.

Releasing Procedure:

1. Press the [I/⏻] button to turn on the system.
2. Touch the [FUNCTION] sensor to select "BD/DVD".
3. Touch the [■] and [▲] sensors simultaneously and hold down unit "DEMO OFF" displayed on the fluorescent indicator tube (around 5 seconds).

Note: When "DEMO LOCK" is displayed, the disc tray lock is not released by turning power on/off with the [I/⏻] button.

ABOUT THE LENS CLEANING

Do not do the lens cleaning with the cotton bud etc. It causes the trouble.

NOTE OF REPLACING THE IC101, IC501 AND IC8001 ON THE MB148 BOARD

IC101, IC501 and IC8001 on the MB148 board cannot exchange with single. When these parts are damaged, exchange the complete mounted board.

NOTE OF REPLACING THE IC106 AND IC206 ON THE MB148 BOARD

Replacement of IC106 and IC206 on the MB148 board used in this unit requires a special tool.

TEST DISC

Part No.	Description	Layer
J-6090-199-A	BLX-104	Single Layer
J-6090-200-A	BLX-204	Dual Layer
J-2501-307-A	CD (HLX-A1)	
J-2501-305-A	HLX-513	Single Layer (NTSC)
J-2501-306-A	HLX-514	Dual Layer (NTSC)
J-6090-077-A	HLX-506	Single Layer (PAL)
J-6090-078-A	HLX-507	Dual Layer (PAL)

Note: Refer to the service manual of BDP-BX1/S350 (Part No. 9-883-989-1□) (page 1-3 to 1-14E) for the use of BLX-104/204.

Operation and Display:

1. BLX-104

Procedure:

1. Select 23.976Hz/1080p.
 2. Play "4.Motion picture".
 3. Check whether player can play back or not.
 4. Check each outputs.
Video:
Composite/S Video/component/HDMI.
Audio:
Speaker out.
- * When 1080/24p monitor is nothing, 1080i (59.94Hz or 50Hz) can use instead of 1080/24p.
However this is temporary correspondence.

2. BLX-204

Procedure:

1. Select 1080i (59.94Hz or 50Hz).
2. Play "4.Motion picture".
3. Check whether player can play back or not (Check the picture and sound output).

3. CD (HLX-A1)

Procedure:

Check whether player can play back or not (Check the sound output).

4. HLX-513/514 (NTSC), HLX-506/507 (PAL)

Procedure:

1. After displayed Main Menu, select "1.Video Signal".
2. Play "1.Color bar 100%" (Check the picture and sound output).
3. Return to Menu.
4. Play "Demonstration 4:3" or "Demonstration 16:9" (Check the picture and sound output).

NOTE OF REPLACING THE OPTICAL DEVICE (KEM480AAA) OR MB148 BOARD

The password will be supplied to only service HQ, and service center name, q'ty and all of software registered information should be maintained by service HQ, and Audio will ask to report the registration information.

Optical device (KEM480AAA) for BD requires precise read out functions and secure contents protection system for more than past DVD/CD.

Therefore, in the case repaired as follows, the writing work of the OP data is necessary.

- When the optical device (KEM480AAA) is replaced (The MB148 board doesn't replace).
- When both the optical device (KEM480AAA) and MB148 board are replaced.
- When the MB148 board is replaced (The optical device (KEM480AAA) doesn't replace) (In this case, do the work of "3. Optical device (KEM480AAA) replacement" other than the replacement of new optical device).

Note: The servo adjustment is done while writing the OP data. The manual adjustment is unnecessary.
LD ON TIME history doesn't carry over.
Do not touch any optical block parts, turn table and during replacing. BD laser diode is very sensitive.

1. Preparation

1-1. ESD Countermeasure

It is necessary to confirm the state of static electricity in the work space before the repair is started.

The static electricity resistance of the BD laser is weaker than that of the DVD/CD laser.

Do work space and worker's ESD countermeasures to prevent destruction by ESD.

1-2. Jig

- Digital camera (Recommend with macro mode)
- USB memory
- PC
- Barcode decoder (Refer to "1-3. Barcode decoder (BDPRdec)")

1-3. Barcode decoder (BDPRdec)

Jig name : BDPRdec.exe

Release : 2011.8.25

Version : 3.0.0.0

Software contents :

- BDPRdec.exe : Barcode decoder software
- SavePath.ini : Decoded file destination setting file (Initial destination is "C:\BD\BuData.txt")
- TasmanBars.dll : Decode dll
- Uninst.exe : Uninstall the "BDPRdec.exe" from PC

Install procedure:

1. Unzip the barcode decoder files to any PC folder.
2. Check the attached 2D code photo (OK_sample.JPG) drag & drop onto "BDPRdec.exe".

When the barcode decoder is used for the first time, the password is necessary. It is unnecessary since the second times.

Note 1: The password will be supplied to only service headquarters, and service center name/q'ty/all of software registered information should be maintained by service headquarters.

Note 2: Do not change the decoded file name "BuData.txt".

3. When ".NET frame work requirements" is displayed, download following applications from Microsoft download site.

- Microsoft .NET Framework Version 2.0 Redistributable Package (x86)
<http://www.microsoft.com/downloads/details.aspx?displaylang=en&FamilyID=0856eacb-4362-4b0d-8edd-aab15c5e04f5>
- Microsoft .NET Framework 2.0 Service Pack 1 (x86)
<http://www.microsoft.com/downloads/details.aspx?displaylang=en&FamilyID=79bc3b77-e02c-4ad3-aacf-a7633f706ba5>

How to use:

Case 1 Drag & drop 2D code photo onto "BDPRdec.exe".

Case 2 Drag & drop BU data file onto "BDPRdec.exe".


Data file name be changed to specify format and end of 7 character are defined.

You can also enter the file path at the prompt.

2. Pass-fail judgment of the optical device (KEM480AAA)


Perform pass-fail judgment to judge whether the repair of the optical device (KEM480AAA) is necessary.

2-1. Flow of drive section check

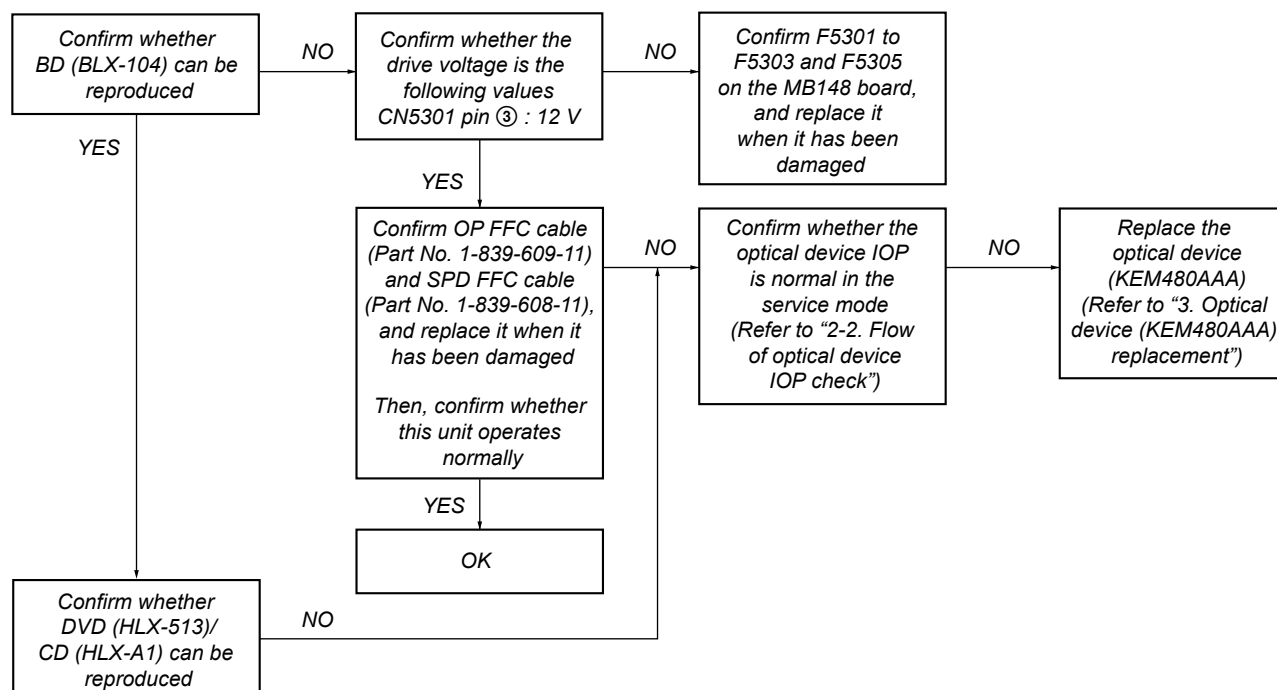

Note: Refer to "2-11. OPTICAL PICK-UP BLOCK (KEM480AAA), WIRE (FLAT TYPE)" (page 19) about how to remove the COVER, DRIVE.

2-2. Flow of optical device IOP check

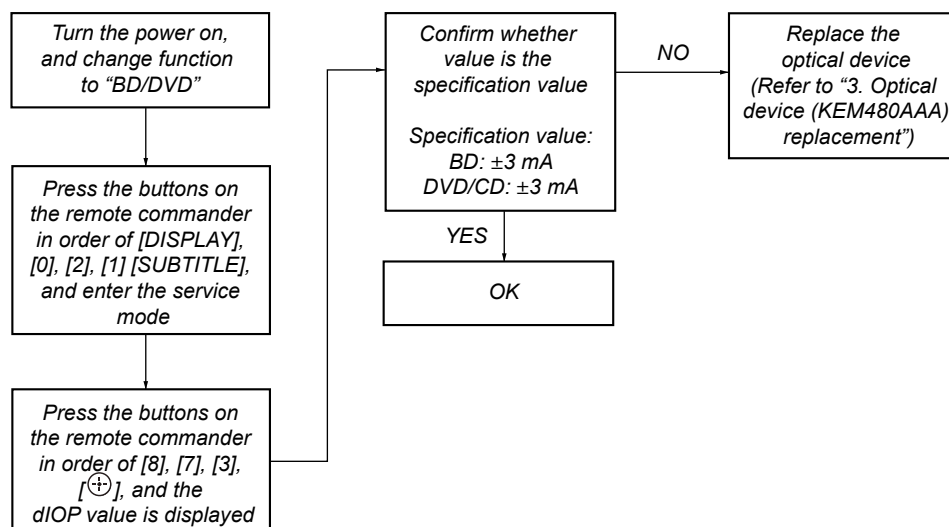

3. Optical device (KEM480AAA) replacement

Flow of replacement:

Note: The photo in flow is an image.



Barcode label on new optical device (KEM480AAA) bottom side



Take photo (JPEG) by digital camera



Change photo into the text data with the barcode decoder



Save the text data to USB memory (memory capacity need not be 8GB)



Connect USB memory with front USB connector on this unit, and read the text data by the service mode


Procedure:

1. Remove the INSULATOR (4 pieces) and broken optical device (KEM480AAA) from LOADING ASSY.
2. Take photo of the barcode on new optical device (KEM480AAA) bottom side by digital camera.



3. Assemble the INSULATOR (4 pieces) to new optical device (KEM480AAA), fix (Torque value: 2 kgf) it to LOADING ASSY with screw, and assemble this unit.
4. Drag & drop the taken photo by step 2 to "BDPRdec.exe", and make the text data (File name: BuData.txt).
5. Save the text data to USB memory.
6. Connect USB memory with front USB connector on this unit, and turn the power on.

– Front view –

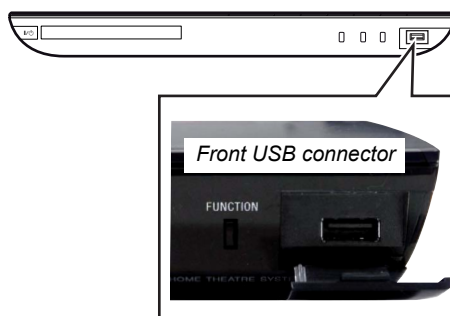

7. Press the [FUNCTION] button on the remote commander to select "BD/DVD".
8. Press the buttons on the remote commander in order of [DISPLAY], [0], [2], [1], [SUBTITLE], and enter the service mode.
9. Press the buttons on the remote commander in order of [8], [1], [ENTER], and execute "[1] Drive OP data Write".
10. Turn the power off after writing the OP data.
11. Turn the power on, and enter the service mode again.
12. Press the buttons on the remote commander in order of [8], [7], [3], [ENTER], and the dIOP value is displayed.
13. Confirm value is the following specification value, and turn the power off.

Specification value:

BD : ± 3 mA
DVD/CD : ± 3 mA

14. Turn the power on, confirm playback performance of the BD (BLX-104)/DVD (HLX-514)/CD (HLX-A1).
15. Completely assemble this unit, and complete the repair.

NOTE THE BD DRIVE (BPX-7) PARTS REPLACING


The mechanism blocks except optical device of BD drive (BPX-7) are chiefly composed of the following parts.

- HOLDER, CHUCK ASSY
- LOADING ASSY
- COVER, DRIVE

These parts are produced by two venders, it is not compatible. Therefore, HOLDER, CHUCK ASSY and LOADING ASSY are supplied by one pair as repair parts. Please exchange both HOLDER, CHUCK ASSY and LOADING ASSY at the same time.


COVER, DRIVE need not be exchanged at the same time.

Note 1: The laser caution label is not pasted to LOADING FOR SERVICE. Please peel off an original laser caution label, and paste it to LOADING FOR SERVICE when you use LOADING FOR SERVICE.

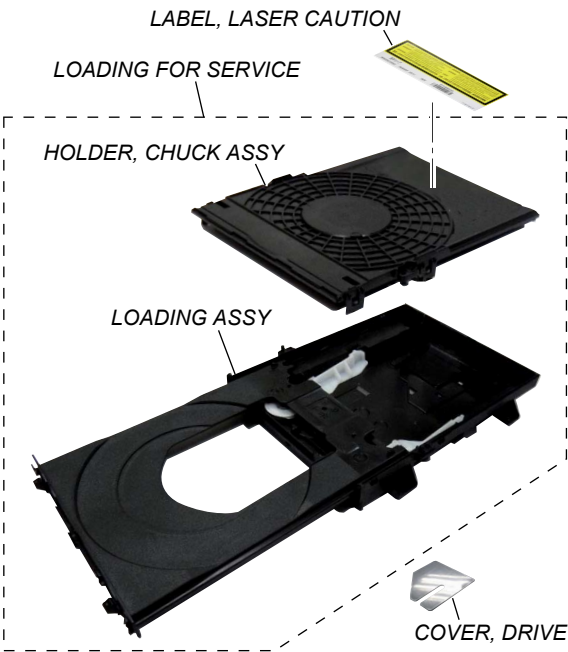


• Limit sample in state of laser caution label

Note 2: If laser caution label is a condition of the figure below, it is acceptable.

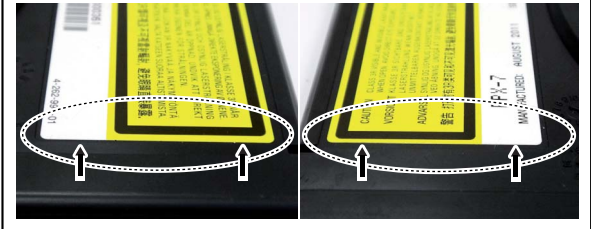

MODEL IDENTIFICATION

- Rear view -



Model	Part No.
E385/E390/T39	4-295-427-2□


CAPACITOR ELECTRICAL DISCHARGE PROCESSING

When checking the board, the electrical discharge is necessary for the electric shock prevention.

Connect the resistor to both ends of respective capacitors.

- Switching regulator
C207, C201, C402, C503, C504, C507

- SWITCHING REGULATOR (Conductor Side) -

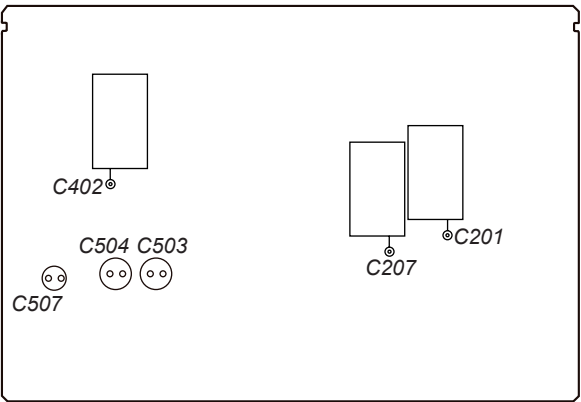

(To both ends of each capacitor)




NOTE OF REPLACING THE IC3102 AND IC3302 ON THE AMP BOARD AND THE COMPLETE AMP BOARD

When IC3102 and IC3302 on the AMP board and the complete AMP board are replaced, it is necessary to spread the compound (GREASE (G-747) 1KG) (Part No. 7-640-004-33) between parts and heat sink.

Spread the compound referring to the figure below.

– AMP Board (Component Side) –

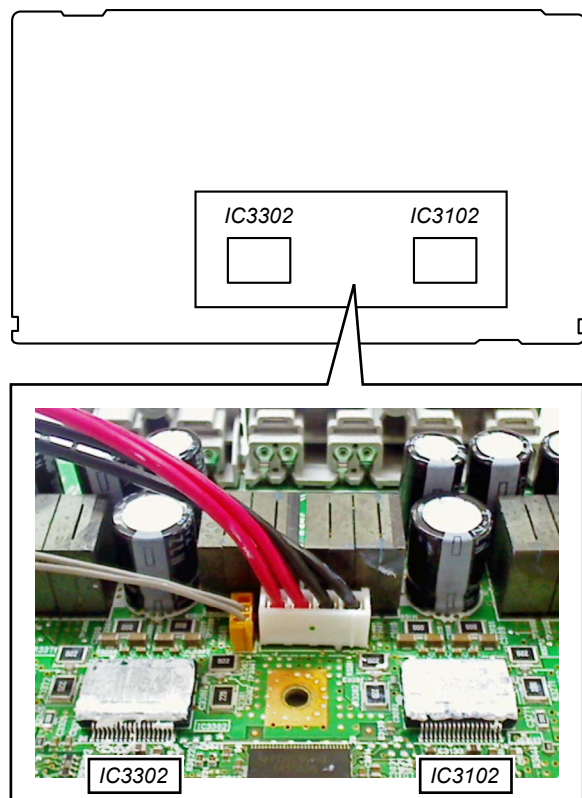

CHECKING METHOD OF NETWORK OPERATION

It is necessary to check the network operation, when replacing the MB148 board. Check the operation of wireless and wired LAN, according to the following method.

1. Checking Method of Wireless LAN Operation

Check that access point is recognized surely.

Necessary Equipment:

Wireless access point with router function (AP)

Procedure:

1. Press the [HOME] button on the remote commander to enter the home menu.
2. Press the [↓]/[↑]/[←]/[→] buttons on the remote commander to select “Network Settings”→“Internet Settings”, and press the [⊕] button on the remote commander.
3. Press the [↓]/[↑] buttons on the remote commander to select “Wireless Setup (built-in)”, and press the [⊕] button on the remote commander.
4. Press the [↓]/[↑] buttons on the remote commander to select “Scan”, and press the [⊕] button on the remote commander.
5. The system starts searching for access points, and displays a list of up available network name (SSID).
6. Check that access point (SSID) is displayed on the searching result.

Note: Refer to the instruction manual about details of the setting method.

2. Checking method of wired LAN operation

Check that access point is recognized surely.

Procedure:

1. Connect the main unit to the router or the hub, etc. with the LAN cable.
2. Press the [HOME] button on the remote commander to enter the home menu.
3. Press the [↓]/[↑]/[←]/[→] buttons on the remote commander to select “Network Settings”→“Internet Settings”, and press the [⊕] button on the remote commander.
4. Press the [↓]/[↑] buttons on the remote commander to select “Wired Setup”, and press the [⊕] button on the remote commander.
5. Press the [↓]/[↑]/[←]/[→] buttons on the remote commander to select “Auto”, and press the [⊕] button on the remote commander.
6. Press the [→] button on the remote commander.
7. Press the [↓]/[↑] buttons on the remote commander to select “Save & Connect”, and press the [⊕] button on the remote commander.
8. When “Internet Settings is now complete.” appears, then press the [⊕] button on the remote commander.
9. Press the [HOME] button on the remote commander to enter the home menu.
10. Press the [↓]/[↑]/[←]/[→] buttons on the remote commander to select “Network Settings”→“Internet Settings”, and press the [⊕] button on the remote commander.
11. Press the [↓]/[↑] buttons on the remote commander to select “Network Connection Diagnostics”, and press the [⊕] button on the remote commander.
12. Press the [←]/[→] buttons on the remote commander to select “Start”, and press the [⊕] button on the remote commander.
13. Check that IP address can be acquired.


Note: Refer to the instruction manual about details of the setting method.

HOW TO OPEN THE TRAY WHEN POWER SWITCH TURN OFF


Note 1: After the left panel is removed, this work is done.

Note 2: Please prepare the thin wire (clip etc. processed to the length of 8 cm or more).

- ❶ Remove the panel, left.
(Illustration of disassembly is omitted.)

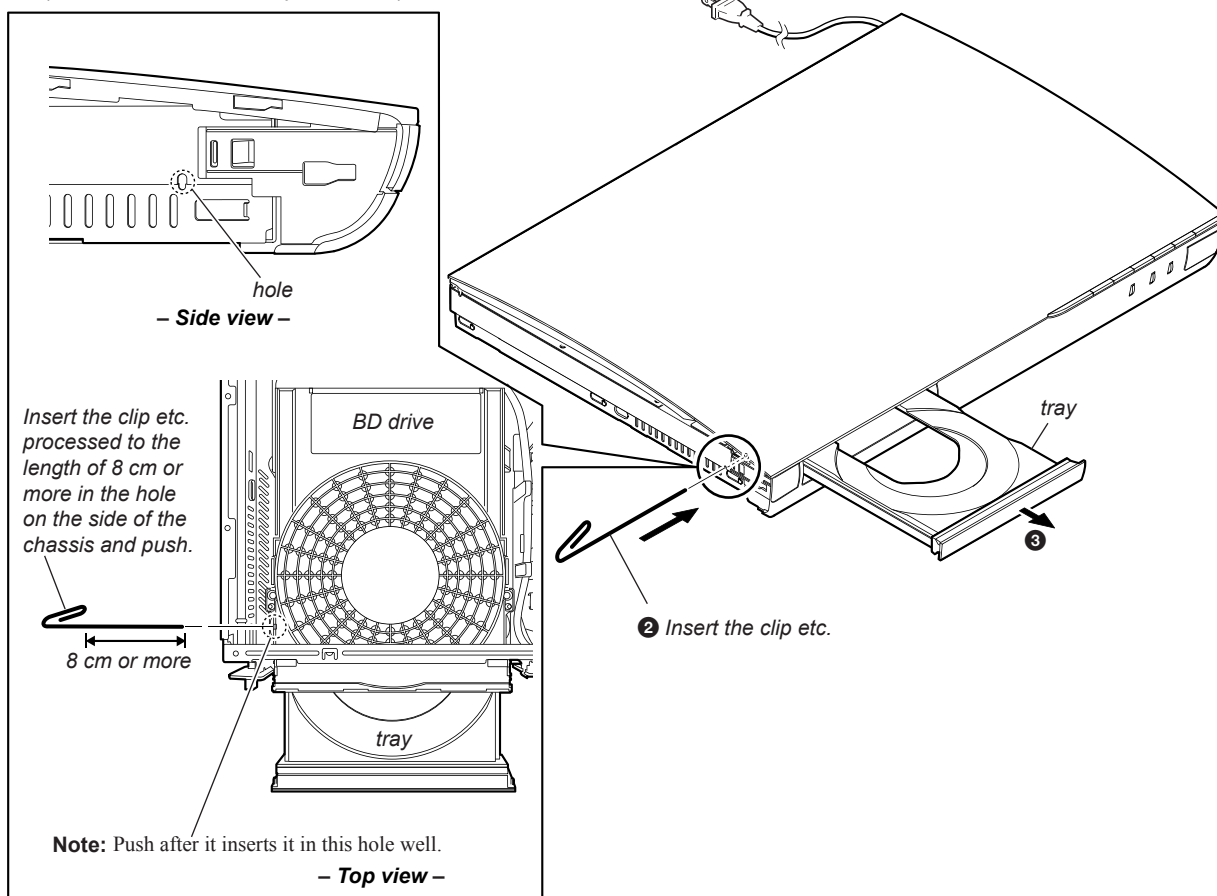


SERVICE POSITION

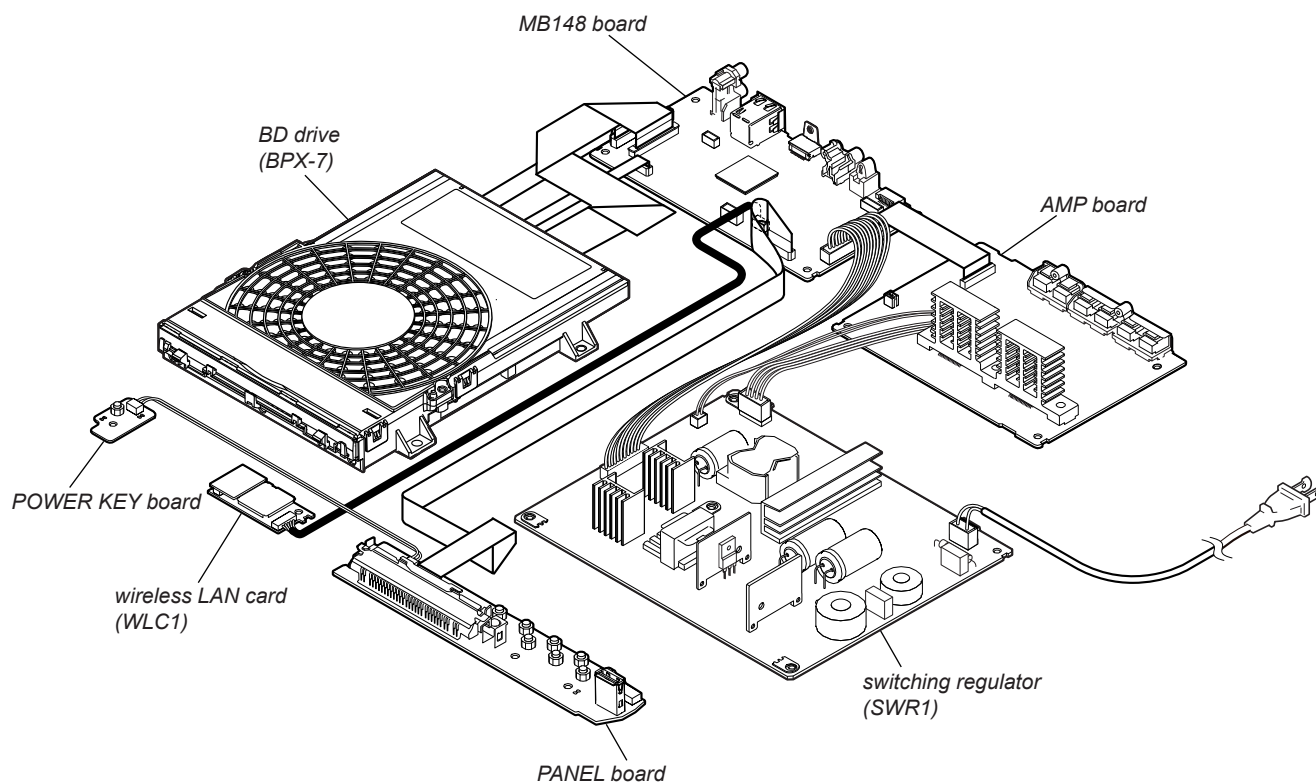

SECTION 2 DISASSEMBLY

- This set can be disassembled in the order shown below.

2-1. DISASSEMBLY FLOW

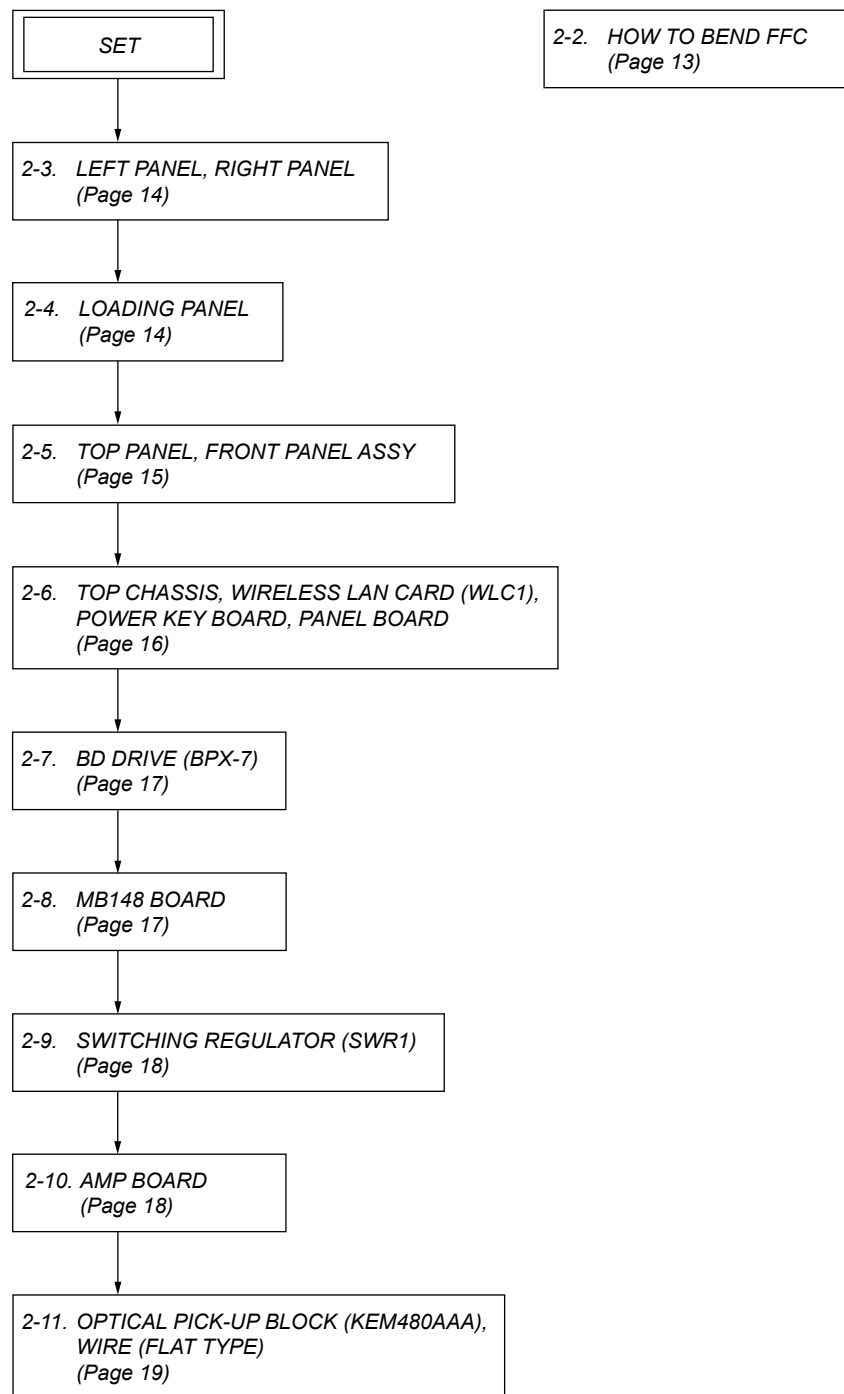


2-2. HOW TO BEND FFC


————— : Mountain fold

----- : Valley fold


wire (flat type) (13 core), length 320 mm (Ref. No. 55)

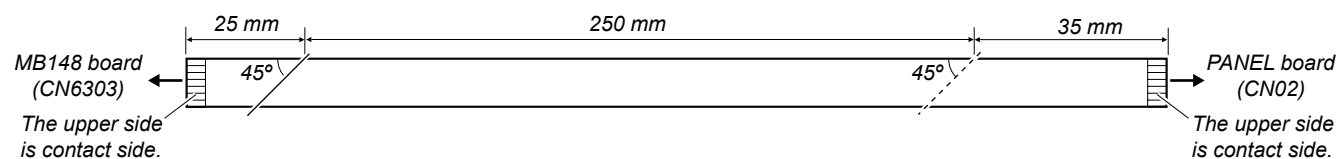


wire (flat type) (7 core), length 65 mm (Ref. No. 104)

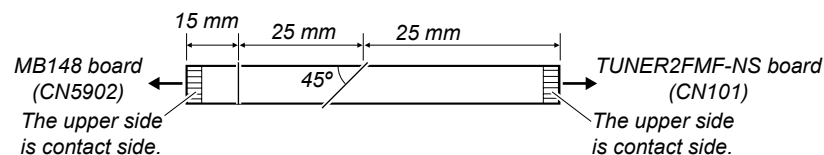


wire (flat type) (30 core), length 130 mm (Ref. No. 107)

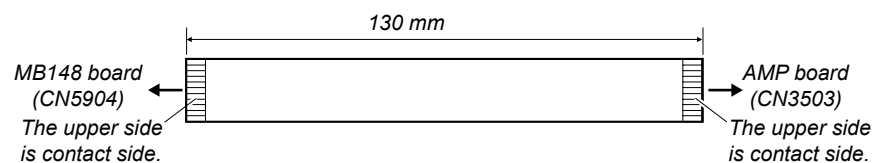


wire (flat type) (9 core), length 245 mm (Ref. No. 206)

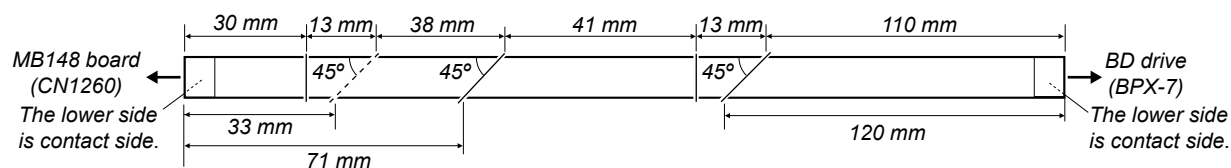

flexible flat cable (45 core), length 244 mm (Ref. No. 207)

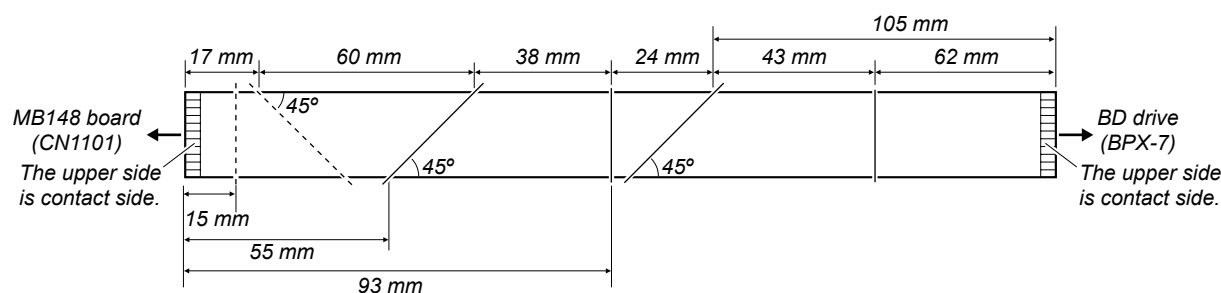


wire (flat type) (5 core), length 265 mm (Ref. No. 208)

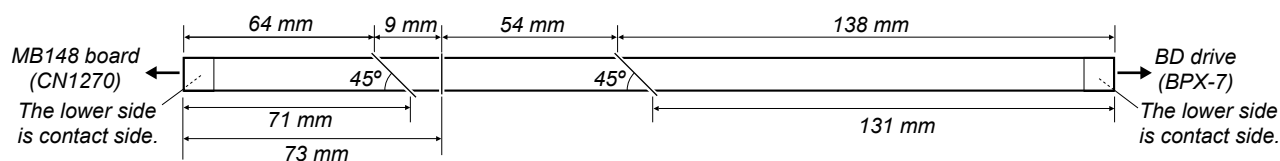


Note: Follow the disassembly procedure in the numerical order given.


2-3. LEFT PANEL, RIGHT PANEL

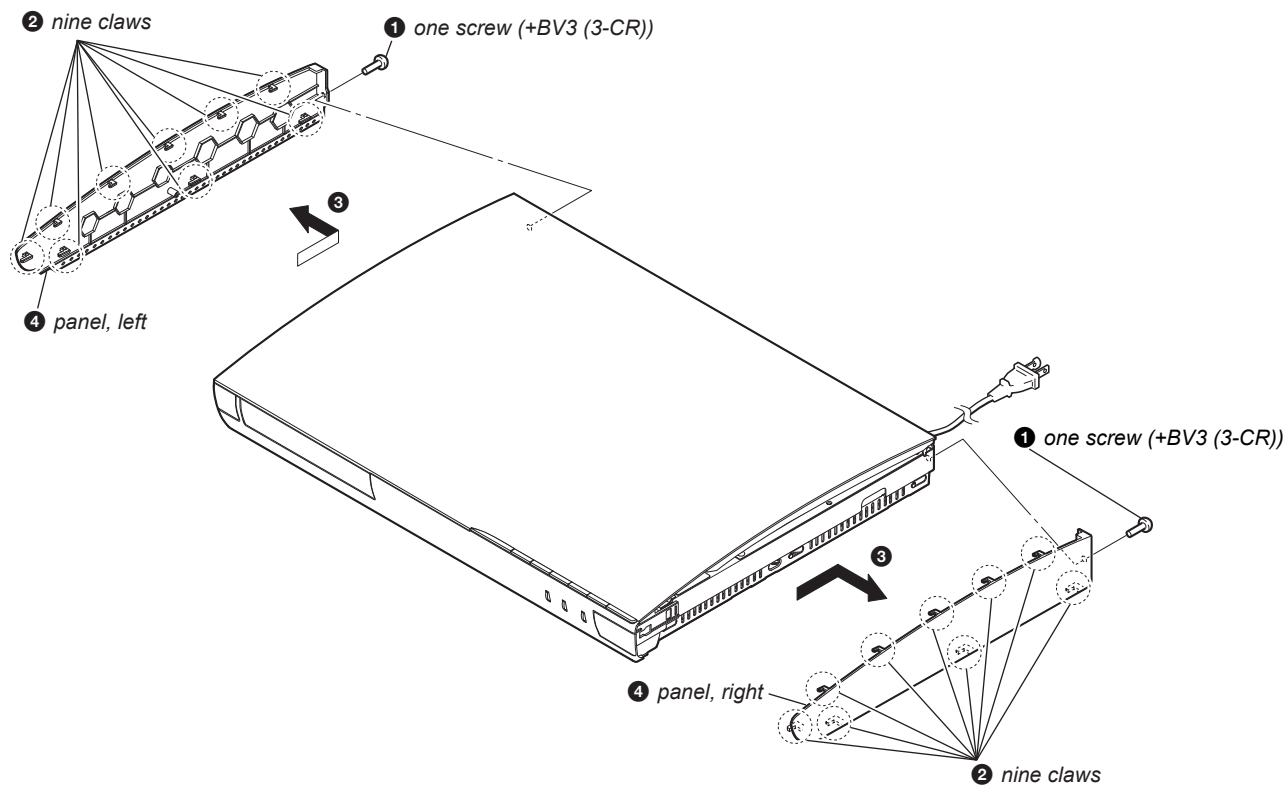


2-4. LOADING PANEL

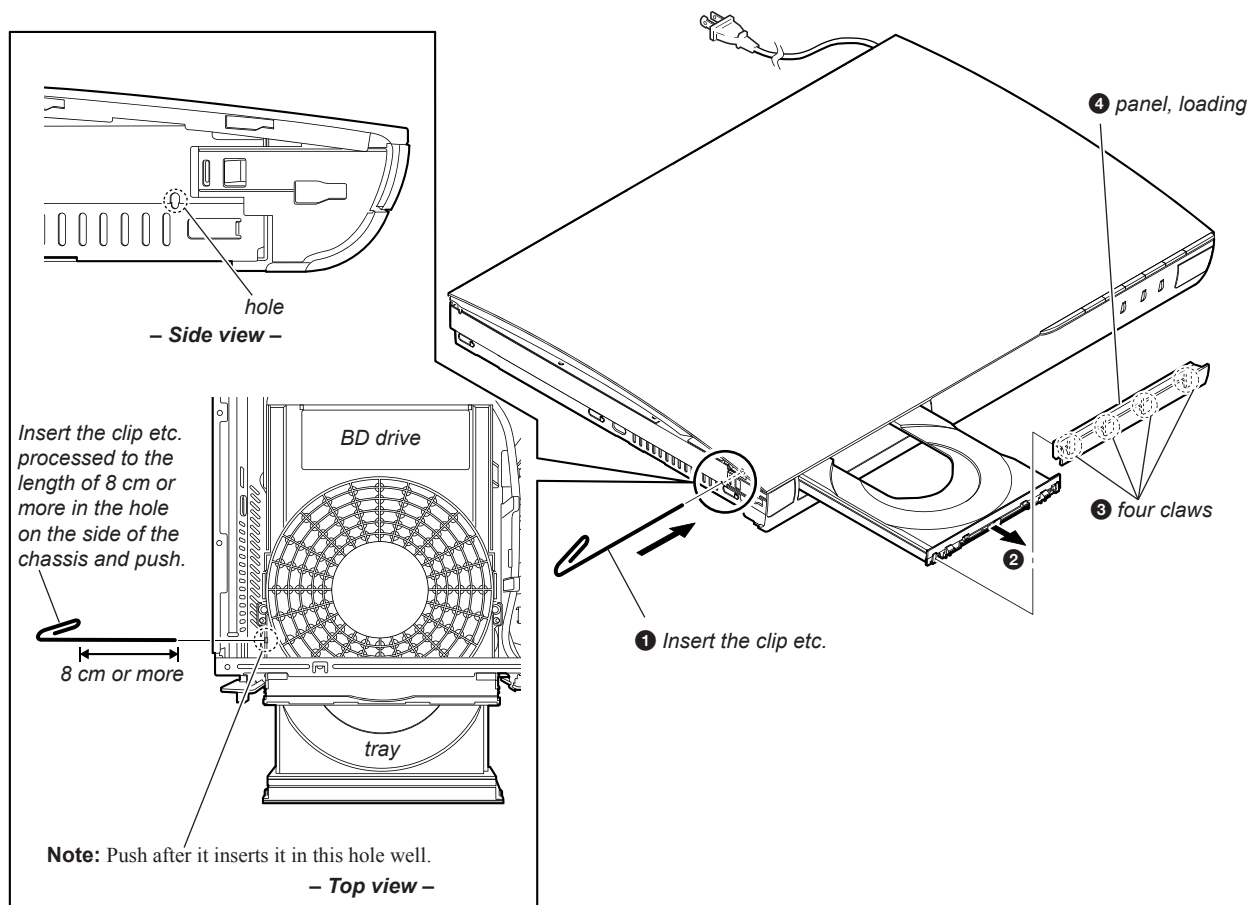

2-5. TOP PANEL, FRONT PANEL ASSY

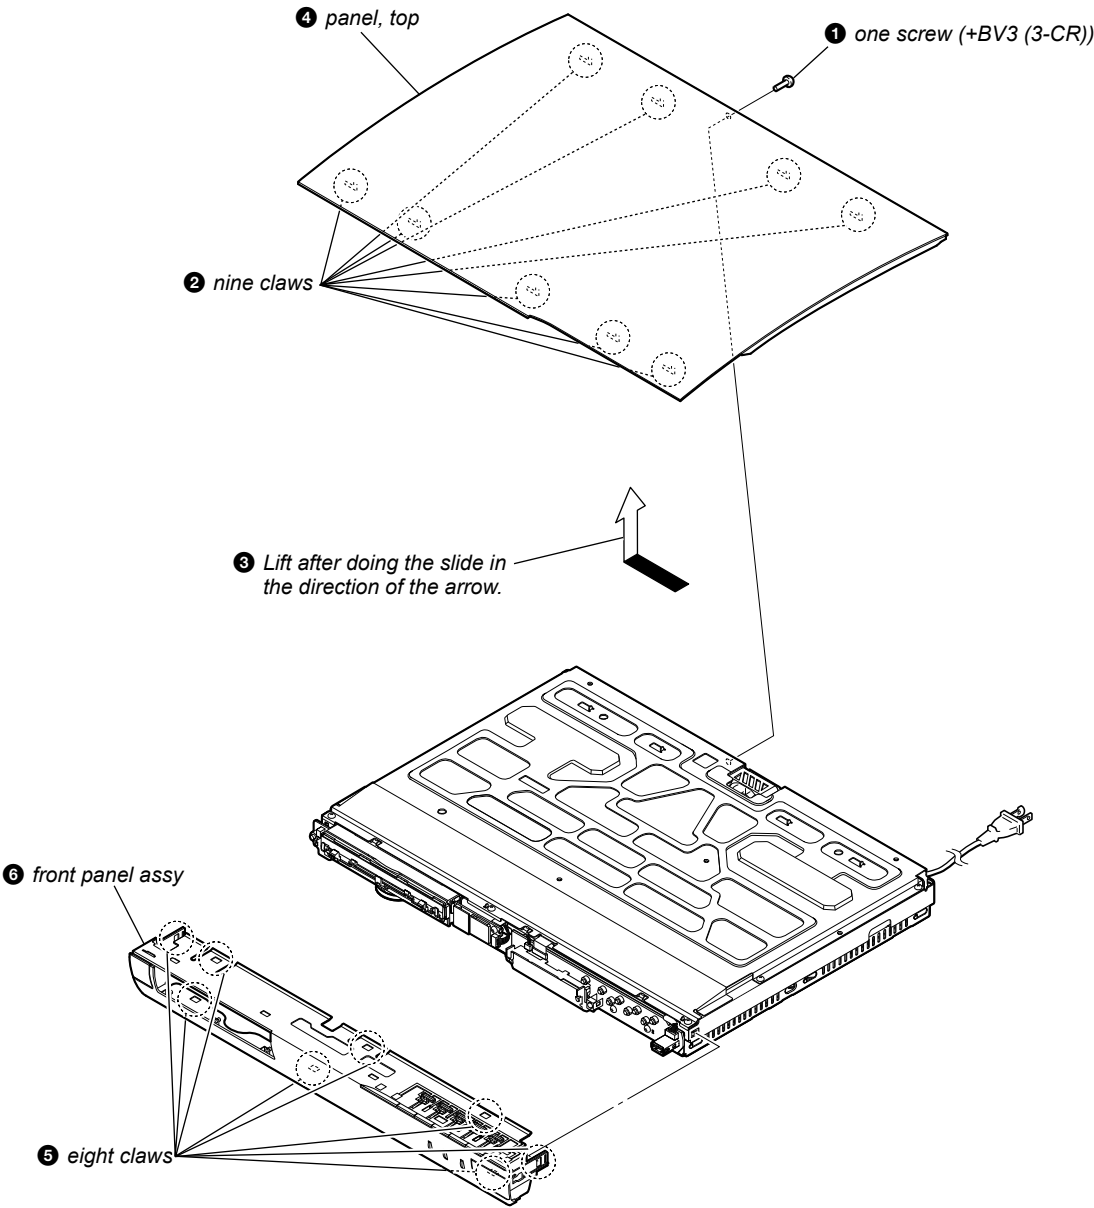


2-6. TOP CHASSIS, WIRELESS LAN CARD (WLC1), POWER KEY BOARD, PANEL BOARD

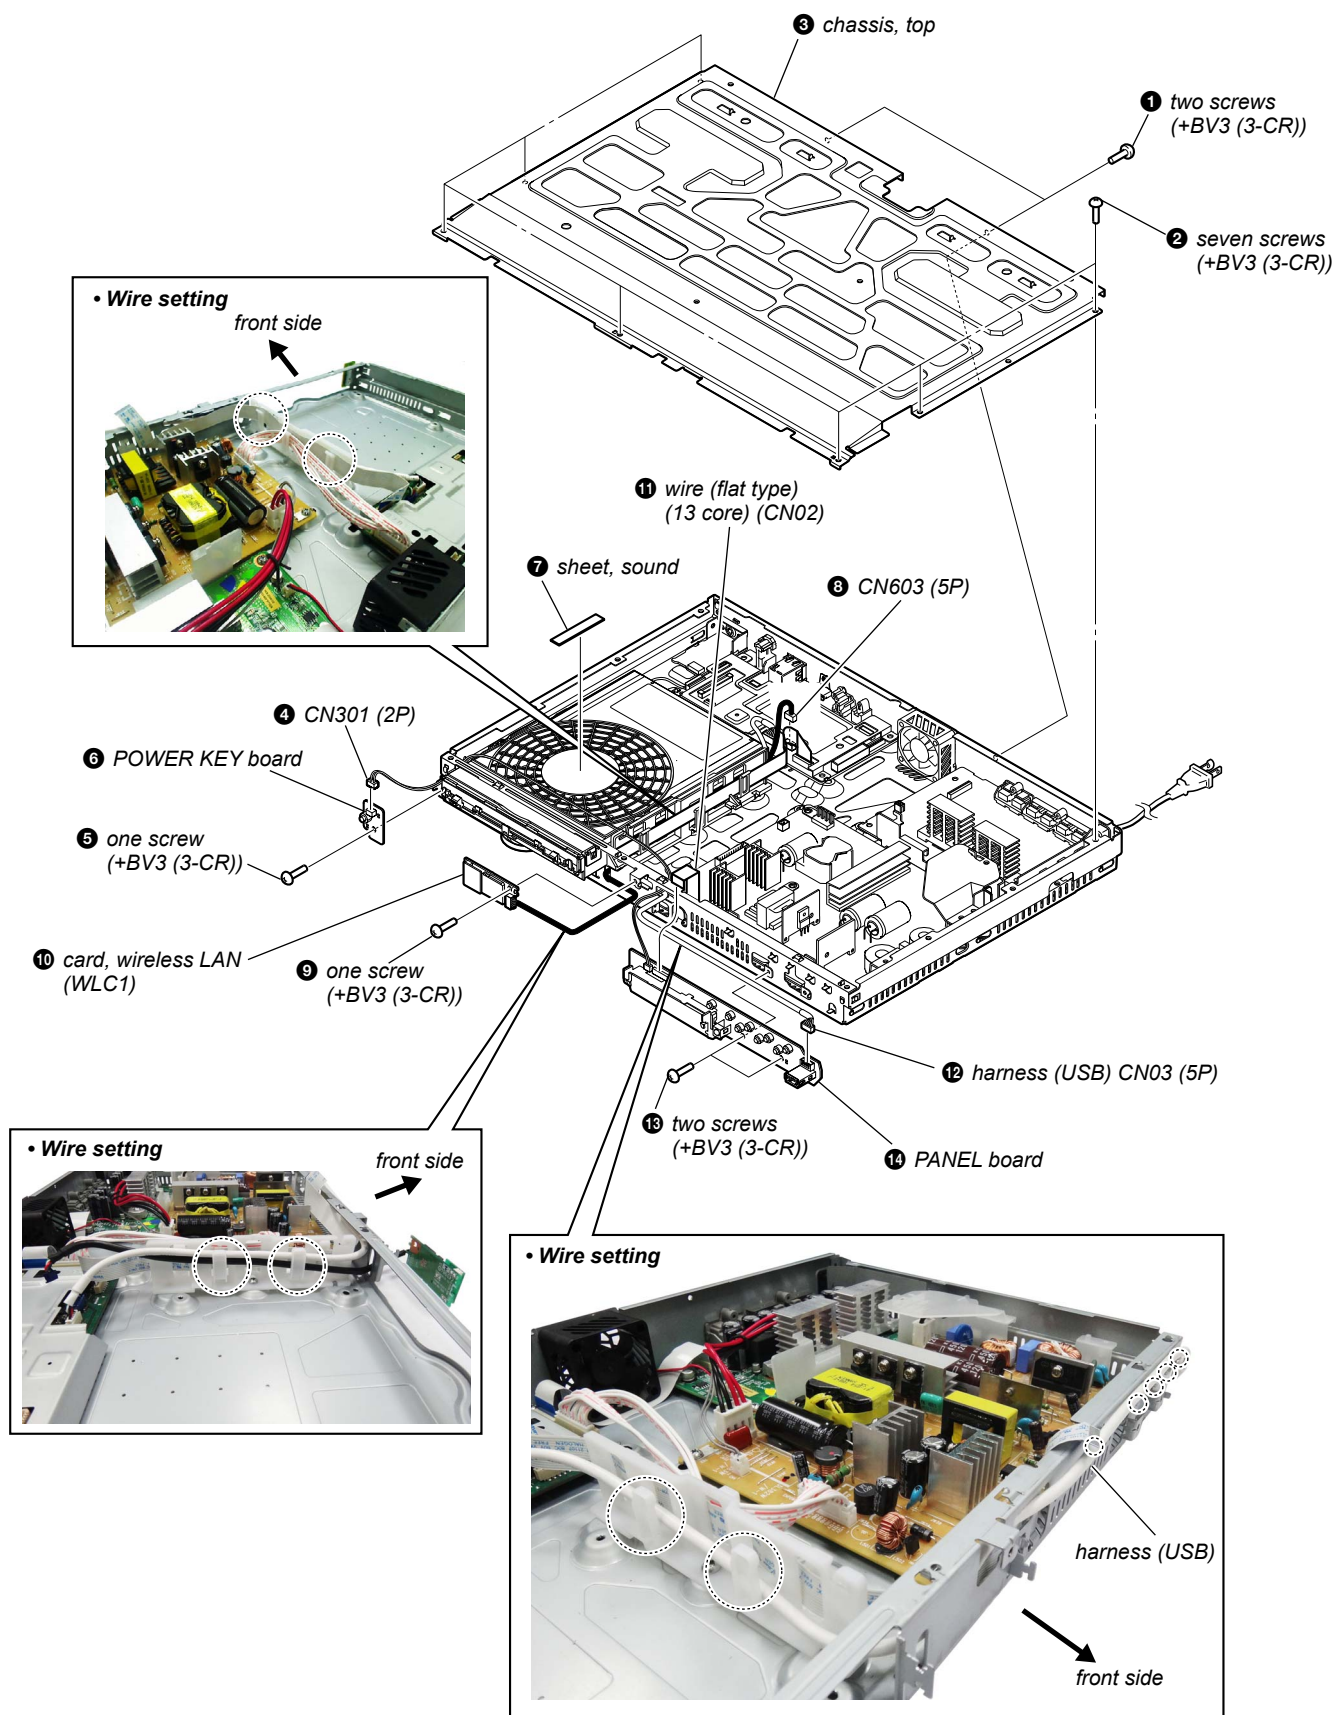


Note: When replacing the wireless LAN card (WLC1), refer to “CHECKING METHOD OF NETWORK OPERATION” (page 10).


2-7. BD DRIVE (BPX-7)

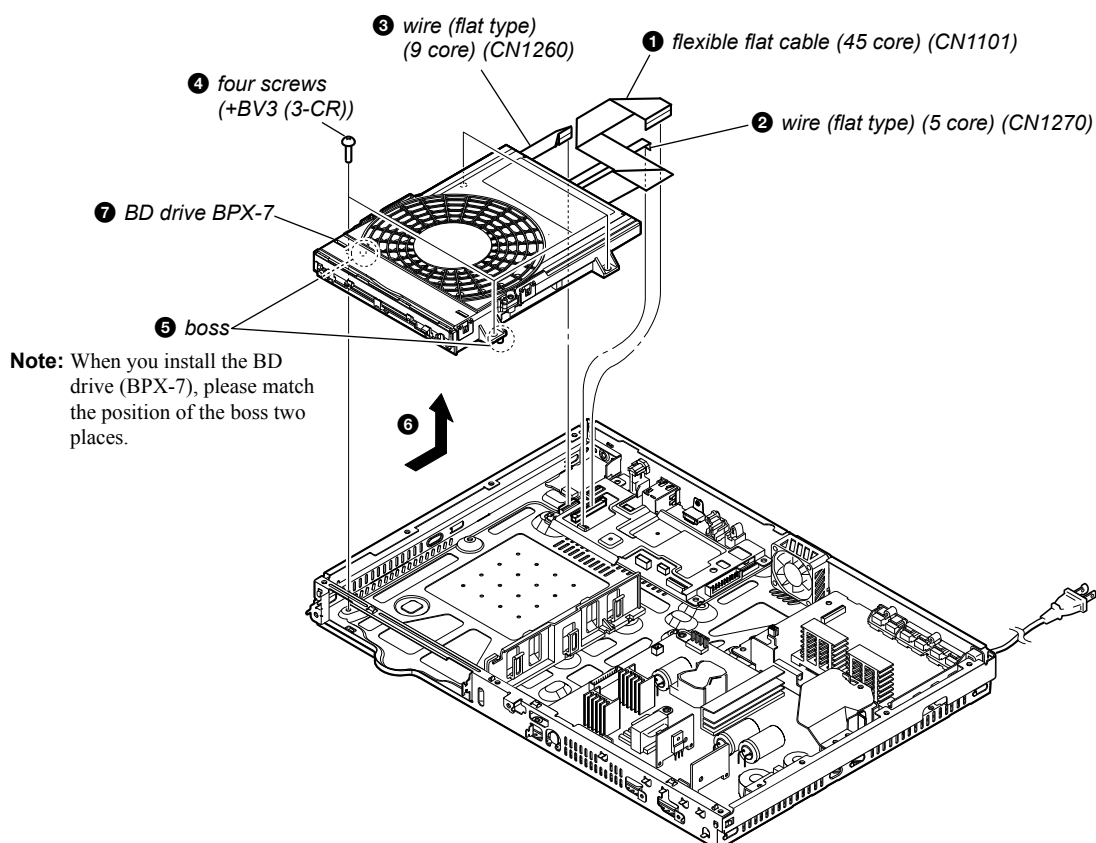


2-8. MB148 BOARD

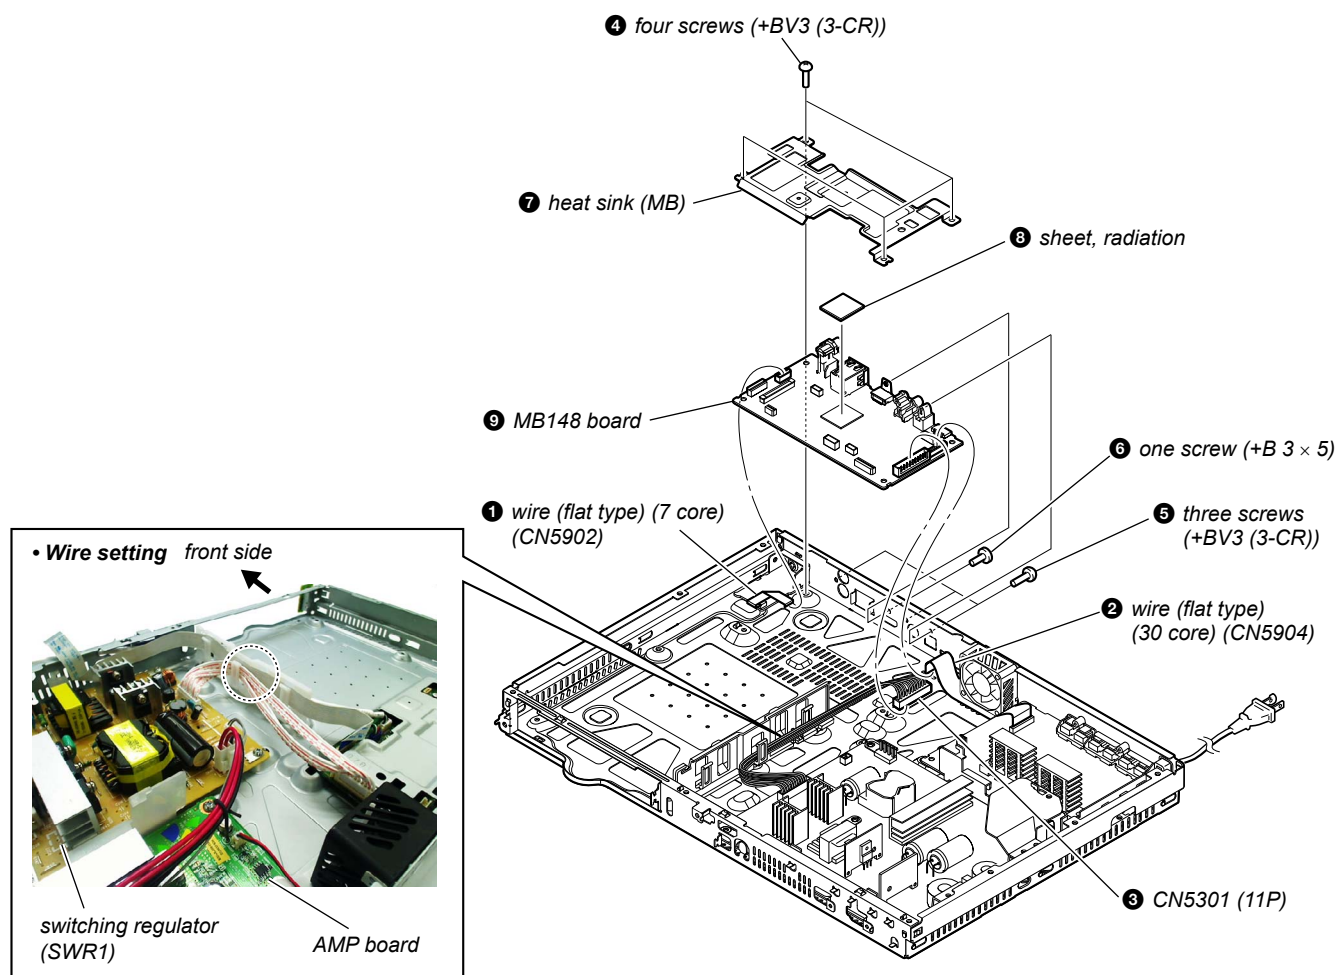


2-9. SWITCHING REGULATOR (SWR1)

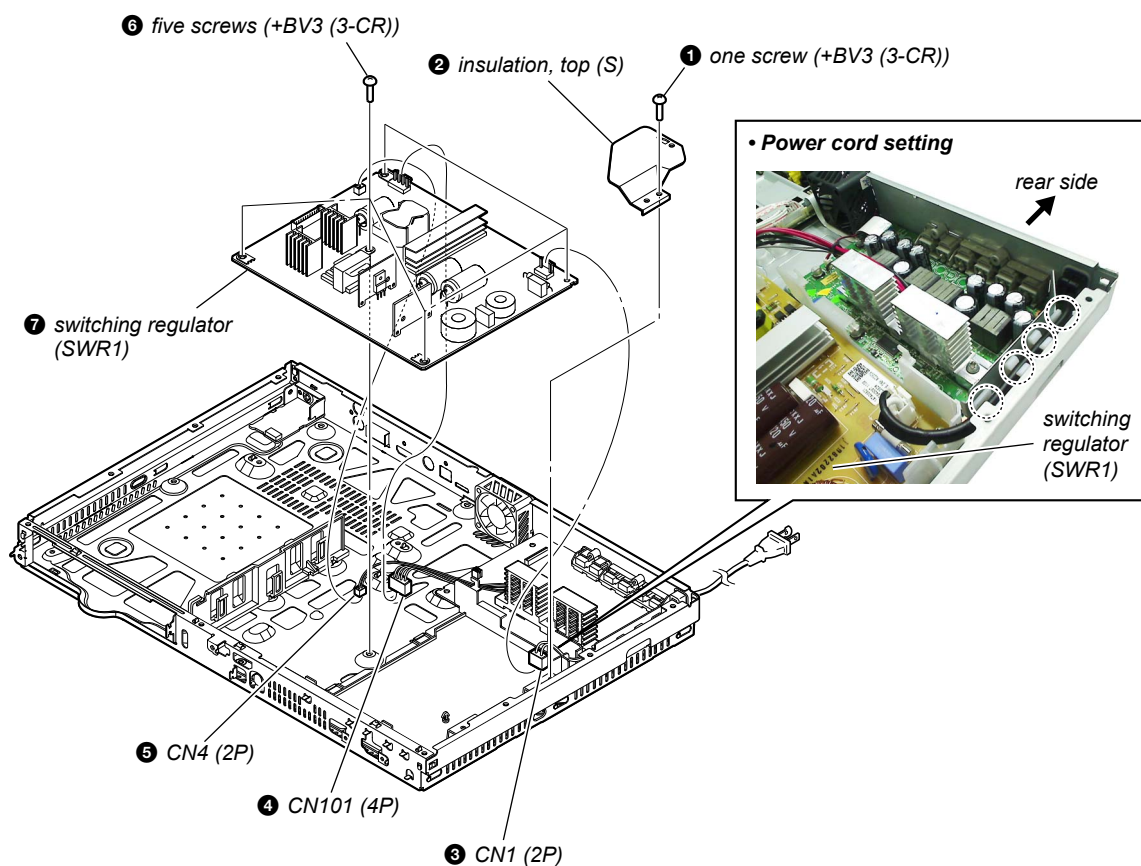

2-10. AMP BOARD

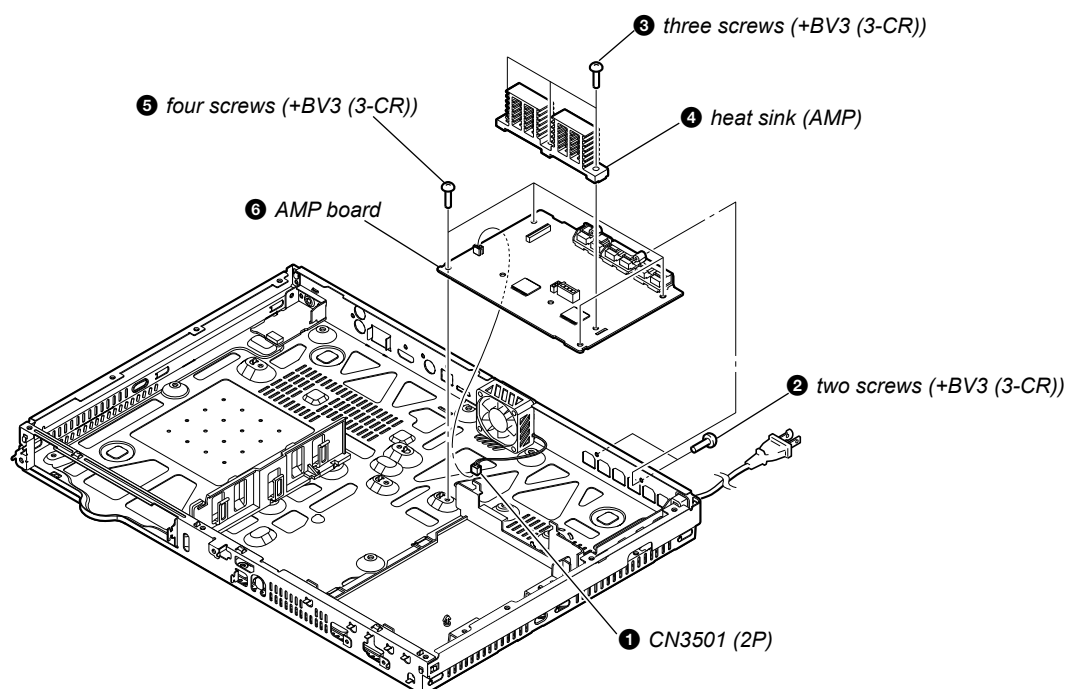


2-11. OPTICAL PICK-UP BLOCK (KEM480AAA), WIRE (FLAT TYPE)

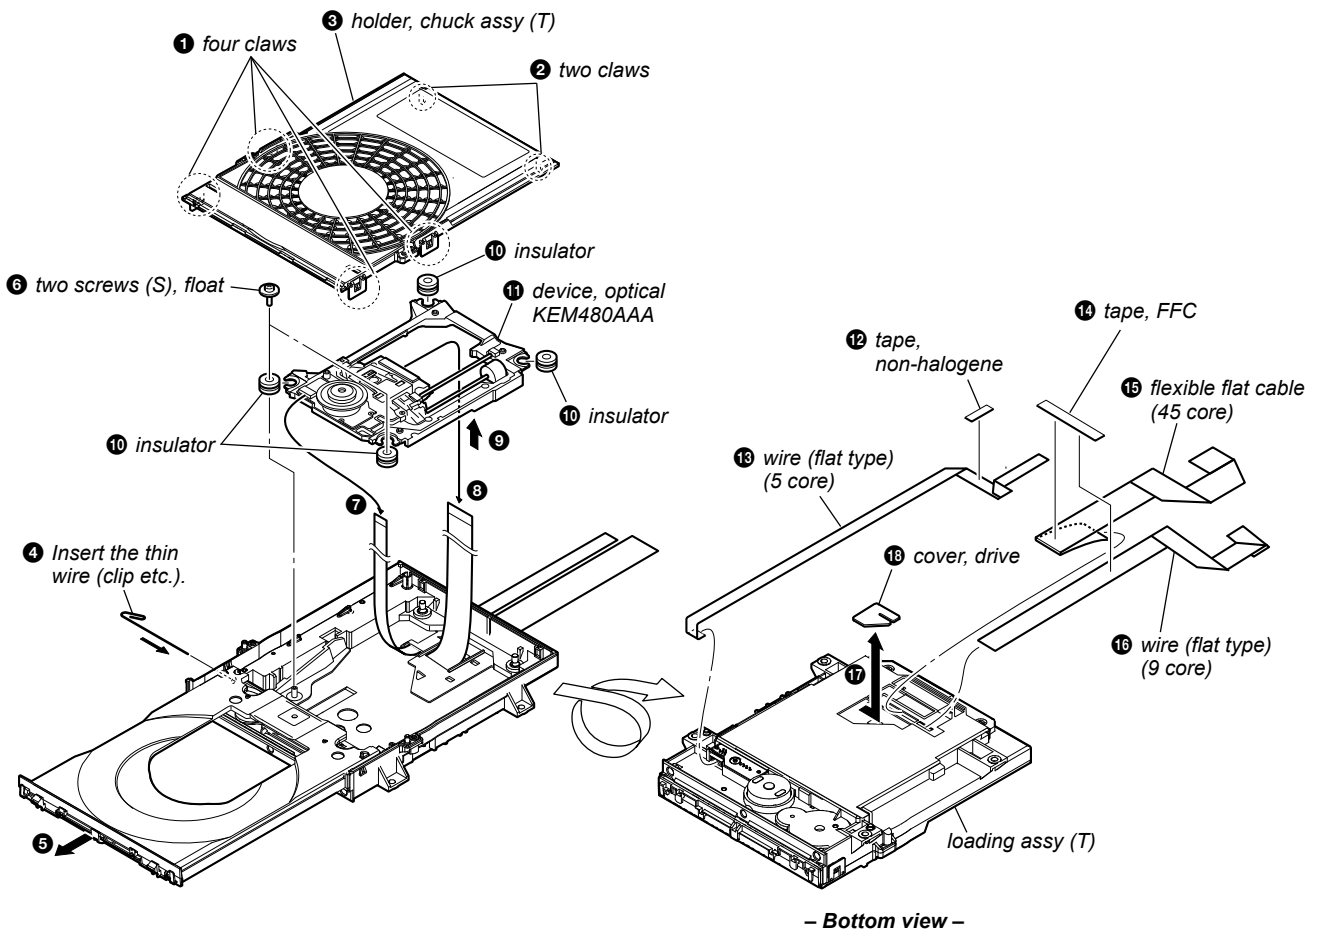

• Installation of flexible flat cable (45 core), wire (flat type) (9 core) and wire (flat type) (5 core)

Note: This illustration sees the loading assy (T) from bottom side.

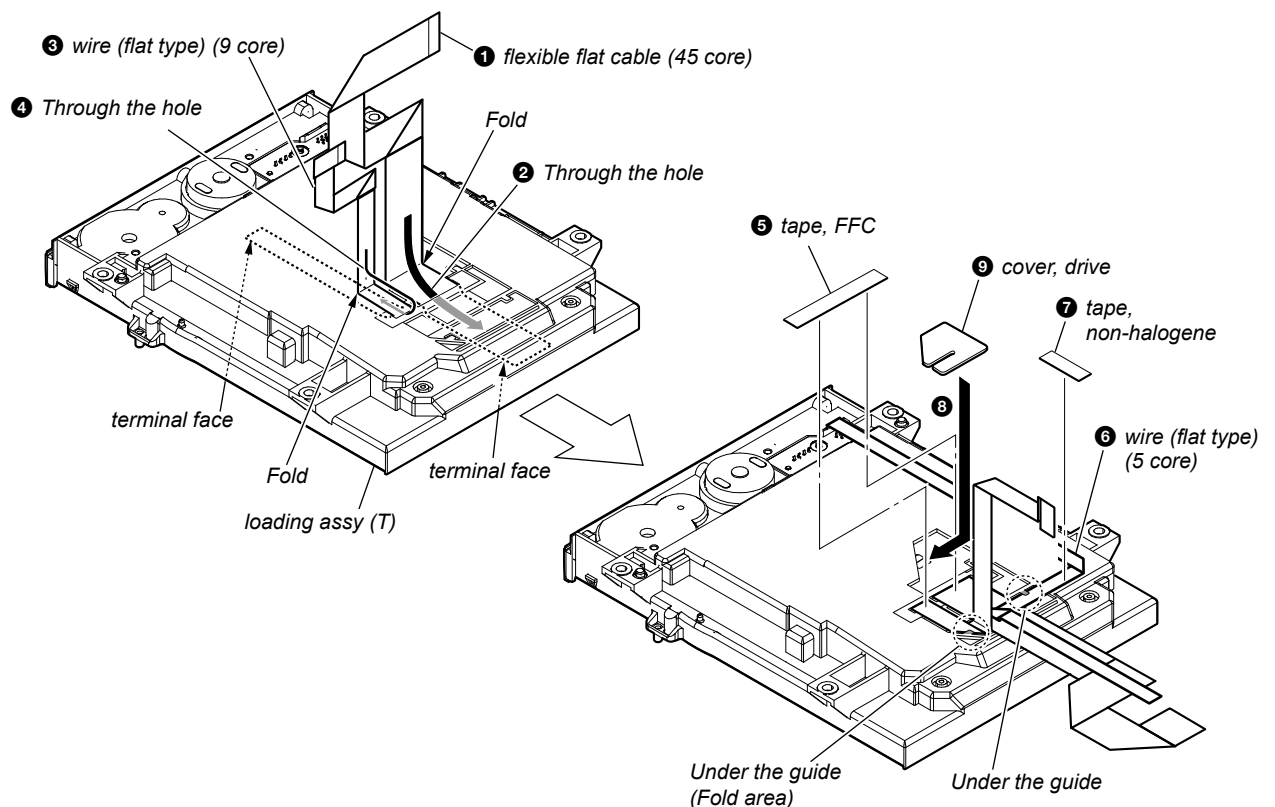

SECTION 3

TEST MODE

COLD RESET

The cold reset clears data except BD/DVD data stored in the RAM to initial conditions. Execute this mode when returning the unit to the customers.

Procedure:

1. Press the [I/⏻] button to turn the power on.
2. Press the [■] and [VOL -] buttons simultaneously and hold down (around 5 seconds).
3. The message “RESET” appears on fluorescent indicator tube, then becomes standby states.

DEMO MODE

This mode let you lock the disc tray. When this mode is activated, the disc will not eject when the [▲] button is pressed. The message “DEMO. LOCK” will be displayed on the fluorescent indicator tube.

Procedure:

1. Press the [I/⏻] button to turn the power on.
2. Press the [FUNCTION] button to select the “BD/DVD”.
3. Press the [■] and [▲] buttons simultaneously and hold down until “DEMO. LOCK” or “DEMO OFF” displayed on the fluorescent indicator tube (around 5 seconds).

Releasing method:

Press the [■] and [▲] buttons simultaneously and hold down until “DEMO OFF” displayed on the fluorescent indicator tube (around 5 seconds).

PANEL TEST

Procedure:

1. Press the [I/⏻] button to turn the power on.
2. Press button in order of the [DISPLAY] → [0] → [0] → [1] → [SUBTITLE] on the remote commander (Make the interval when each button is pressed within two seconds).
3. All segments in fluorescent indicator tube are lighted up. And half segments in fluorescent indicator tube are lighted up, others half segments in fluorescent indicator tube are lighted up, then all segments in fluorescent indicator tube are lighted up. This operation is repeated.
4. When all segments in fluorescent indicator tube are lighted up in the state of step 3, press the [VOL +] button on the remote commander and model information is displayed on the fluorescent indicator tube.
Each time the [VOL +] button on the remote commander is pressed, the display changes from destination information, STR version in this order, and returns to the model information display.
5. In the state of step 3, press the [FUNCTION] button on the remote commander and “K 0” is displayed on the fluorescent indicator tube.
“K 0” value increases whenever a button or sensor on the unit is pressed. However, once a button or sensor has been pressed, it is no longer taken into account.
All button and sensors on the unit are pressed, “OK” and “K 9” are alternately displayed on the fluorescent indicator tube.

Releasing method:

To release from this mode, press the [I/⏻] button.

FACTORY INITIALIZE

Return all of the unit setting to their factory defaults.


Note 1: Disconnect the following connections when you use this mode.

- USB
- LAN


Note 2: The operation in this mode must use a remote commander and TV monitor.

Procedure:


1. Press the [I/⏻] button to turn the power on.
2. Press the [HOME] button on the remote commander, and the home menu is displayed.
3. Select “Setup” → “Resetting”, and press the [⊕] button on the remote commander.

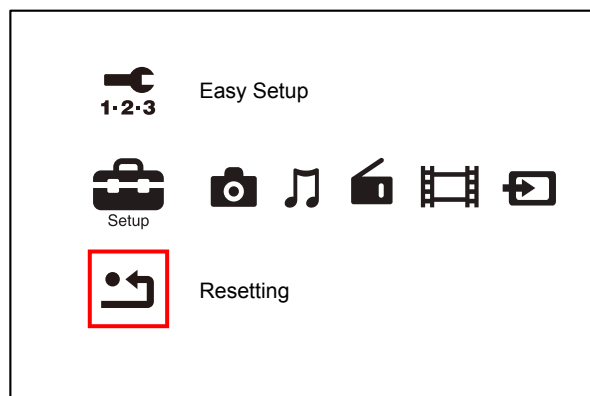


4. Select “Initialize Personal Information”, and press the [⊕] button on the remote commander.

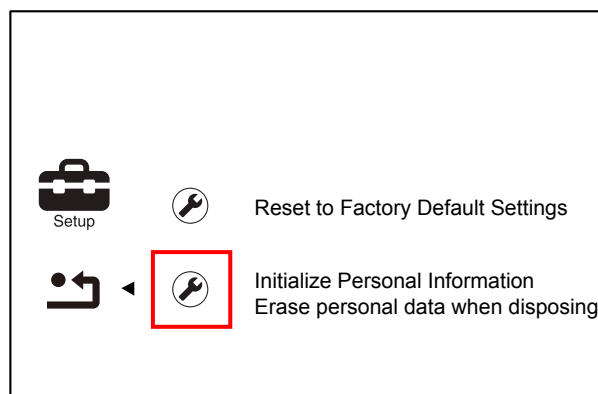


5. Select “OK”, and press the [⊕] button on the remote commander.

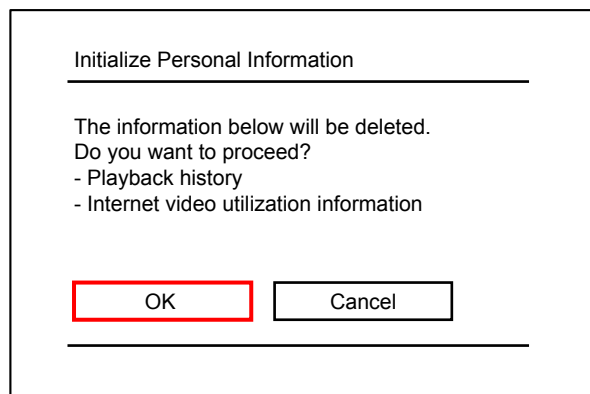


6. The message “Close” appears, and press the [⊕] button on the remote commander.

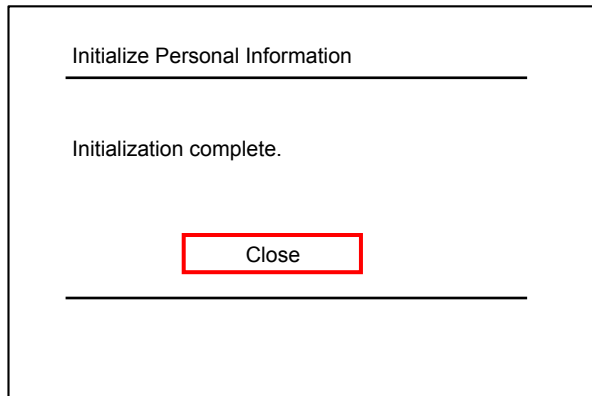


7. Select “Reset to Factory Default Settings”, and press the [⊕] button on the remote commander.

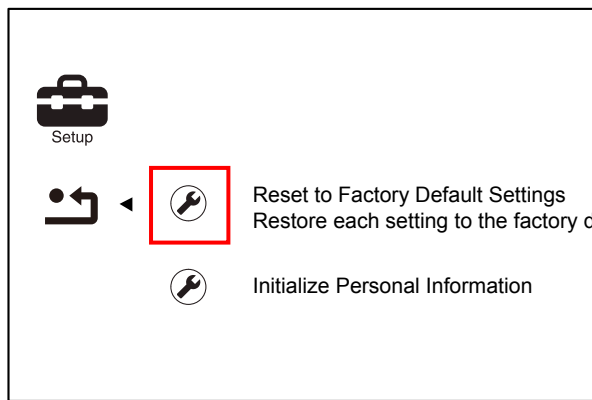

8. Select “All Settings”, and press the [⊕] button on the remote commander.

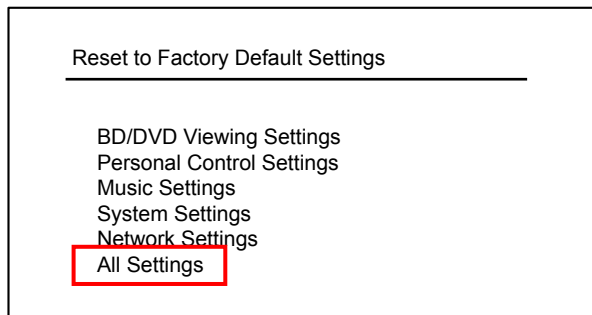

9. Select “Start”, and press the [⊕] button on the remote commander.

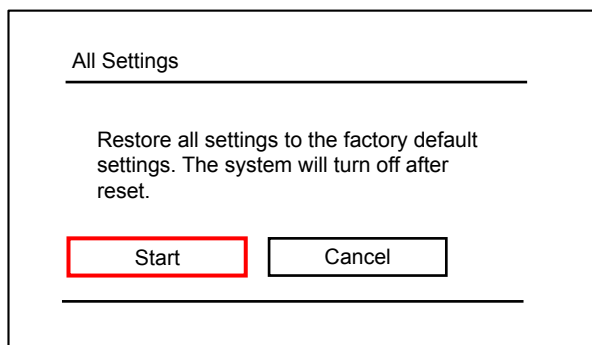

10. Initialization ends when the message “WELCOME” on the fluorescent indicator tube disappears.

BD SERVICE MODE

Note: The operation in this mode must use a remote commander and TV monitor.


Setting method of the BD service mode:

1. Connect this unit with TV monitor.
2. Press the [I/⏻] button to turn the power on.
3. Press button in order of the [DISPLAY] → [0] → [2] → [1] → [SUBTITLE] on the remote commander. (Make the interval when each button is pressed within two seconds)
4. Enter the BD service mode. The OSD menu on TV monitor can be operated by remote commander.

1. Main Functions

- **Diag**
Performs unit test of devices installed on the board.
- **Log**
Error log is displayed. Displayed contents can also be saved in an USB memory device.
- **Factory Initialize**
Restores the unit to its factory settings.
- **Network**
Checks the wired network connection.
- **Version Up**
Not used.
- **System Information**
Displays the system information of the unit.
Displays information such as the software version, drive information, etc.
- **EMC Test Mode**
Not used.
- **Drive**
Write drive OP data and check drive.

2. Menu Tree

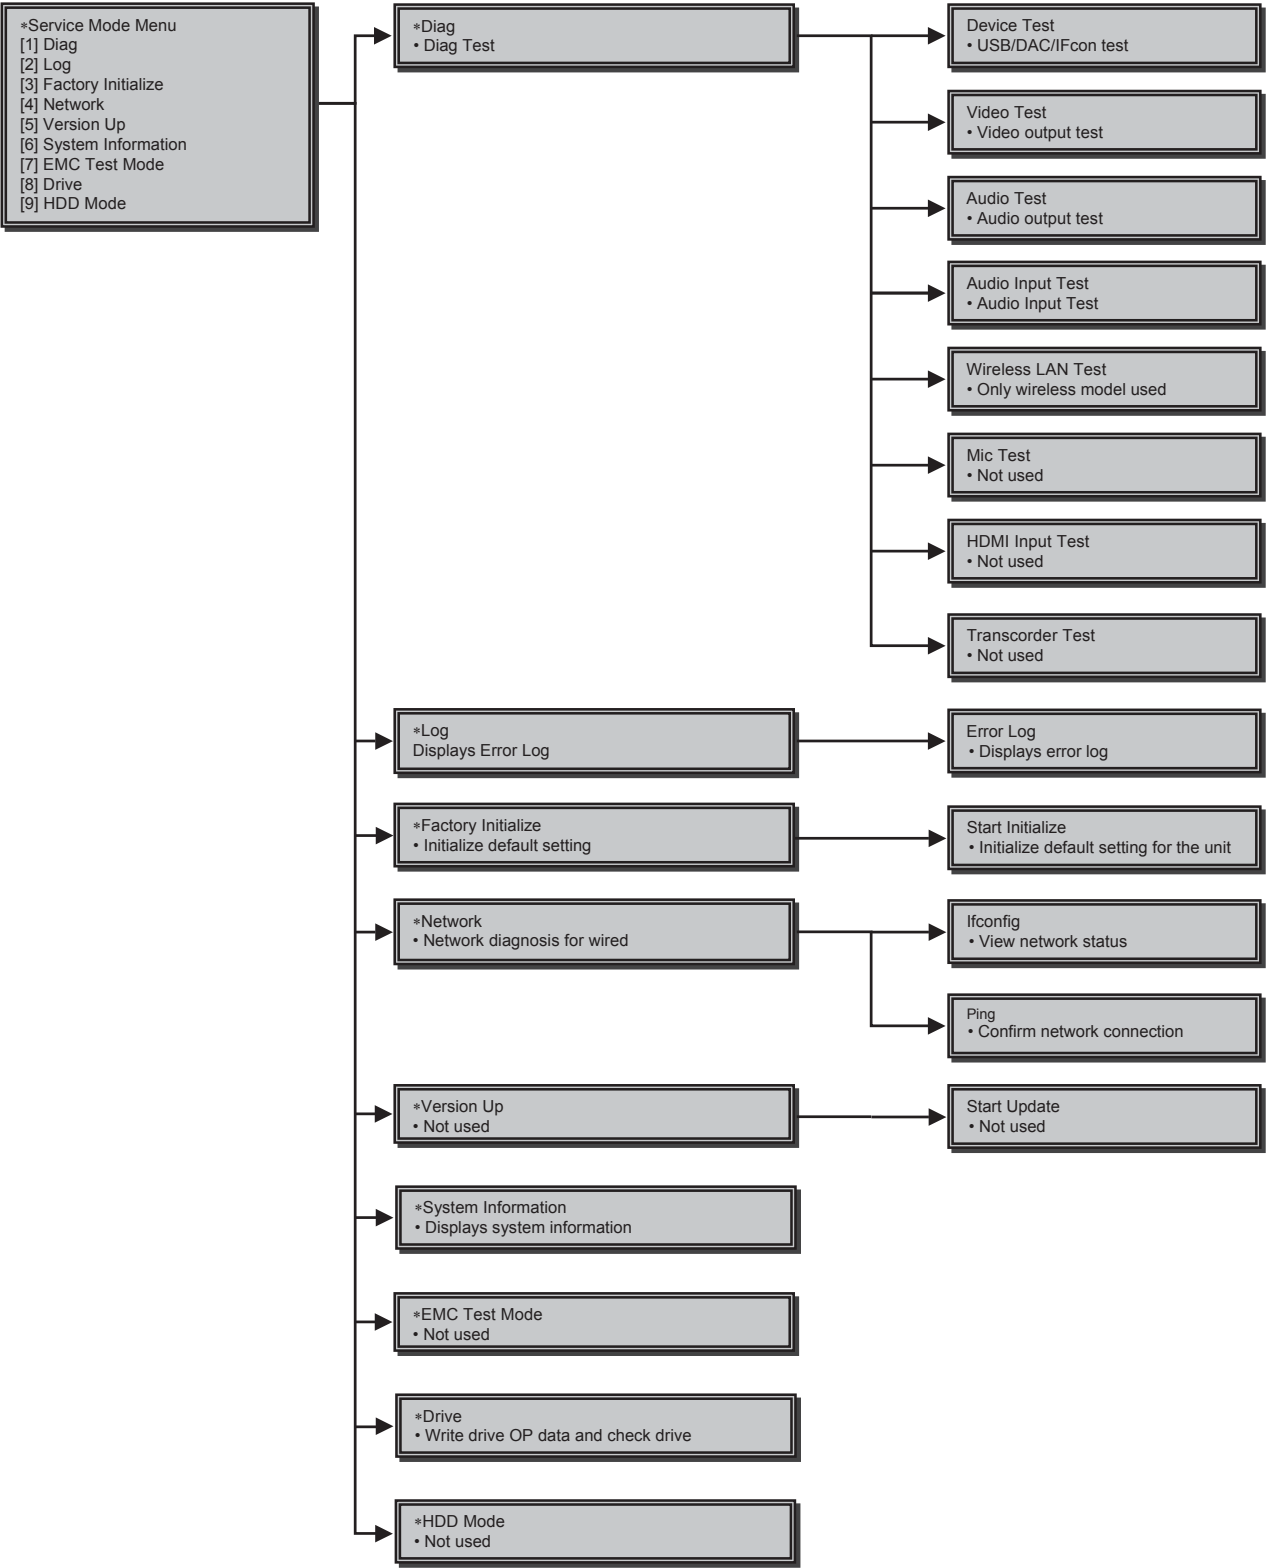


3. Service Mode Menu (Top Menu)

This is the top menu of service mode.
Each function is accessed from this screen.

Operation:

- [1] Moves to Diag screen
- [2] Moves to Log screen
- [3] Moves to Factory Initialize screen
- [4] Moves to Network screen
- [5] Moves to Version Up (DISC version update) screen (Not used)
- [6] Moves to System Information screen
- [7] Moves to EMC test mode screen (Not used)
- [8] Moves to Drive screen
- [9] Moves to HDD mode (Not used)
- [↑]/[↓] Moves the cursor
- [⊕] Moves to the screen of the item selected with the cursor

* Cursor is not displayed when the menu is first displayed.

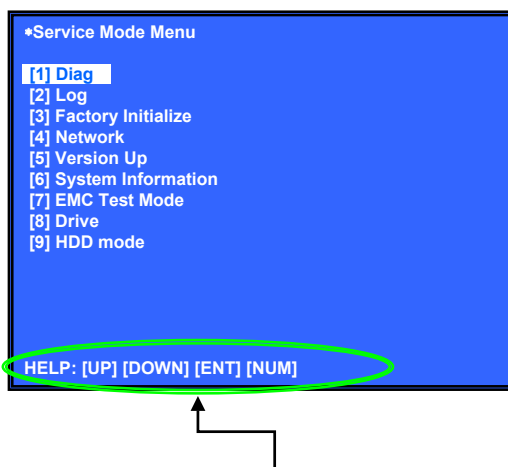

HELP (currently available keys, etc.) is displayed

4. Diag (Device Test)

This screen is used to test devices mounted on the board.

Screen 1: Selects the test category

Operation:

- [←]/[→] Selects the category
- [↓]/[⊕] Moves to the selected category
- [RETURN] Returns to the service top menu

Screen 2: Device test


Selects the device to test after selecting Device Test in screen 1.

Operation:

- [←]/[→] Selects the device to test
- [⊕] Executes the test
- [↑] Returns to selection of test category
- [RETURN] Returns to selection of test category

List of test categories

Device Test
Video Test
Audio Test
Audio Input Test
Wireless LAN Test (Only wireless model used)
Mic Test (Not used)
HDMI Input Test (Not used)
Transcoder Test (Not used)

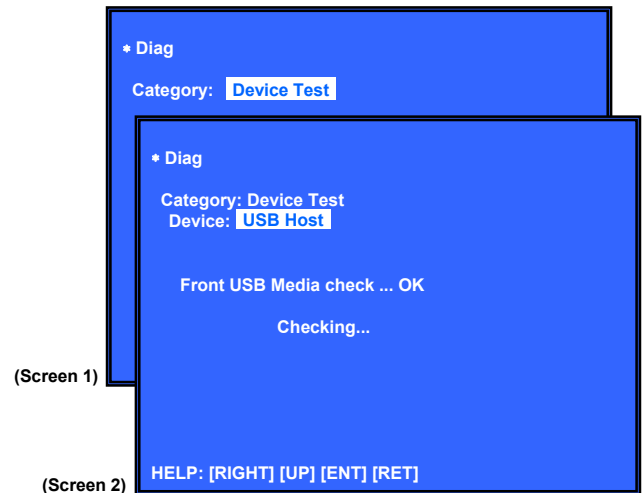

- Device Test: List of devices
- USB Host : USB media check (front). Only one time.
- D/A Converter : DAC write check (non-verification).
- Ifcon : Not used in this unit.
- MIC : Not used in this unit.
- MFI : MFI read/write Check
- IPC : Not used
- External HDMI : Not used
- Transcoder : Not used

5. Diag (Video/Audio Test)

This screen performs video and audio tests.

Screen 1: When video test category is selected

Operation:


- [⊕] Shows/hides the color bar
- [↑]/[RETURN] Returns to the selection of test category

Screen 2: When audio test category is selected

Operation:

- [⊕] Plays back/stops the tone sound
- [↑]/[RETURN] Returns to the selection of test category

- Video test:
Outputs a color bar (composite & HDMI).
- Audio test:
TONE sound output (speaker & HDMI).

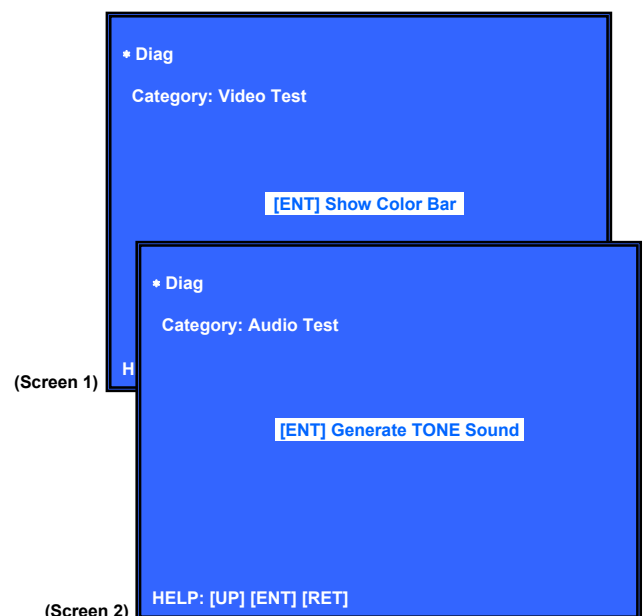

6. Diag (Audio Input Test)

This screen performs audio input test.

Screen 1: Select Audio Input Test Category

Operation:

- [←]/[→] Selects the category
- [↓]/[⊕] Activate the selected category
- [RETURN] Returns to the service top menu


Screen 2: Select Input Device

After “Audio Input Test” selects in Screen 1, the device to test is chosen.

Operation:

- [↑]/[↓] Selects Device
- [⊕] Activate and Start Test/Stop
- [RETURN] Returns to the selection of test category

- Device Test : Device List
- Digital Input1 : CXD90008 is inputted from ARC
- Digital Input2 : CXD90008 is inputted from Optical
- Analog Input : CXD90008 is inputted from AUDIO
- Audio Input Test
- CXD90008 is inputted from DIR/analog and outputs LineOut (8ch) L and R.
- Check tone sound by speaker connected with LineOut (8ch) L and R.
- (Input; LPCM 48kHz 2ch)

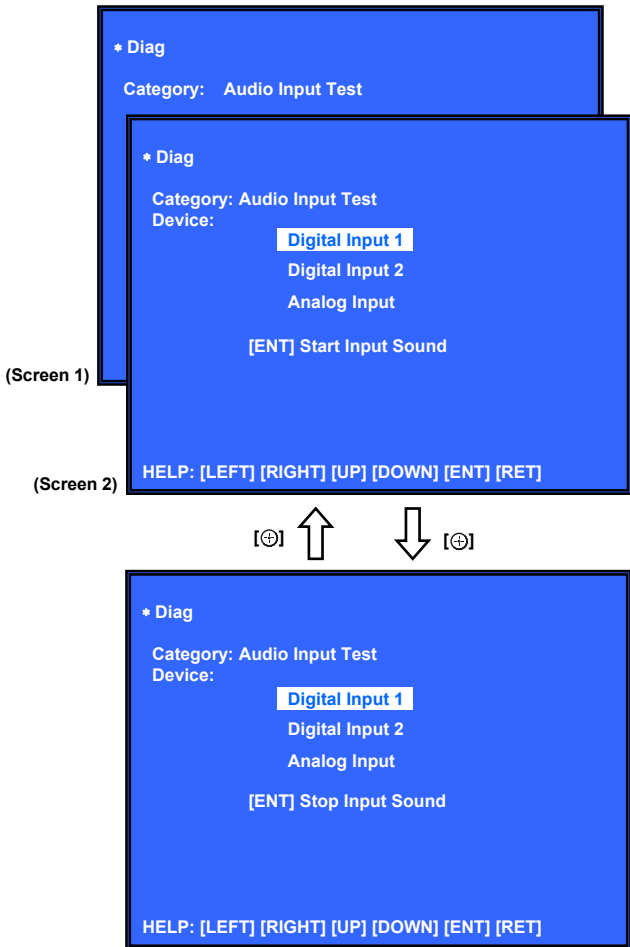

7. Diag (Wireless LAN Test)

This screen performs wireless LAN test.

Note: This mode doesn't operate correctly. Never use this mode. Refer to “CHECKING METHOD OF NETWORK OPERATION” on page 10 when you confirm the wireless LAN operation.

8. Diag (MIC Input Test)

This screen performs MIC input test.

Note: Not used for the servicing.

9. Diag (HDMI Input Test)

This screen performs HDMI input test.

Note: Not used for the servicing.

10. Diag (Transcoder Test)

Note: Not used for the servicing.

11. Log: Error Log (Output of each Log)

This screen displays the contents of each log.

Note: Do not refer to the displayed date.

Screen 1: Selects log

Operation:

- [1]/[⊕] Moves to the Error Log output screen
- [RETURN] Returns to the top menu of the service mode

Screen 2: Displays the Error Log

Operation:

- [←] Returns to the previous page
- [→] Moves to the next page
- [RETURN] Returns to the screen (Screen 1) that selects the log type
- [RED] Writes the log contents to a USB memory device

- Viewing the log display

Error Log:

[174] 2010/01/01 00:00:08: [ErrCode:0902A4053002]
[Index number] [Date] [Time] [Error code]

About copying log to USB memory device:

Press the [RED] button in each log display screen with the USB memory device inserted into the unit.

Note: Please do not press the [RED] button immediately after USB memory is inserted.
Please do not pull out USB memory immediately after the [RED] button was pressed.

Error Log:

When “getErrLogFile.trm file” exists in the USB memory device, errlog.log file is output.



12. Factory Initialize (Factory Settings)

There is a possibility that this mode cannot be correctly executed.
Never use this mode.

13. Network (Network Test Diagnosis Screen: Ifconfig)

Network menu for the wired ethernet.

Screen 1: Ifconfig Test

Operation:

[⊕] Activate Ifconfig (Display network setting)
[➡] Select ping test
[RETURN] Returns to the top menu of the service mode

Screen 2: Ping Test

Operation:


[←] Select Ifconfig test
[RETURN] Returns to the top menu of the service mode
(The details of a Ping test are “14. Network (Network Test Diagnosis Screen: Ping)”)

Screen 3: Ifconfig Test Active

Display Ifconfig command results.

Operation:

[⊕] Ifconfig retry
[➡] Select Ping test
[RETURN] Returns to the top menu of the service mode

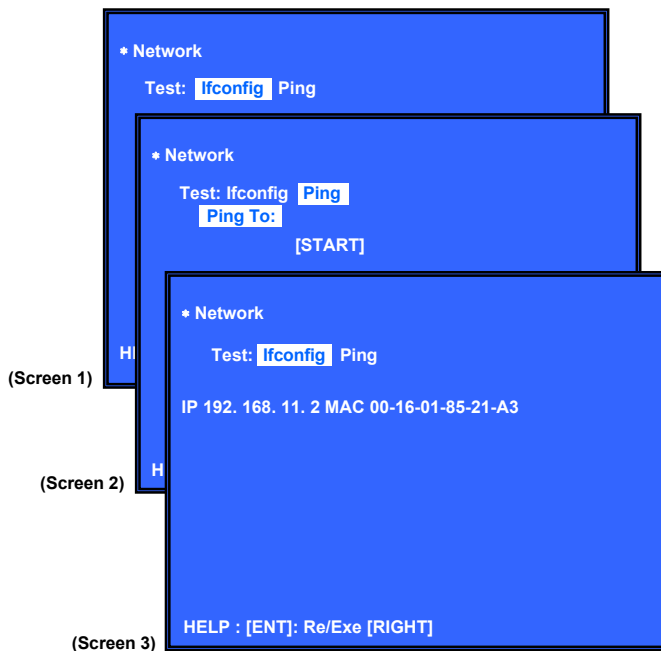

14. Network (Network Test Diagnosis Screen: Ping)

Ping test for the wired ethernet.

Screen 1: Ping Test

Operation:

[←] Select Ifconfig test
[↓] Ping execution preparation
[RETURN] Returns to the top menu of the service mode

Screen 2: The IP address of the Ping point is set up (IP address input mode)

When “Ping to :>” is reversed, the [⊕] button is pressed and IP is inputted.

Operation:


[⊕] Finish to input
[RETURN] Finish to input
[←] Finish to input and Select Ifconfig Test
[0] to [9] Input Character sting ‘0-9’
[TIME] Input Character sting ‘.’
[CLEAR] Backspace

Screen 3: Ping Test Active

When [START] is reversed, the [⊕] button is pressed and execute ping.

Operation:

[⊕] Activate ping test
[↑] The IP address of the ping point is set up
[RETURN] Returns to the top menu of the service mode

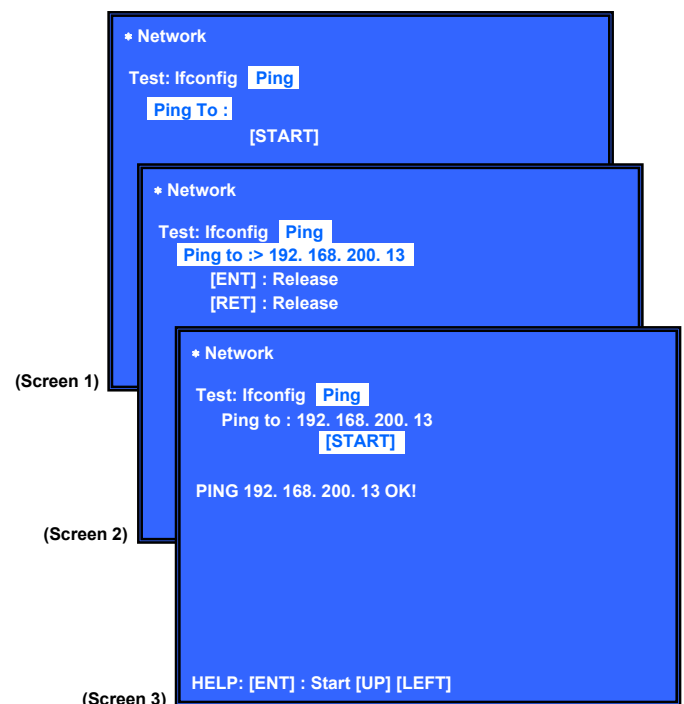

15. System Information (System Information Display)

This screen displays system information.

Screen 1: Basic Information

Operation:

[➡] Drive information (delta IOP of a drive is measured) and wireless device information (E385/E390/T39) displayed (go to Screen 2)
[RETURN] Returns to the top menu of the service mode

Screen 2: Drive and Wireless Information Menu

Operation:


[←] Basic Information displayed (go to Screen 1)
[RETURN] Returns to the top menu of the service mode

When delta IOP is measured, it becomes impossible to use the Version Up function.


Contents List:

Main LSIname	
Model	
Destination	
Sequence Number	
MAC	
IP	
IFCON	IFCON Version
Bootloader	Bootloader Version
Host Main	Host Main Version
MicroBE	MicroBE Version
Host Sub	Host Sub Version
Middleware	Middleware Version
ADSP	ADSP Version
ADSP Coeff	ADSP Coeff Version
2nd DSP	2nd DSP Version (not used)
IF Model	
IF Dest	
WLAN module Serial	
WLAN module hw Version	
WLAN module MAC Address	
Drive Firm Revision	
CD DIOP	Delta IOP
DVD DIOP	Delta IOP
BD DIOP	Delta IOP
CD LD TIME	LD Time
DVD LD TIME	LD Time
BD LD TIME	LD Time

(Screen 1)

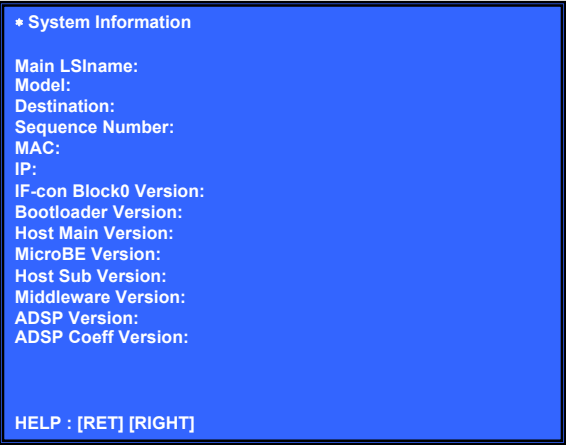

(Screen 2)

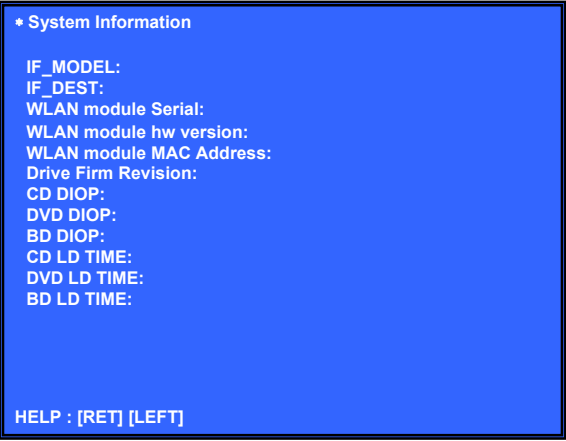

16. Drive

This menu is used to operate the drive using drive-related diagnostic and tools.

Screen 1: Selecting items under *Drive

Operation:

- [←]/[→] Selects the category
- [↓]/[⊕] Activate the selected category
- [RETURN] Returns to the top menu of the service mode
- [1] Drive OP data Write
- [2] Servo Parameter Check Menu (Not used)
- [3] Servo Signal Check Menu (Not used)
- [4] S-Curve Check Menu (Not used)
- [5] Readability Check Menu (Not used)
- [6] OP Position Check Menu (Not used)
- [7] OP Check Menu (Not used)
- [8] Load Eject Aging (Not used)
- [9] Spindle Control Check Menu (Not used)
- [10] FA Test Mode (Not used)

Screen 2: To start OP data Write

Operation:

- [⊕] Starts



Screen 3: Show OP data Write result

Operation:

- NG - USB is not find
- OK - OP data write

- Drive Test

For drive operating check. Service is only use Drive OP data write to rewrite OP data after change of new CPU.

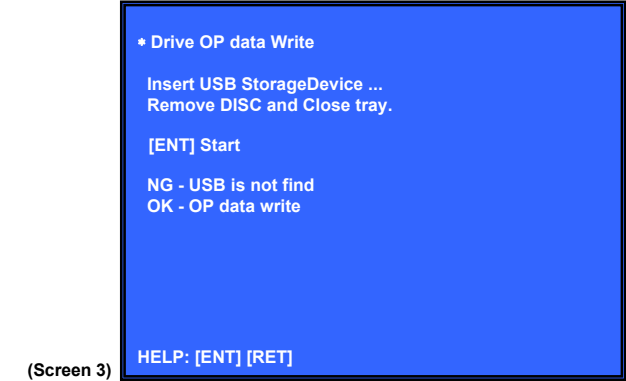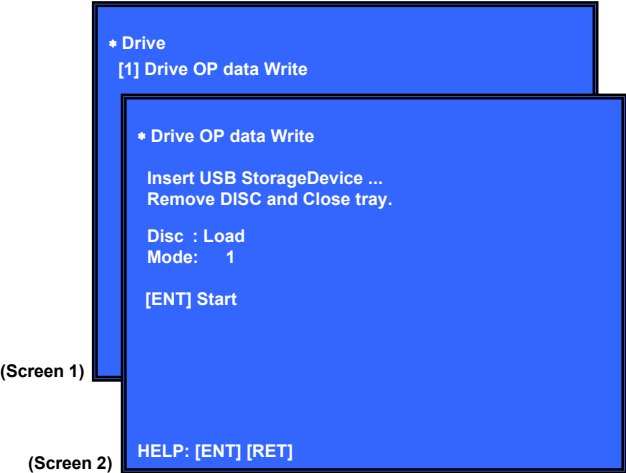

CONFIRMATION ITEM**1. Playback Operation Confirmation****1-1. Test Disc**

Part No.	Description	Layer
J-6090-199-A	BLX-104	Single Layer
J-6090-200-A	BLX-204	Dual Layer
J-2501-307-A	CD (HLX-A1)	
J-2501-305-A	HLX-513	Single Layer (NTSC)
J-2501-306-A	HLX-514	Dual Layer (NTSC)
J-6090-077-A	HLX-506	Single Layer (PAL)
J-6090-078-A	HLX-507	Dual Layer (PAL)

Note: Refer to the service manual of BDP-BX1/S350 (Part No. 9-883-989-1□) (page 1-3 to 1-14E) for the use of BLX-104/204.

Operation and Display:**1. BLX-104****Procedure:**

1. Select 23.976Hz/1080p.
2. Play "4.Motion picture".
3. Check whether player can play back or not.
4. Check each outputs.
Video:
Composite/S Video/component/HDMI.
Audio:
Speaker out.
- * When 1080/24p monitor is nothing, 1080i (59.94Hz or 50Hz) can use instead of 1080/24p.
However this is temporary correspondence.
- * When the output of HDMI is 1080p, the signal of Composite/S Video/Component are not output.
It is necessary to lower the output of HDMI to 1080i or less.

2. BLX-204**Procedure:**

1. Select 1080i (59.94Hz or 50Hz).
2. Play "4.Motion picture".
3. Check whether player can play back or not.
(Check the picture and sound output)

3. CD (HLX-A1)**Procedure:**

Check whether player can play back or not.
(Check the sound output)

4. HLX-513/514 (NTSC), HLX-506/507 (PAL)**Procedure:**

1. After displayed Main Menu, select "1.Video Signal".
2. Play "1.Color bar 100%".
(Check the picture and sound output)
3. Return to Menu.
4. Play "Demonstration 4:3" or "Demonstration 16:9".
(Check the picture and sound output)

1-2. Playback operation confirmation

Confirm operation in each signal/output mode of test disc (BLX-104/204) according to the content of the repair.

Note: "AV Sync." doesn't operate.

2. Networking Confirmation

Confirm it according to the following procedure when you confirm the connection of the network.

Note: Do not execute "Network Connection Diagnostics" of "Network Settings" of the home menu with only the router connected.


Procedure:

1. Connect the router with the unit with LAN cable.
2. Turn on the power of the unit and the router.
3. Press the [HOME] button on the remote commander, and the home menu is displayed.
4. Select "Setup" → "Network Settings" → "Internet Settings", and press the [⊕] button on the remote commander.
5. Select "View Networks Status" and press the [⊕] button on the remote commander.
6. Confirm IP address are displayed in "IP Address", "Subnet Mask" and "Default Gateway".

Physical Connection:	XXXX
Internet Access:	XXXX
IP Address Setting:	XXXX
IP Address:	XXX.XXX.XXX.XXX
Subnet Mask:	XXX.XXX.XXX.XXX
Default Gateway:	XXX.XXX.XXX.XXX
DNS Settings:	XXXX
Primary DNS:	XXX.XXX.XXX.XXX
Secondary DNS:	XXX.XXX.XXX.XXX
MAC Address:	XXX.XXX.XXX.XXX

SECTION 4 ELECTRICAL CHECK

FM AUTO STOP CHECK

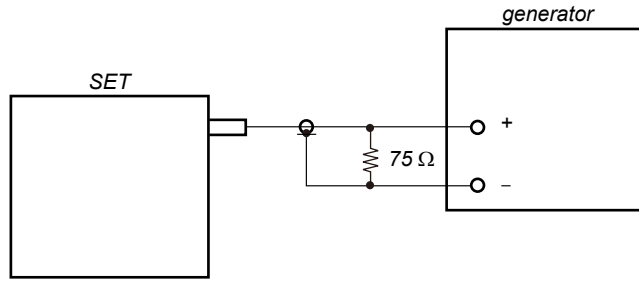

Procedure:

1. Turn the power on.
2. Input the following signal from Signal Generator to FM antenna input directly.

Carrier frequency : A = 87.5 MHz, B = 98 MHz, C = 108 MHz
 Deviation : 75 kHz
 Modulation : 1 kHz
 ANT input : 35 dBu (EMF)


Note: Please use 75 ohm "coaxial cable" to connect SG and the set. You cannot use video cable for checking.
 Please use SG whose output impedance is 75 ohm.

3. Set to FM tuner function and scan the input FM signal with automatic scanning.
4. Confirm that input Frequency of A, B and C detected and automatic scanning stops.


The stop of automatic scanning means "The station signal is received in good condition".

SECTION 5
DIAGRAMS


5-1. BLOCK DIAGRAM - SERVO Section -

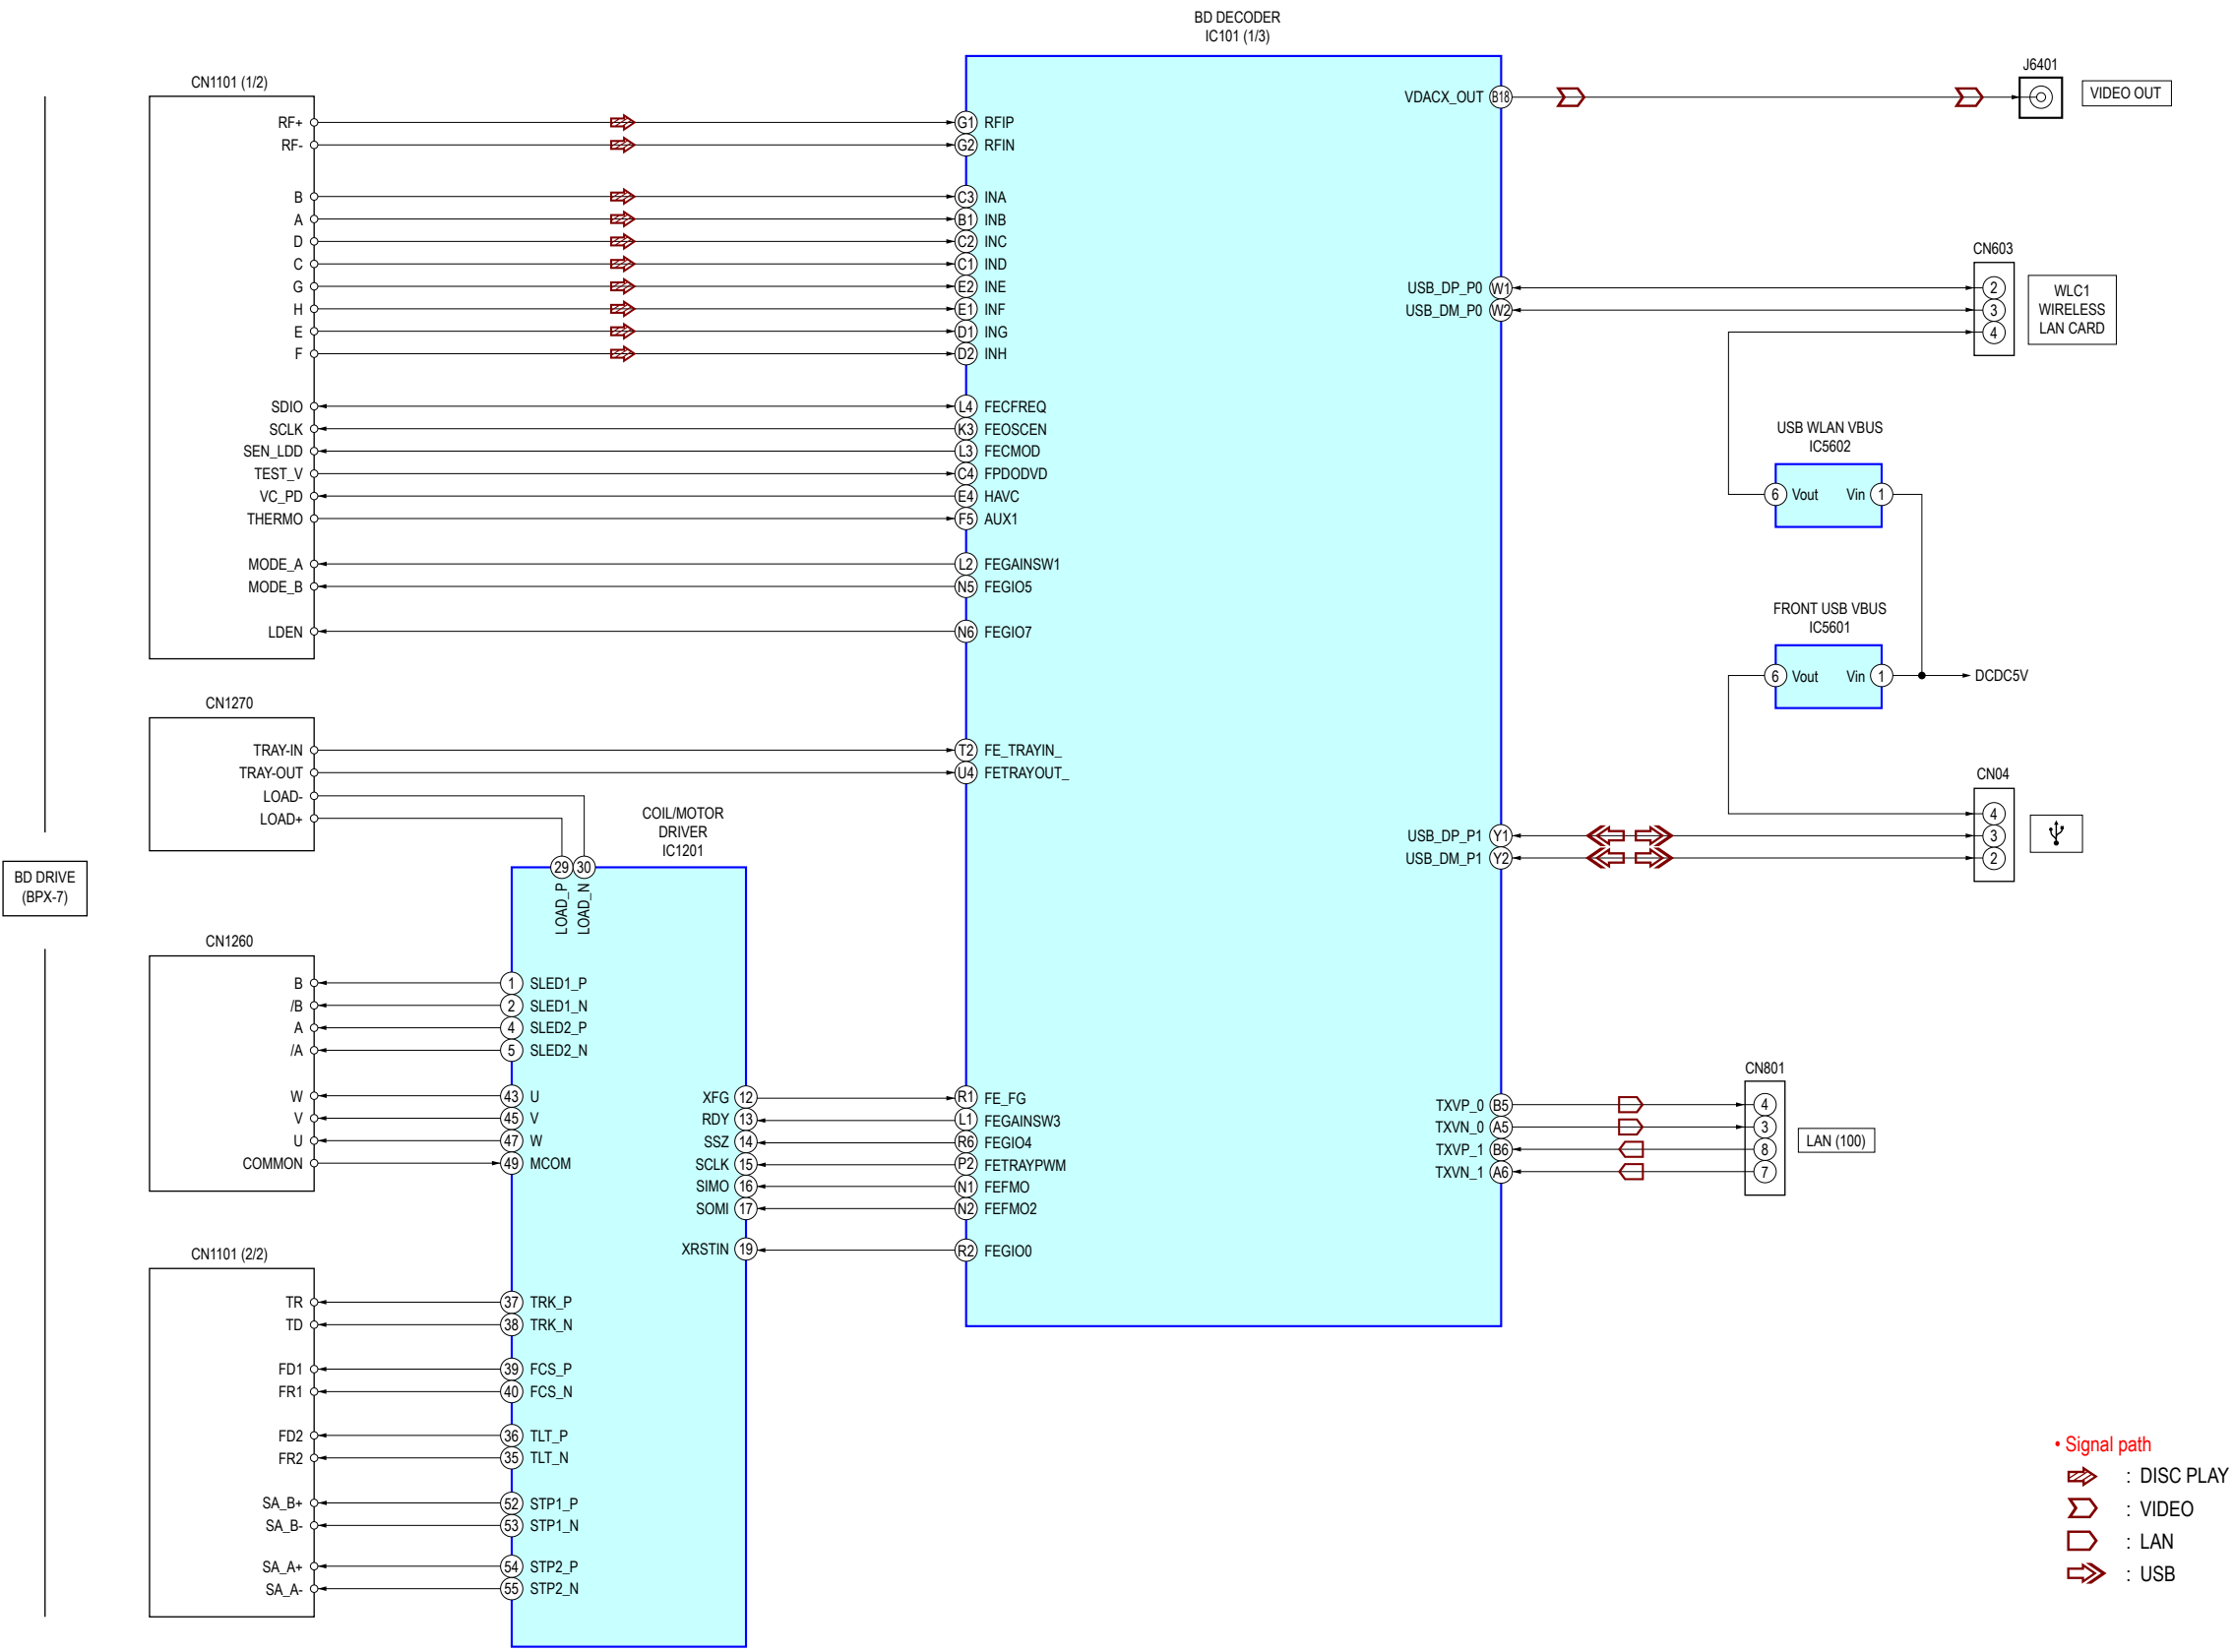


5-2. BLOCK DIAGRAM - MEMORY/HDMI Section -

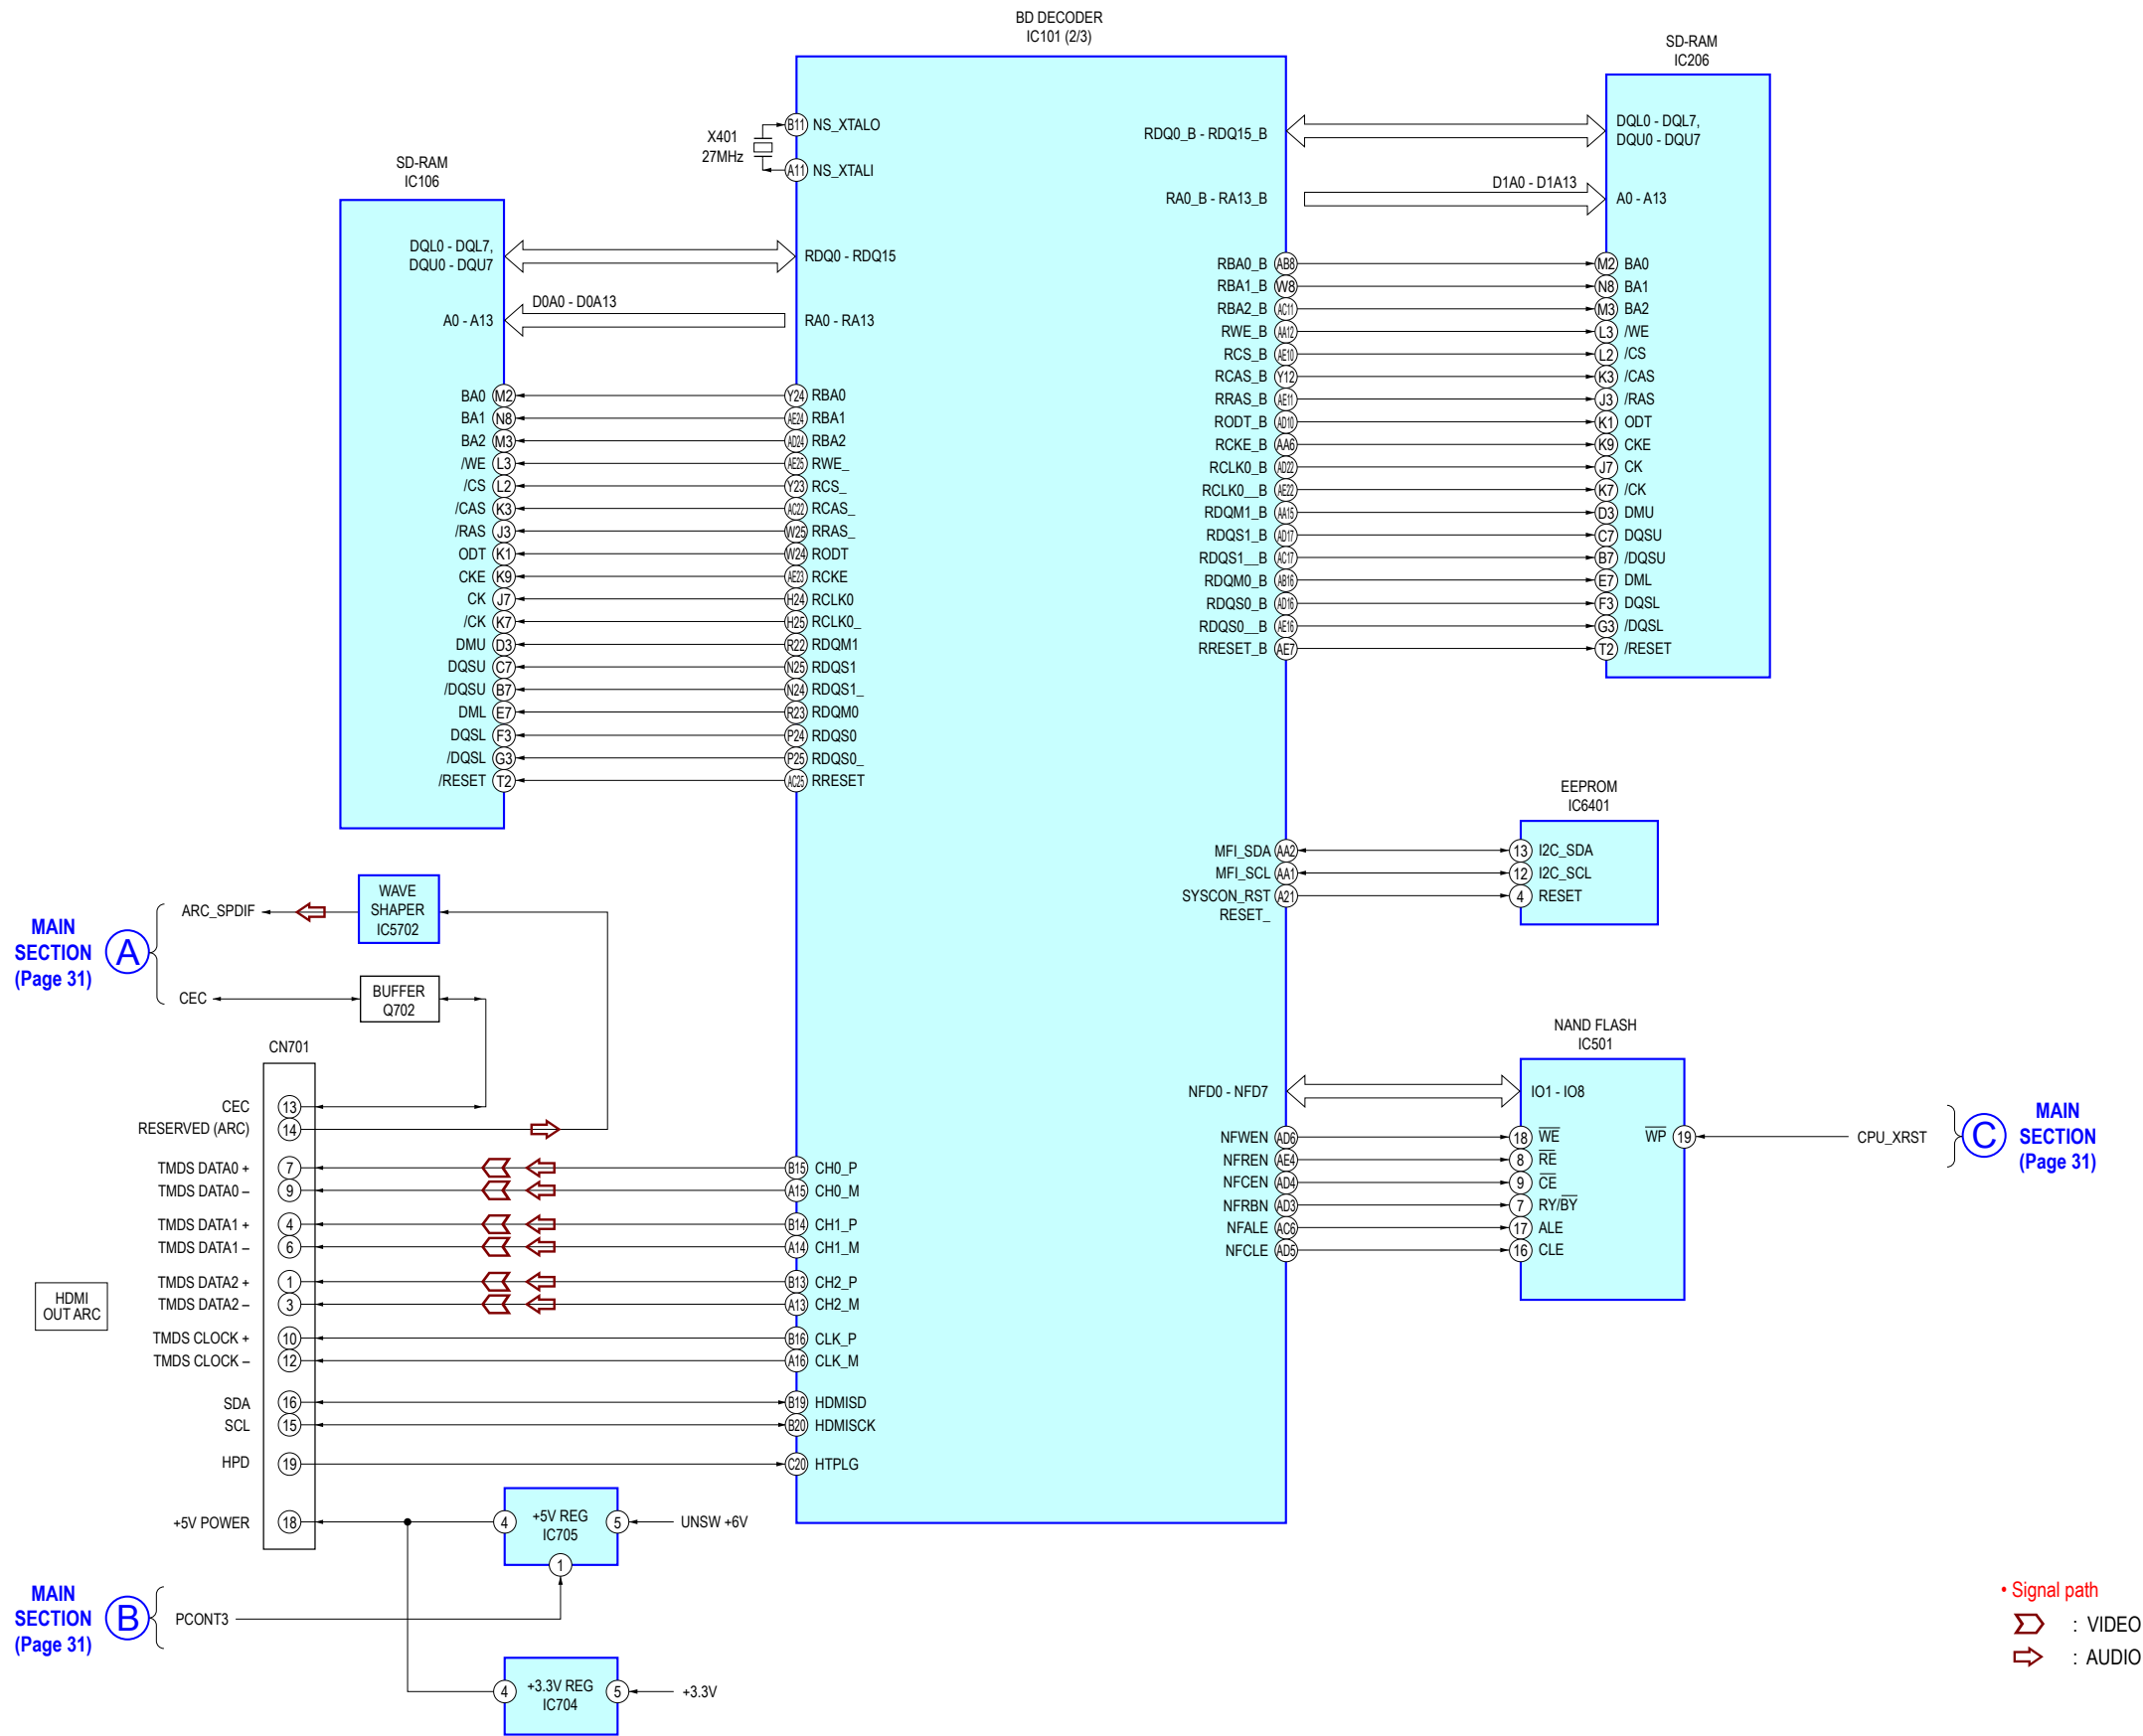


5-3. BLOCK DIAGRAM - MAIN Section -

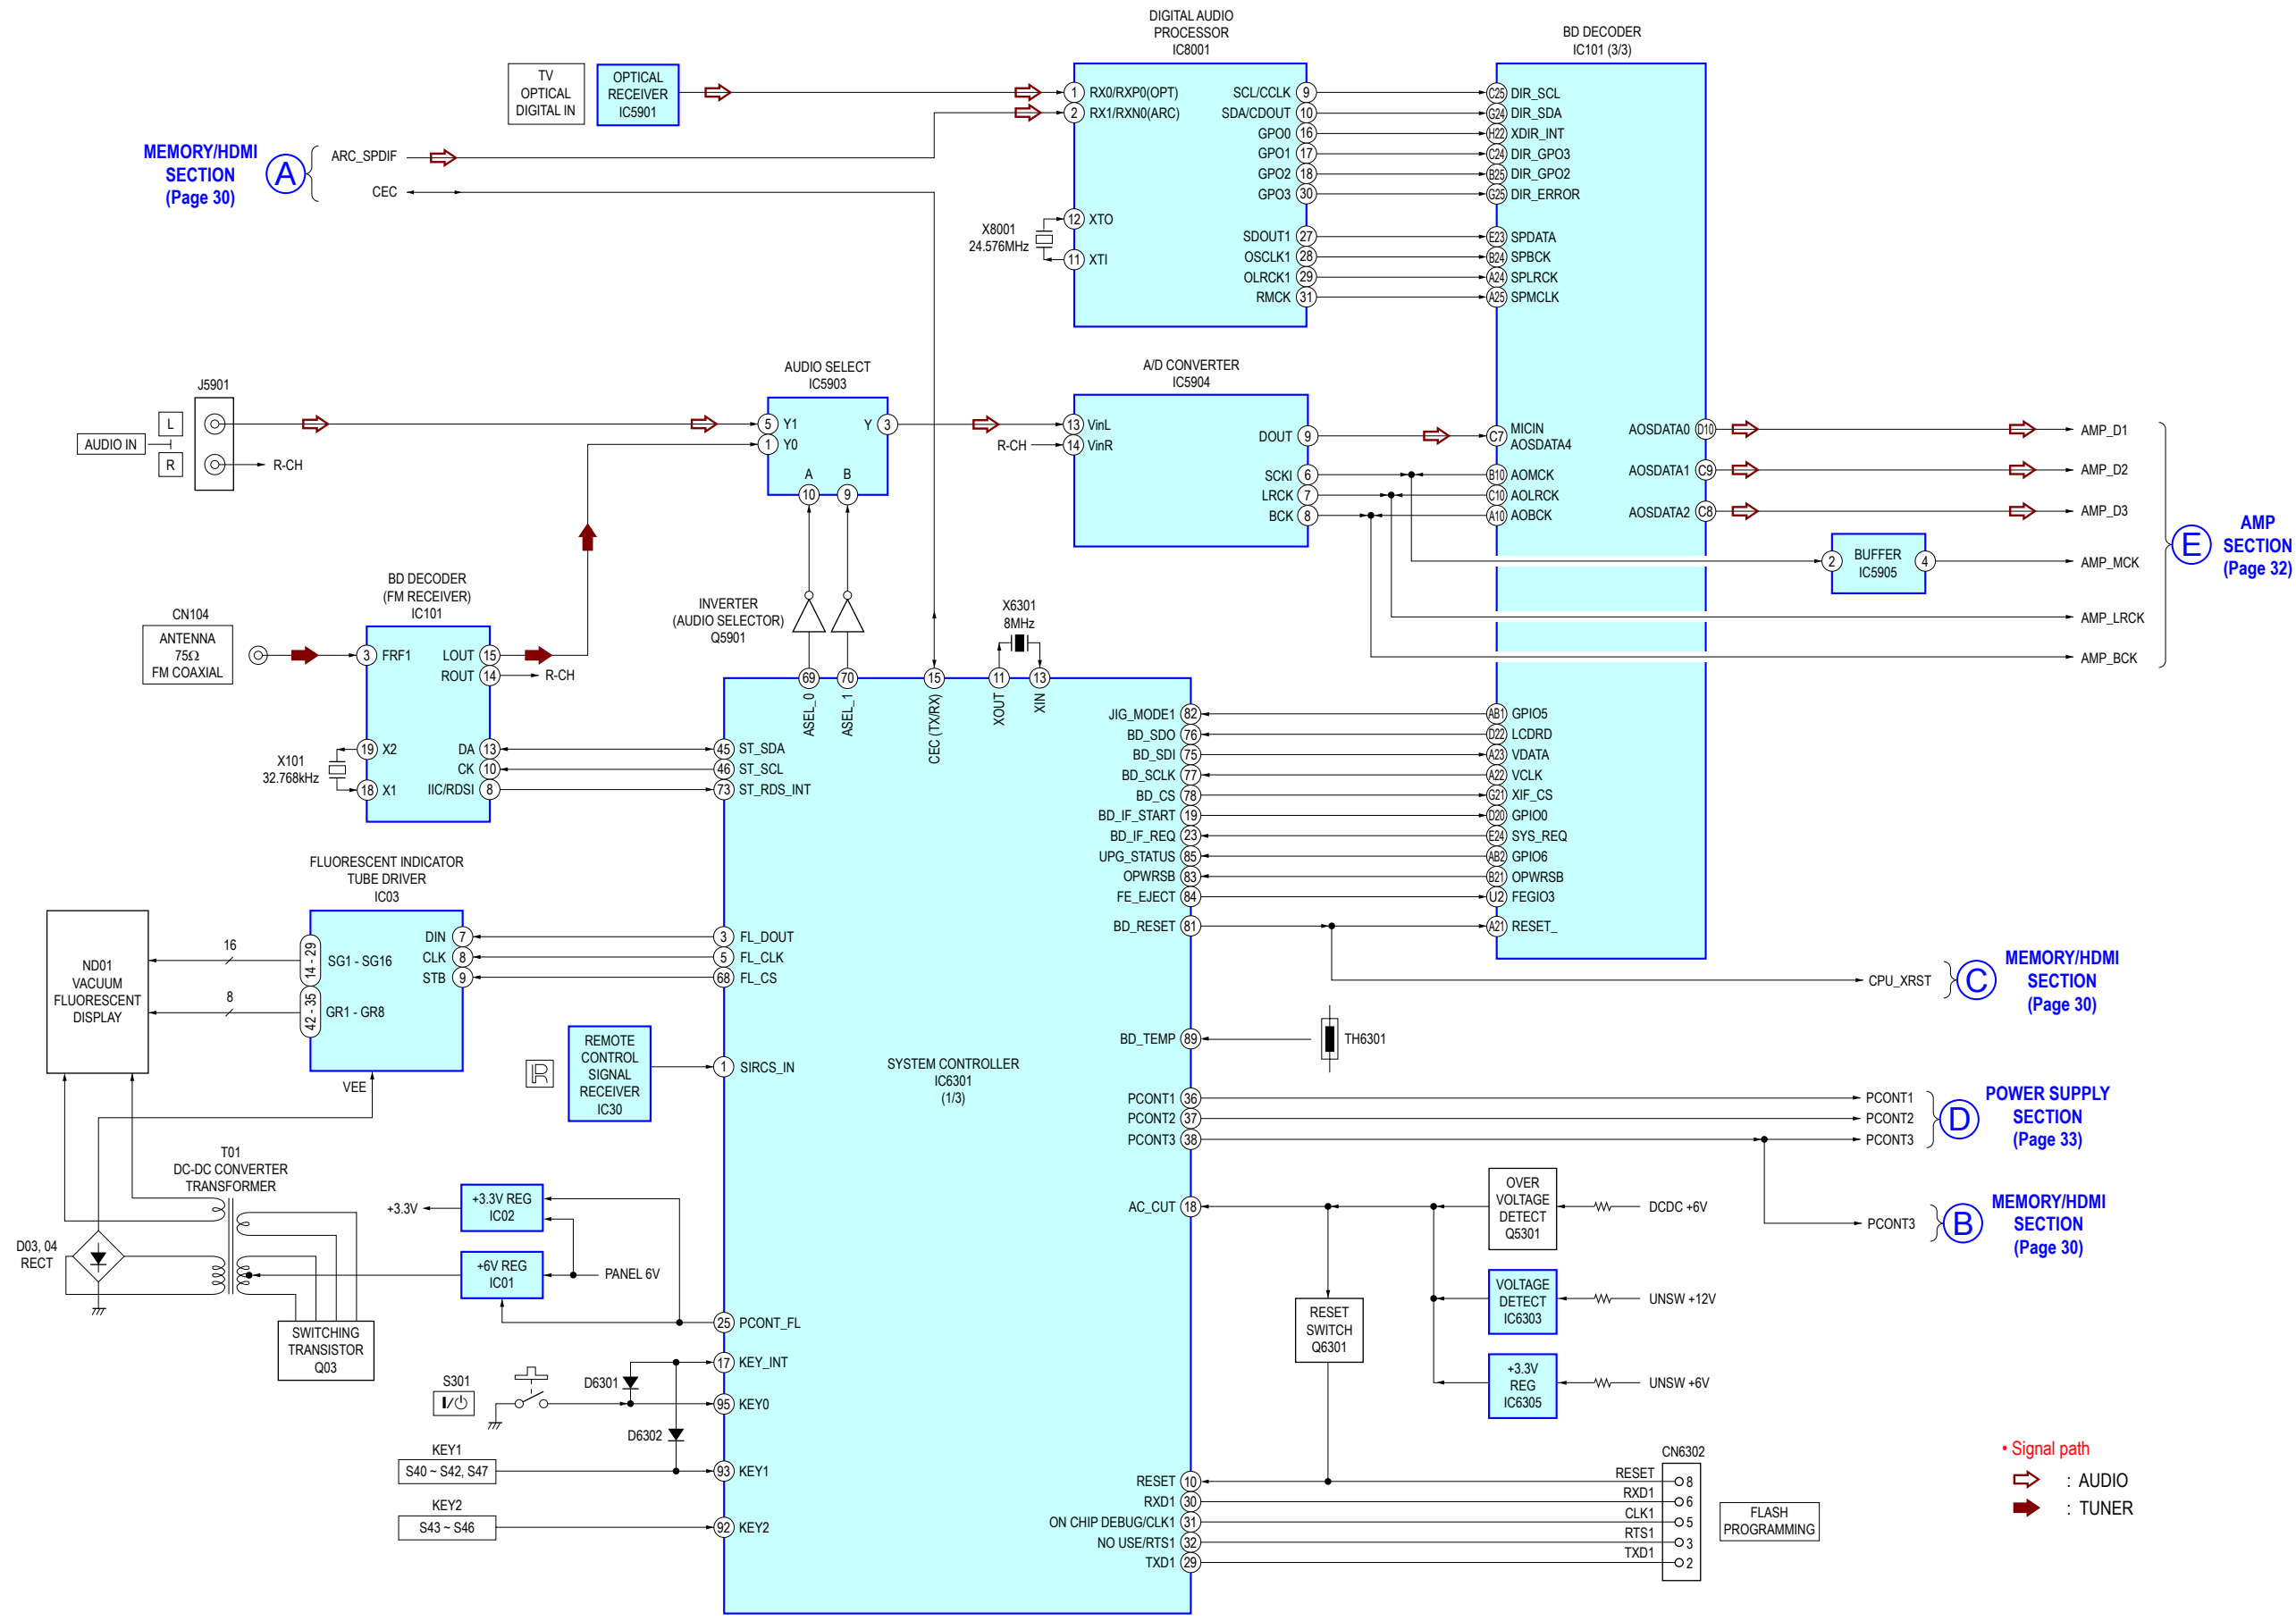

5-4. BLOCK DIAGRAM - AMP Section -

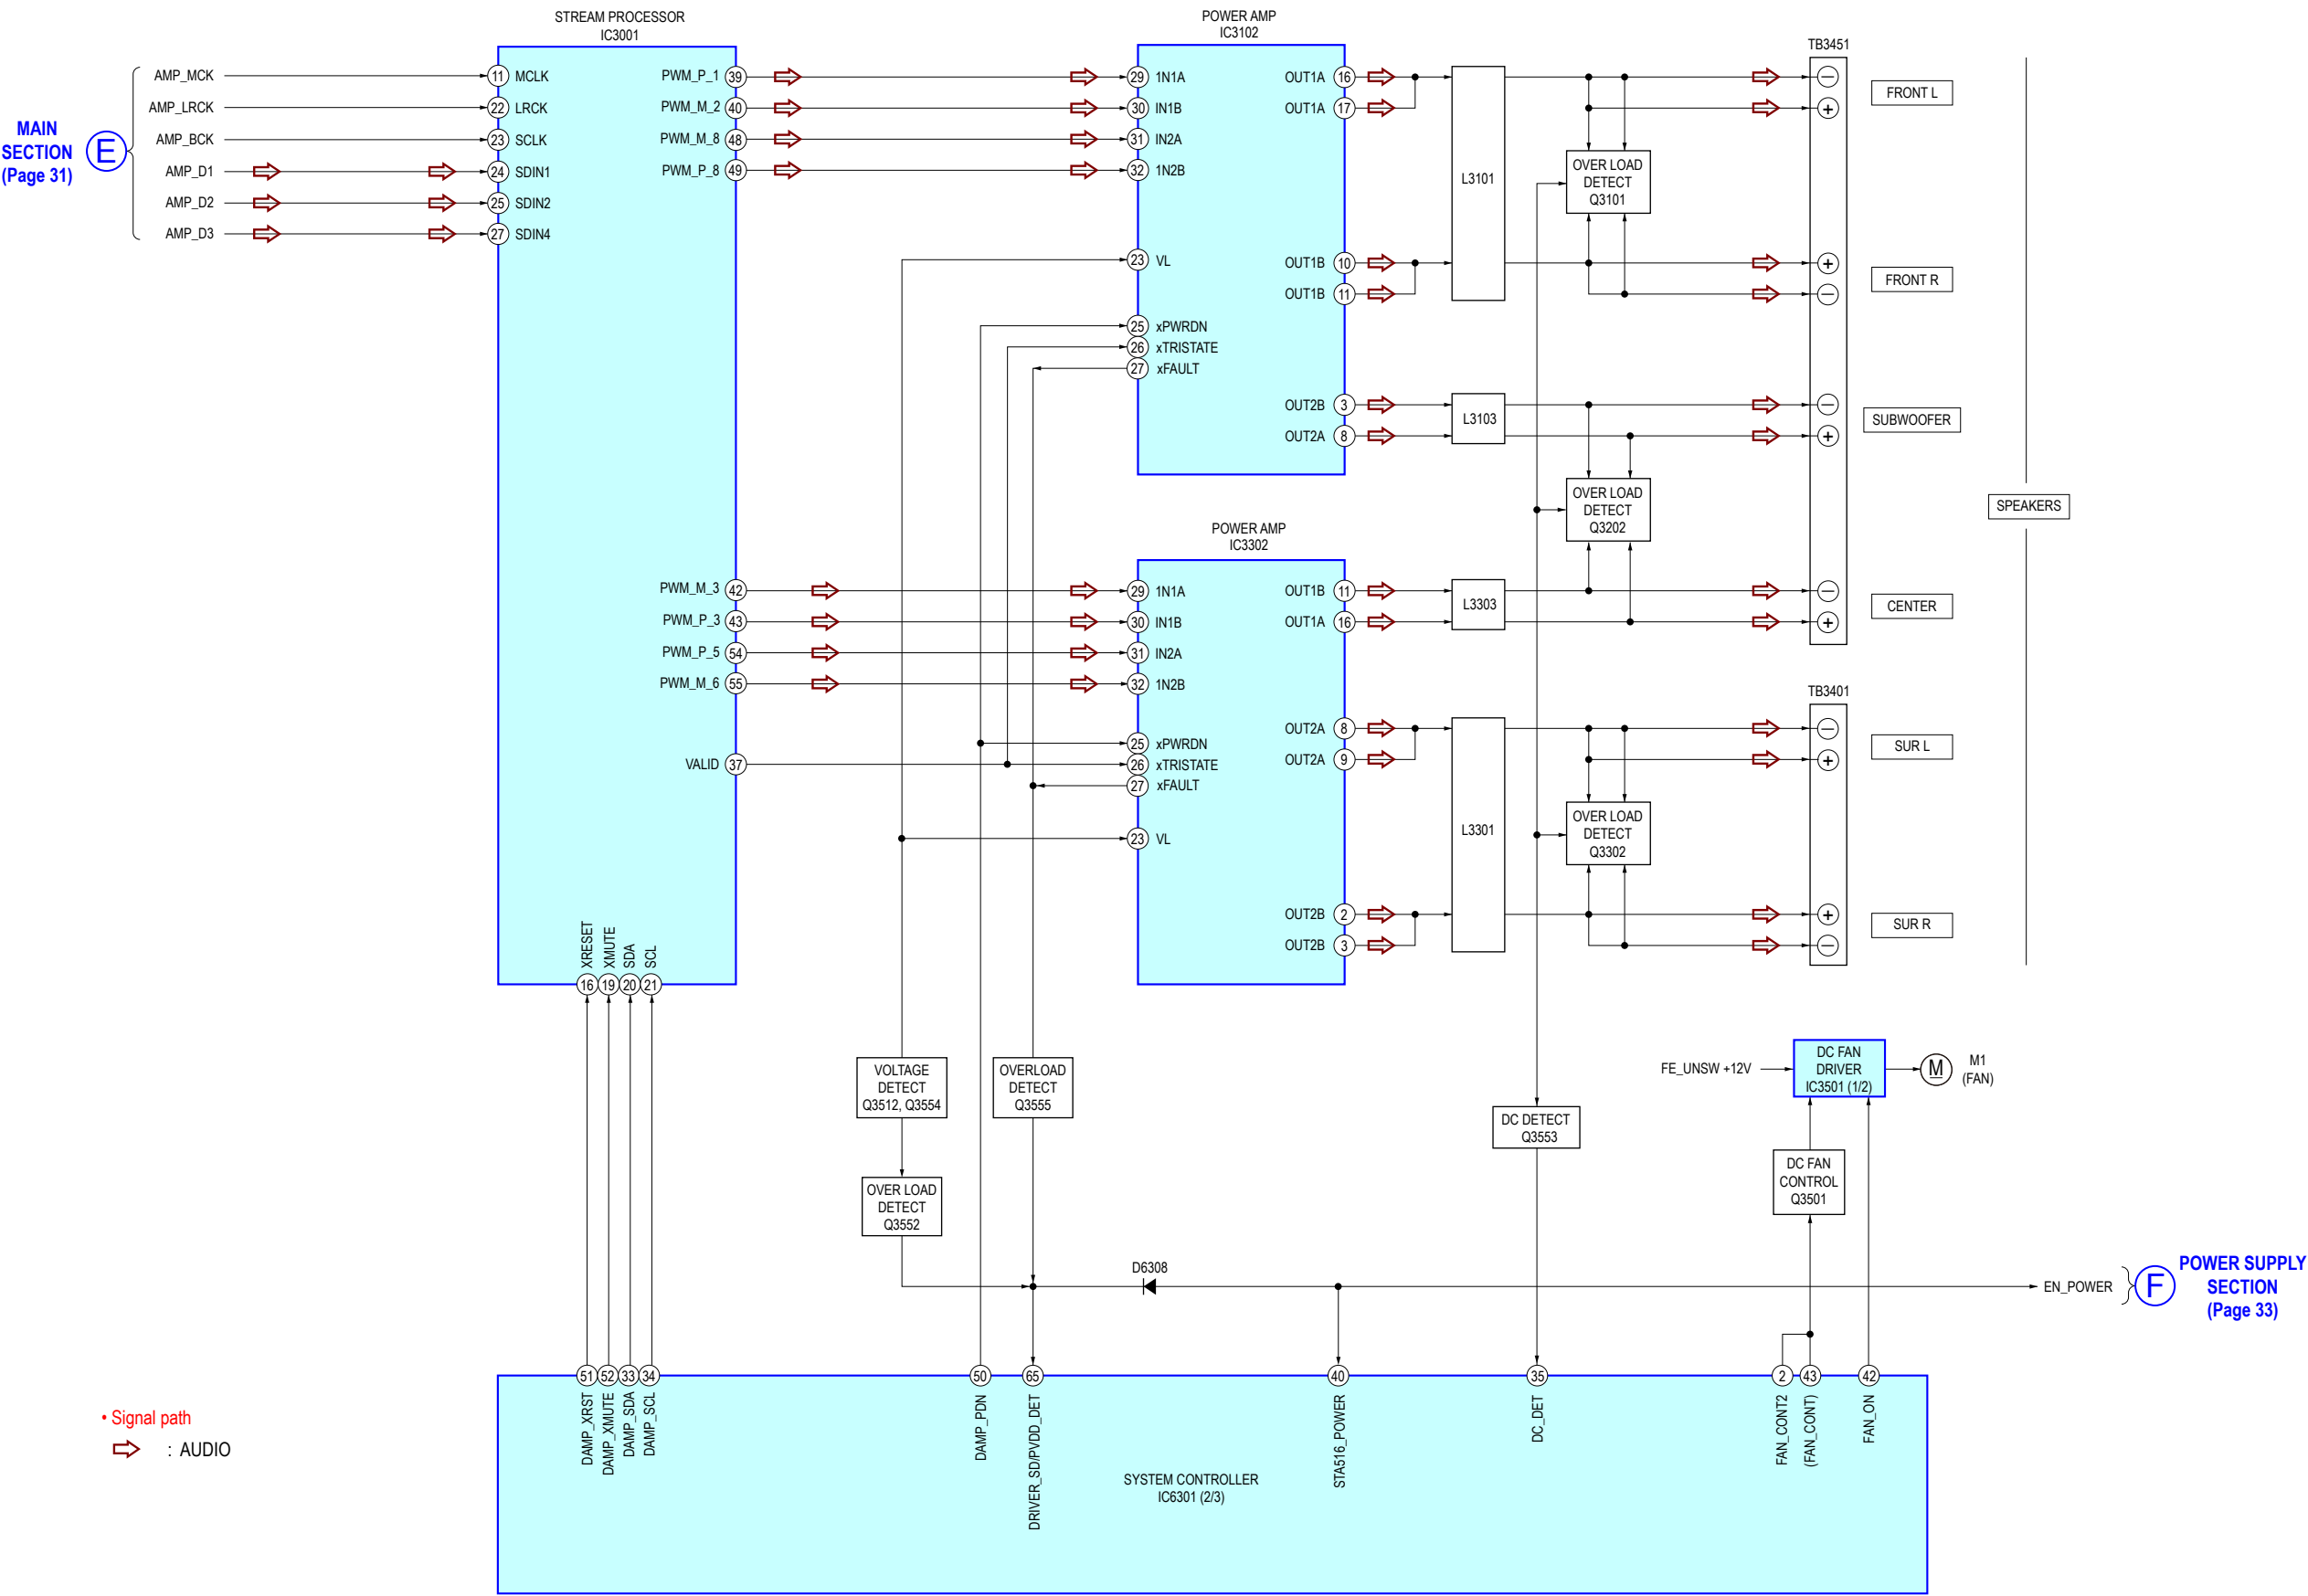

5-5. BLOCK DIAGRAM - POWER SUPPLY Section -

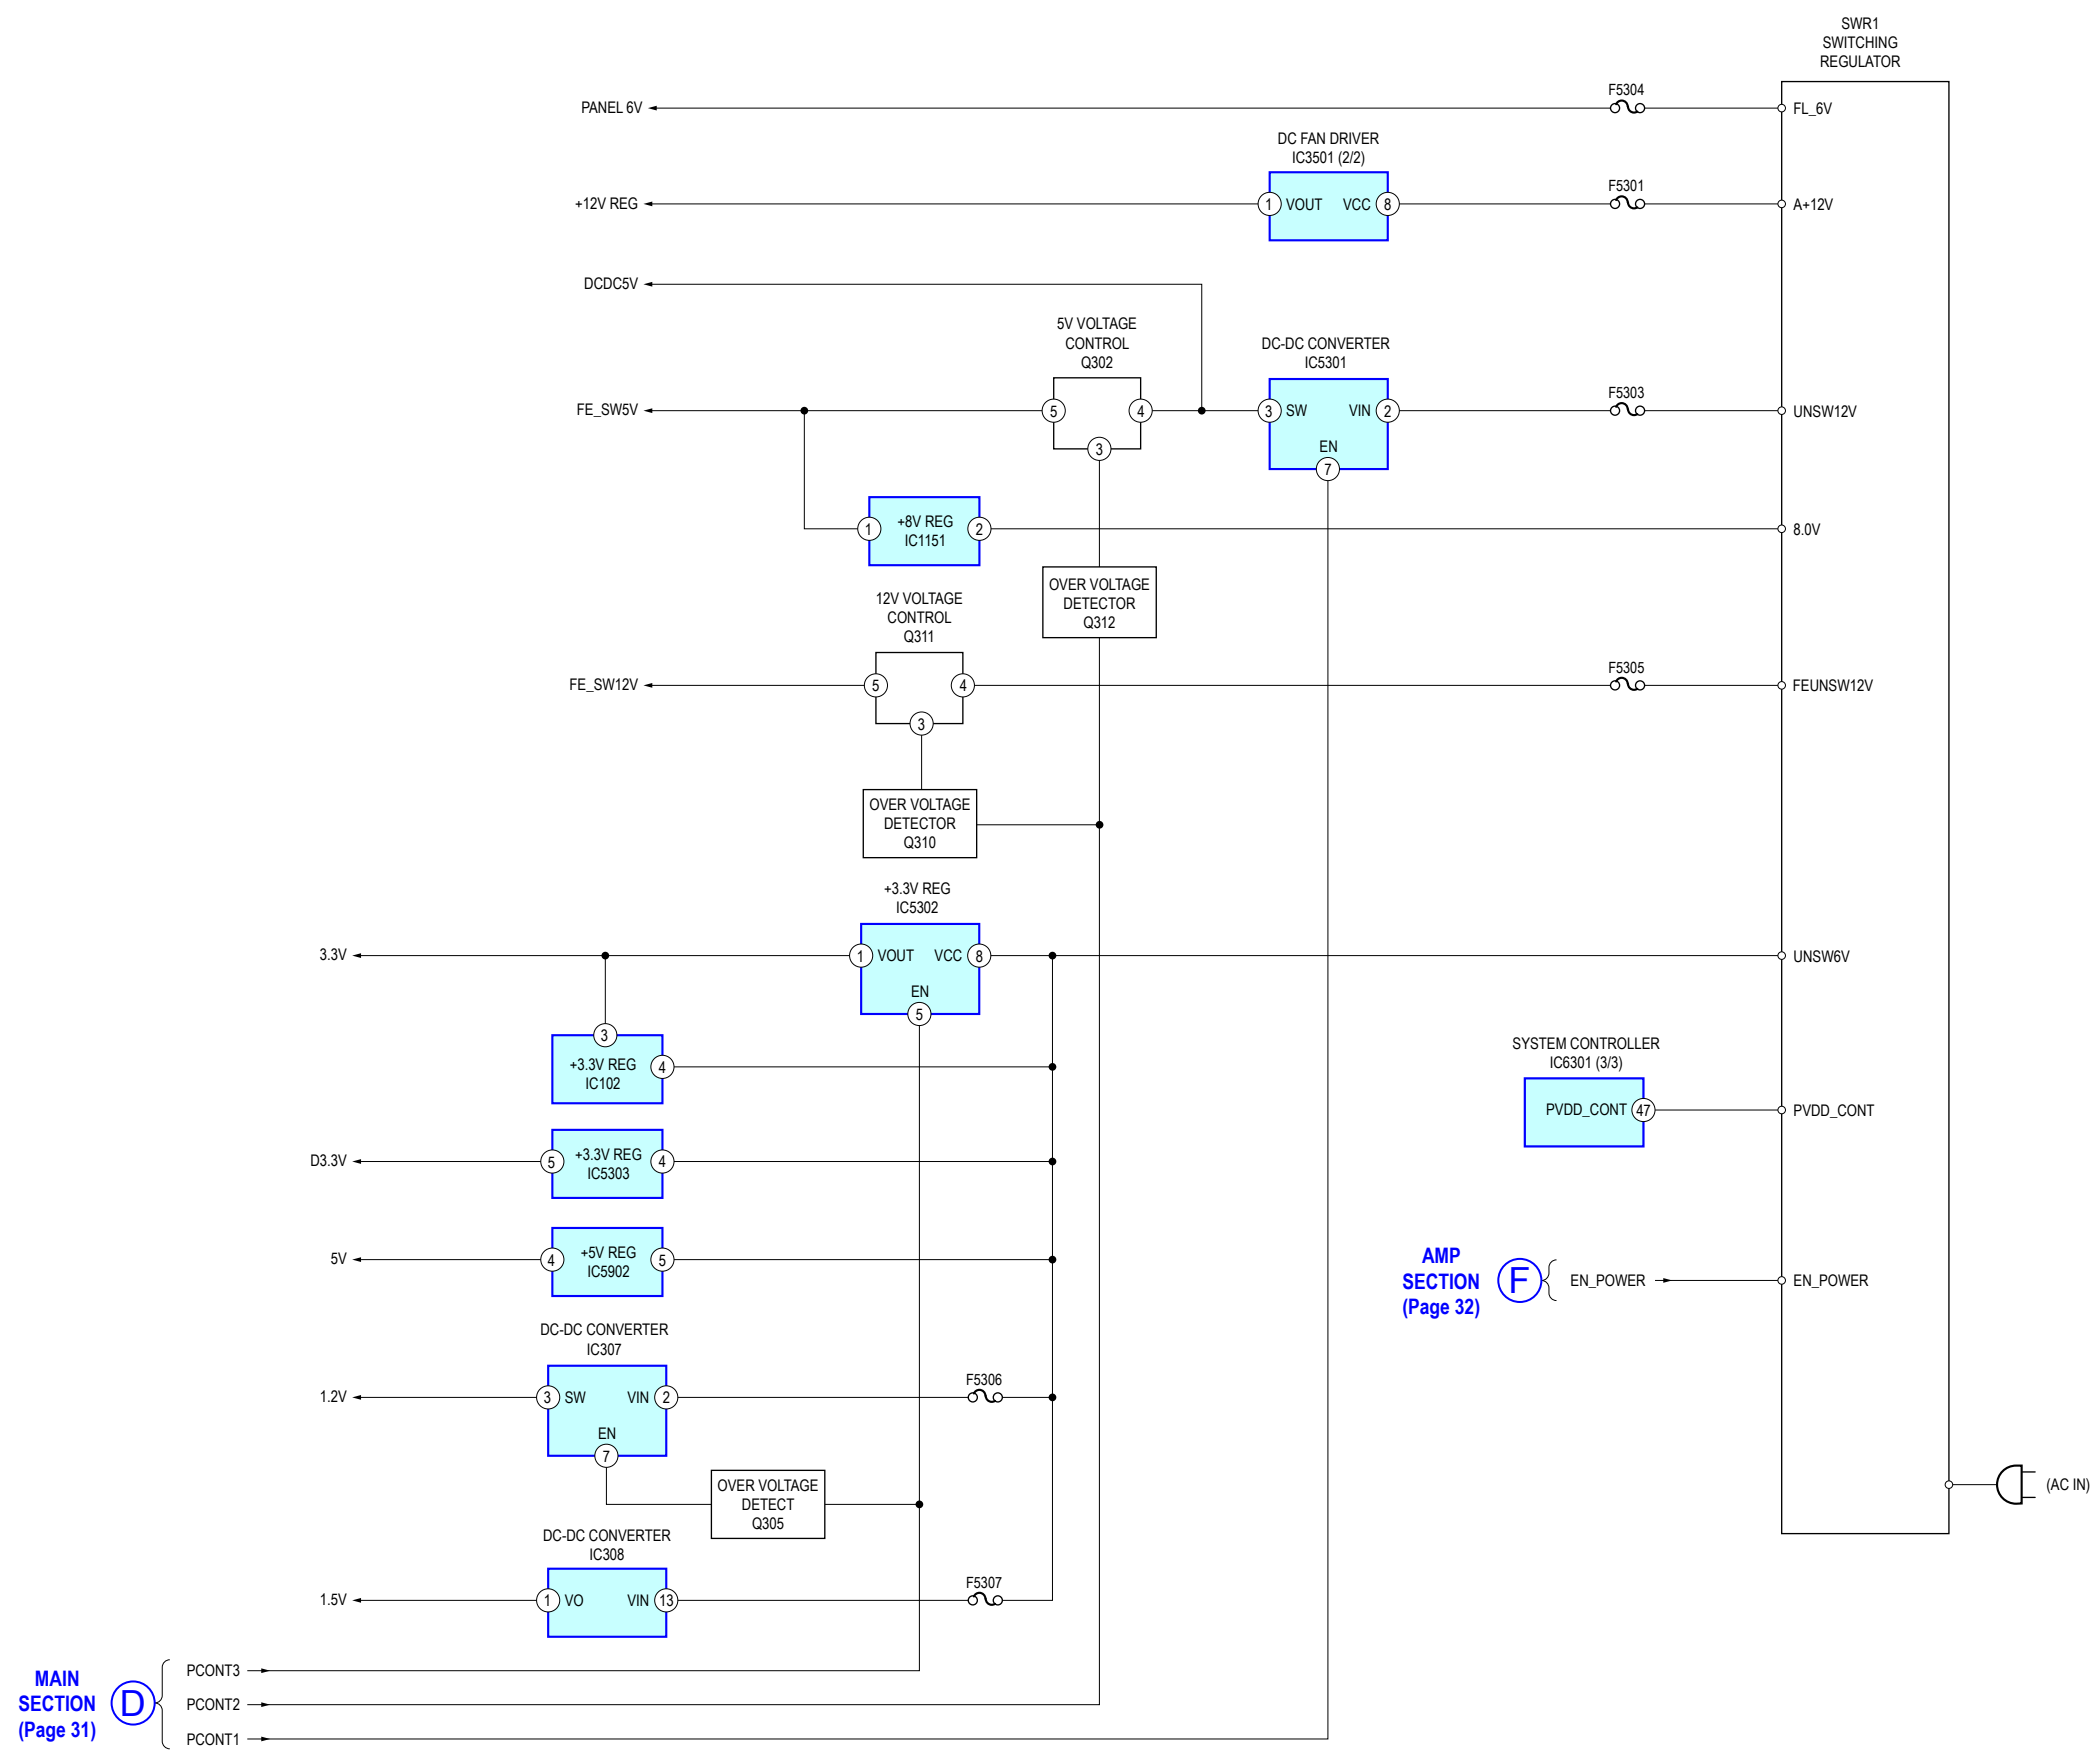

THIS NOTE IS COMMON FOR PRINTED WIRING BOARDS AND SCHEMATIC DIAGRAMS.
(In addition to this, the necessary note is printed in each block.)

For Printed Wiring Boards.

Note:

- — : Parts extracted from the component side.
- : Parts extracted from the conductor side.
- △ : Internal component.
- : Pattern from the side which enables seeing.
(The other layers' patterns are not indicated.)

Caution:

Pattern face side: Parts on the pattern face side seen (Conductor Side) from the pattern face are indicated.



Parts face side: Parts on the parts face side seen from (Component Side) the parts face are indicated.

Caution:


Pattern face side: Parts on the pattern face side seen (SIDE B) from the pattern face are indicated.

Parts face side: Parts on the parts face side seen from (SIDE A) the parts face are indicated.

- MB148 board is multi-layer printed board. However, the patterns of intermediate-layers have not been included in this diagrams.
- Abbreviation
CND : Canadian model
- Indication of transistor.



- Lead layouts

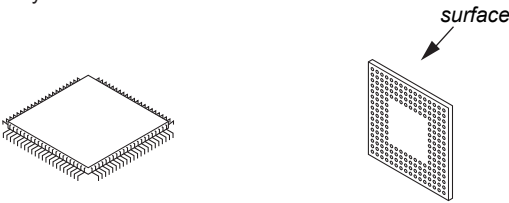

Lead layout of conventional IC CSP (Chip Size Package)

* Replacement of IC106 and IC206 on the MB148 board used in this unit requires a special tool.

Note: When the AMP board is replaced, spread the compound referring to “NOTE OF REPLACING THE IC3102 AND IC3302 ON THE AMP BOARD AND THE COMPLETE AMP BOARD” on servicing notes (page 10).

For Schematic Diagrams.

Note:

- All capacitors are in μF unless otherwise noted. (p: pF) 50 WV or less are not indicated except for electrolytics and tantalums.
- All resistors are in Ω and 1/4 W or less unless otherwise specified.
- △ : internal component.
- □ : panel designation.

Note: The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified.


Note: Les composants identifiés par une marque △ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

- — : B+ Line.
- - - - : B- Line.
- Voltages and waveforms are dc with respect to ground under no-signal conditions.
no mark: TUNER
* : Impossible to measure
- Voltages are taken with VOM (Input impedance 10 M Ω).
Voltage variations may be noted due to normal production tolerances.
- Waveforms are taken with a oscilloscope.
Voltage variations may be noted due to normal production tolerances.
- Circled numbers refer to waveforms.
- Signal path.
⇒ : AUDIO
➡ : TUNER
⇒ : USB
⇒ : VIDEO
⇒ : LAN
⇒ : DISC PLAY
- Abbreviation
CND : Canadian model
- The voltage and waveform of CSP (chip size package) cannot be measured, because its lead layout is different from that of conventional IC.


* Replacement of IC106 and IC206 on the MB148 board used in this unit requires a special tool.


Note: When the AMP board is replaced, spread the compound referring to “NOTE OF REPLACING THE IC3102 AND IC3302 ON THE AMP BOARD AND THE COMPLETE AMP BOARD” on servicing notes (page 10).

• Circuit Boards Location

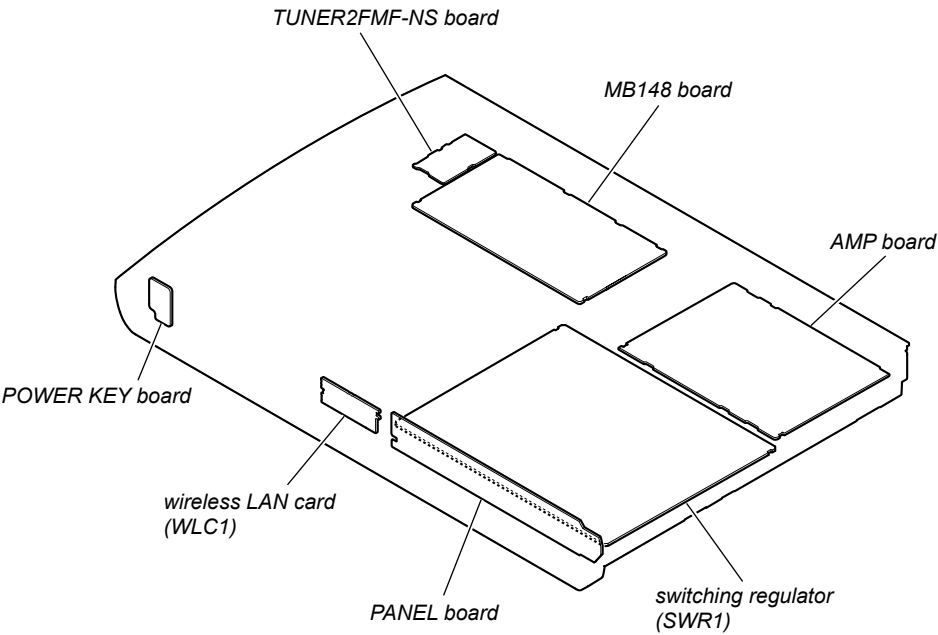


5-6. PRINTED WIRING BOARD - MB148 Board (Side A) - • See page 34 for Circuit Boards Location. • : Uses unleaded solder.

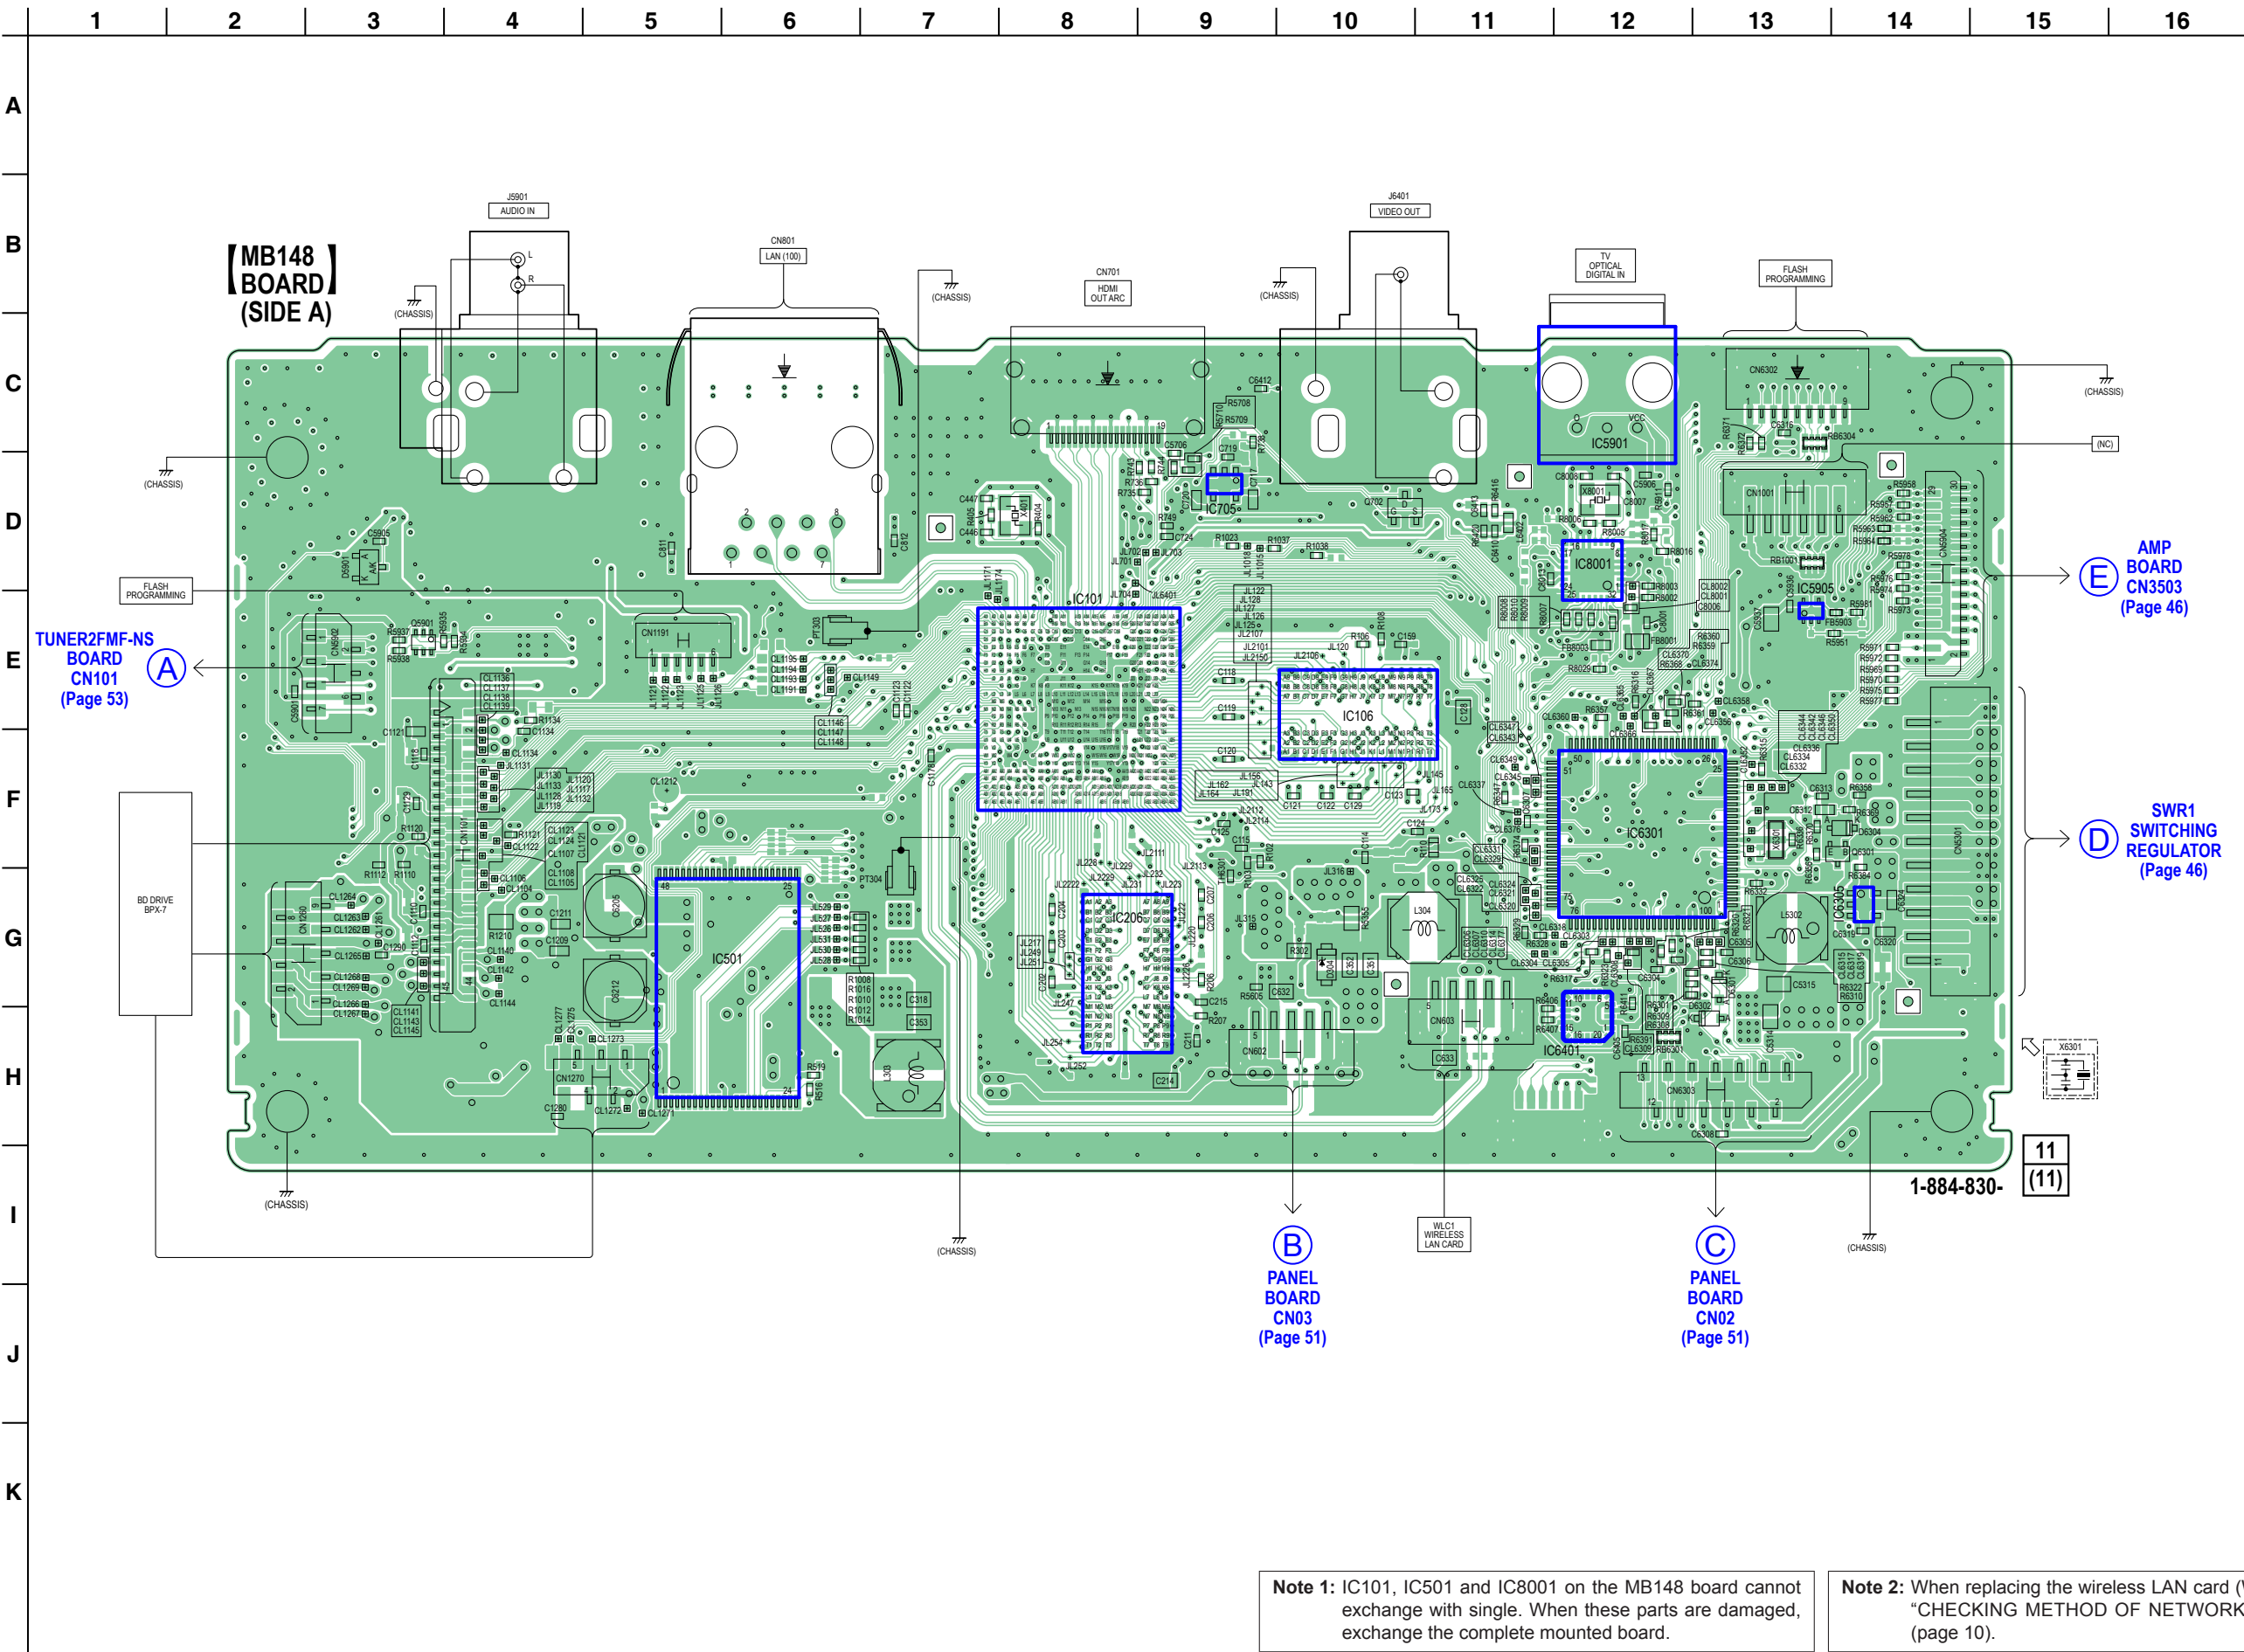

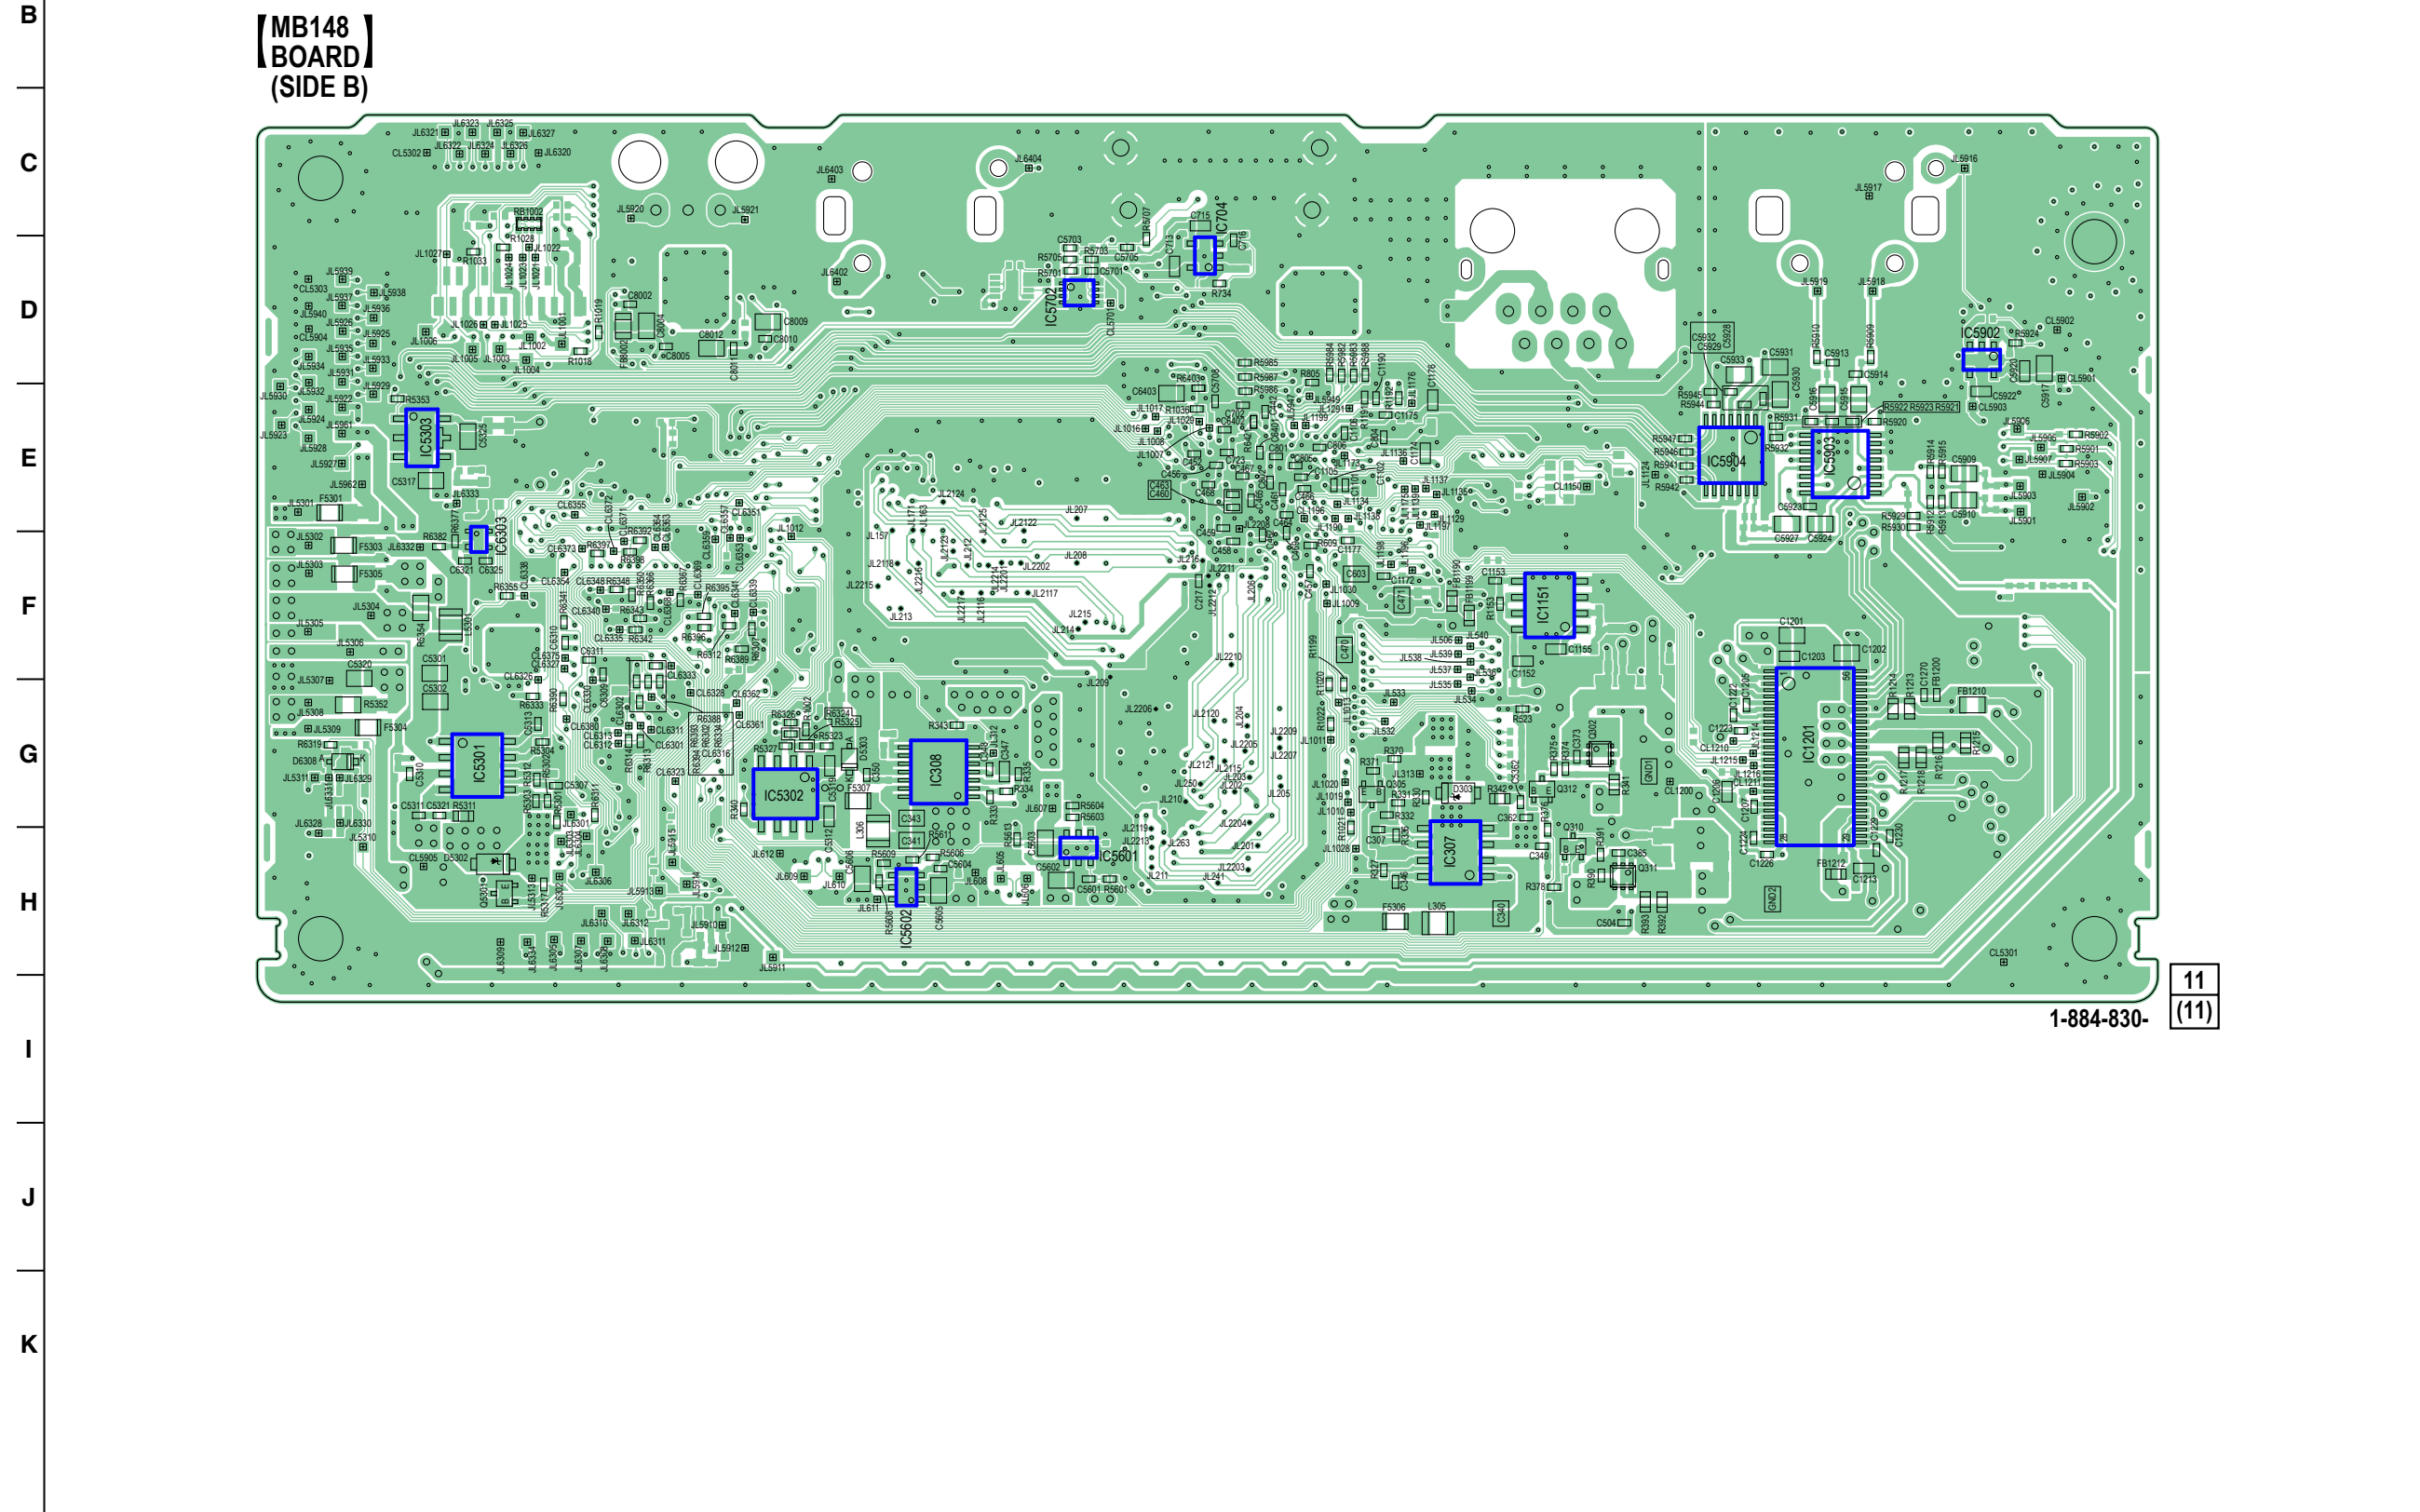


Note: IC101 on the MB148 board cannot exchange with single. When this part is damaged, exchange the complete mounted board.




Note: IC101 on the MB148 board cannot exchange with single. When this part is damaged, exchange the complete mounted board.

5-9. SCHEMATIC DIAGRAM - MB148 Board (2/9) - • See page 55 for IC Block Diagrams.

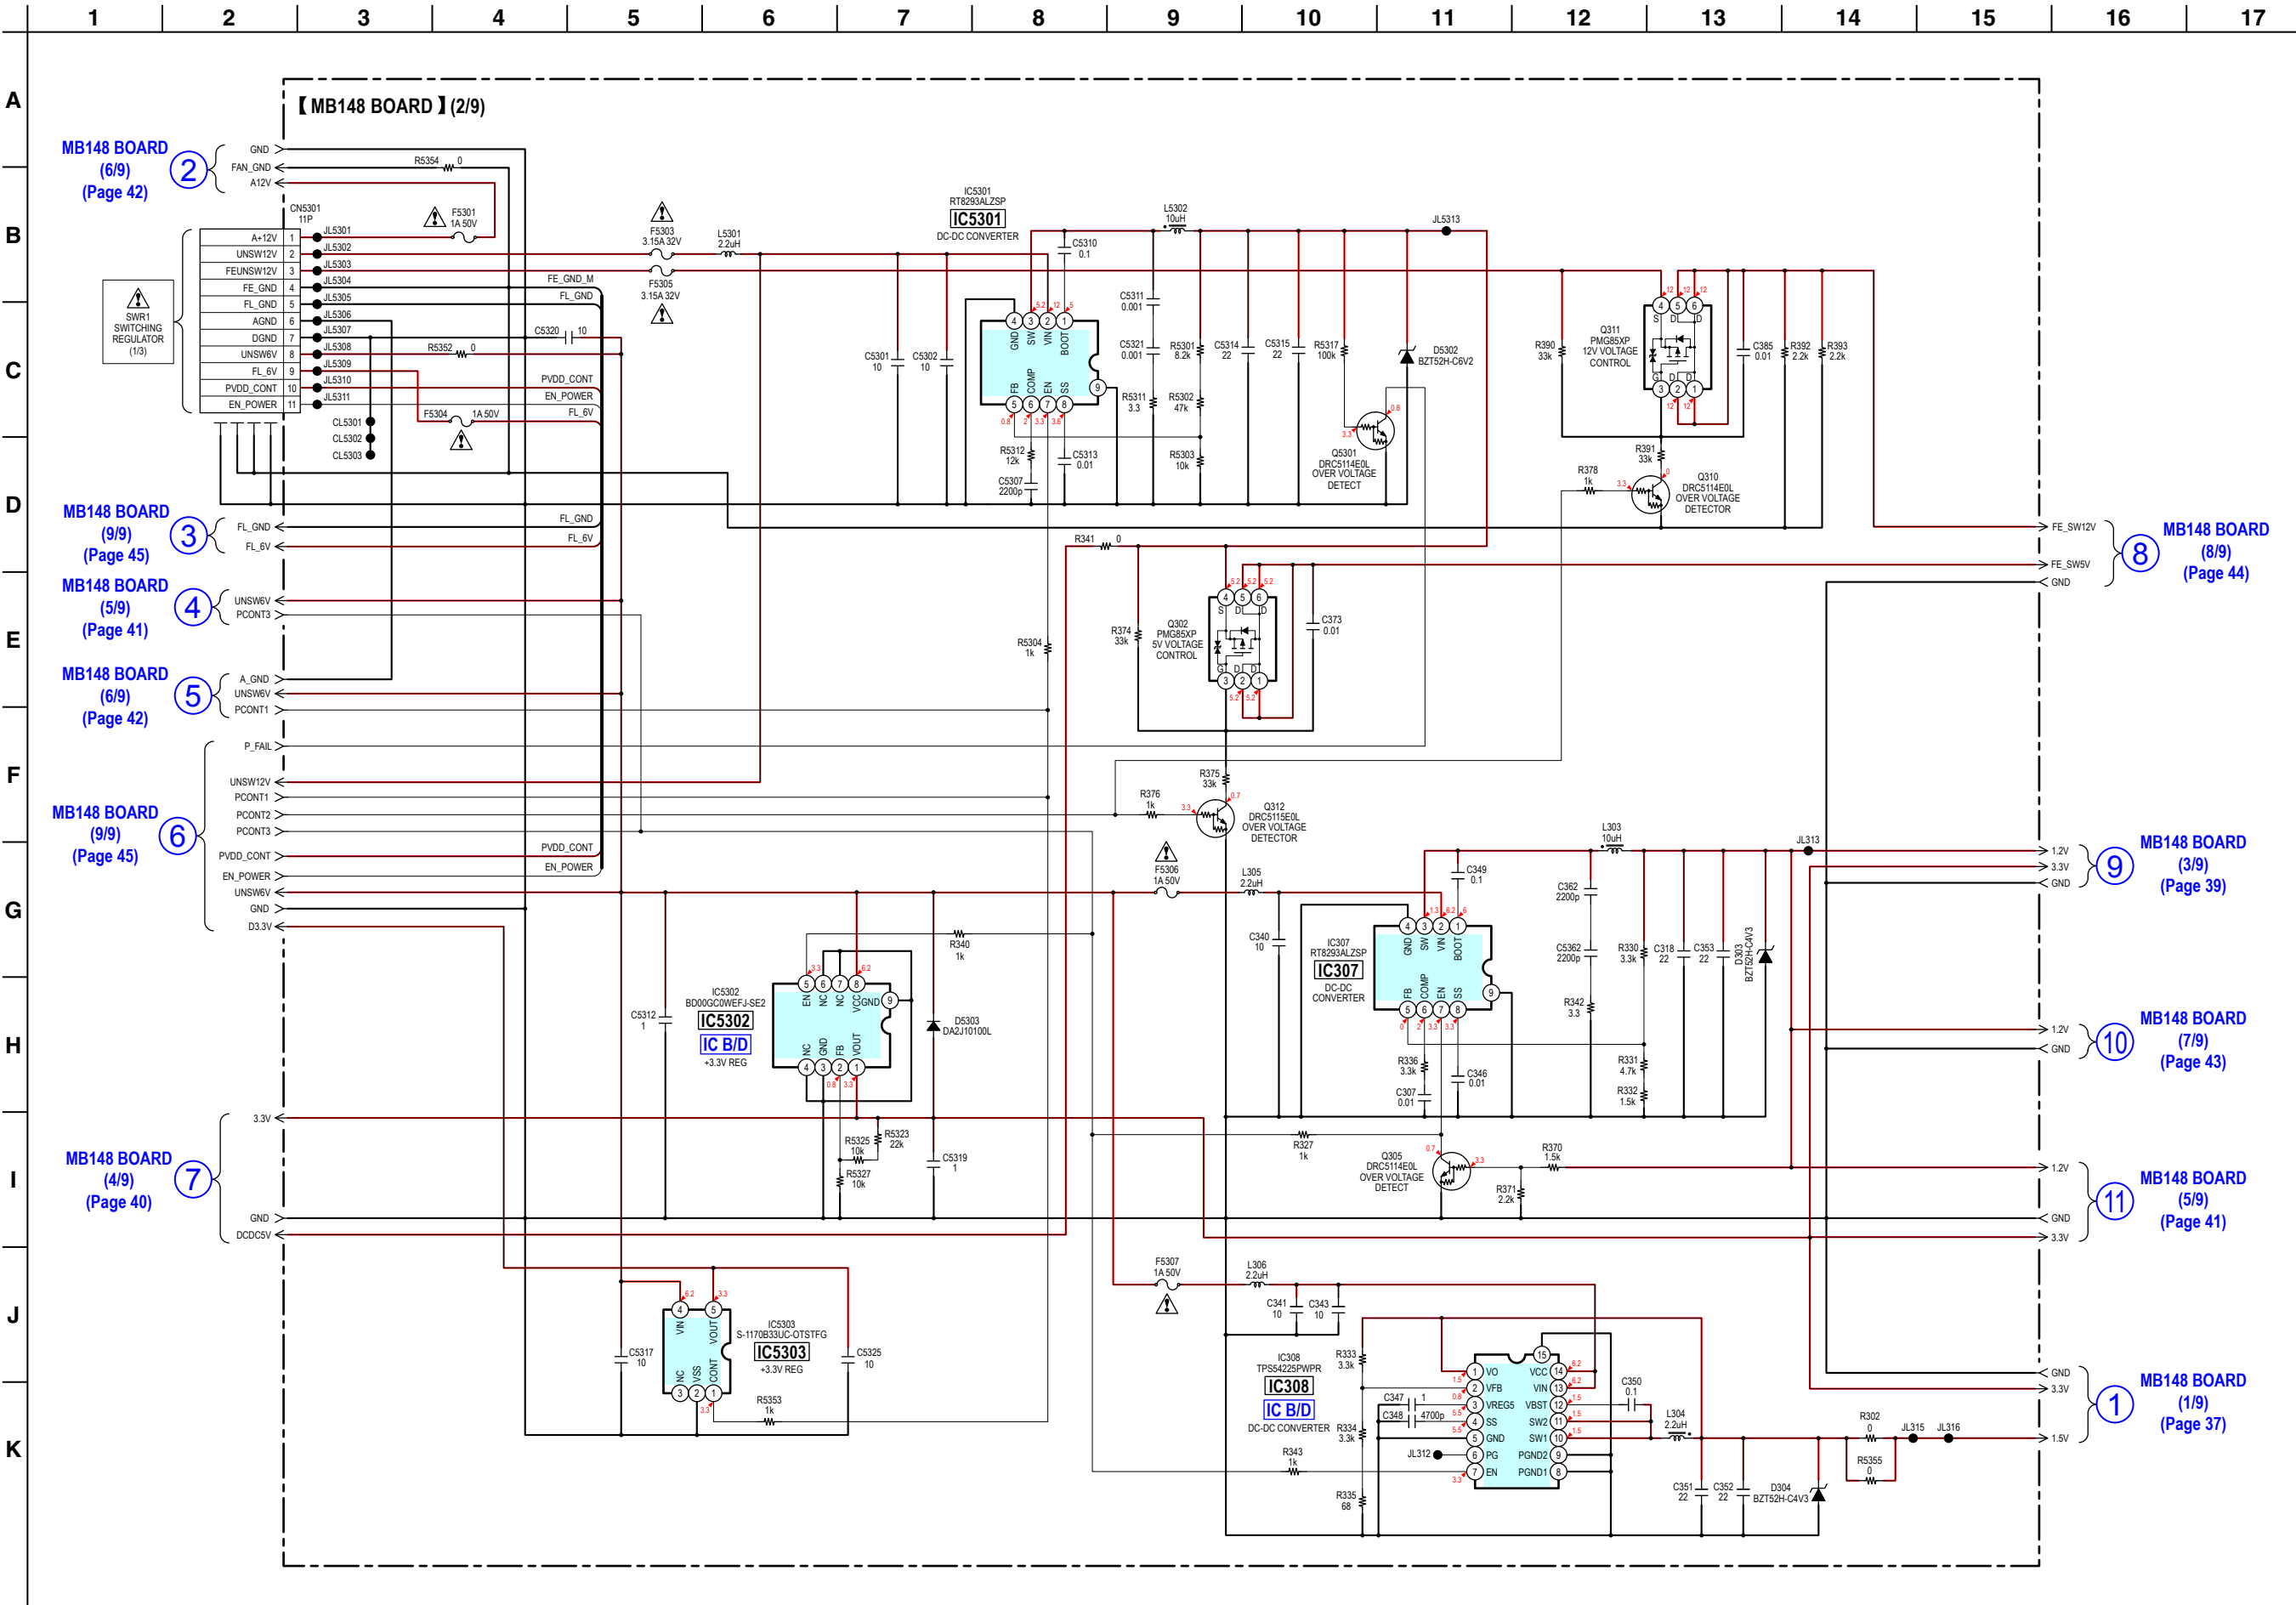


5-10. SCHEMATIC DIAGRAM - MB148 Board (3/9) - • See page 55 for IC Block Diagrams. • See page 61 for IC Pin Function Descriptions.

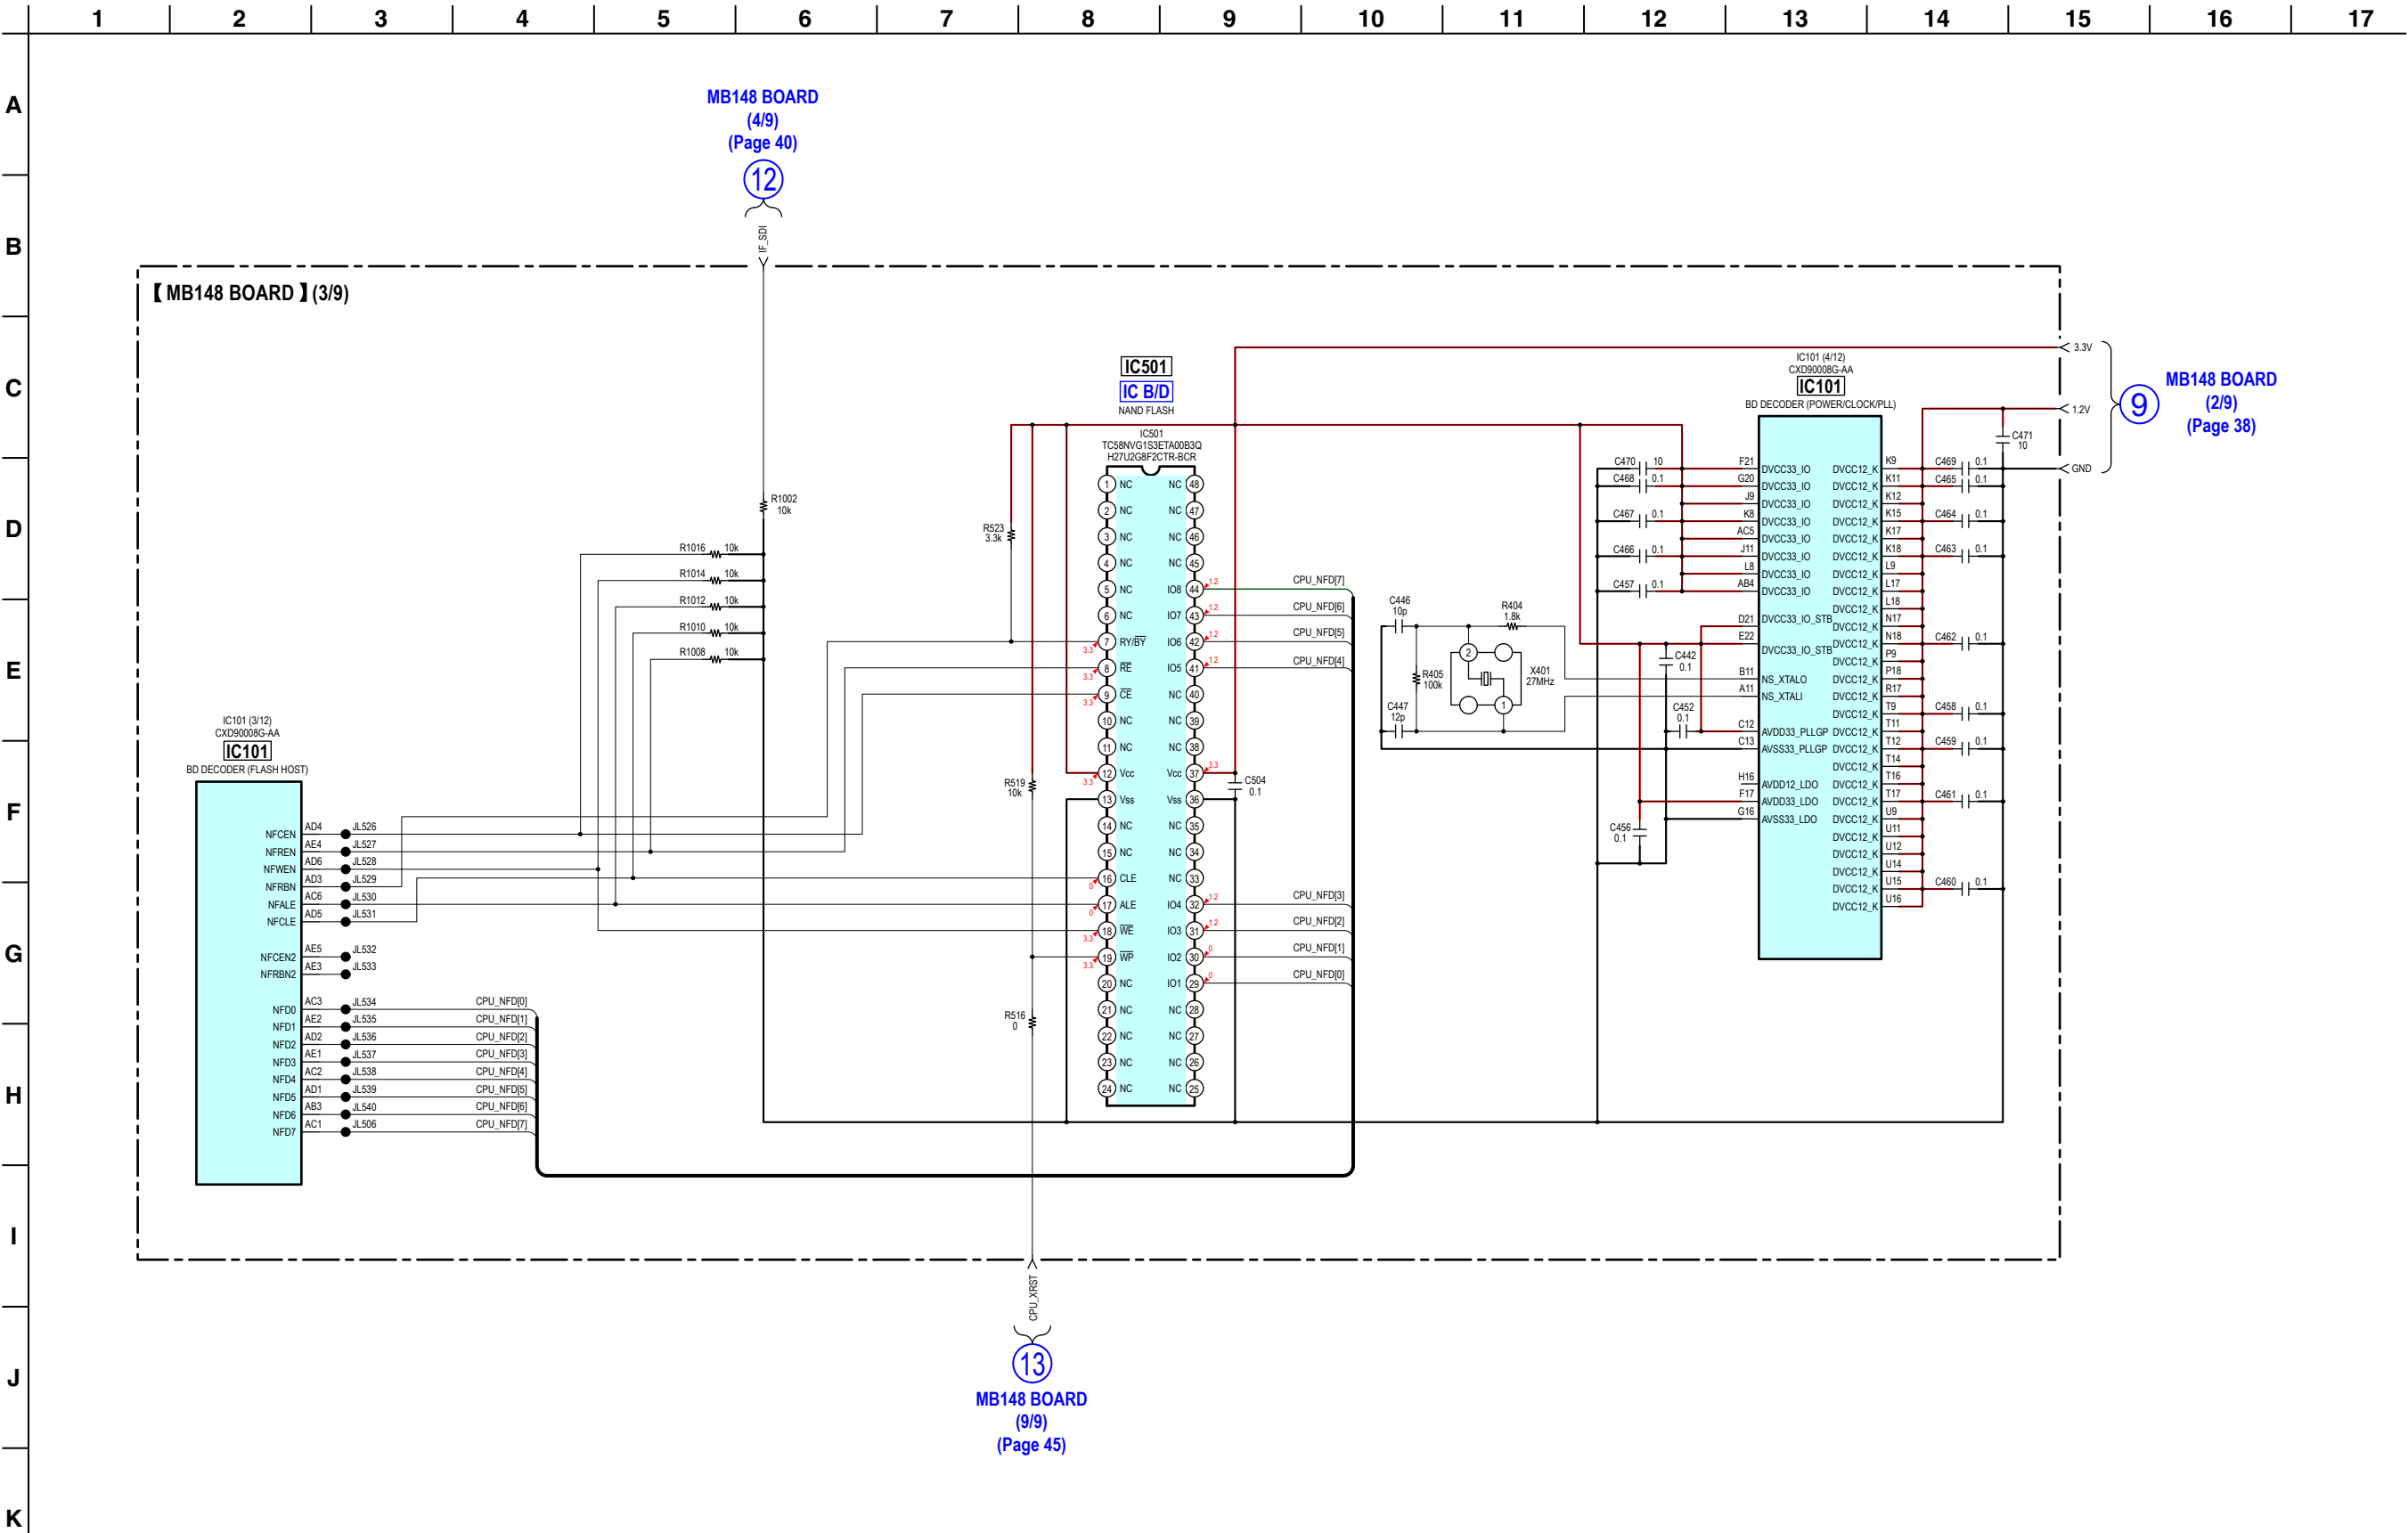

Note: IC101 and IC501 on the MB148 board cannot exchange with single. When these parts are damaged, exchange the complete mounted board.


5-11. SCHEMATIC DIAGRAM - MB148 Board (4/9) - • See page 55 for IC Block Diagrams. • See page 61 for IC Pin Function Descriptions.

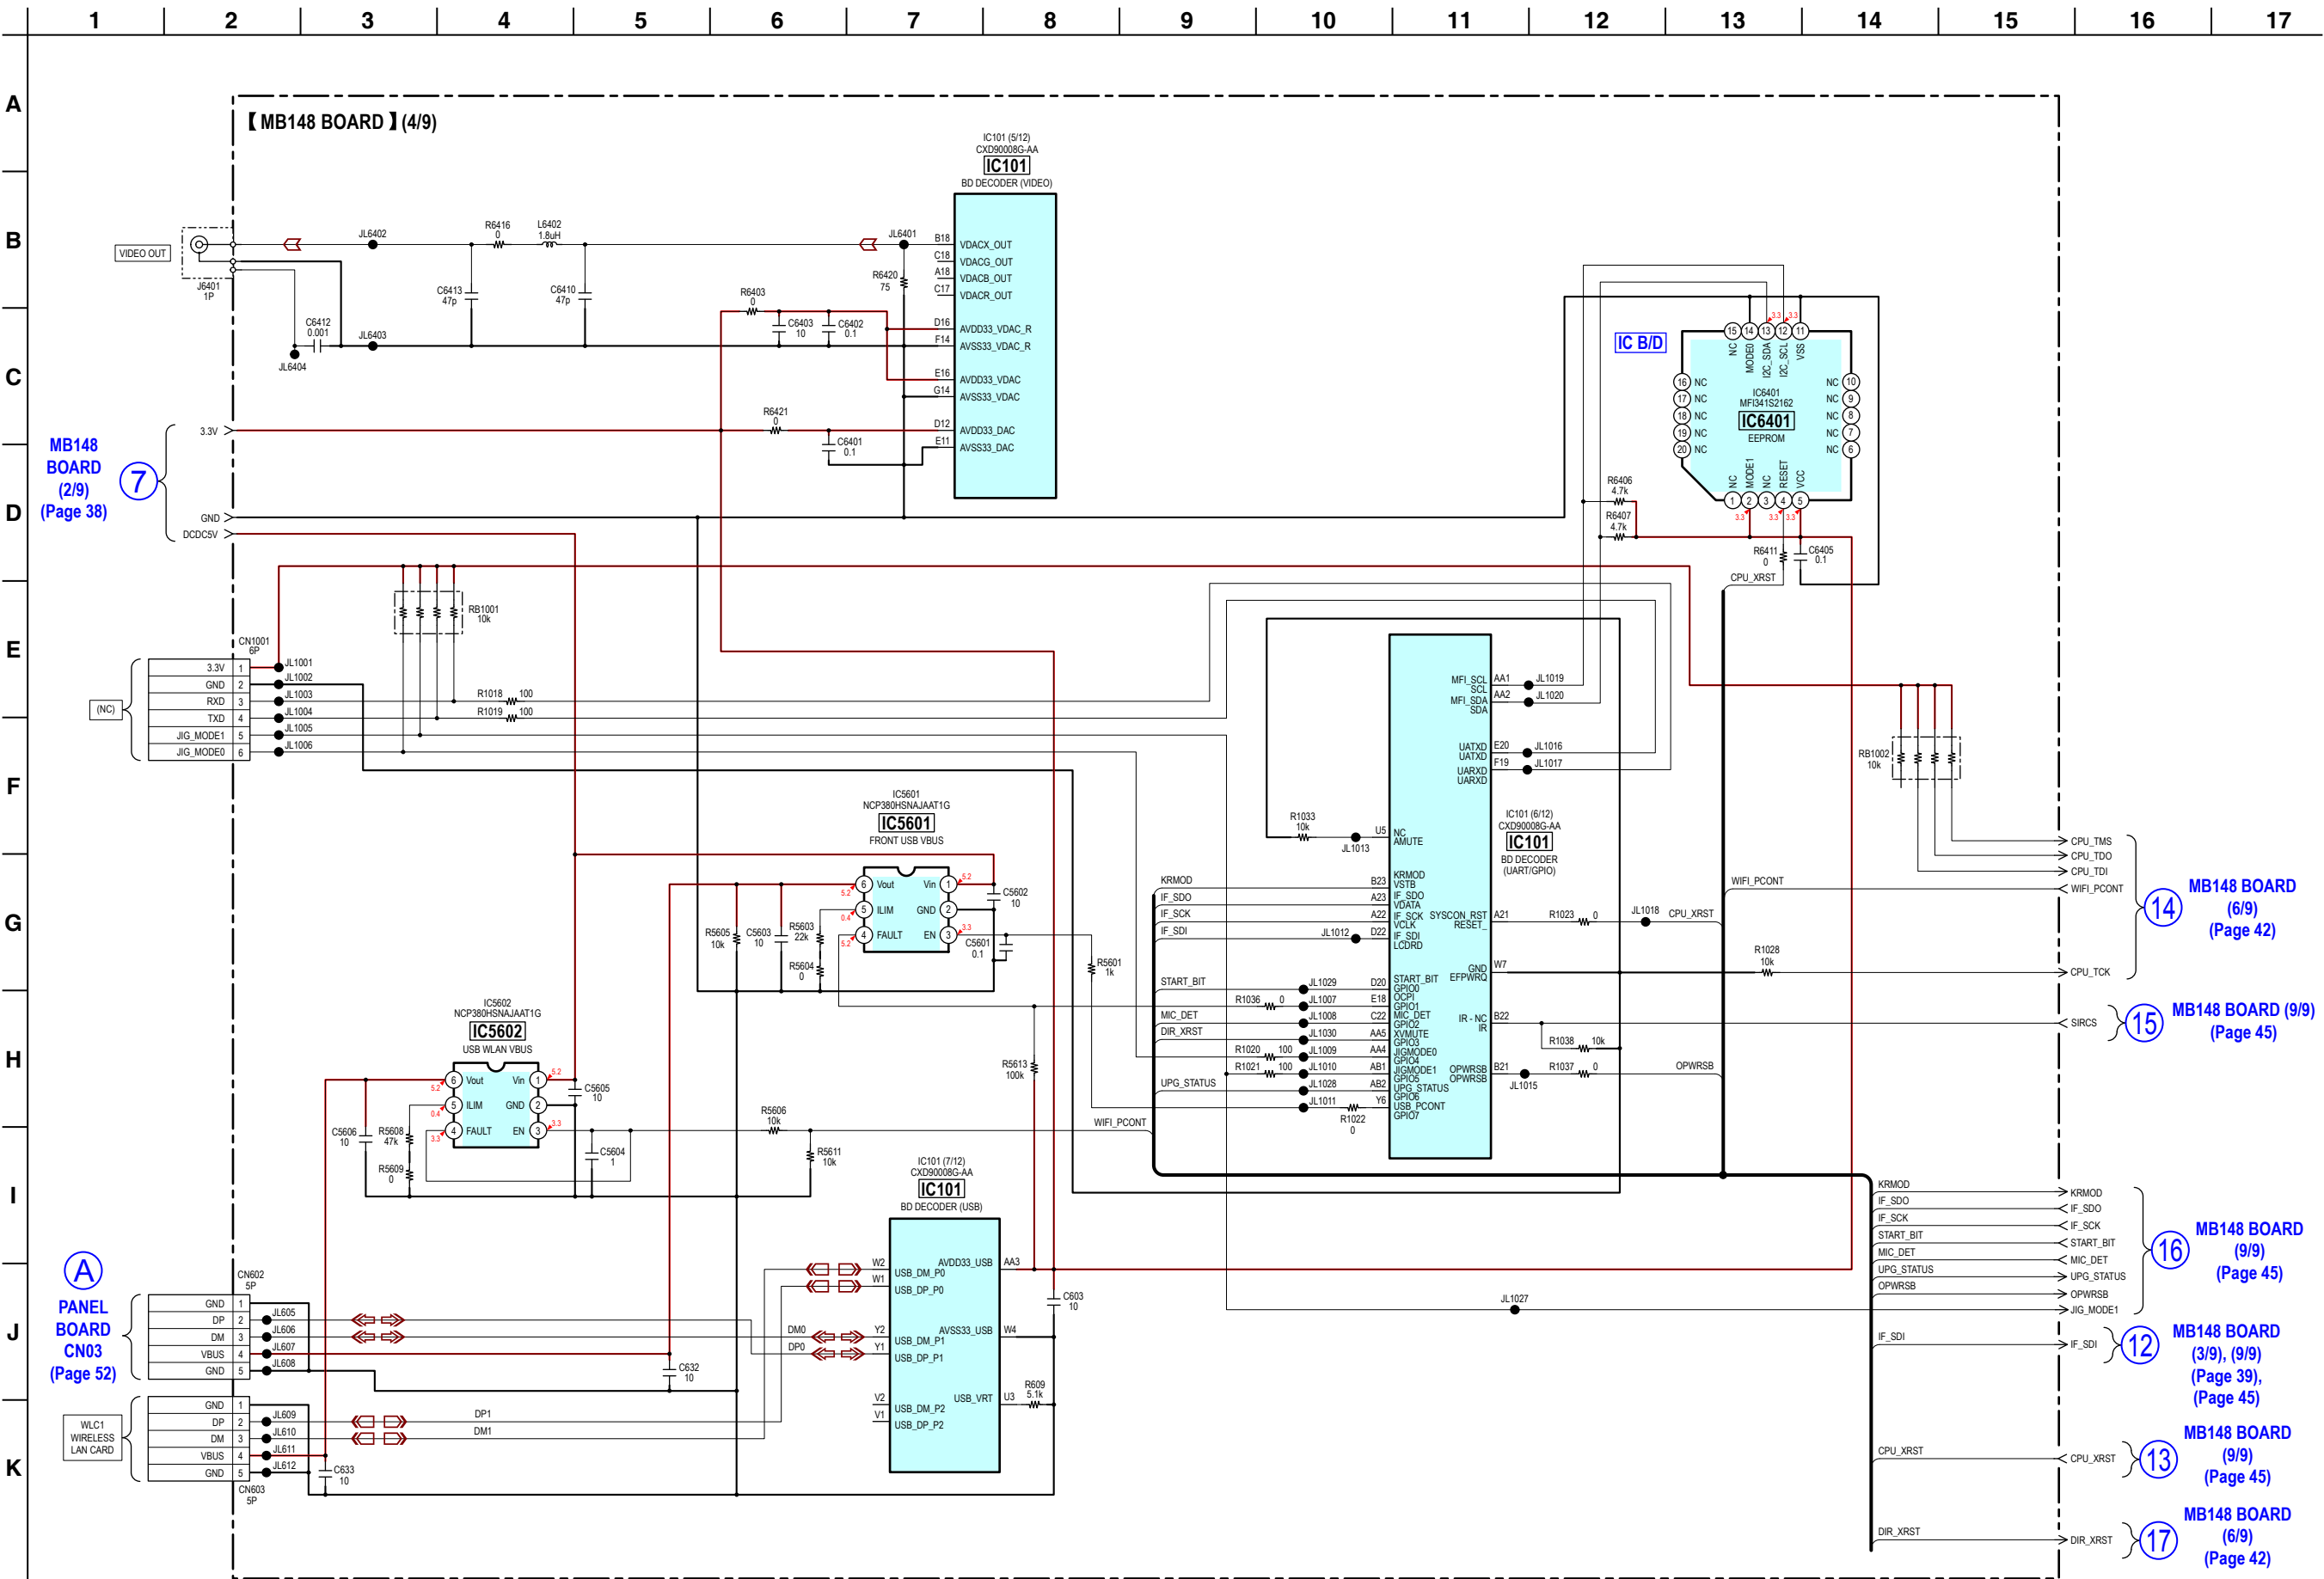

Note 1: IC101 on the MB148 board cannot exchange with single. When this part is damaged, exchange the complete mounted board.


Note 2: When replacing the wireless LAN card (WLC1), refer to "CHECKING METHOD OF NETWORK OPERATION" (page 10).

5-12. SCHEMATIC DIAGRAM - MB148 Board (5/9) - • See page 55 for IC Block Diagrams. • See page 61 for IC Pin Function Descriptions.

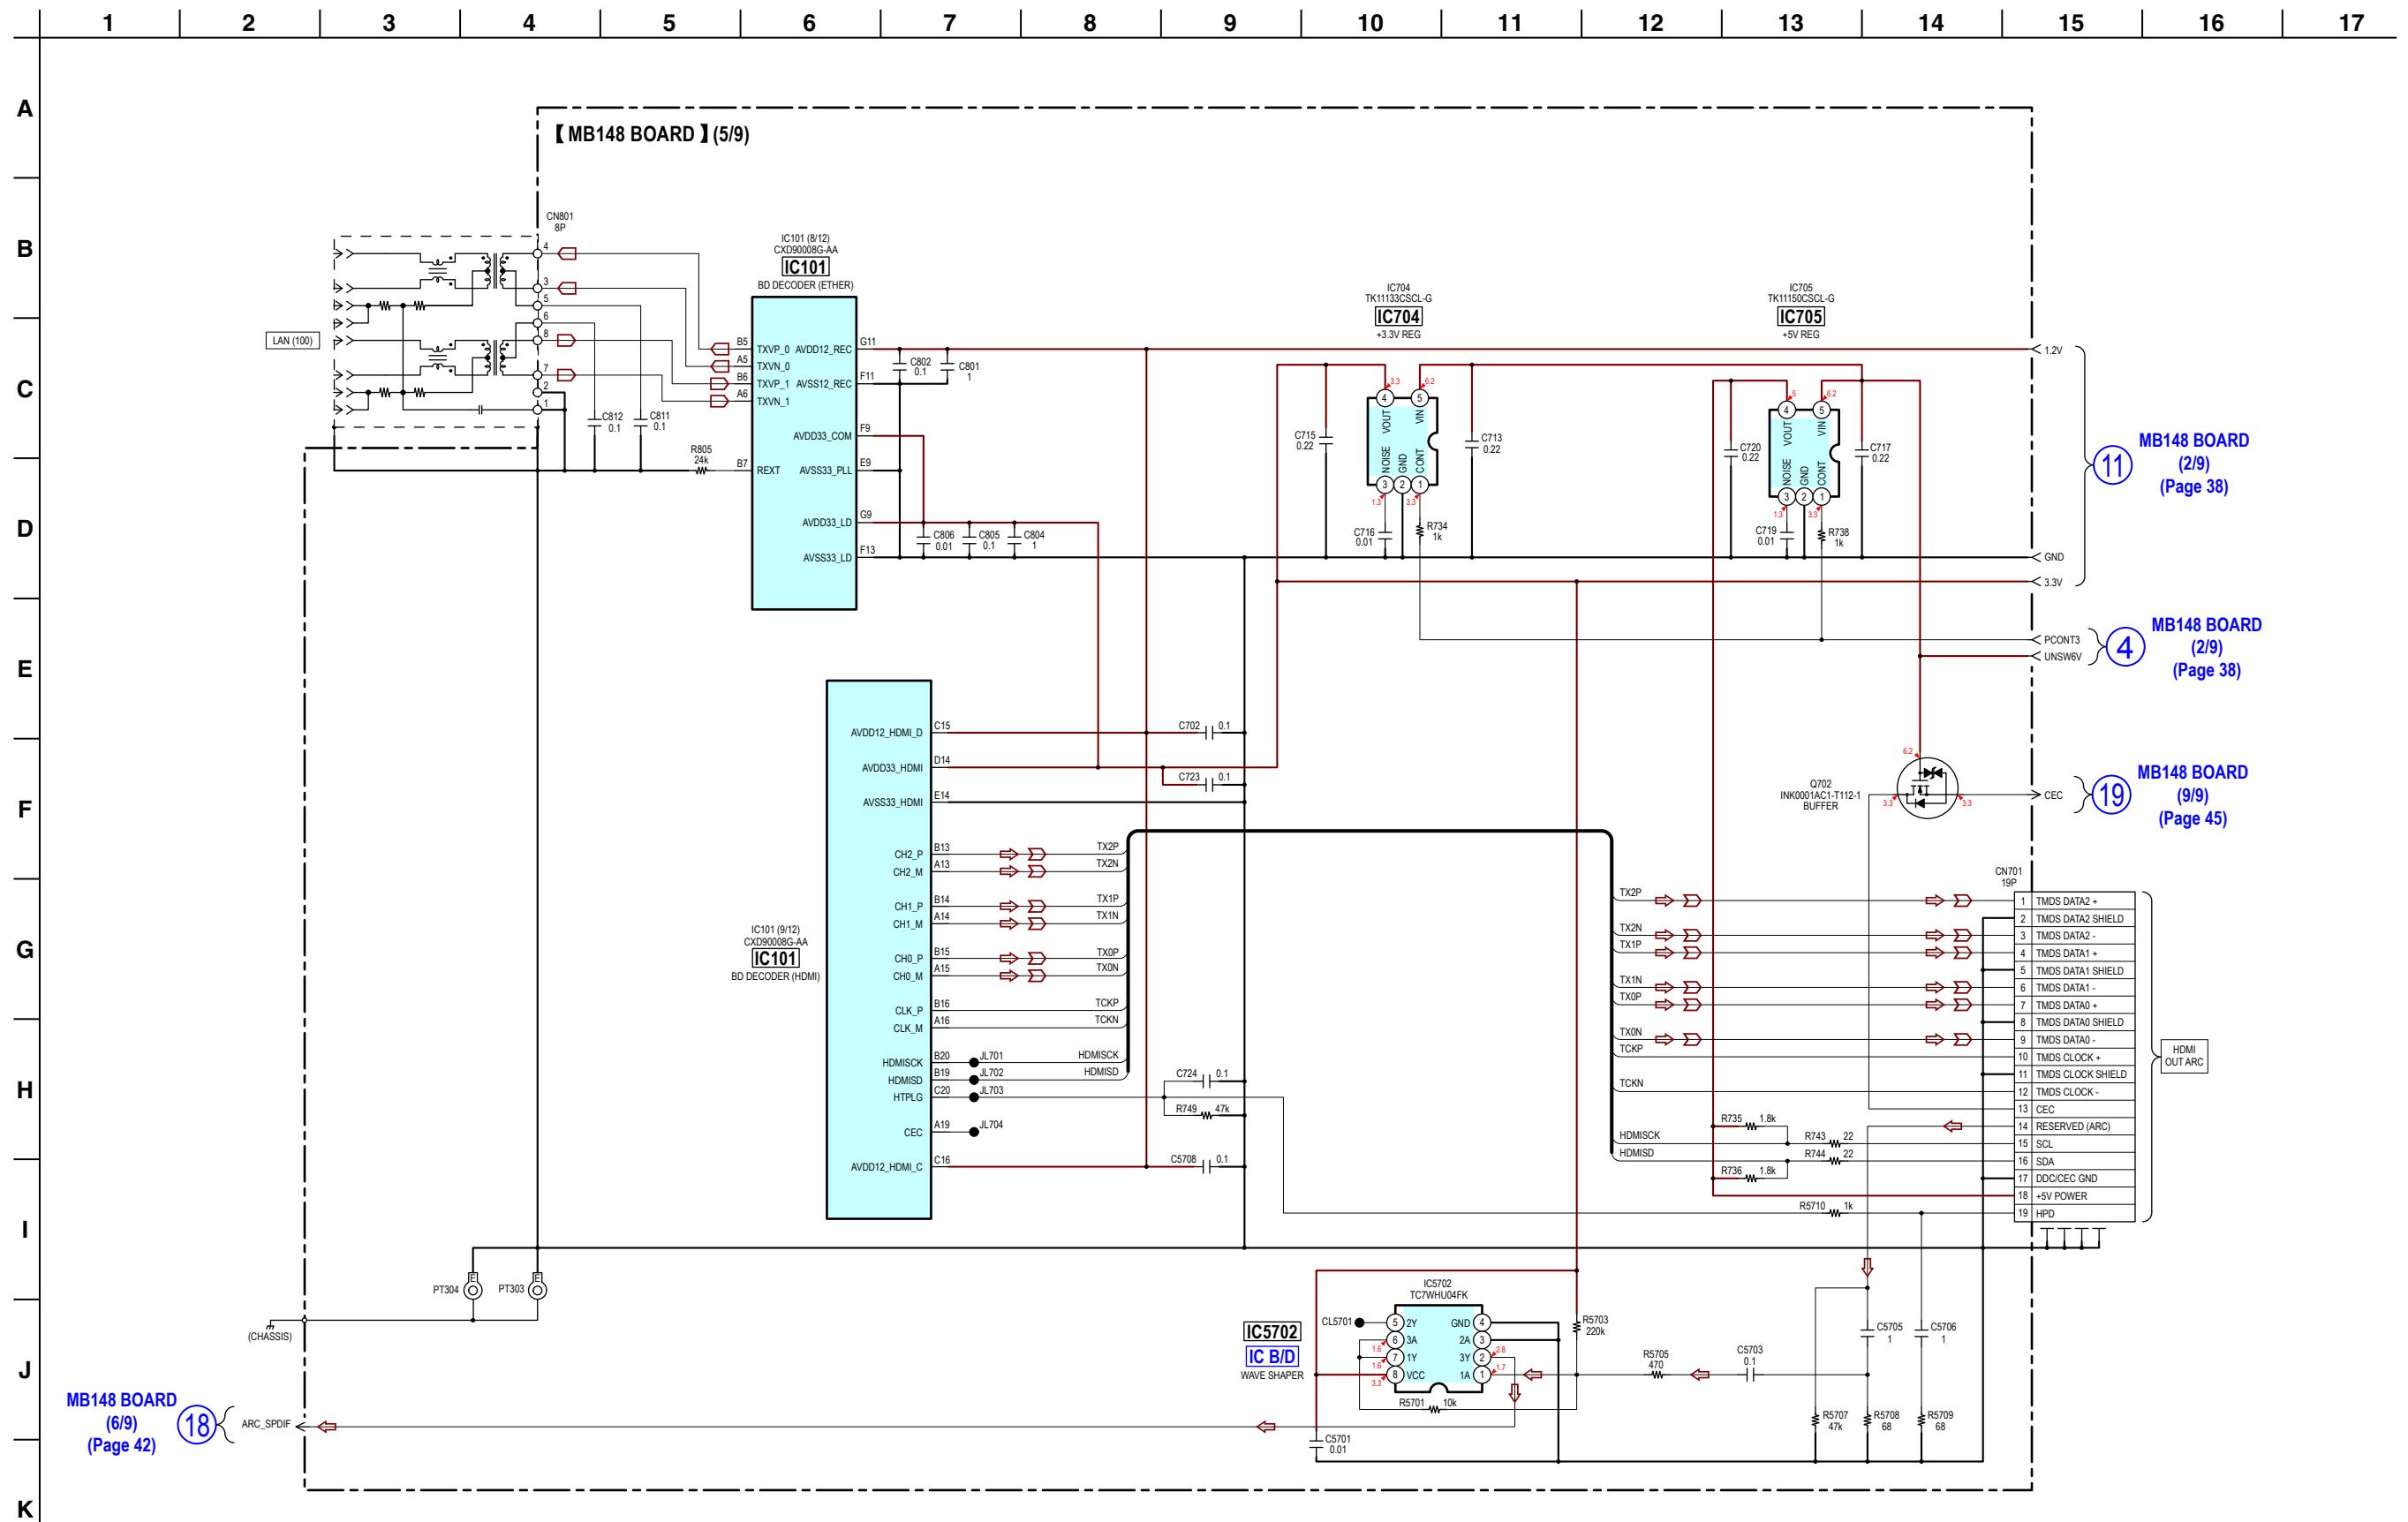


Note: IC101 on the MB148 board cannot exchange with single. When this part is damaged, exchange the complete mounted board.

5-13. SCHEMATIC DIAGRAM - MB148 Board (6/9) - • See page 53 for Waveforms. • See page 55 for IC Block Diagrams. • See page 61 for IC Pin Function Descriptions.

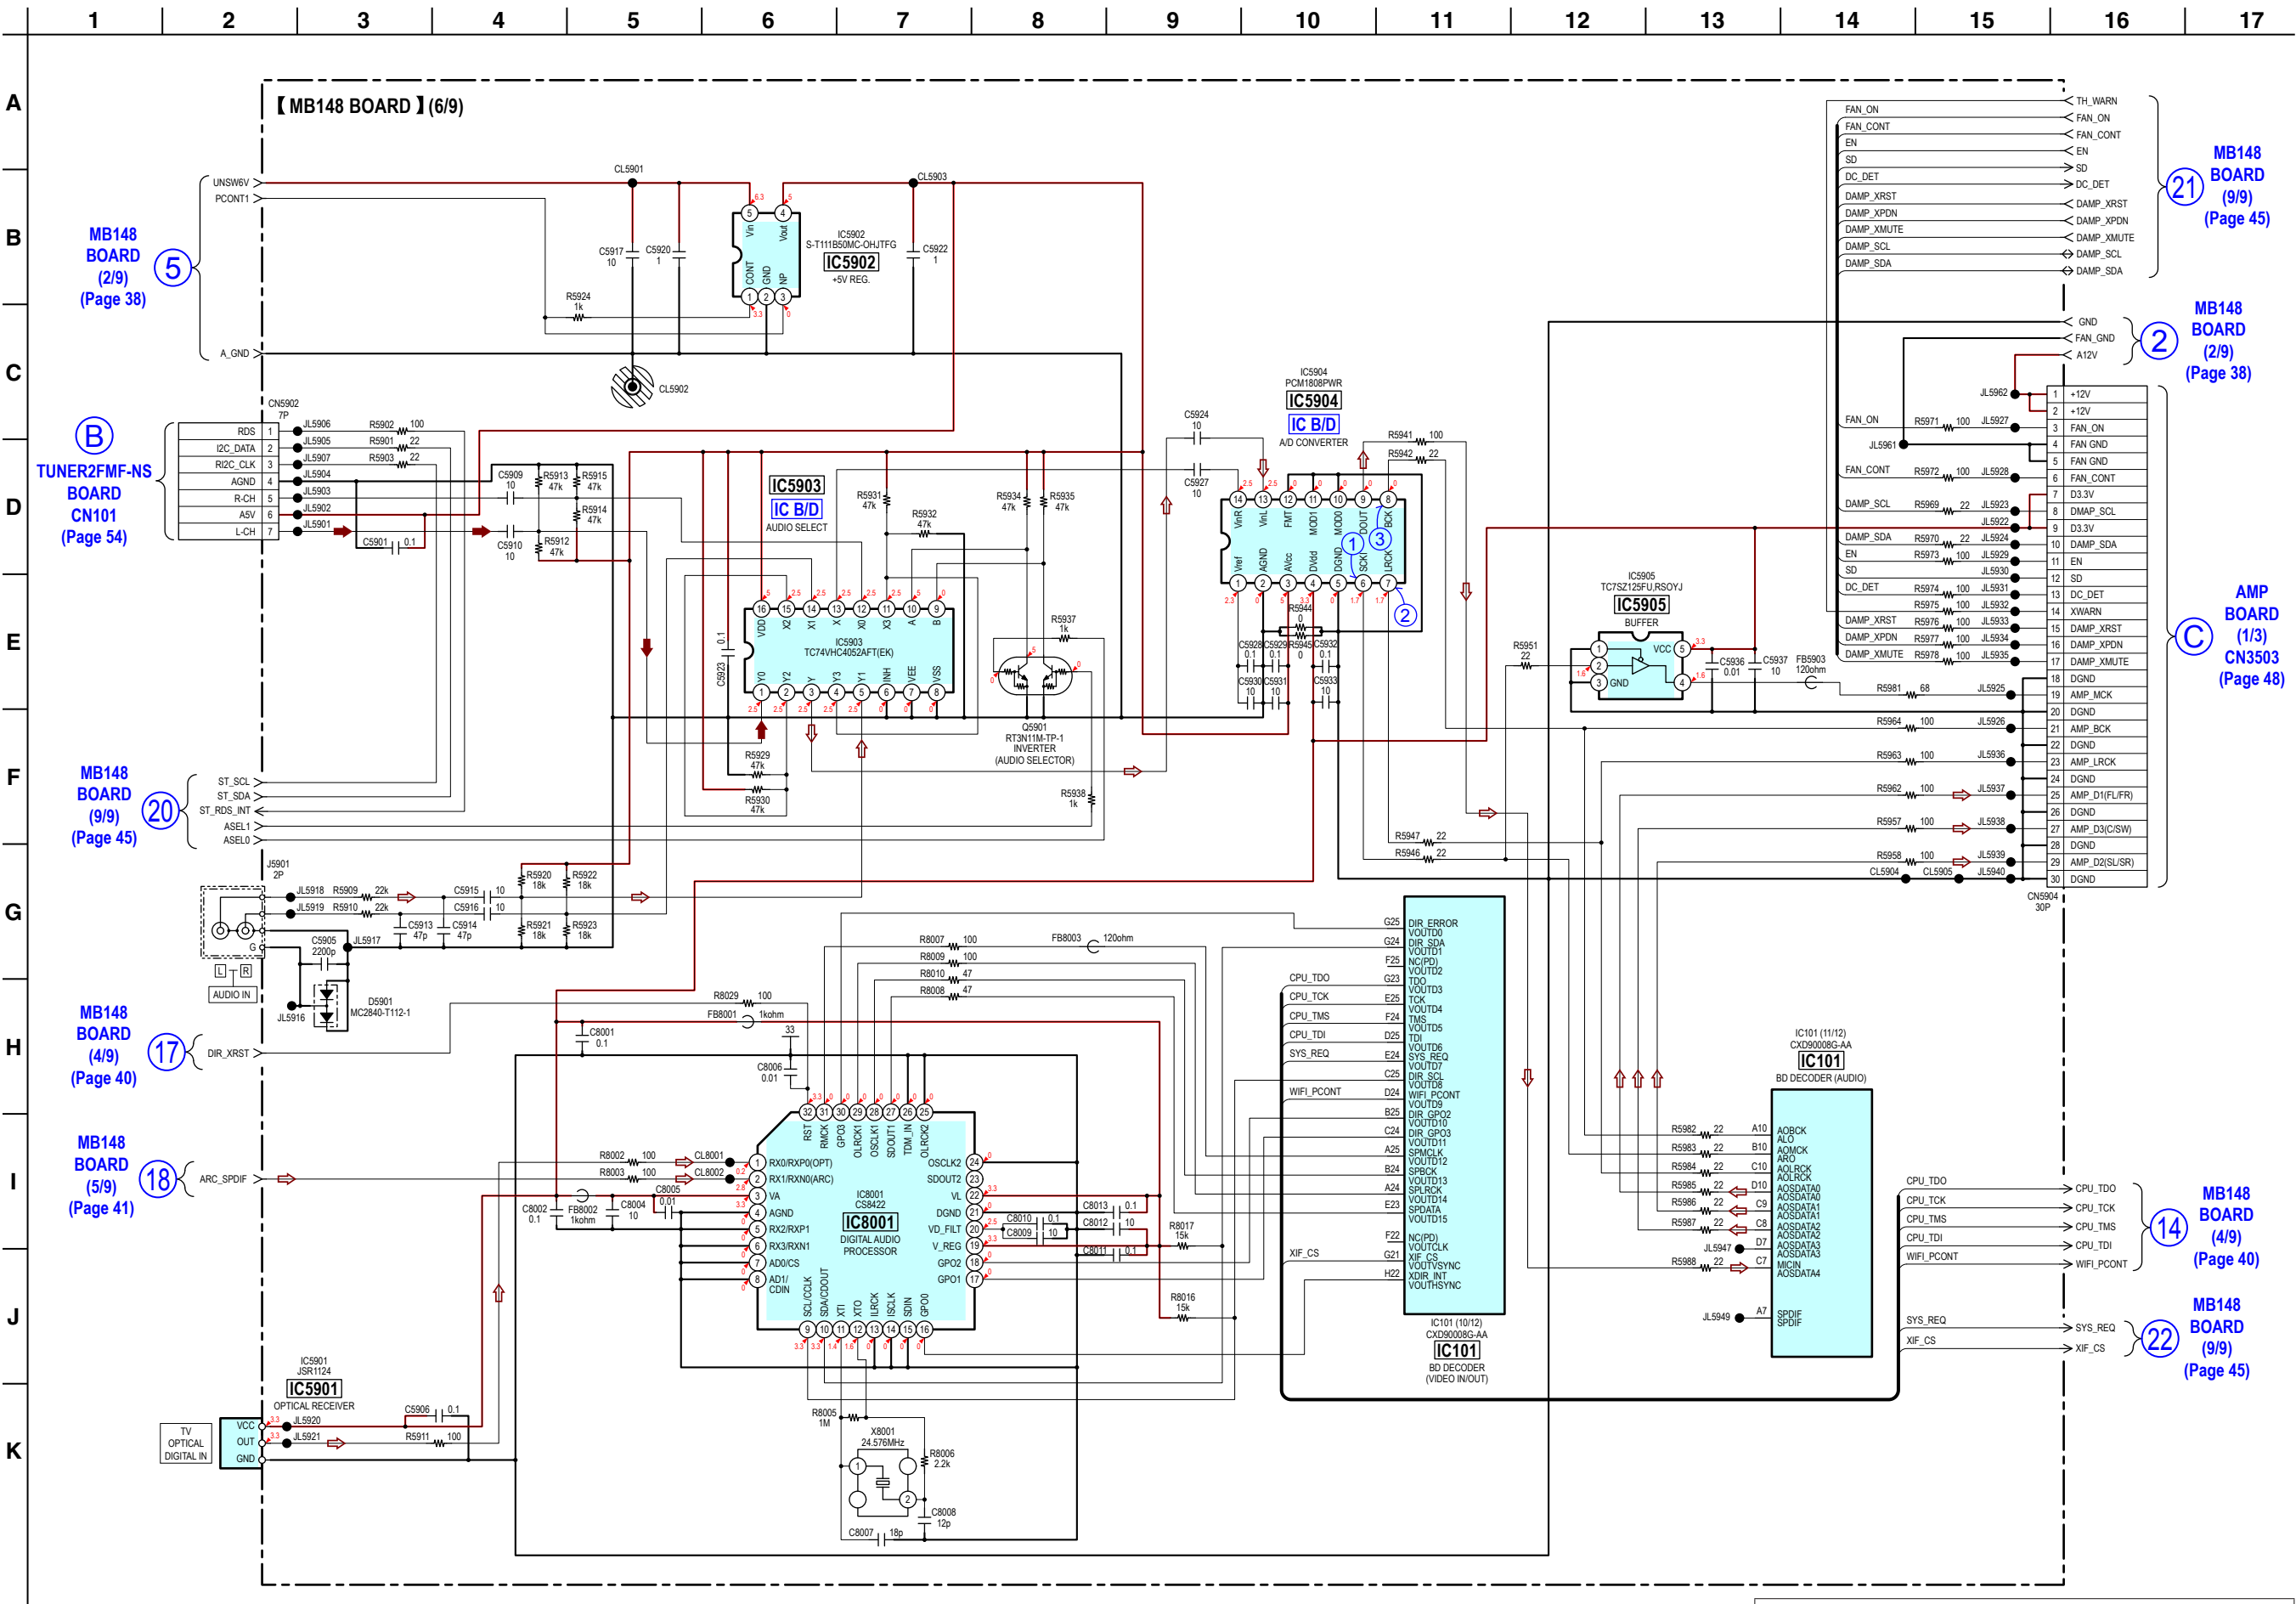

Note: IC101 and IC8001 on the MB148 board cannot exchange with single. When these parts are damaged, exchange the complete mounted board.

5-14. SCHEMATIC DIAGRAM - MB148 Board (7/9) - • See page 61 for IC Pin Function Descriptions.

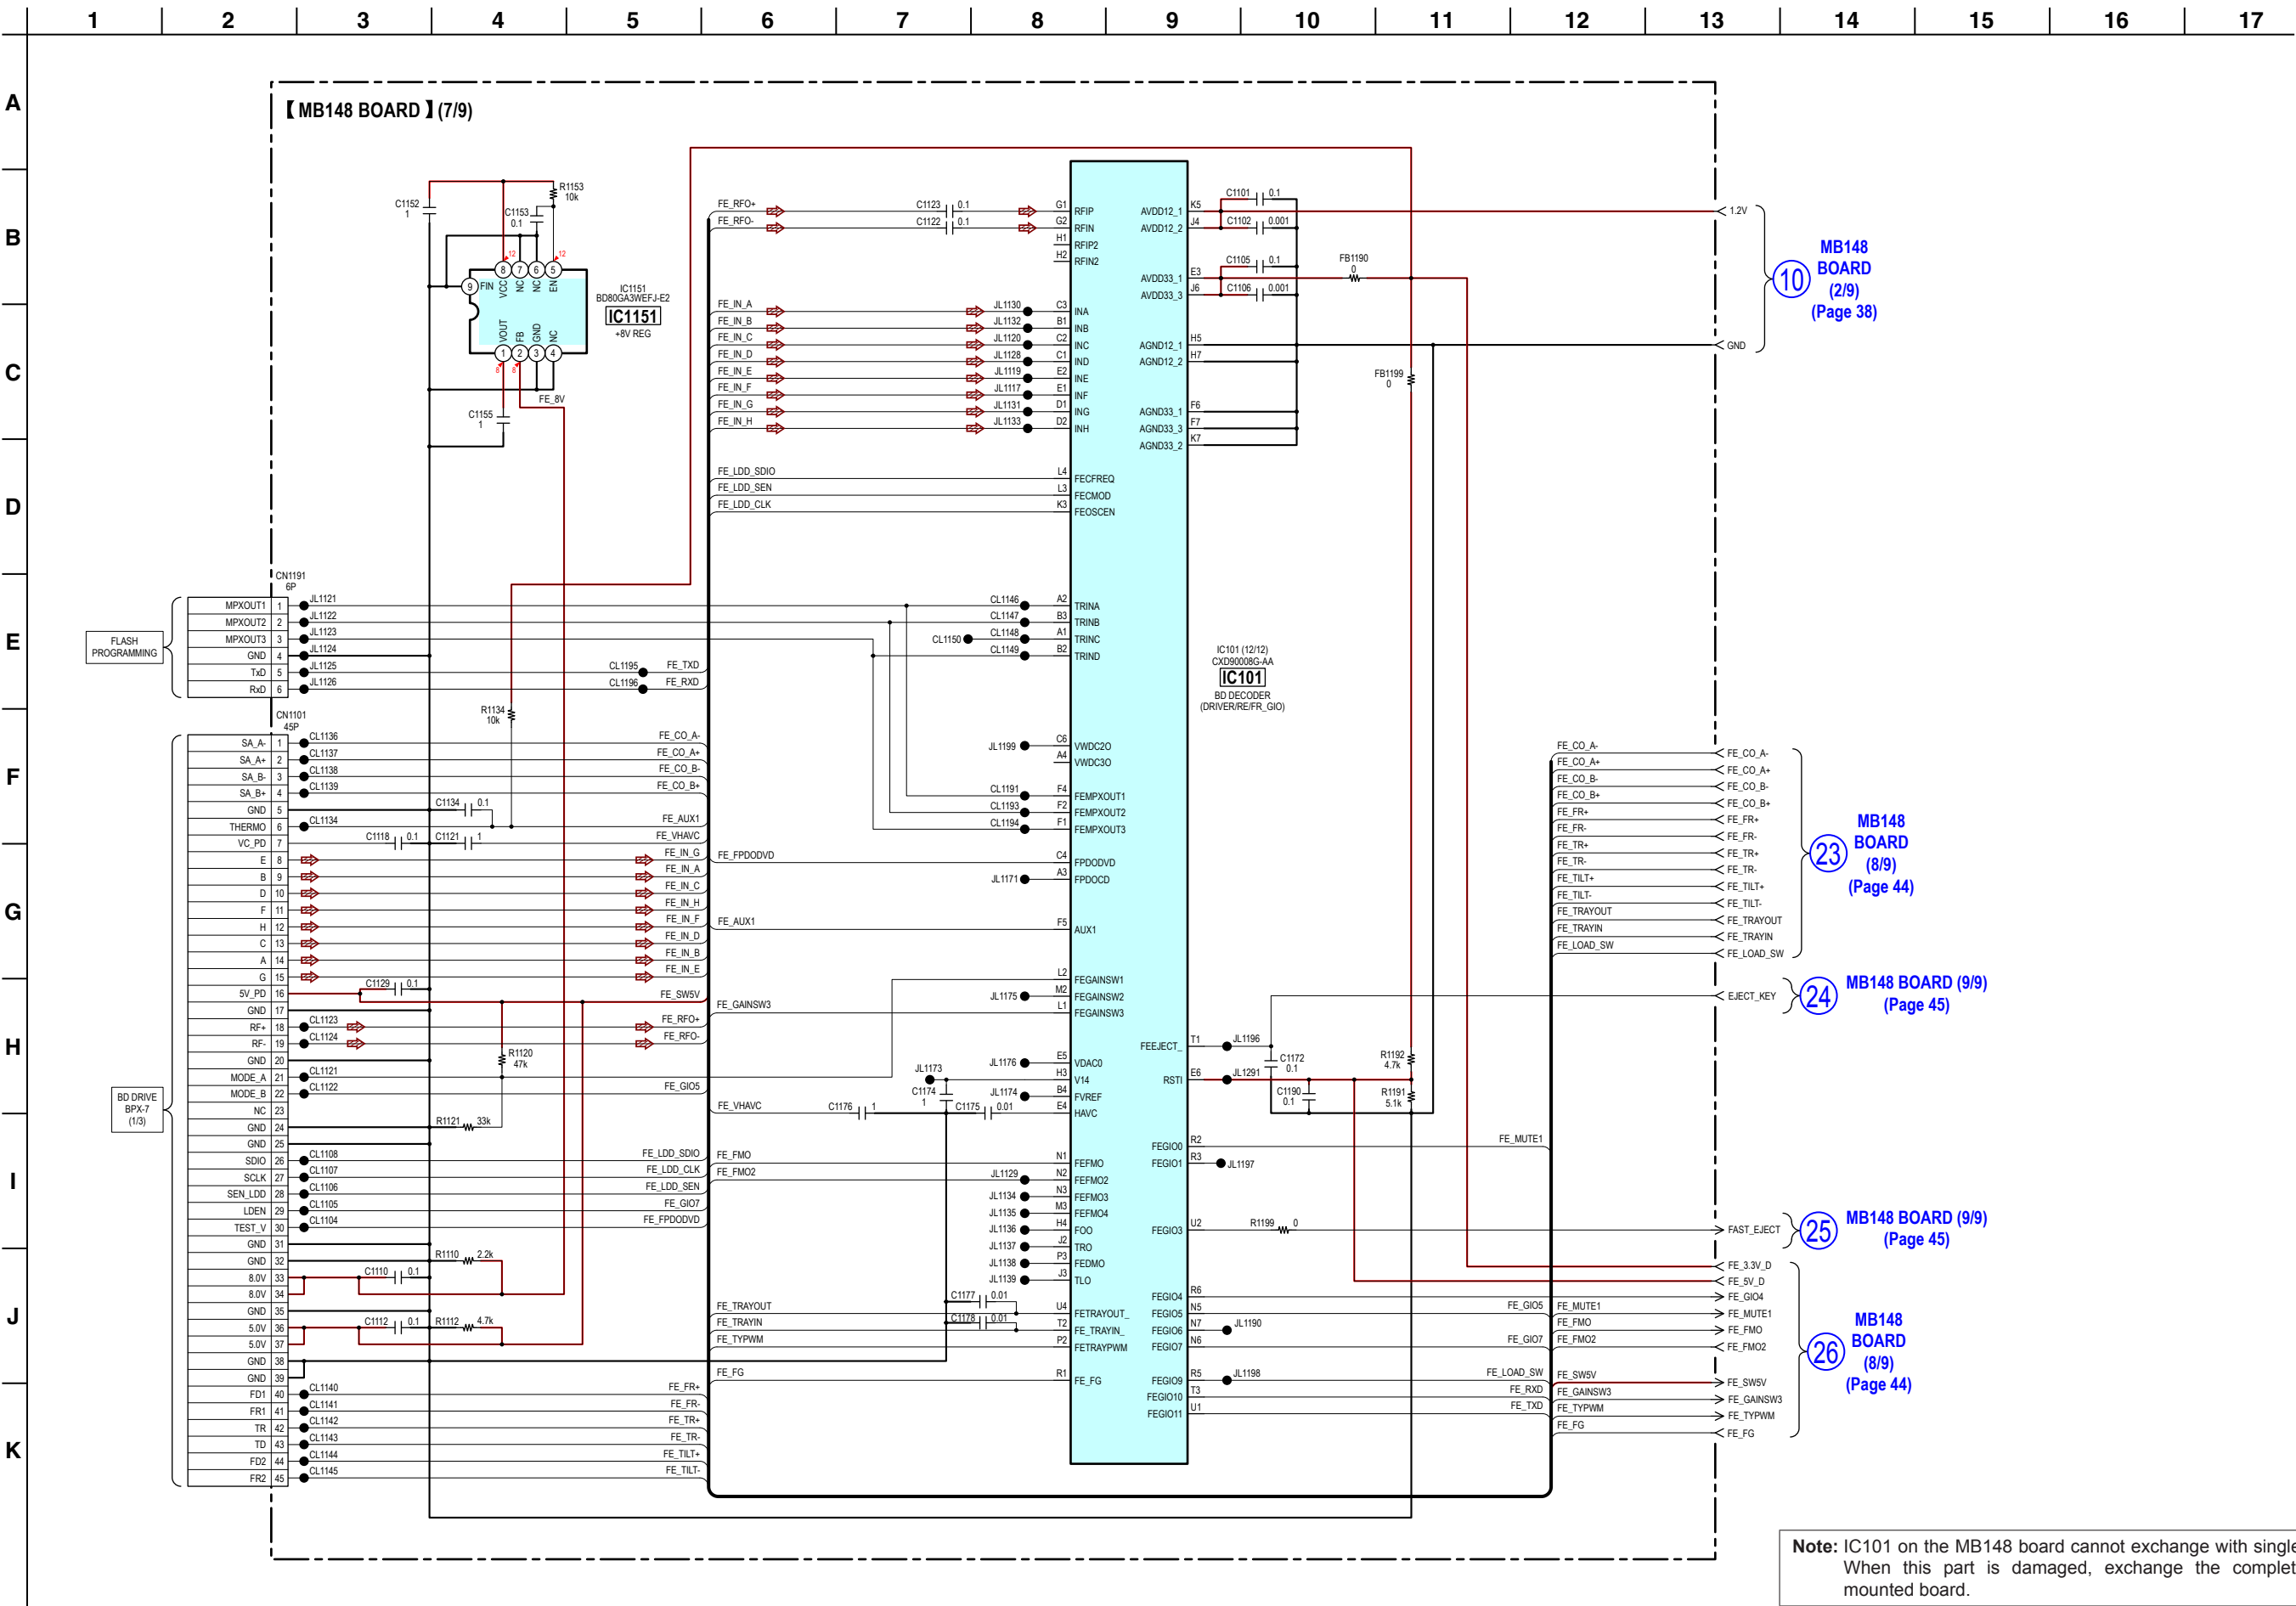

10 MB148 BOARD (2/9) (Page 38)

23 MB148 BOARD (8/9) (Page 44)

24 MB148 BOARD (9/9) (Page 45)

25 MB148 BOARD (9/9) (Page 45)


26 MB148 BOARD (8/9) (Page 44)

Note: IC101 on the MB148 board cannot exchange with single. When this part is damaged, exchange the complete mounted board.


44 44




5-16. SCHEMATIC DIAGRAM - MB148 Board (9/9) - • See page 53 for Waveforms. • See page 55 for IC Block Diagrams. • See page 61 for IC Pin Function Descriptions.

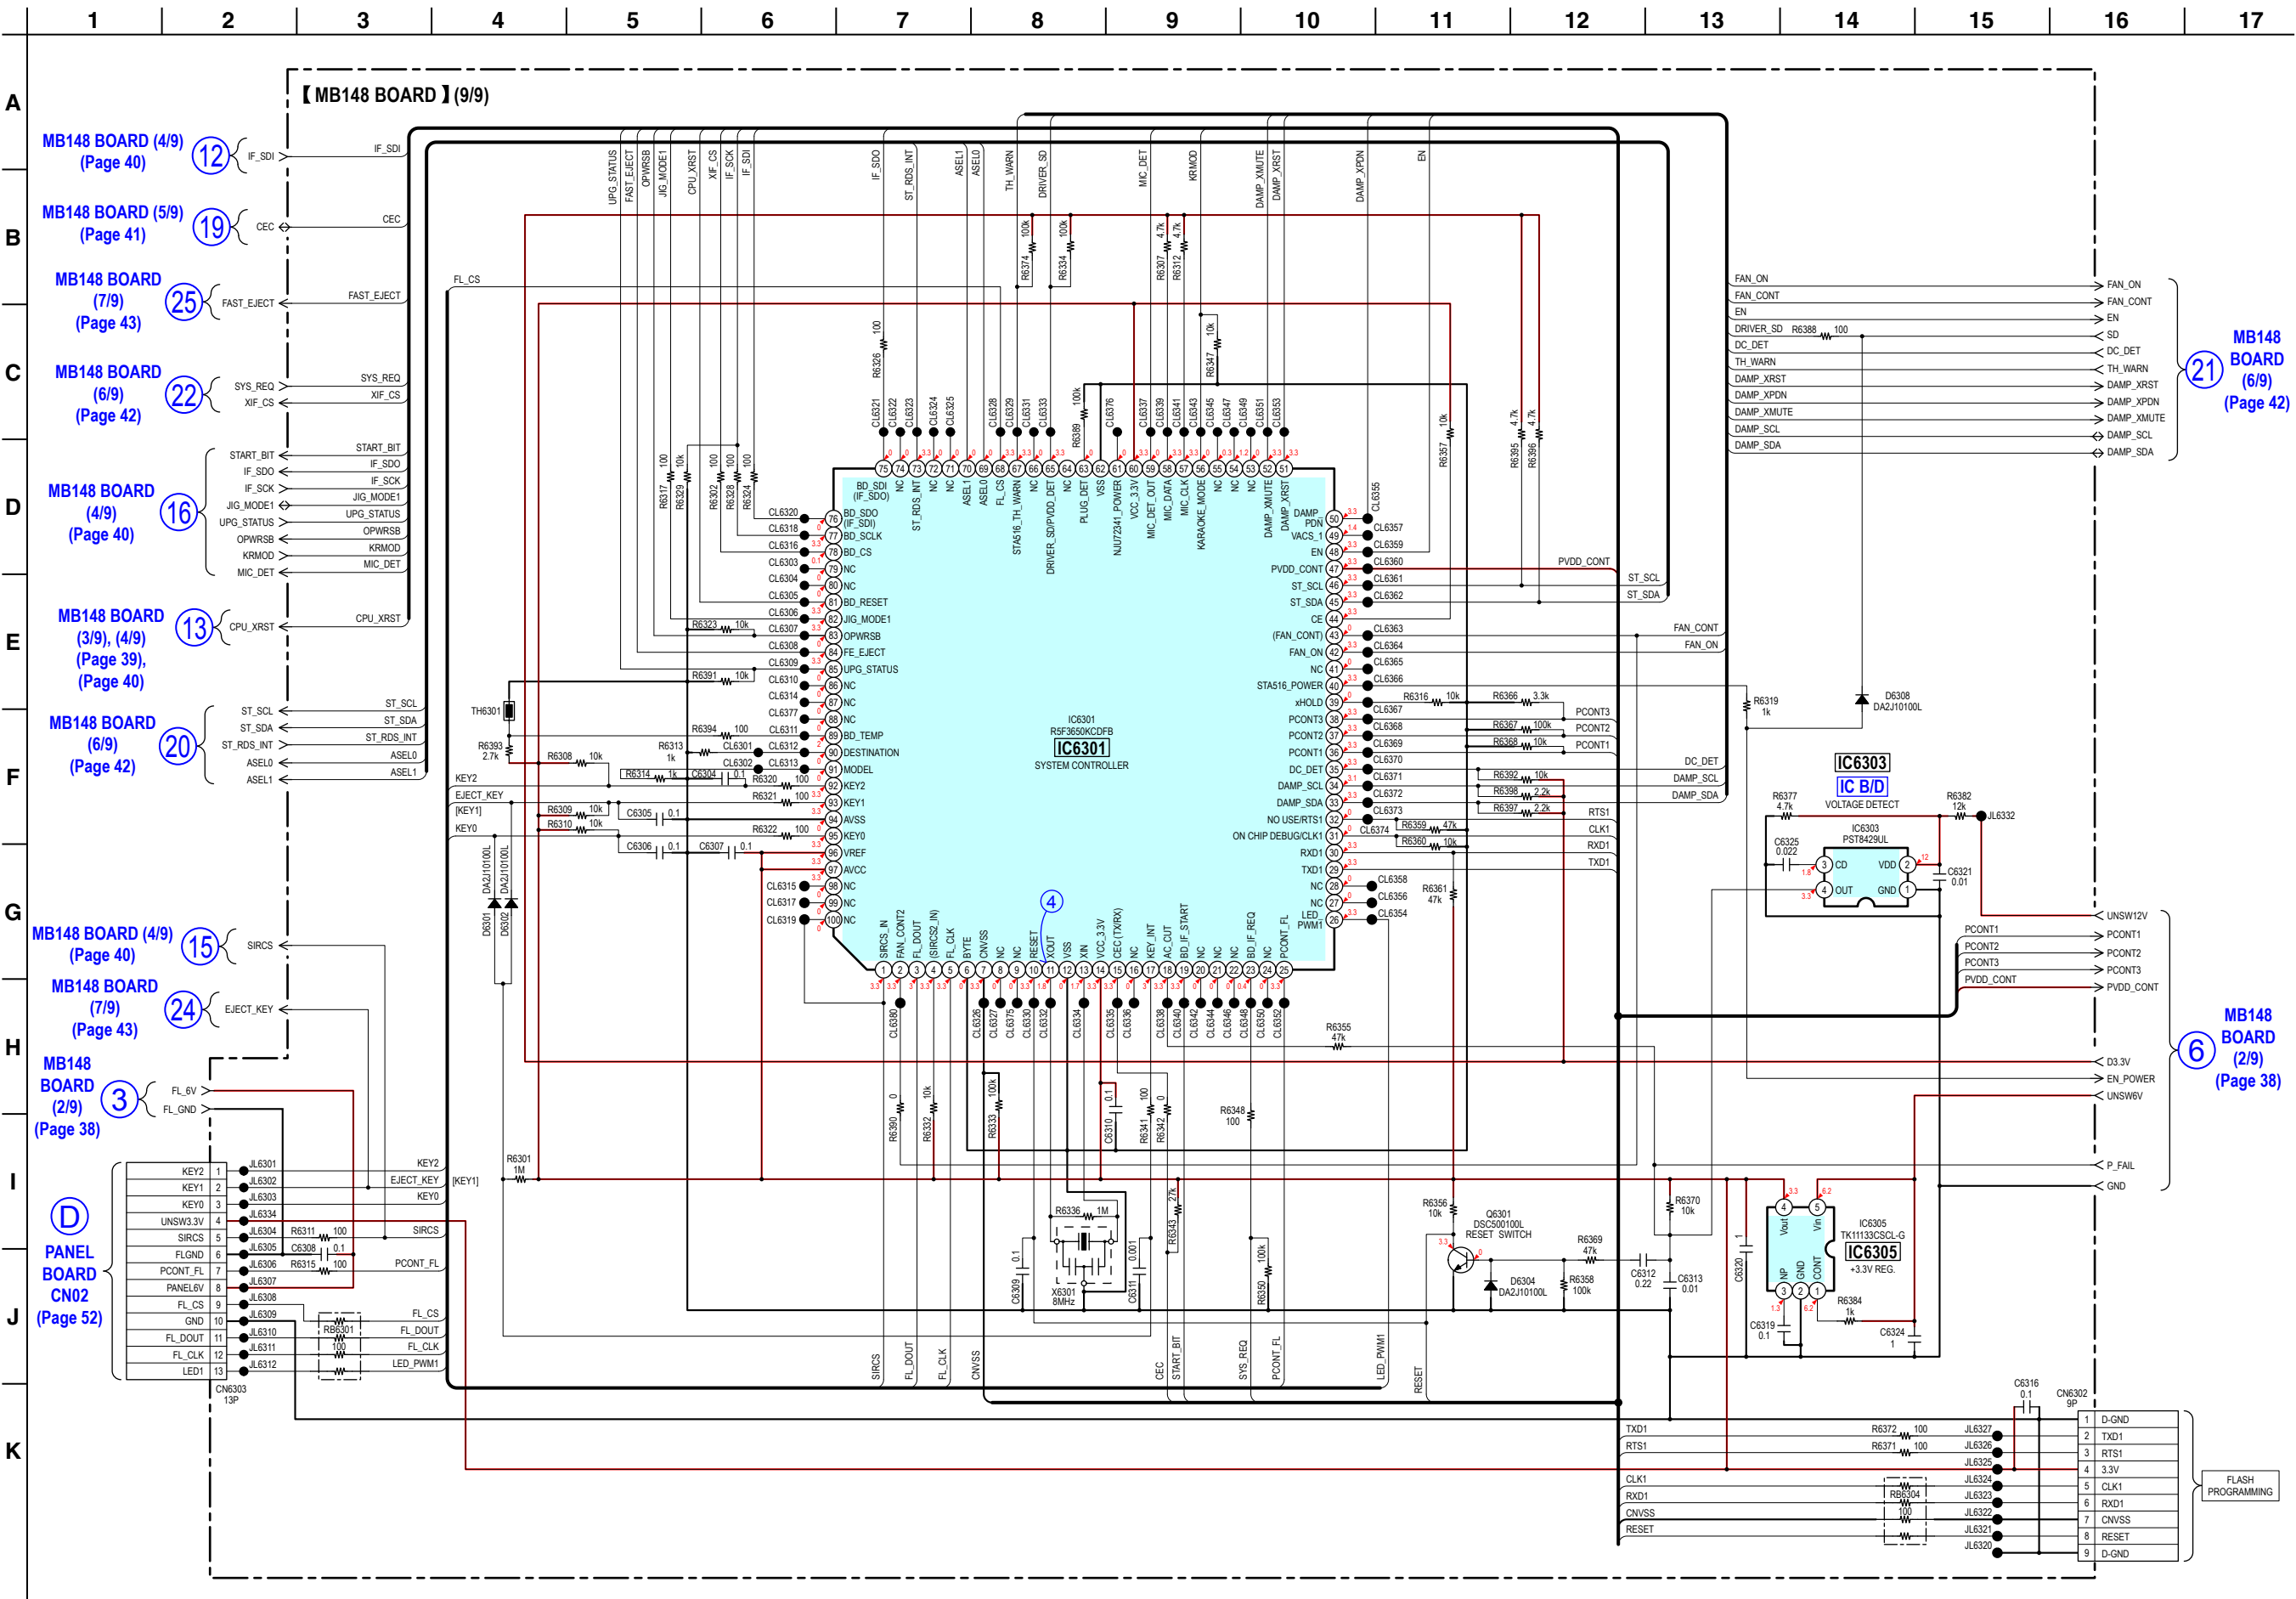


5-17. PRINTED WIRING BOARD - AMP Board (Side A) - • See page 34 for Circuit Boards Location. • : Uses unleaded solder.

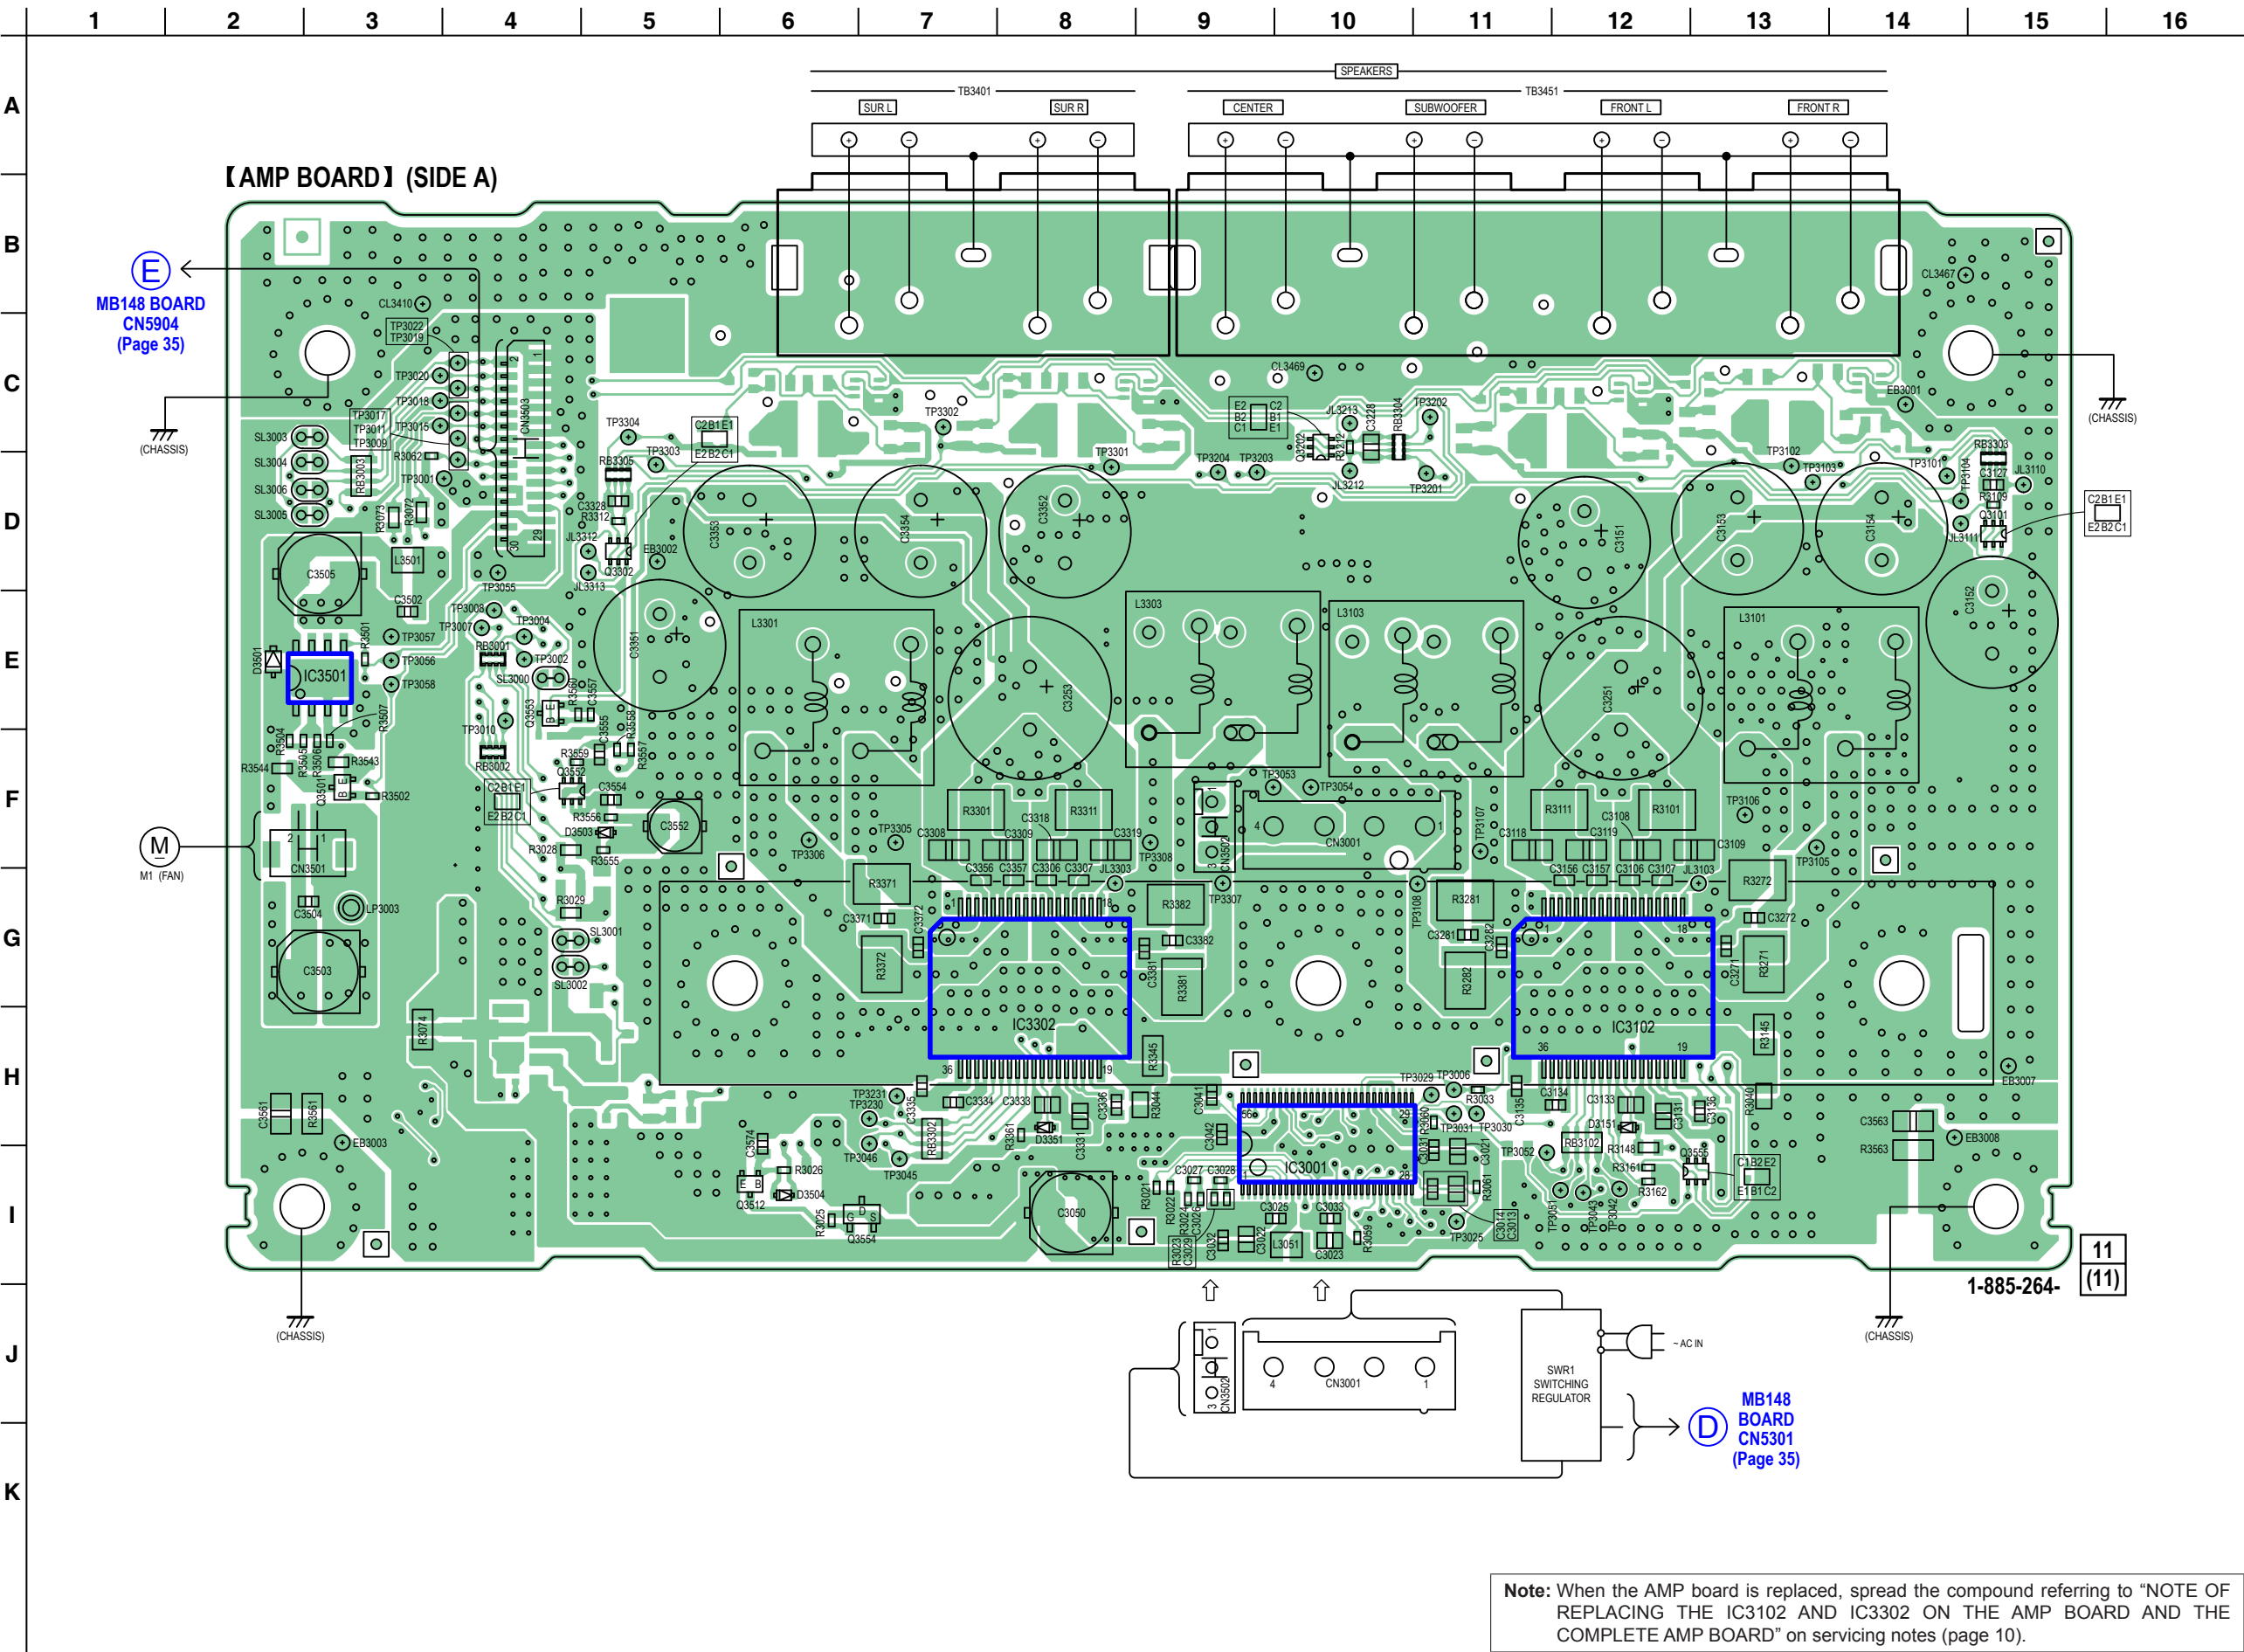


5-18. PRINTED WIRING BOARD - AMP Board (Side B) - • See page 34 for Circuit Boards Location. • : Uses unleaded solder.

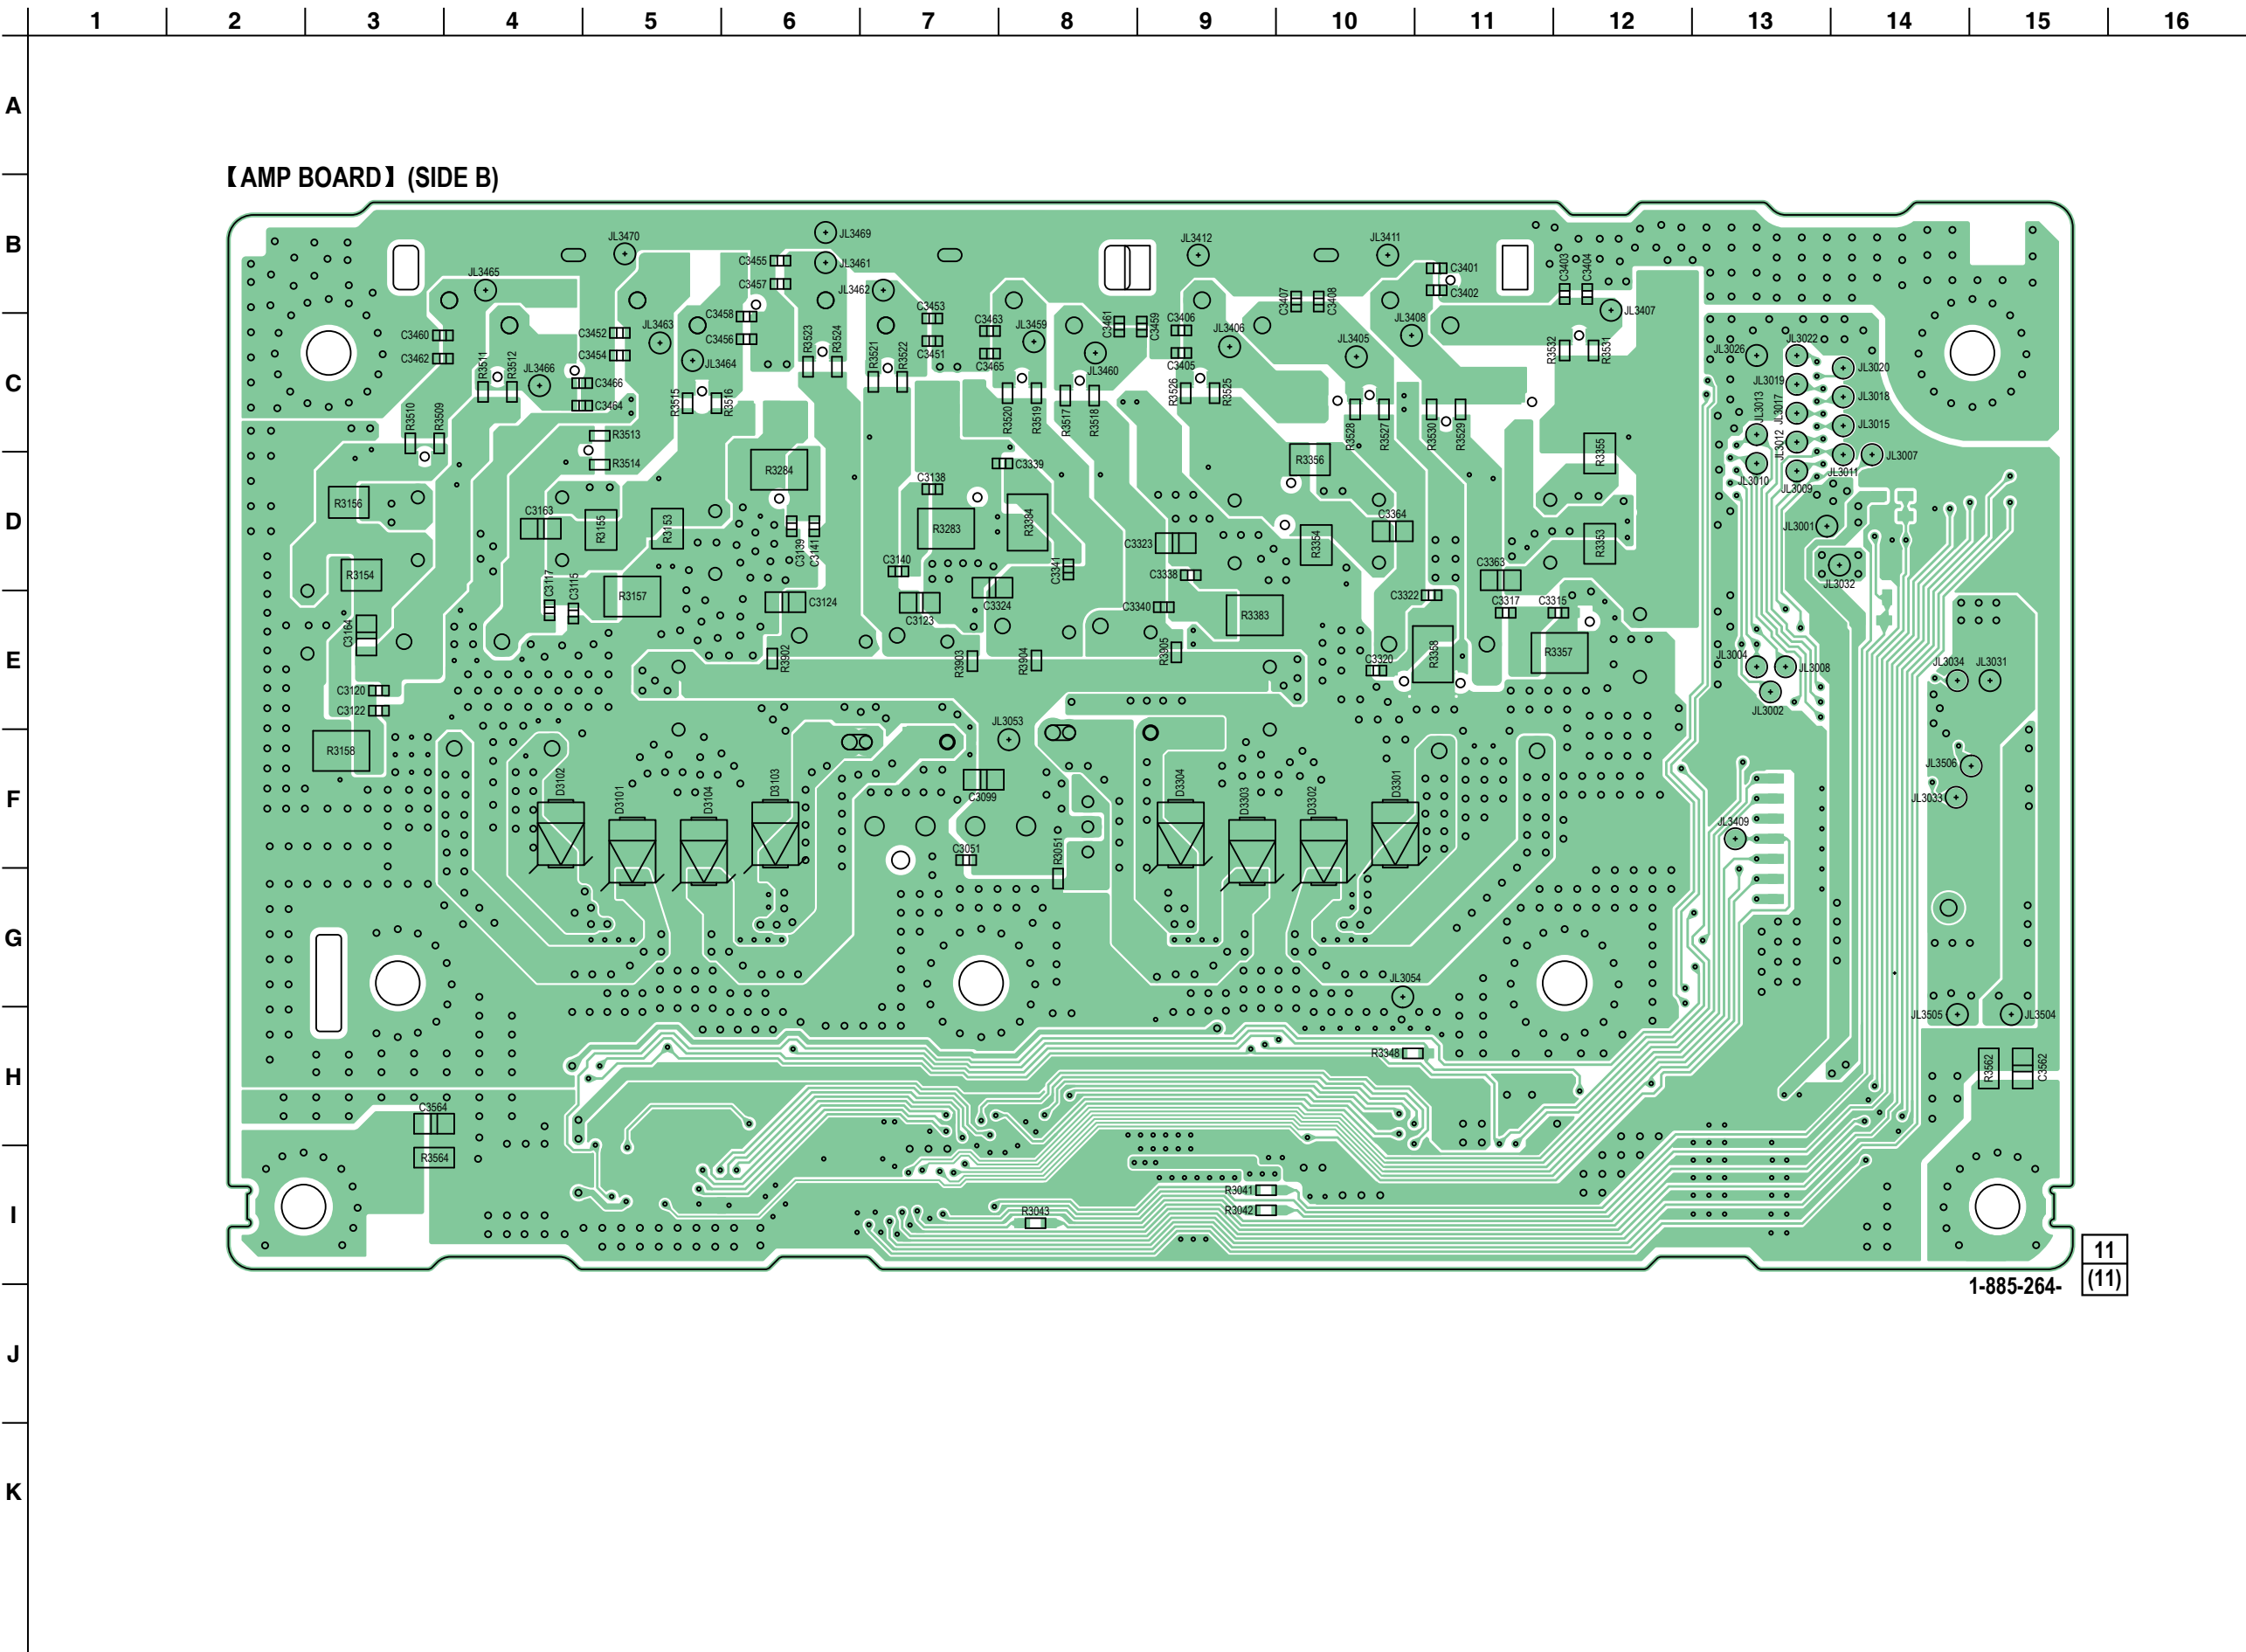


5-19. SCHEMATIC DIAGRAM - AMP Board (1/3) - • See page 55 for IC Block Diagrams.

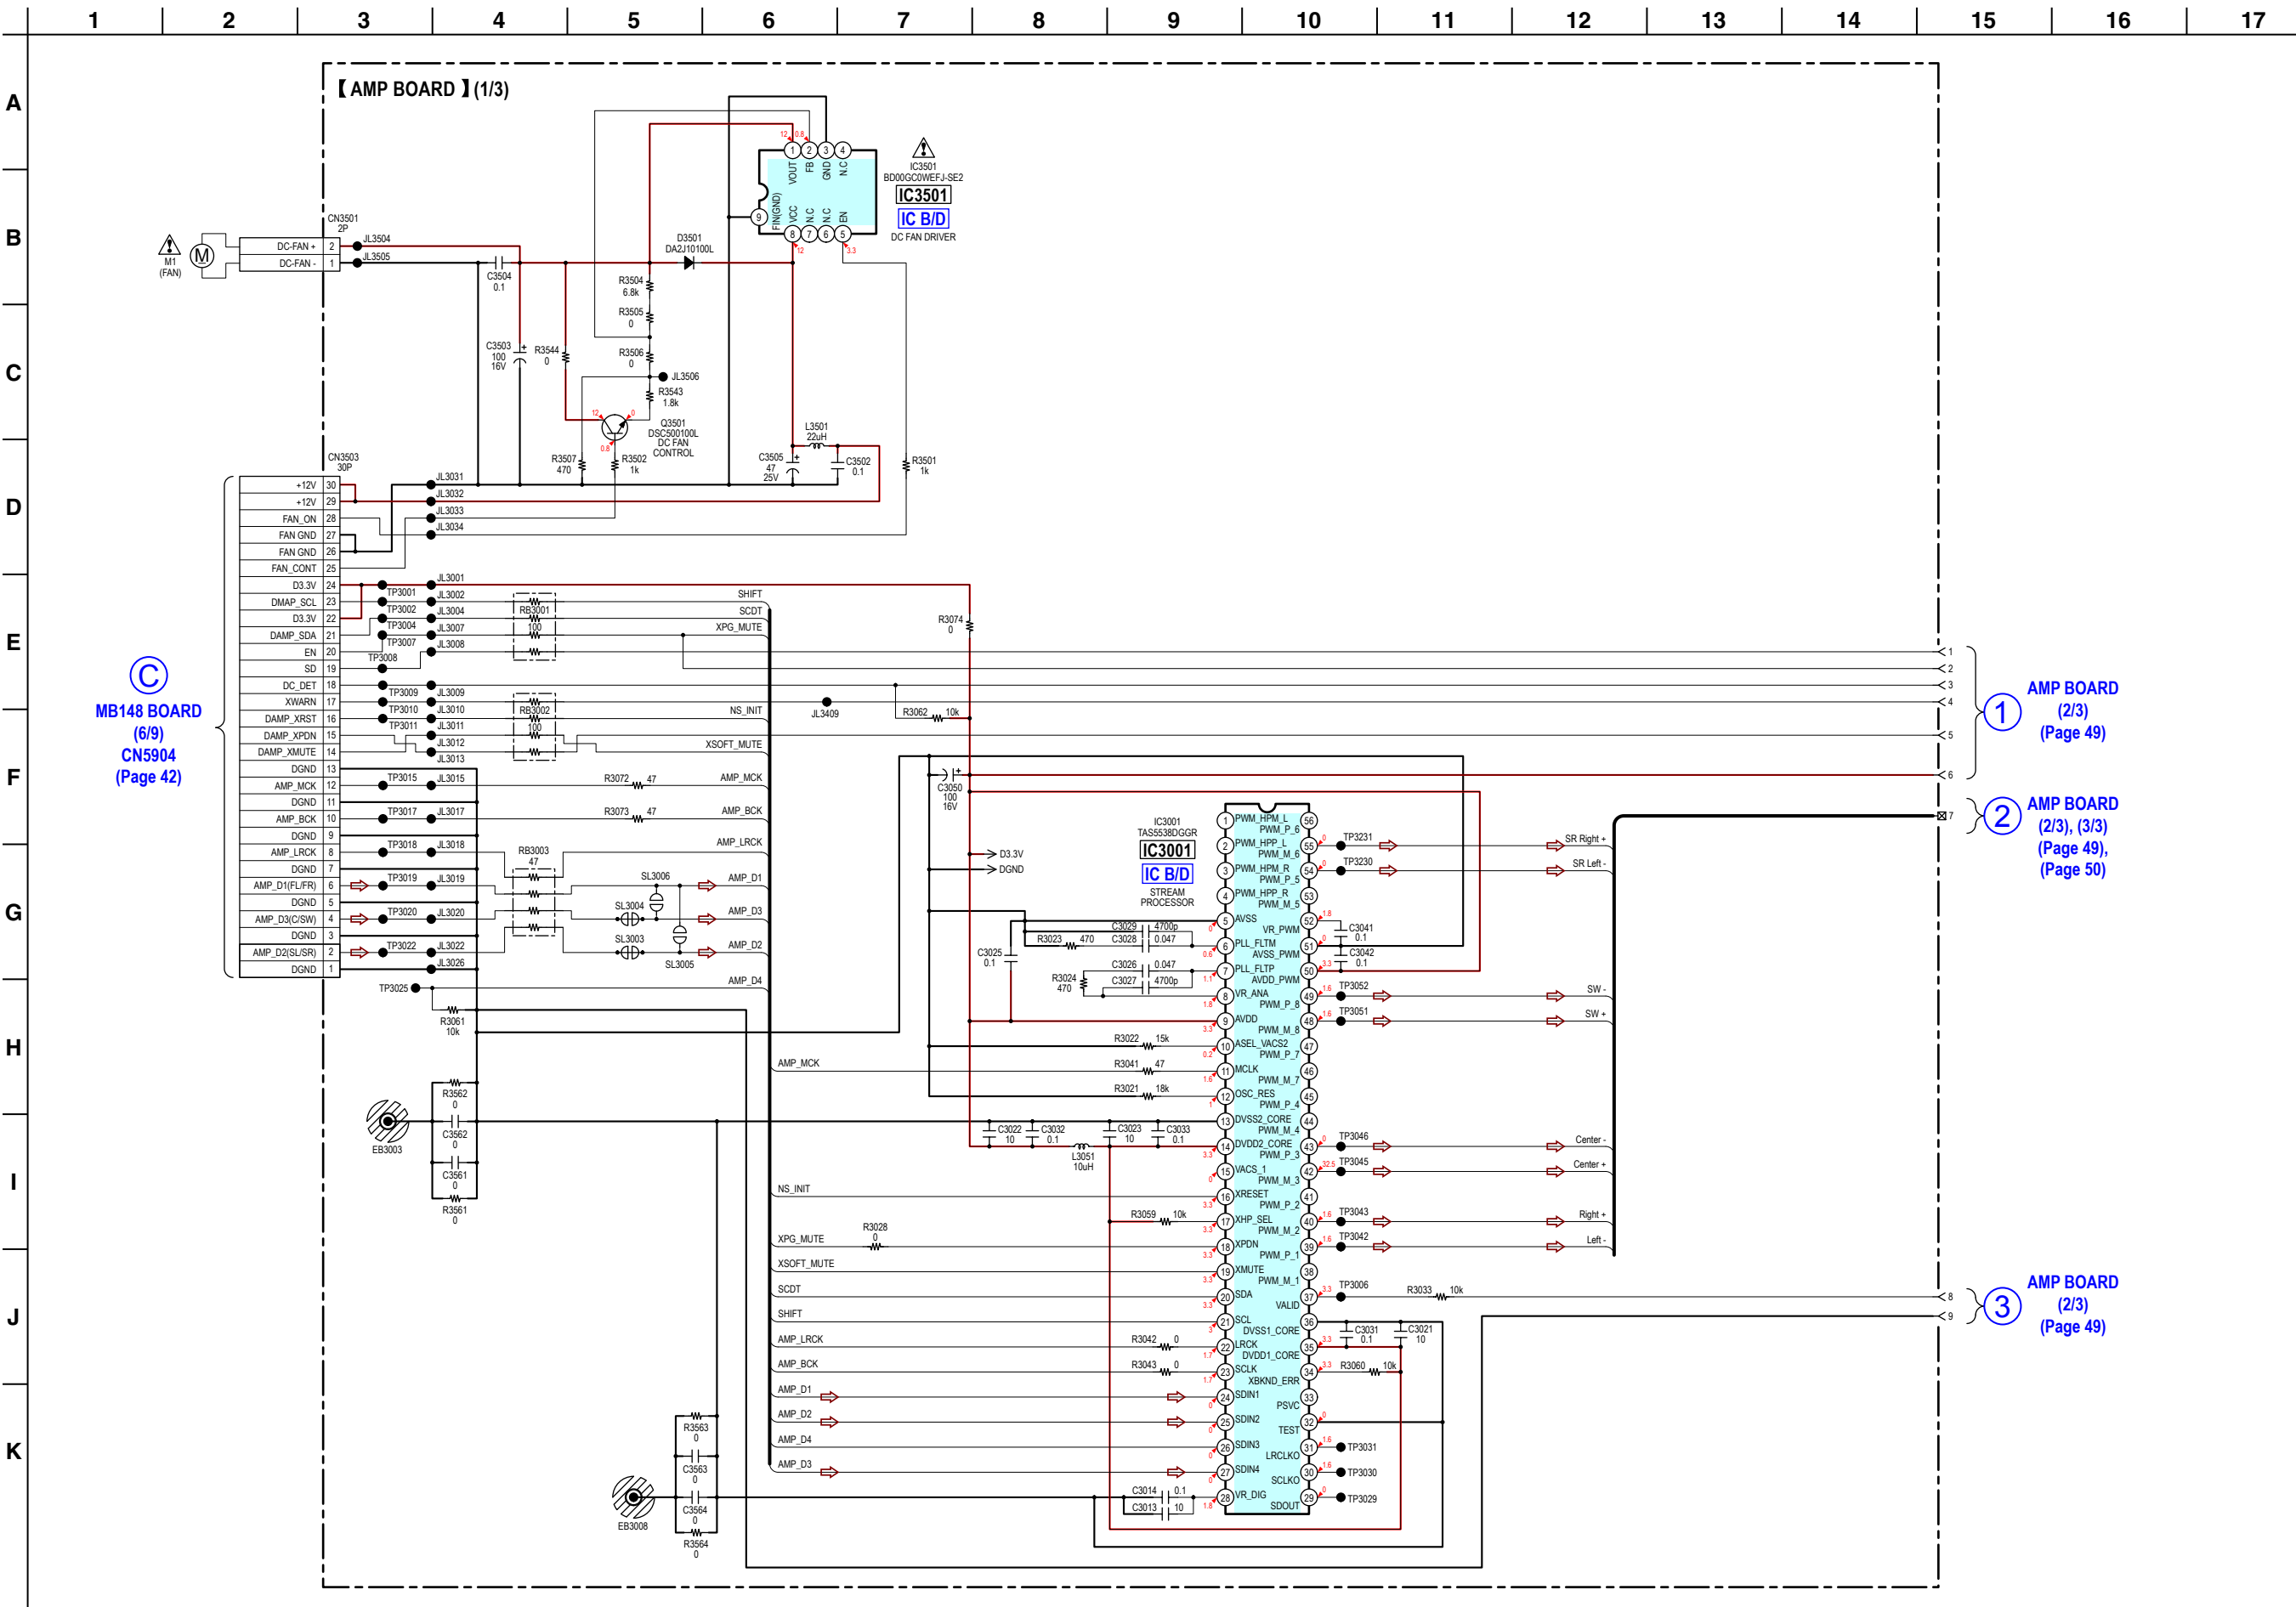


49




50 50



5-22. PRINTED WIRING BOARDS - PANEL Section - • See page 34 for Circuit Boards Location. • : Uses unleaded solder.

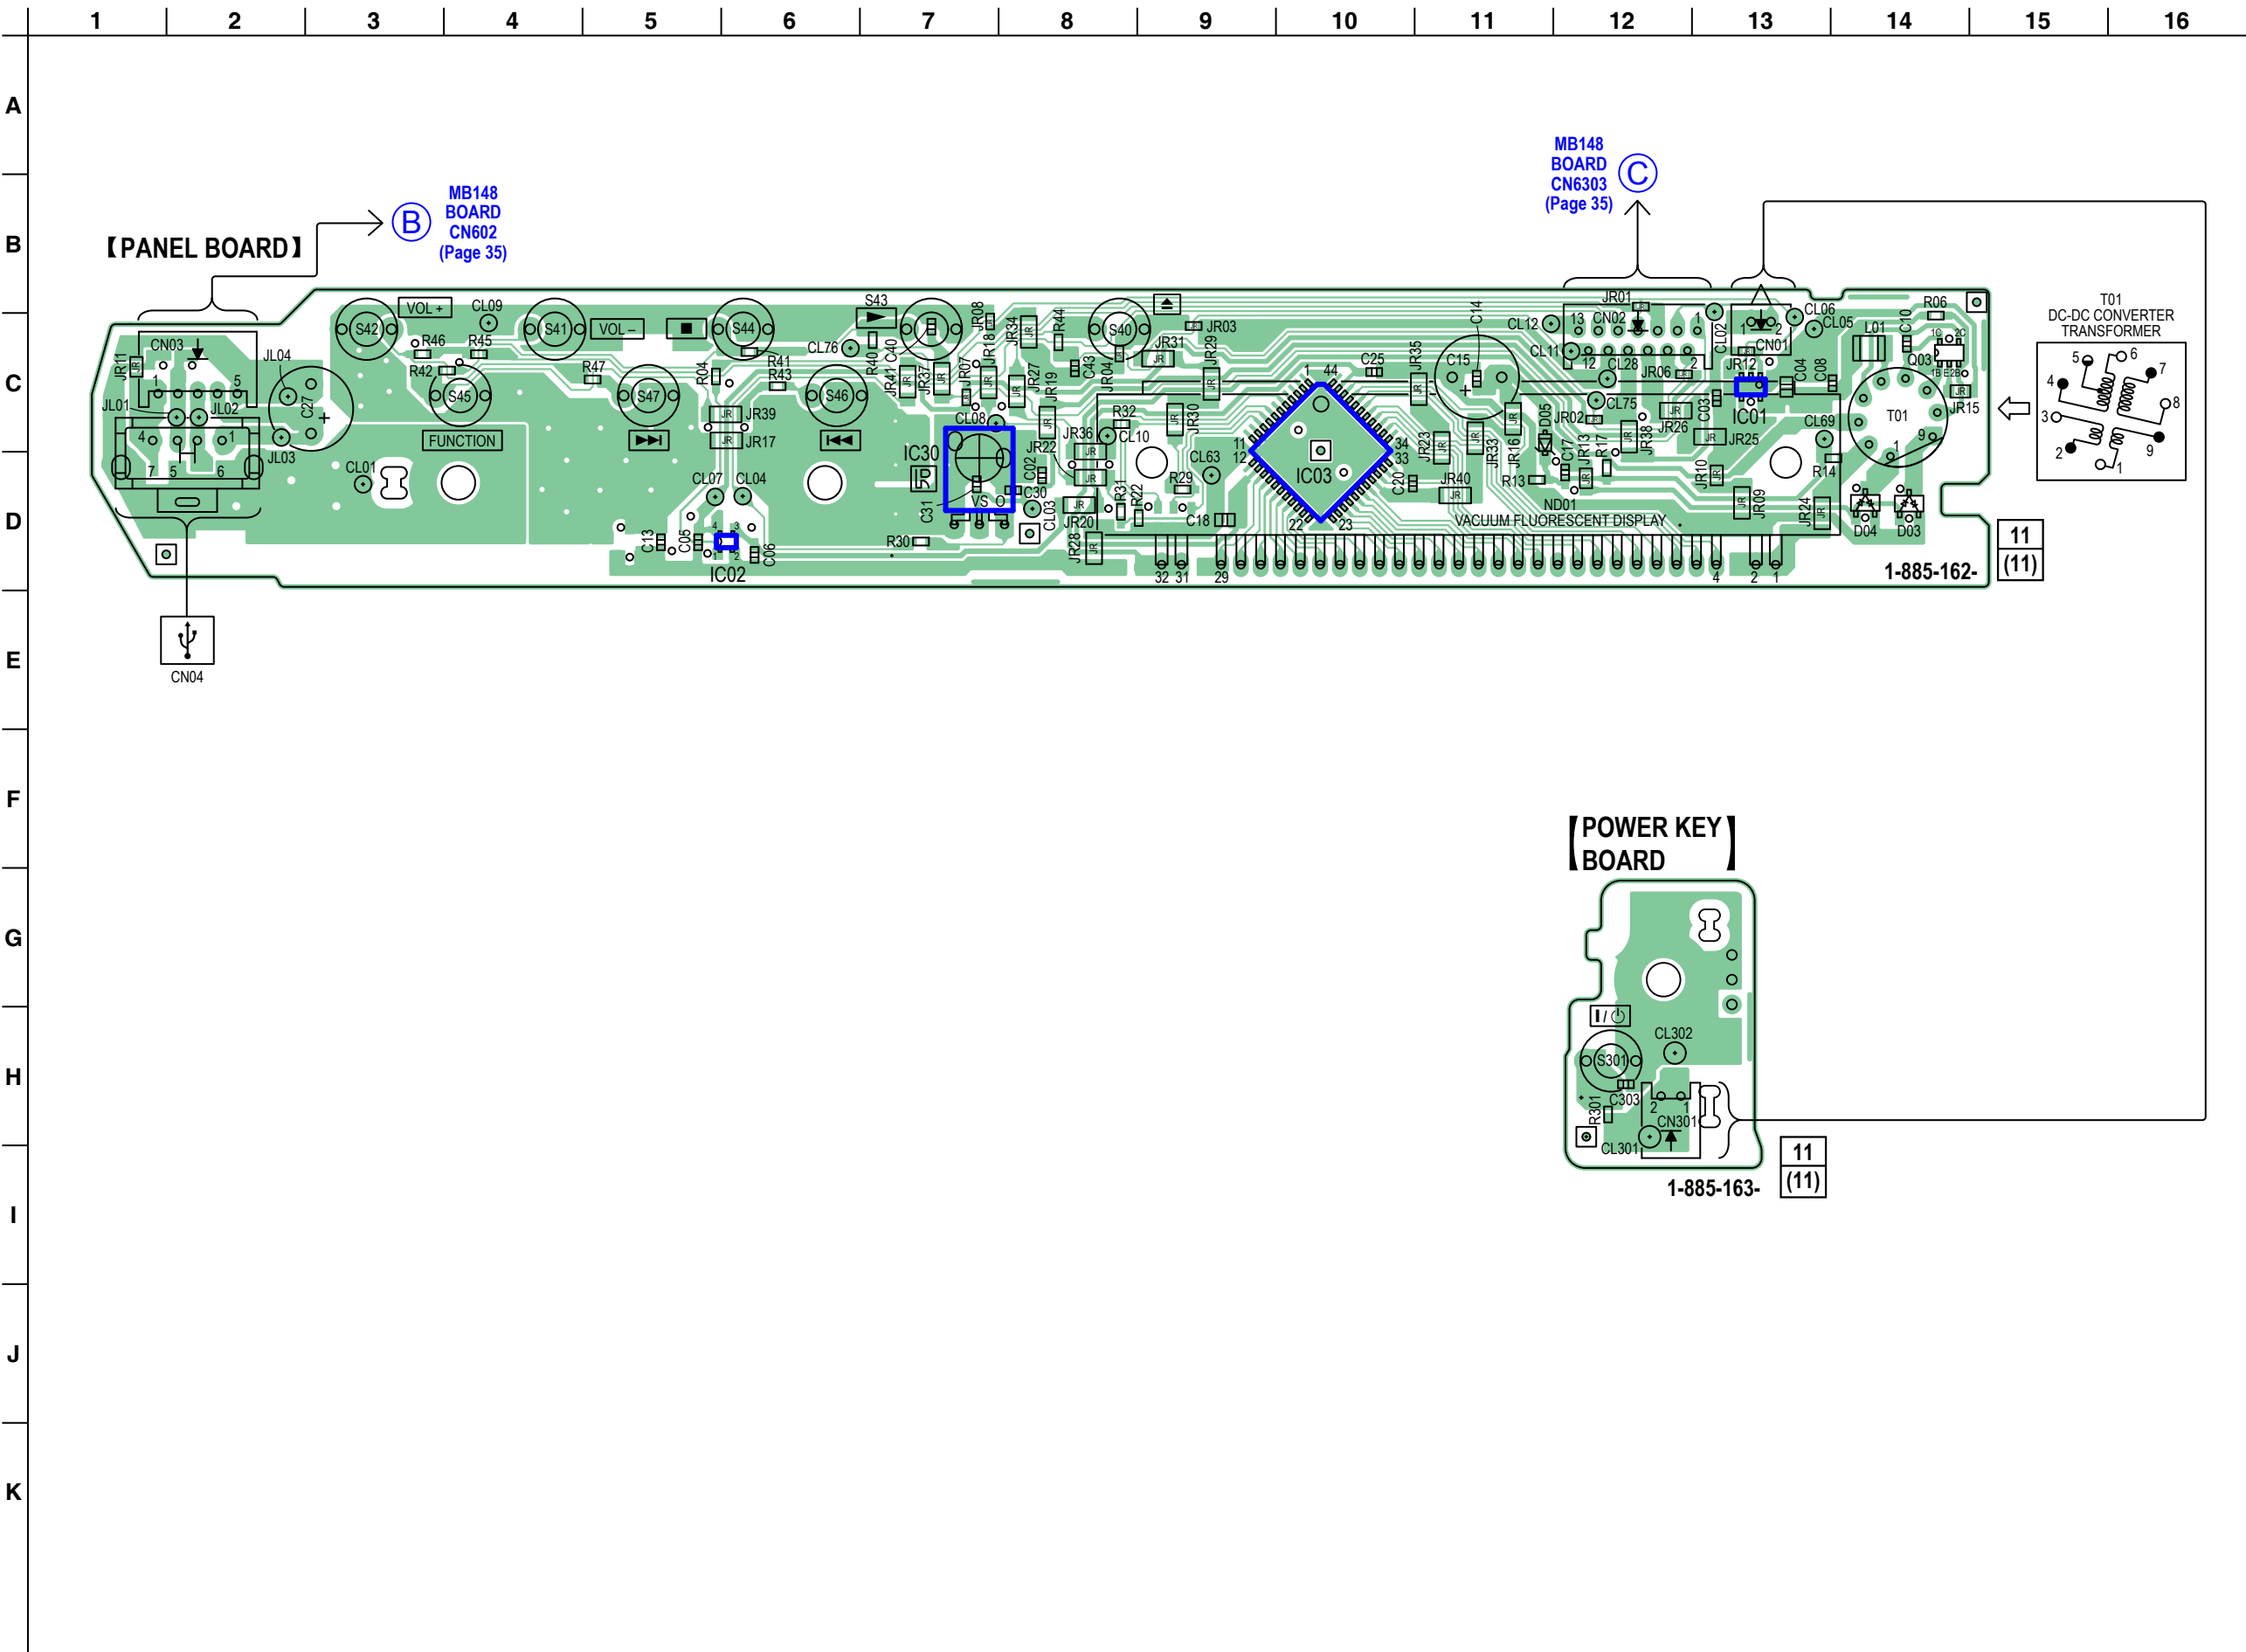


5-23. SCHEMATIC DIAGRAM - PANEL Section - • See page 55 for IC Block Diagrams.

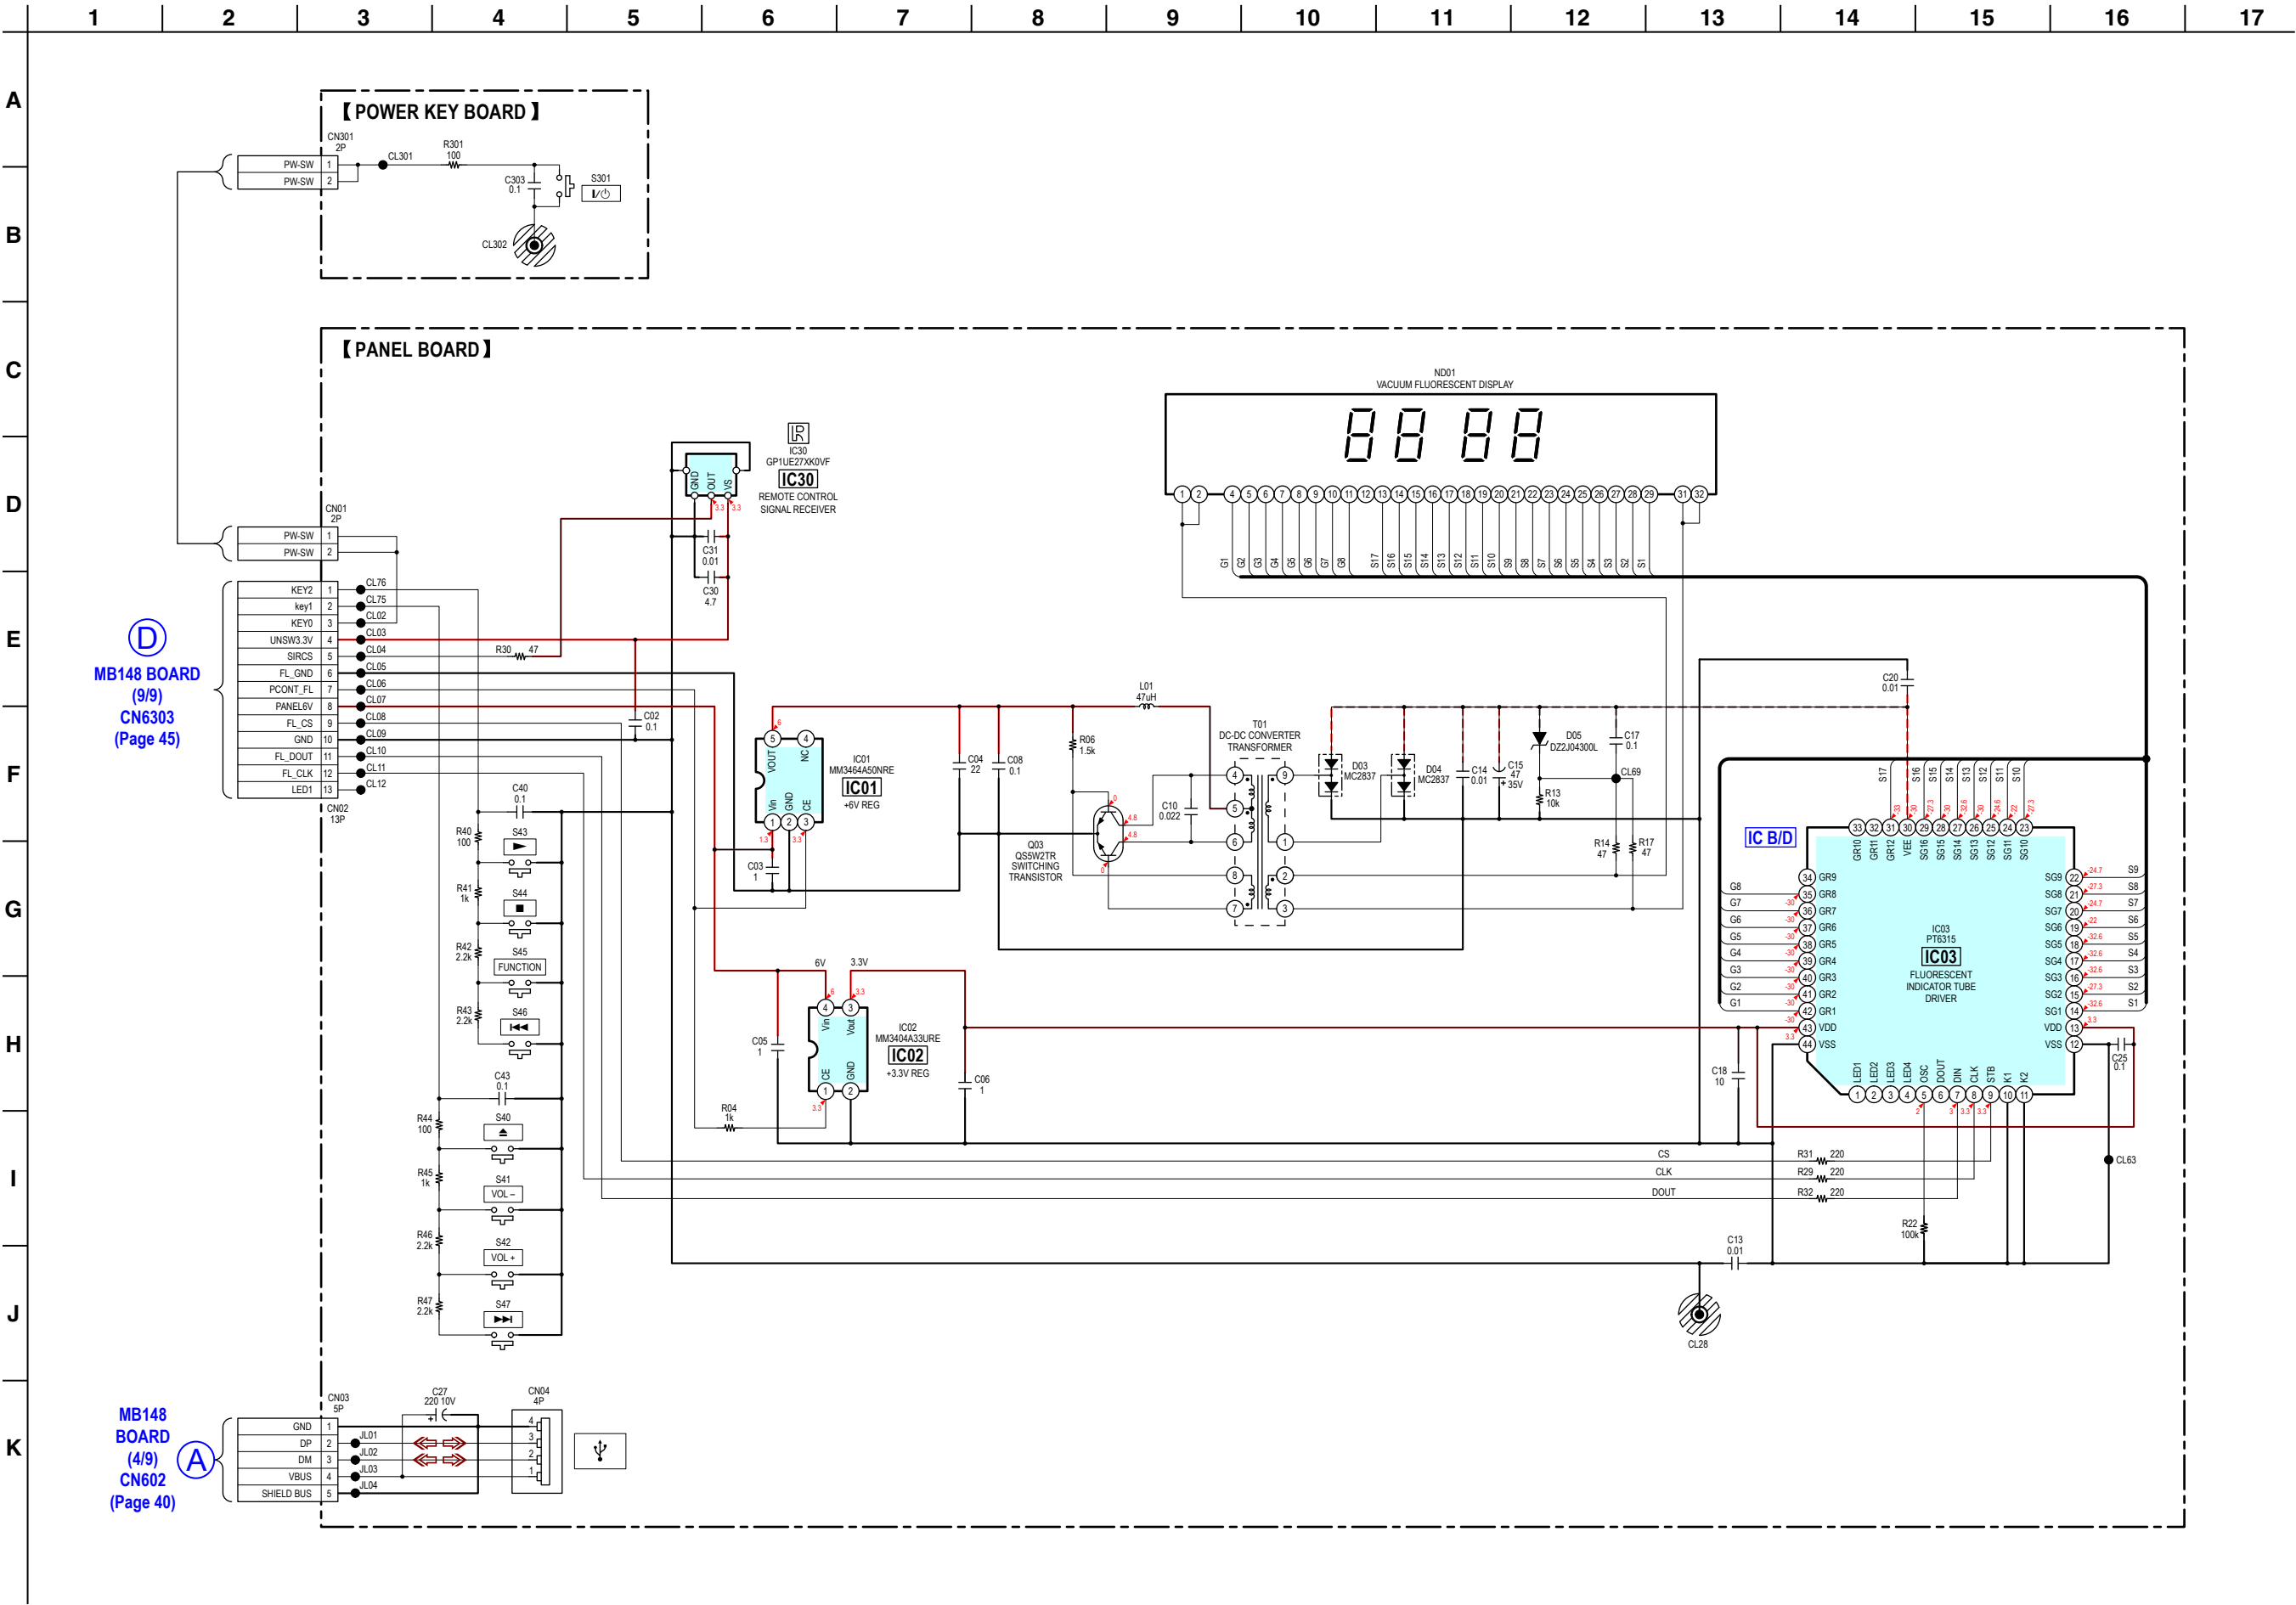


• Waveforms

– MB148 Board –

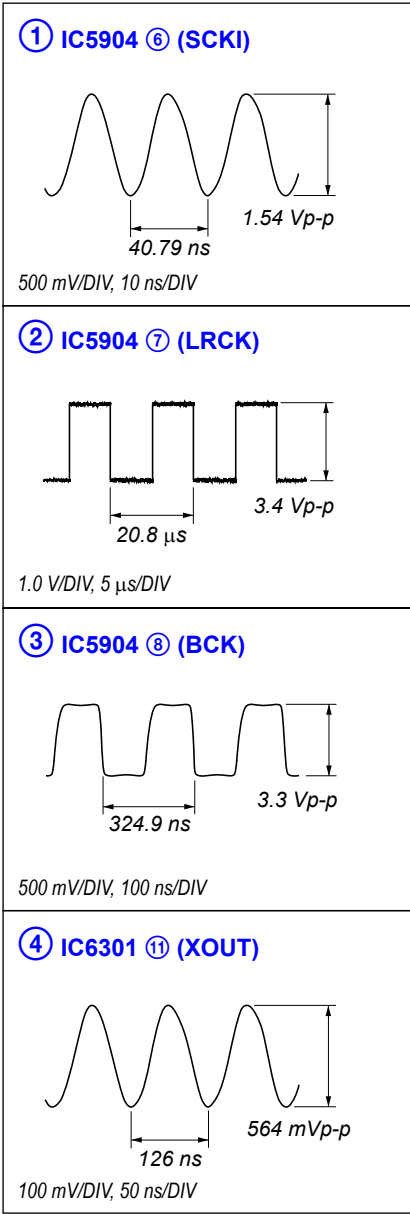


5-24. PRINTED WIRING BOARD - TUNER2FMF-NS Board -

• See page 34 for Circuit Boards Location. • : Uses unleaded solder.

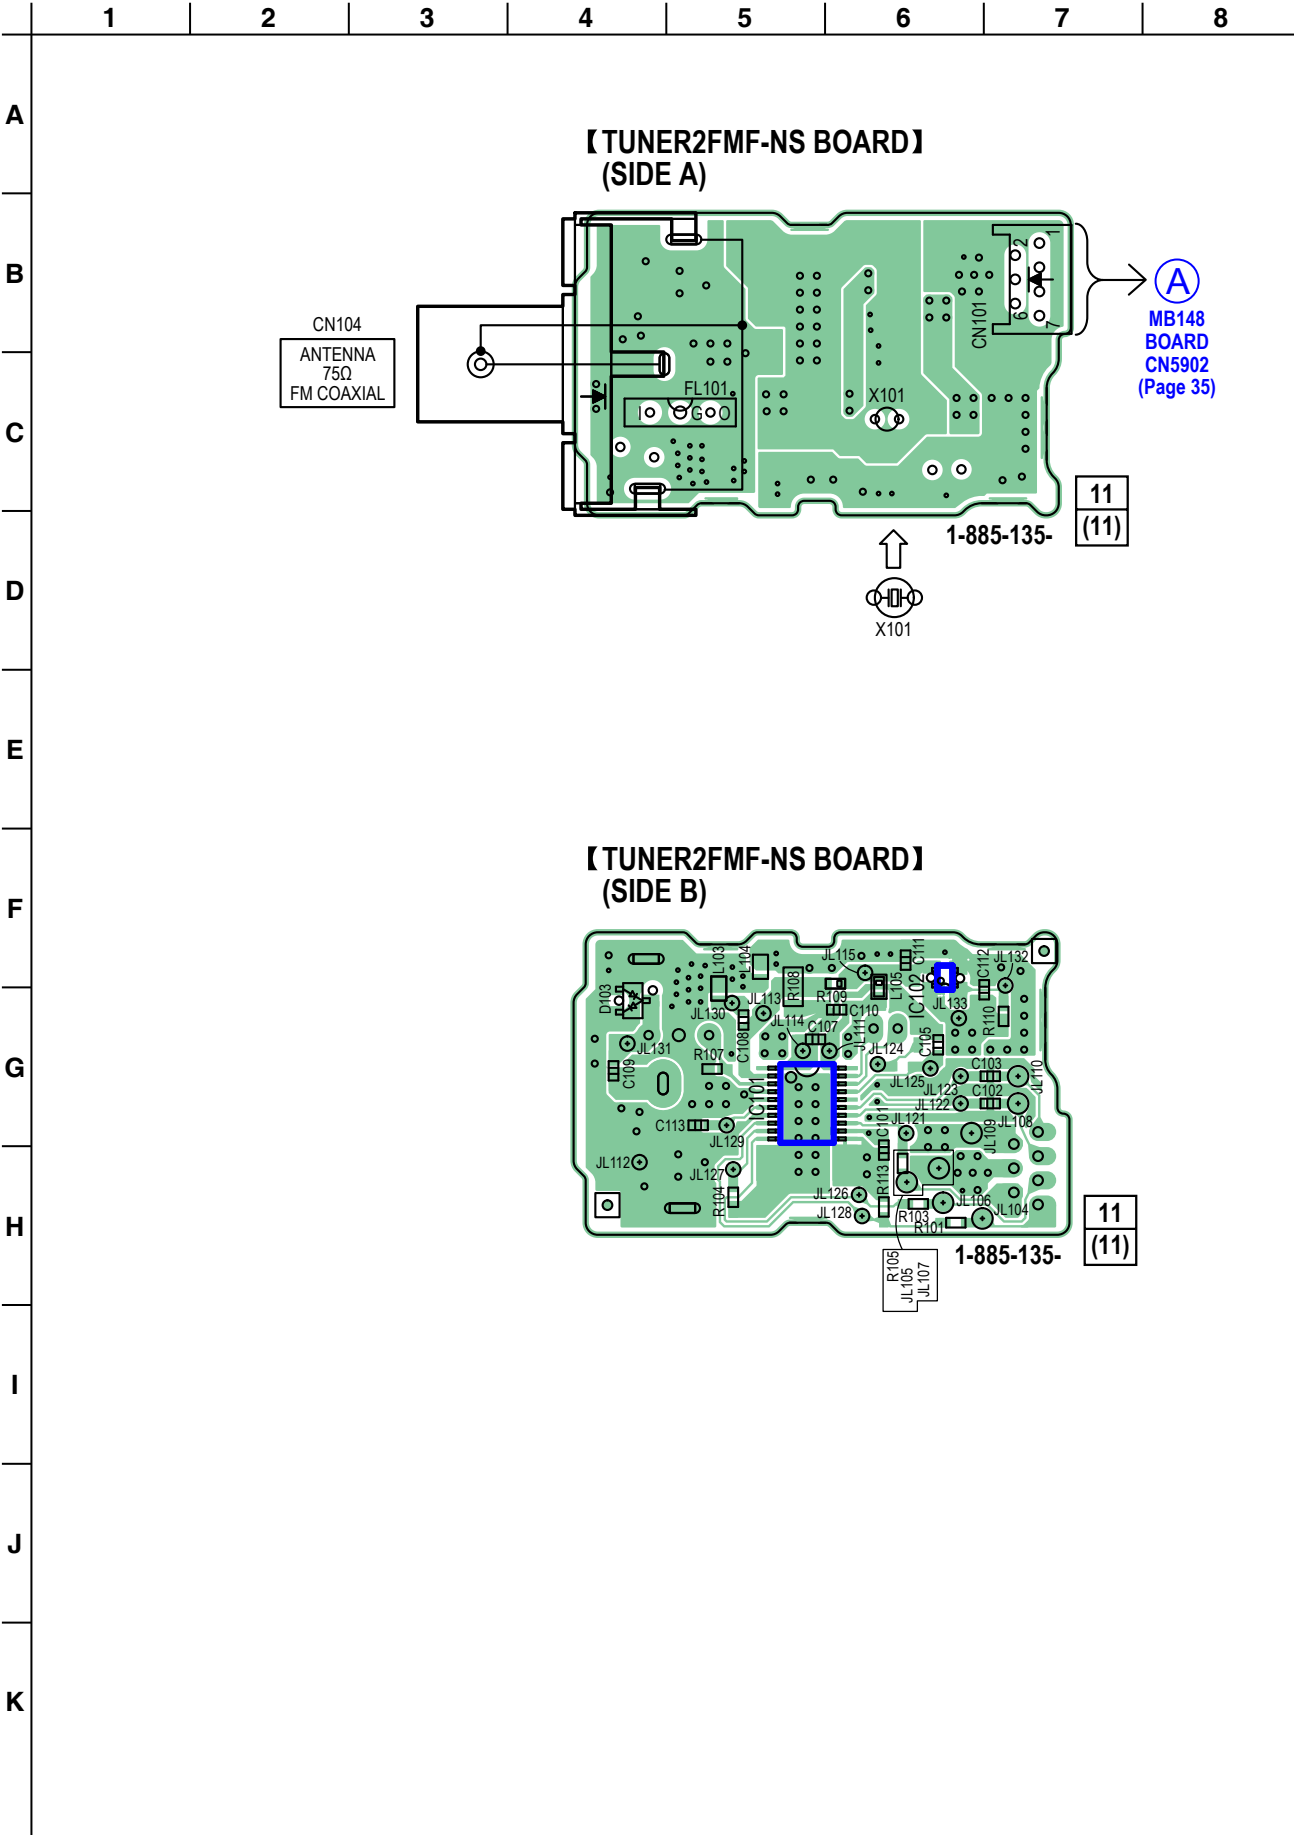


5-25. SCHEMATIC DIAGRAM - TUNER2FMF-NS Board - • See page 55 for IC Block Diagrams.

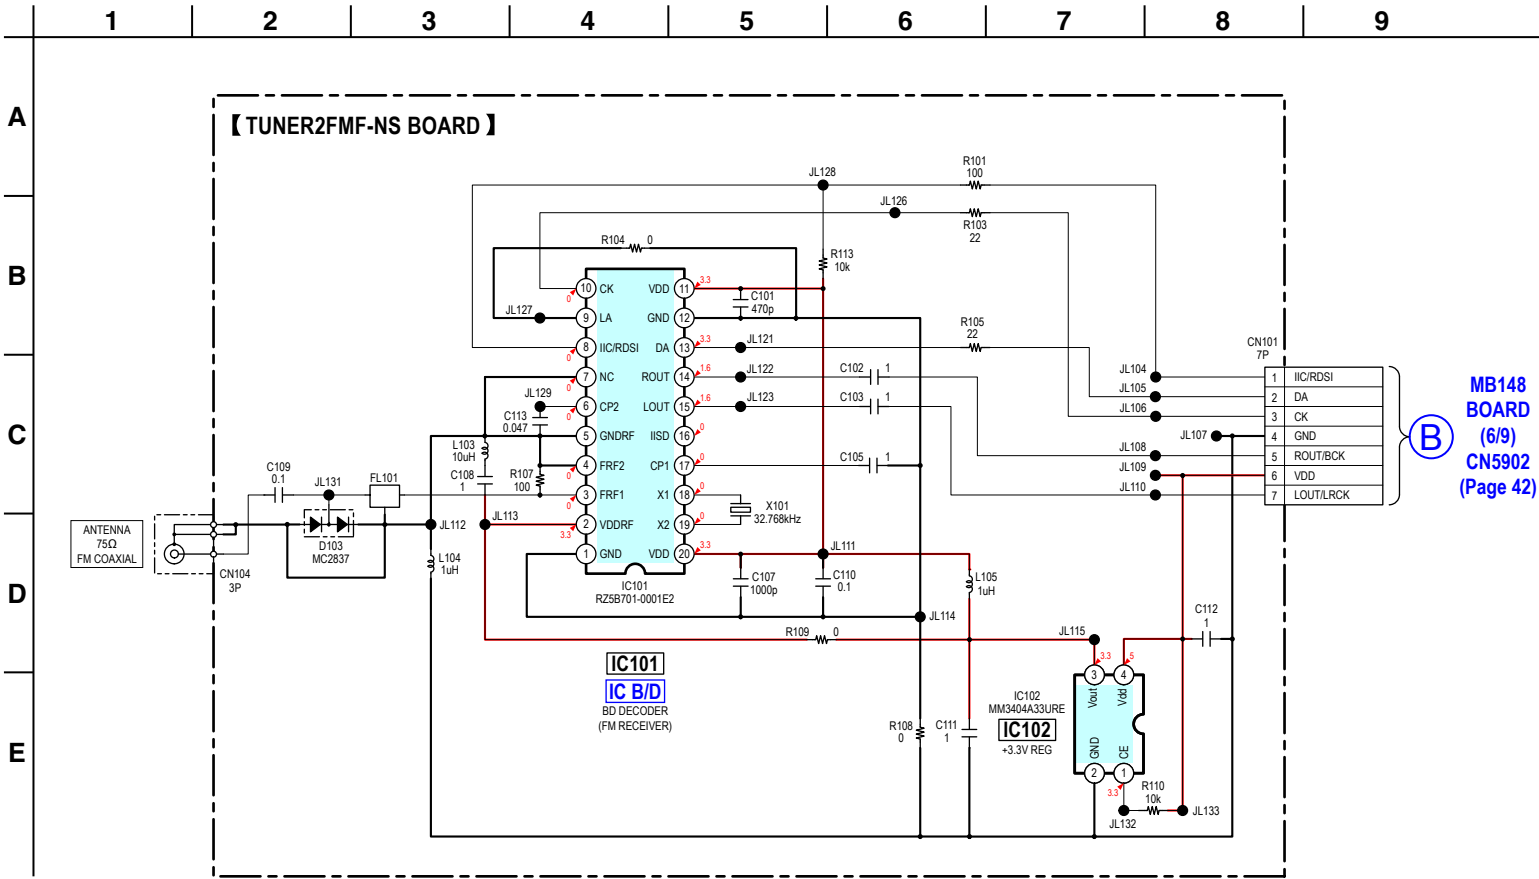


• IC Block Diagrams

IC3001 TAS5538DGGR (AMP BOARD (1/3))

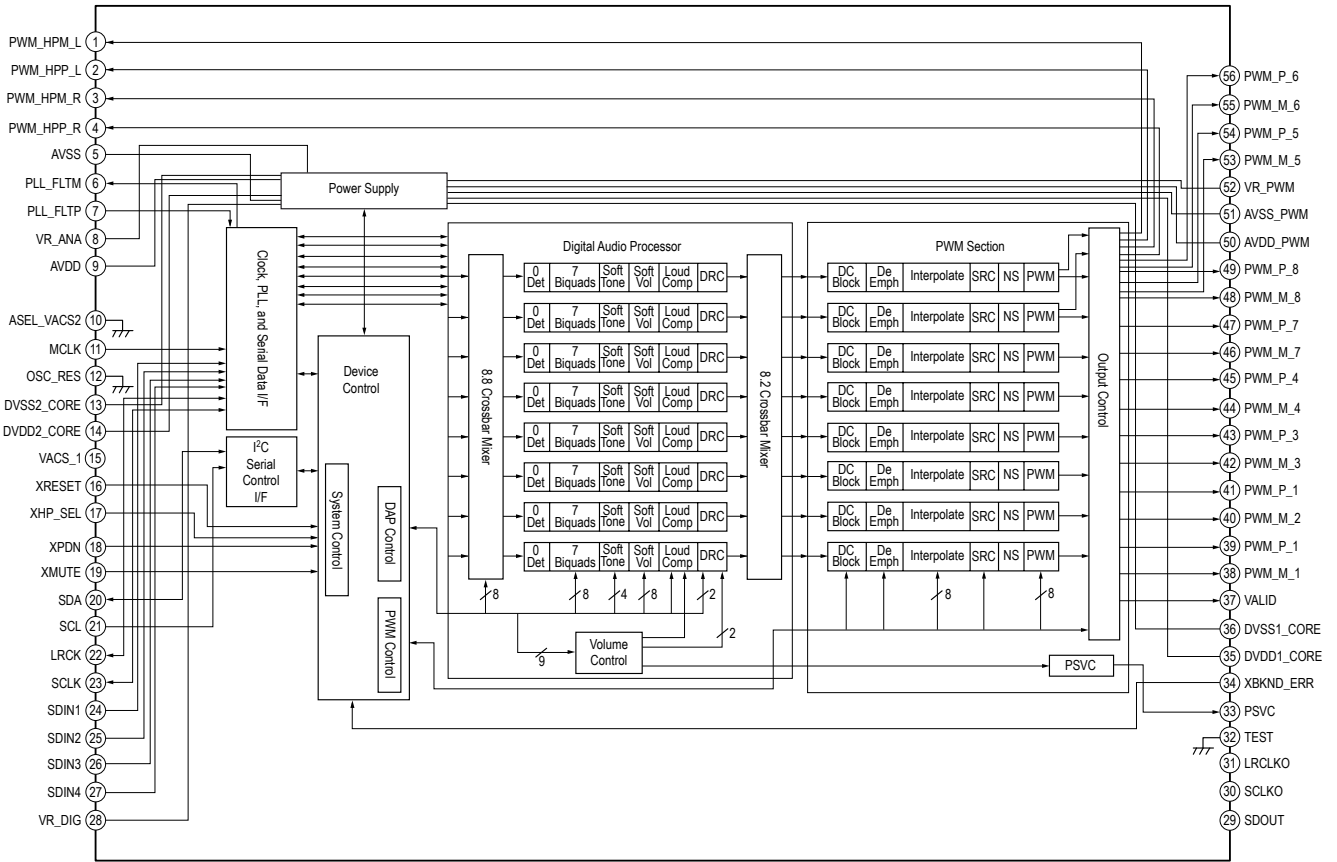


IC3102 STA516B13TR-A (AMP BOARD (3/3))
IC3302 STA516B13TR-A (AMP BOARD (2/3))

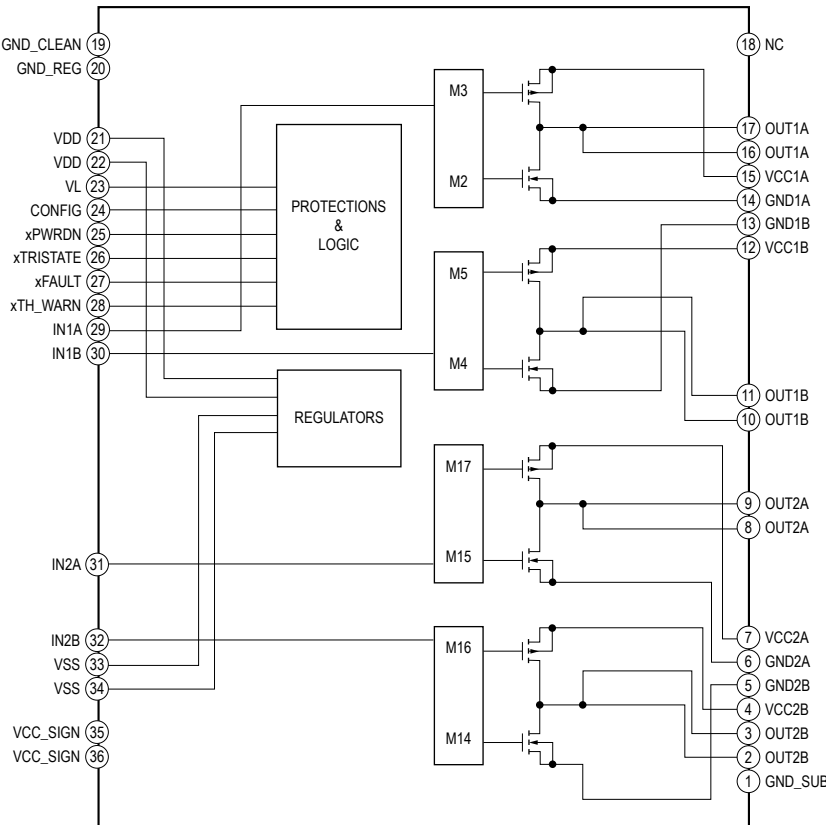


IC3501 BD00GC0WEFJ-SE2 (AMP BOARD (1/3))
IC5302 BD00GC0WEFJ-SE2 (MB148 BOARD (2/9))




IC1201 TPIC2050RDFDRG4 (MB148 BOARD (8/9))

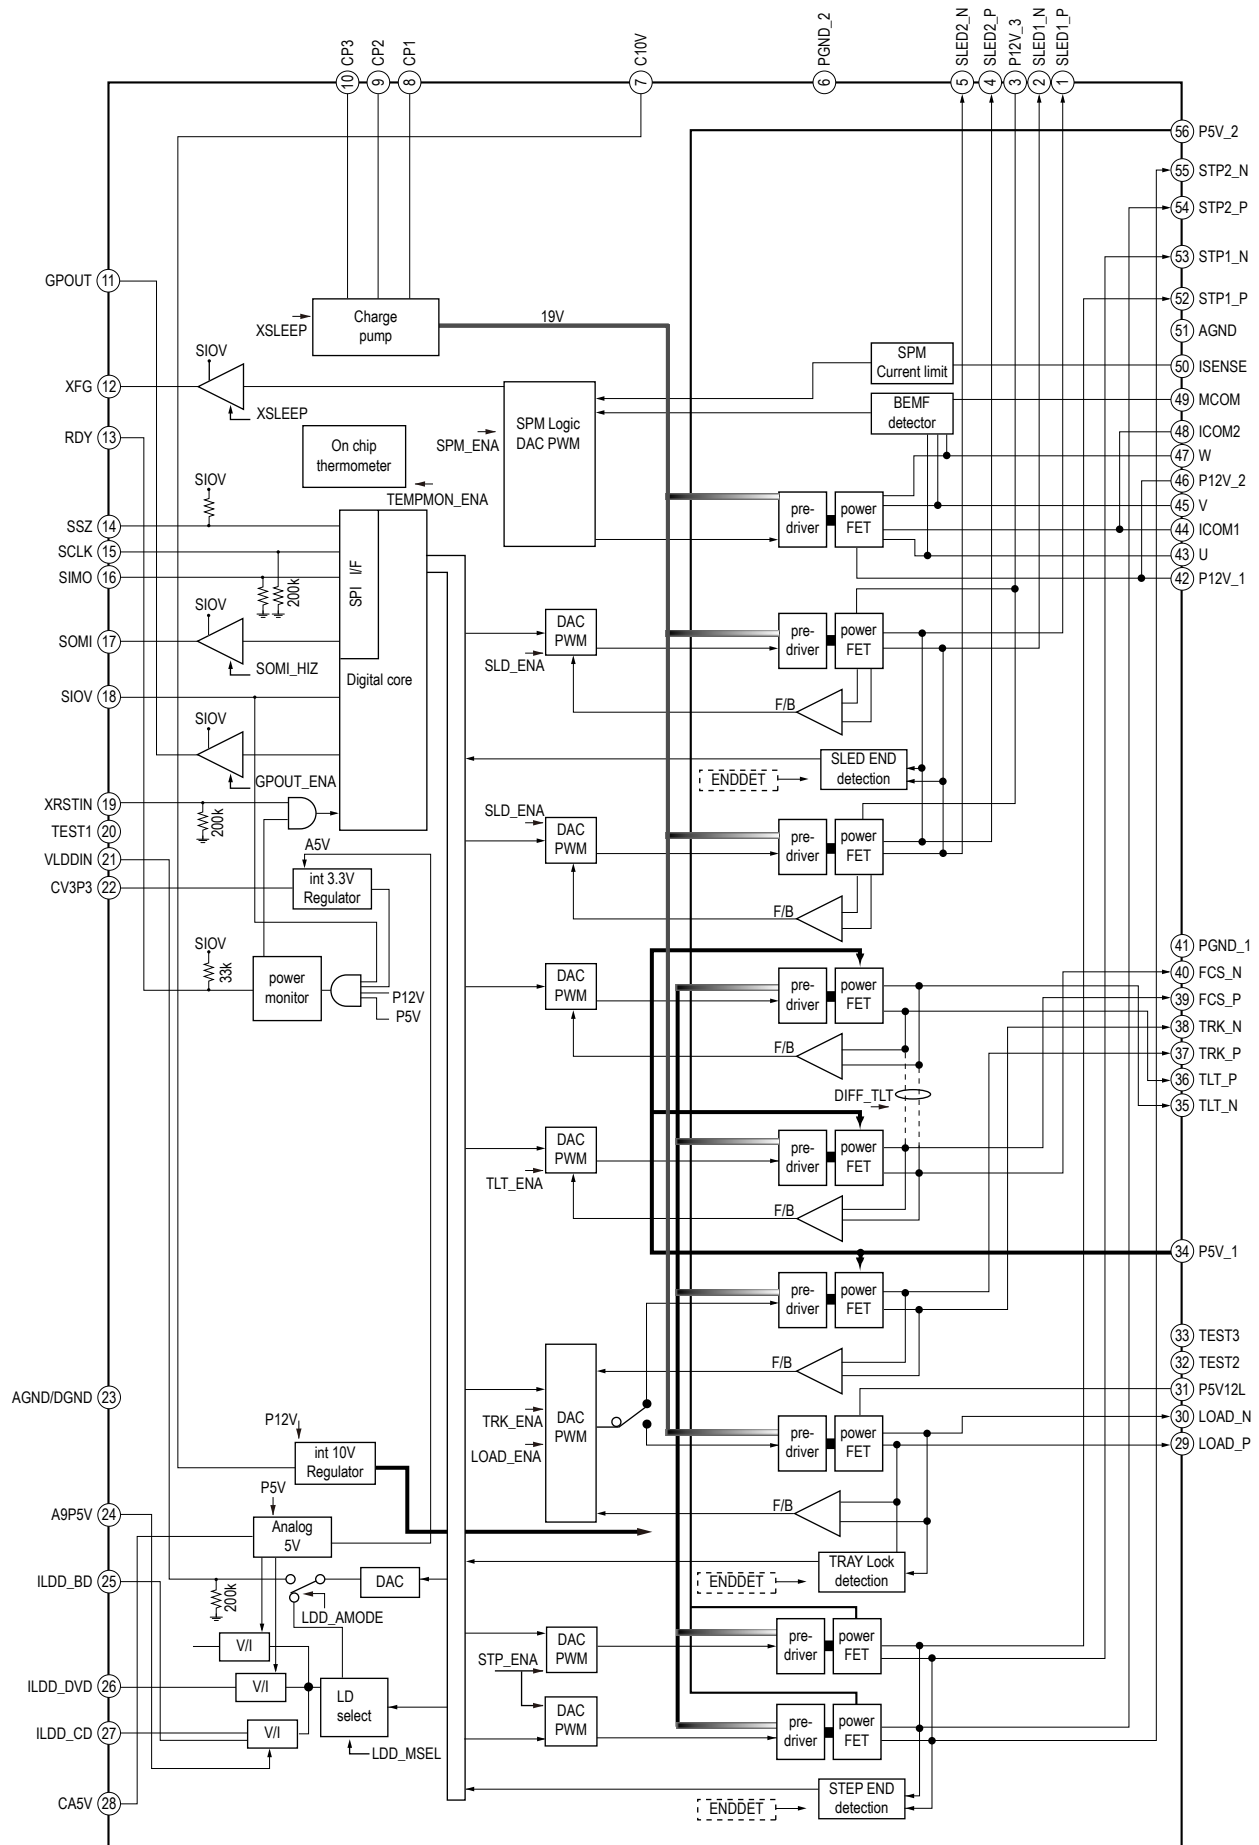


IC5702 TC7WHU04FK (MB148 BOARD (5/9))




IC6303 PST8429UL (MB148 BOARD (9/9))

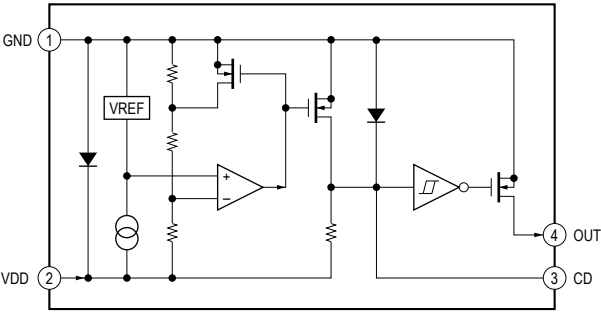


IC5903 TC74VHC4052AFT (EK) (MB148 BOARD (6/9))

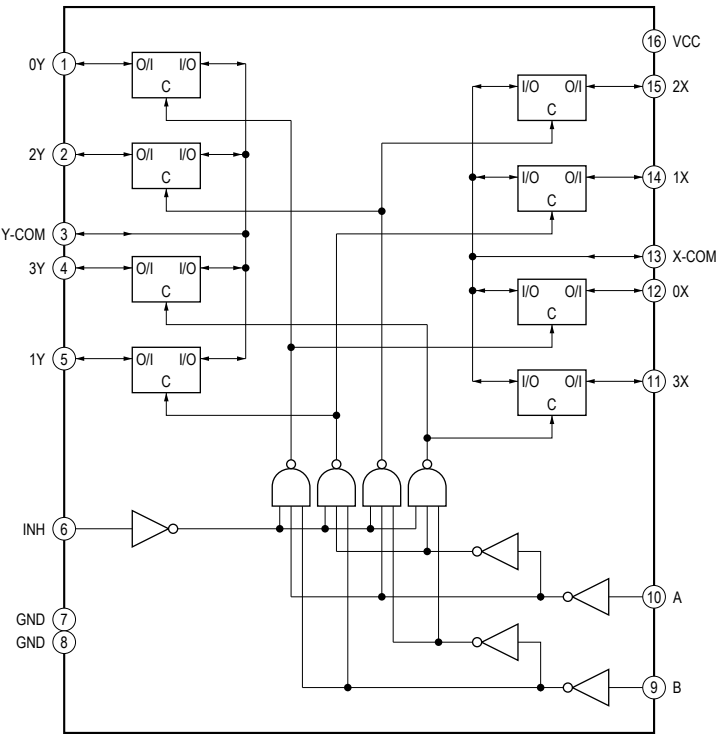


IC5904 PCM1808PWR (MB148 BOARD (6/9))

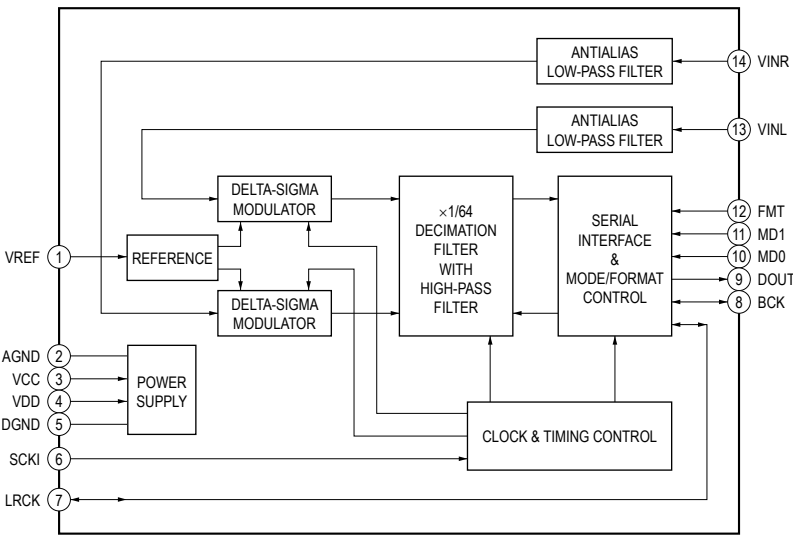


IC6401 MFI341S2162 (MB148 BOARD (4/9))

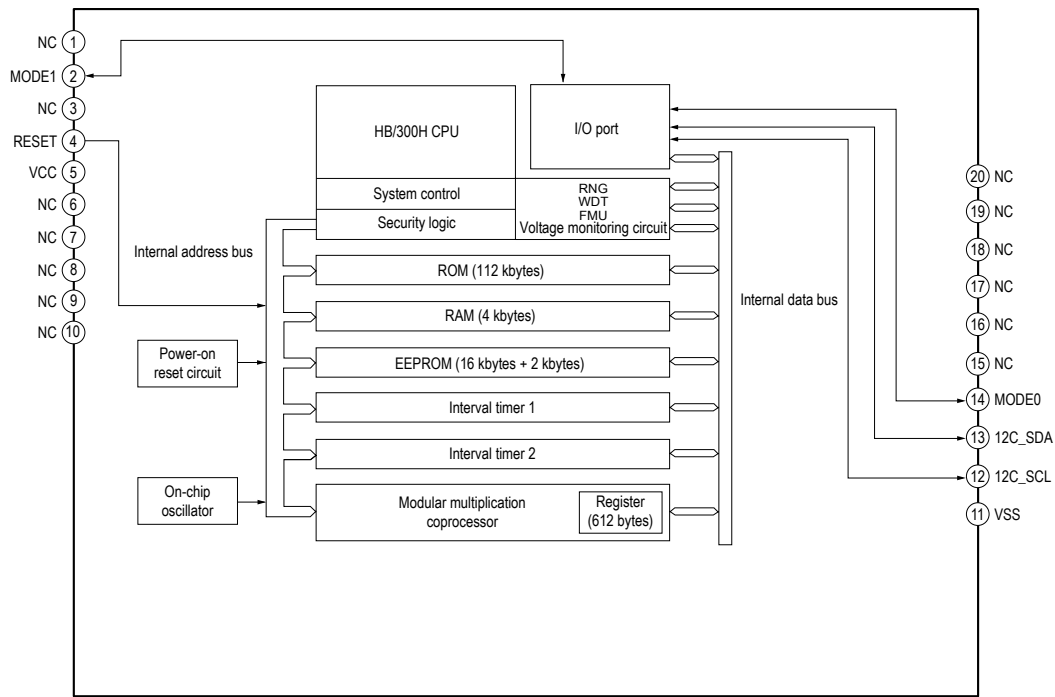

IC03 PT6315 (PANEL BOARD)

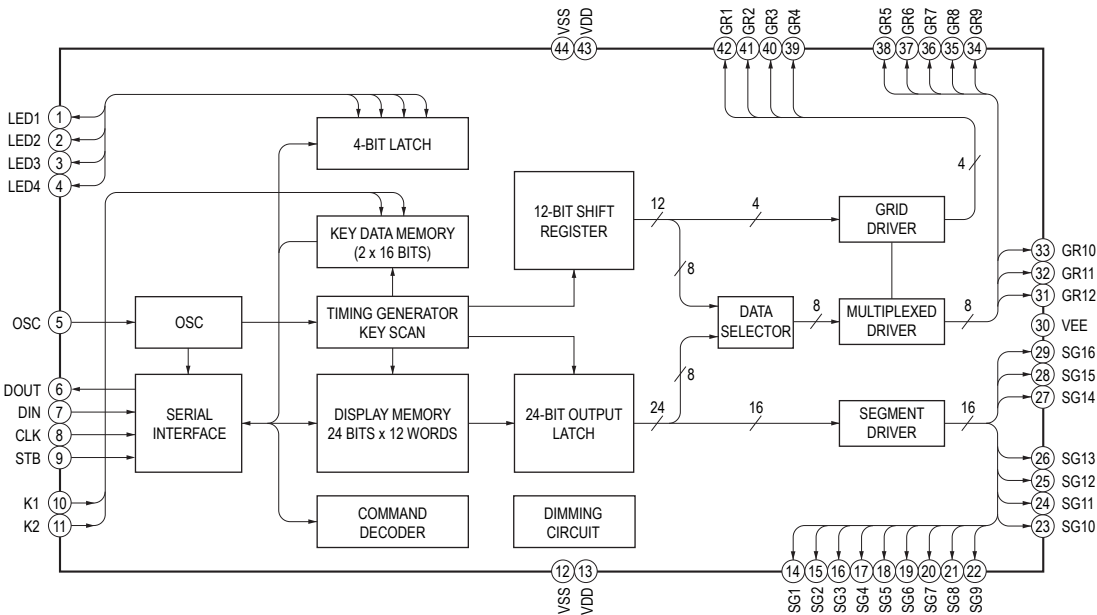

IC101 RZ5B701-0001E2 (TUNER2FMF-NS BOARD)

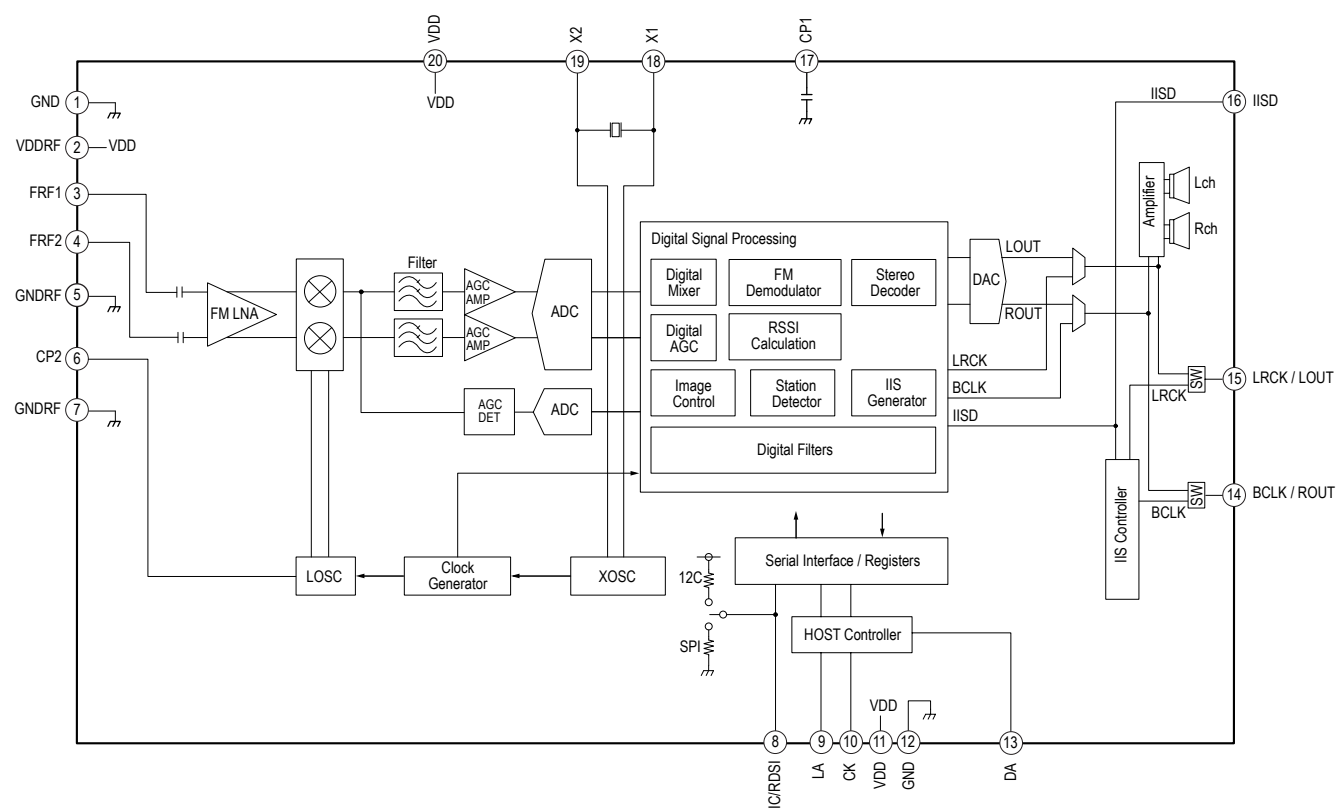

• IC Pin Function Descriptions

MB148 BOARD (1/9), (3/9), (4/9), (5/9), (6/9), (7/9) IC101 CXD90008G-AA (BD DECODER)

Pin No.	Pin Name	I/O	Description
A1	TRINC	I	Input of Tracking Signal (C)
A2	TRINA	I	Input of Tracking Signal (A)
A3	FPDOCD	I	Laser Power Monitor Input for CD APC / Differential negative input
A4	VWDC3O	O	Output Voltage 3 of Laser Diode Control in APC
A5	TXVN_0	I/O	Ethernet TD -
A6	TXVN_1	I/O	Ethernet RD -
A7	SPDIF	I/O	SPDIF digital audio output
A8	NO_USE	-	Not used
A9	NO_USE	-	Not used
A10	AOBCK ALO	I/O	Audio output bit clock
A11	NS_XTALI	-	3.3V power for standby
A12	NO_USE	-	Not used
A13	CH2_M	O	HDMI TX data 2 differential pair (M)
A14	CH1_M	O	HDMI TX data 1 differential pair (M)
A15	CH0_M	O	HDMI TX data 0 differential pair (M)
A16	CLK_M	O	HDMI TX clock differential pair (M)
A17	NO_USE	-	Not used
A18	VDACG_OUT	O	DAC output
A19	CEC	I/O	HDMI CEC
A20	NO_USE	-	Not used
A21	RESET_	I	Power on reset
A22	IF_SCK VCLK	I/O	VFD clock
A23	IF_SDO VDATA	I/O	VFD data
A24	SPLRCK	I/O	SPDIF input left-right clock
A25	SPMCLK	I/O	SPDIF input master clock
B1	INB	I	Input of Main Beam Signal (B)
B2	TRIND	I	Input of Tracking Signal (D)
B3	TRINB	I	Input of Tracking Signal (B)
B4	FVREF	O	Output of Voltage Reference
B5	TXVP_0	I/O	Ethernet TD +
B6	TXVP_1	I/O	Ethernet RD +
B7	REXT	O	External reference resistor
B8	NO_USE	-	Not used
B9	NO_USE	-	Not used
B10	AOMCL ARO	I/O	Audio output master clock
B11	NS_XTALO	I	27MHz Crystal In
B12	NO_USE	-	Not used
B13	CH2_P	O	HDMI TX data 2 differential pair (P)
B14	CH1_P	O	HDMI TX data 1 differential pair (P)
B15	CH0_P	O	HDMI TX data 0 differential pair (P)
B16	CLK_P	O	HDMI TX clock differential pair (P)
B17	NO_USE	-	Not used
B18	VDACX_OUT	O	DAC output
B19	HDMISD	I/O	HDMI I2C data
B20	HDMISCK	I/O	HDMI I2C clock
B21	OPWRSB	I/O	Power Control
B22	NC IR	I/O	Infrared input
B23	KRMOD VSTB	I/O	GPIO

HBD-E385/E390/T39

Pin No.	Pin Name	I/O	Description
B24	SPBCK	I/O	SPDIF input bit clock
B25	DIR_GPO2	I/O	GPIO
C1	IND	I	Input of Main Beam Signal (D)
C2	INC	I	Input of Main Beam Signal (C)
C3	INA	I	Input of Main Beam Signal (A)
C4	FPDODVD	I	Laser Power Monitor Input for DVD APC / Differential positive input
C5	NO_USE	-	Not used
C6	VWDD2O	O	Output Voltage 2 of Laser Diode Control in APC
C7	MICIN AOSDATA4	I/O	Audio line input data
C8	AOSDATA2	I/O	Audio output serial data 2
C9	AOSDATA1	I/O	Audio output serial data 1
C10	AOLRCK	I/O	Audio output left-right clock
C11	NO_USE	-	Not used
C12	AVDD33_PLLGP	-	3.3 V Analog Power for PLL Group
C13	AVSS33_PLLGP	-	Analog Ground for PLL Group
C14	NO_USE	-	Not used
C15	AVDD12_HDMI_D	-	1.2 V Analog Power
C16	AVDD12_HDMI_C	-	1.2 V Analog Power
C17	VDACR_OUT	O	DAC output
C18	VDACG_OUT	O	DAC output
C19	NO_USE	-	Not used
C20	HTPLG	I/O	HDMI Hot Plug
C21	NO_USE	-	Not used
C22	MIC_DET GPIO2	I/O	GPIO
C23	NO_USE	-	Not used
C24	DIR_GPO3	I/O	GPIO
C25	DIR_SCL	I/O	GPIO
D1	ING	I	Input of Main Beam Signal (G)
D2	INH	I	Input of Main Beam Signal (H)
D3	NO_USE	-	Not used
D4	NO_USE	-	Not used
D5	NO_USE	-	Not used
D6	NO_USE	-	Not used
D7	NO USE	-	Not used
D8	NO_USE	-	Not used
D9	NO_USE	-	Not used
D10	AOSDATA0	I/O	Audio output serial data 0
D11	NO_USE	-	Not used
D12	AVDD33_DAC	-	3.3 V Analog Power
D13	NO_USE	-	Not used
D14	AVDD33_HDMI	-	3.3 V Analog Power
D15	NO_USE	-	Not used
D16	AVDD33_VDAC_R	-	3.3 V Analog Power
D17	NO_USE	-	Not used
D18	NO_USE	-	Not used
D19	NO_USE	-	Not used
D20	START_BIT GPIO0	I/O	GPIO
D21	DVCC33_IO_STB	-	3.3 V digital IO power for Stand-By Module
D22	IF_SDI LCDRD	I/O	GPIO
D23	NO_USE	-	Not used
D24	WIFI_PCONT	I/O	GPIO
D25	TDI	I/O	JTAG ICE data in

Pin No.	Pin Name	I/O	Description
E1	INF	I	Input of Main Beam Signal (F)
E2	INE	I	Input of Main Beam Signal (E)
E3	AVDD33_1	-	3.3 V Power Pin
E4	HAVC	O	Decoupling Pin for Reference Voltage of Main and Sub Beams
E5	VDAC0	O	Output of General DAC
E6	RSTI	I	Front-End Power on reset
E7	NO_USE	-	Not used
E8	NO_USE	-	Not used
E9	AVSS33_PLL	-	PLL /BG analog ground
E10	NO_USE	-	Not used
E11	AVSS33_DAC	-	Analog Ground
E12	NO_USE	-	Not used
E13	NO_USE	-	Not used
E14	AVSS33_HDMI	-	3.3 V Analog Power
E15	NO_USE	-	Not used
E16	AVDD33_VDAC	-	3.3 V Analog Power
E17	NO_USE	-	Not used
E18	OCPI GPIO1	I/O	GPIO
E19	NO_USE	-	Not used
E20	UATXD	I/O	Reserved for debug-only Uart pins. (1) 1st RS232 TX (2) T8032 RS232 TX
E21	NO_USE	-	Not used
E22	DVCC33_IO_STB	-	3.3 V digital IO power for Stand-By Module
E23	SPDATA	I/O	SPDIF input data
E24	SYS_REQ	I/O	GPIO
E25	TCK	I/O	JTAG ICE clock
F1	FEMPXOUT3	O	Multiplexer Output 3 for Signal Monitoring. The pin is not allowed to pull-up in circuit layout. Alternative function: Internal monitored signal output / General output.
F2	FEMPXOUT2	O	Multiplexer Output 2 for Signal Monitoring. The pin is not allowed to pull-up in circuit layout. Alternative function: Internal monitored signal output / General output.
F3	NO_USE	-	Not used
F4	FEMPXOUT1	O	Multiplexer Output 1 for Signal Monitoring. The pin is not allowed to pull-up in circuit layout. Alternative function: Internal monitored signal output / General output.
F5	AUX1	I/O	Auxiliary Input Alternative function: Signal Monitoring
F6	AGND33_1	-	Analog Ground
F7	AGND33_3	-	Analog Ground
F8	NO_USE	-	Not used
F9	AVDD33_COM	-	PLL / BG 3.3 V analog power
F10	NO_USE	-	Not used
F11	AVSS12_REC	-	ADC analog ground
F12	NO_USE	-	Not used
F13	AVSS33_LD	-	Line driver analog ground
F14	AVSS33_VDAC_R	-	Analog Ground
F15	NO_USE	-	Not used
F16	NO_USE	-	Not used
F17	AVDD33_LD0	-	3.3 V power for standby
F18	NO_USE	-	Not used
F19	UARXD	I/O	Reserved for debug-only Uart pins. (1) 1st RS232 RX (2) T8032 RS232 RX
F20	NO_USE	-	Not used
F21	DVCC33_IO	-	3.3 V digital IO power
F22	NC (PD)	-	Not used
F23	NO_USE	-	Not used

HBD-E385/E390/T39

Pin No.	Pin Name	I/O	Description
F24	TMS	I/O	GPIO
F25	NC (PD)	-	Not used
G1	RFIP	I	Differential Input of AC Coupling RF SUM Signal (Positive)
G2	RFIN	I	Differential Input of AC Coupling RF SUM Signal (Negative)
G3	NO_USE	-	Not used
G4	NO_USE	-	Not used
G5	NO_USE	-	Not used
G6	NO_USE	-	Not used
G7	NO_USE	-	Not used
G8	NO_USE	-	Not used
G9	AVDD33_LD	-	Line driver 3.3 V analog power
G10	NO_USE	-	Not used
G11	AVDD12_REC	-	ADC analog power
G12	NO_USE	-	Not used
G13	NO_USE	-	Not used
G14	AVSS33_VDAC	-	Analog Ground
G15	NO_USE	-	Not used
G16	AVSS33_LDO	-	Analog ground for standby
G17	NO_USE	-	Not used
G18	NO_USE	-	Not used
G19	NO_USE	-	Not used
G20	DVCC33_IO	-	3.3 V digital IO power
G21	XIF_CS	I/O	GPIO
G22	NO_USE	-	Not used
G23	TDO	I/O	JTAG ICE data out
G24	DIR_SDA	I/O	GPIO
G25	DIR_ERROR	I/O	GPIO
H1	RFIP2	I	Differential Input of AC Coupling RF SUM Signal (Positive)
H2	RFIN2	I	Differential Input of AC Coupling RF SUM Signal (Negative)
H3	V14	O	Output of Voltage Reference (1.4 V)
H4	FOO	O	Focus servo output. PDM output of focus servo compensator.
H5	AGND12_1	-	Analog Ground
H6	NO_USE	-	Not used
H7	AGND12_2	-	Analog Ground
H8	NO_USE	-	Not used
H9	NO_USE	-	Not used
H10	NO_USE	-	Not used
H11	NO_USE	-	Not used
H12	NO_USE	-	Not used
H13	NO_USE	-	Not used
H14	DGND12_K	-	Digital ground
H15	NO_USE	-	Not used
H16	AVDD12_LDO	-	1.2 V standby power
H17	NO_USE	-	Not used
H18	NO_USE	-	Not used
H19	NO_USE	-	Not used
H20	NO_USE	-	Not used
H21	DGND12_K	-	Digital ground
H22	XDIR_INT	I/O	GPIO
H23	NO_USE	-	Not used
H24	RCLK0	O	Memory clock 0 positive
H25	RCLK0_	O	Memory clock 0 negative
J1	NO_USE	-	Not used
J2	TRO	O	Tracking servo output. PDM output of tracking servo compensator.
J3	TLO	O	Tilt servo output
J4	AVDD12_2	-	1.2 V Power Pin

Pin No.	Pin Name	I/O	Description
J5	NO_USE	-	Not used
J6	AVDD33_3	-	3.3 V Power Pin
J7	NO_USE	-	Not used
J8	NO_USE	-	Not used
J9	DVCC33_IO	-	3.3 V digital IO power
J10	NO_USE	-	Not used
J11	DVCC33_IO	-	3.3 V digital IO power
J12	NO_USE	-	Not used
J13	NO_USE	-	Not used
J14	NO_USE	-	Not used
J15	NO_USE	-	Not used
J16	NO_USE	-	Not used
J17	NO_USE	-	Not used
J18	NO_USE	-	Not used
J19	NO_USE	-	Not used
J20	DDRVCCIO	-	1.5 V digital IO power
J21	NO_USE	-	Not used
J22	DGND12_K	-	Digital ground
J23	RDQ5	I/O	Memory data bit 5
J24	RDQ7	I/O	Memory data bit 7
J25	NO_USE	-	Not used
K1	NO_USE	-	Not used
K2	NO_USE	-	Not used
K3	FEOSCEN	I/O	High frequency modulation enable signal output, or LDD serial interface CLK or I2C SCL. The pin is spike-free at power-on stage.
K4	NO_USE	-	Not used
K5	AVDD12_1	-	1.2 V Power Pin
K6	NO_USE	-	Not used
K7	AGND33_2	-	Analog Ground
K8	DVCC33_IO	-	3.3 V digital IO power
K9	DVCC12_K	-	1.2V digital power
K10	NO_USE	-	Not used
K11	DVCC12_K	-	1.2V digital power
K12	DVCC12_K	-	1.2V digital power
K13	NO_USE	-	Not used
K14	NO_USE	-	Not used
K15	DVCC12_K	-	1.2V digital power
K16	NO_USE	-	Not used
K17	DVCC12_K	-	1.2V digital power
K18	DVCC12_K	-	1.2V digital power
K19	DDRVCCIO	-	1.5 V digital IO power
K20	NO_USE	-	Not used
K21	DGND12_K	-	Digital ground
K22	RDQ4	I/O	Memory data bit 4
K23	RDQ6	I/O	Memory data bit 6
K24	NO_USE	-	Not used
K25	NO_USE	-	Not used
L1	FEAINSW3	O	Read gain switch 3.
L2	FEAINSW1	O	Read gain switch 1.
L3	FECMOD	I/O	High frequency modulation mode selection signal output, or LDD serial interface command enable. The pin is spike-free at power-on stage.
L4	FECFREQ	I/O	Frequency selection signal output, or LDD serial interface data or I2C SDA. The pin is spike-free at power-on stage.
L5	DGND12_K	-	Digital ground
L6	DGND12_K	-	Digital ground

Pin No.	Pin Name	I/O	Description
L7	DGND12_K	-	Digital ground
L8	DVCC3_IO	-	3.3 V digital IO power
L9	DVCC12_K	-	1.2V digital power
L10	DGND12_K	-	Digital ground
L11	DGND12_K	-	Digital ground
L12	DGND12_K	-	Digital ground
L13	DGND12_K	-	Digital ground
L14	DGND12_K	-	Digital ground
L15	DGND12_K	-	Digital ground
L16	DGND12_K	-	Digital ground
L17	DVCC12_K	-	1.2V digital power
L18	DVCC12_K	-	1.2V digital power
L19	DDRVCCIO	-	1.5 V digital IO power
L20	DDRVCCIO	-	1.5 V digital IO power
L21	DGND12_K	-	Digital ground
L22	RDQ14	I/O	Memory data bit 14
L23	RDQ13	I/O	Memory data bit 13
L24	NO_USE	-	Not used
L25	NO_USE	-	Not used
M1	NO_USE	-	Not used
M2	FEGAINSW2	O	Read gain switch 2.
M3	FEFMO4	I/O	Feed motor 4 control. DAC output. Alternative function: Auxiliary servo input
M4	NO_USE	-	Not used
M5	NO_USE	-	Not used
M6	NO_USE	-	Not used
M7	NO_USE	-	Not used
M8	NO_USE	-	Not used
M9	NO_USE	-	Not used
M10	DGND12_K	-	Digital ground
M11	NO_USE	-	Not used
M12	DGND12_K	-	Digital ground
M13	NO_USE	-	Not used
M14	DGND12_K	-	Digital ground
M15	NO_USE	-	Not used
M16	DGND12_K	-	Digital ground
M17	NO_USE	-	Not used
M18	NO_USE	-	Not used
M19	NO_USE	-	Not used
M20	NO_USE	-	Not used
M21	NO_USE	-	Not used
M22	NO_USE	-	Not used
M23	RDQ15	I/O	Memory data bit 15
M24	RDQ12	I/O	Memory data bit 12
M25	NO_USE	-	Not used
N1	FEFMO	O	Feed motor 1 control. DAC output.
N2	FEFMO2	O	Feed motor 2 control. DAC output.
N3	FEFMO3	I/O	Feed motor 3 control. DAC output. Alternative function: Auxiliary servo input
N4	DGND12_K	-	Digital ground
N5	FEGIO5	O	General IO
N6	FEGIO7	I/O	General IO. The pin is spike-free at power-on stage. The pin is not allowed to pull-up in circuit layout.
N7	FEGIO6	O	Read gain switch 6. The pin is not allowed to pull-up in circuit layout. General IO
N8	NO_USE	-	Not used

Pin No.	Pin Name	I/O	Description
N9	NO_USE	-	Not used
N10	DGND12_K	-	Digital ground
N11	DGND12_K	-	Digital ground
N12	NO_USE	-	Not used
N13	DGND12_K	-	Digital ground
N14	NO_USE	-	Not used
N15	DGND12_K	-	Digital ground
N16	DGND12_K	-	Digital ground
N17	DVCC12_K	-	1.2V digital power
N18	DVCC12_K	-	1.2V digital power
N19	DDRVCCIO	-	1.5 V digital IO power
N20	DDRVCCIO	-	1.5 V digital IO power
N21	NO_USE	-	Not used
N22	DGND12_K	-	Digital ground
N23	DGND12_K	-	Digital ground
N24	RDQS1_	I/O	Memory negative data strobe bit 1
N25	RDQS1	I/O	Memory positive data strobe bit 1
P1	NO_USE	-	Not used
P2	FETRYPWM	O	Tray DAC / PWM control input. Controlled by uP.
P3	FEDMO	O	Disk motor control output. DAC output.
P4	NO_USE	-	Not used
P5	NO_USE	-	Not used
P6	NO_USE	-	Not used
P7	NO_USE	-	Not used
P8	NO_USE	-	Not used
P9	DVCC12_K	-	1.2V digital power
P10	DGND12_K	-	Digital ground
P11	NO_USE	-	Not used
P12	DGND12_K	-	Digital ground
P13	NO_USE	-	Not used
P14	DGND12_K	-	Digital ground
P15	NO_USE	-	Not used
P16	DGND12_K	-	Digital ground
P17	NO_USE	-	Not used
P18	DVCC12_K	-	1.2V digital power
P19	DDRVCCIO	-	1.5 V digital IO power
P20	NO_USE	-	Not used
P21	NO_USE	-	Not used
P22	NO_USE	-	Not used
P23	NO_USE	-	Not used
P24	RDQS0	I/O	Memory positive data strobe bit 0
P25	RDQS0_	I/O	Memory negative data strobe bit 0
R1	FE_FG	I/O	Motor Hall sensor input. The pin is spike-free at power-on stage.
R2	FEGIO0	I/O	LDD serial interface data. The pin is spike-free at power-on stage. The pin is not allowed to pull-up in circuit layout. General IO
R3	NO_USE	-	Not used
R4	DGND12_K	-	Digital ground
R5	FEGIO9	I/O	General IO. The pin is spike-free at power-on stage. General IO
R6	FEGIO4	O	Read gain switch 4 General IO
R7	NO_USE	-	Not used
R8	NO_USE	-	Not used
R9	NO_USE	-	Not used
R10	DGND12_K	-	Digital ground

Pin No.	Pin Name	I/O	Description
R11	DGND12_K	-	Digital ground
R12	DGND12_K	-	Digital ground
R13	DGND12_K	-	Digital ground
R14	DGND12_K	-	Digital ground
R15	DGND12_K	-	Digital ground
R16	NO_USE	-	Not used
R17	DVCC12_K	-	1.2V digital power
R18	NO_USE	-	Not used
R19	NO_USE	-	Not used
R20	DDRVCCIO	-	1.5 V digital IO power
R21	NO_USE	-	Not used
R22	RDQM1_B	O	Memory data mask bit 1
R23	RDQM0	O	Memory data mask bit 0
R24	RDQ10	I/O	Memory data bit 10
R25	NO_USE	-	Not used
T1	FEEJECT_	I/O	Eject / stop key input, active low. The pin is spike-free at power-on stage. Alternative function: General IO
T2	FE_TRAYIN_	I/O	Tray_is_in Input, A Logical Low Indicates the Tray is IN. Feedback Flag is from Tray Connector. The pin is spike-free at power-on stage. Alternative function: General IO
T3	FEGIO10	I/O	PC RS232 serial receive data. The pin is spike-free at power-on stage.
T4	NO_USE	-	Not used
T5	NO_USE	-	Not used
T6	NO_USE	-	Not used
T7	NO_USE	-	Not used
T8	NO_USE	-	Not used
T9	DVCC12_K	-	1.2V digital power
T10	NO_USE	-	Not used
T11	DVCC12_K	-	1.2V digital power
T12	DVCC12_K	-	1.2V digital power
T13	NO_USE	-	Not used
T14	DVCC12_K	-	1.2V digital power
T15	NO_USE	-	Not used
T16	DVCC12_K	-	1.2V digital power
T17	DVCC12_K	-	1.2V digital power
T18	DDRVCCIO	-	1.5 V digital IO power
T19	RVREFO	I	Memory VREF
T20	NO_USE	-	Not used
T21	DGND12_K	-	Digital ground
T22	RDQ9	I/O	Memory data bit 9
T23	RDQ8	I/O	Memory data bit 8
T24	RDQ11	I/O	Memory data bit 11
T25	NO_USE	-	Not used
U1	FEGIO11	I/O	PC RS232 serial transmit data. The pin is spike-free at power-on stage.
U2	FEGIO3	I/O	LED Control Output. Initial 0 Output. The pin is spike-free at power-on stage. General IO
U3	USB_VRT	O	USB reference resistor
U4	FETRAYOUT_	I/O	Tray_is_in Input, A Logical Low Indicates the Tray is OUT. Feedback Flag is from Tray Connector. The pin is spike-free at power-on stage. Alternative function: General IO
U5	NC AMUTE	I/O	Multiple function: (1) 1st Audio DAC mute (2) GPIO
U6	DGND12_K	-	Digital ground
U7	NO_USE	-	Not used

Pin No.	Pin Name	I/O	Description
U8	NO_USE	-	Not used
U9	DVCC12_K	-	1.2V digital power
U10	NO_USE	-	Not used
U11	DVCC12_K	-	1.2V digital power
U12	DVCC12_K	-	1.2V digital power
U13	NO_USE	-	Not used
U14	DVCC12_K	-	1.2V digital power
U15	DVCC12_K	-	1.2V digital power
U16	DVCC12_K	-	1.2V digital power
U17	NO_USE	-	Not used
U18	NO_USE	-	Not used
U19	NO_USE	-	Not used
U20	NO_USE	-	Not used
U21	RA1	O	Memory address bit 1
U22	DGND12_K	-	Digital ground
U23	RDQ3	I/O	Memory data bit 3
U24	NO_USE	-	Not used
U25	RDQ2	I/O	Memory data bit 2
V1	USB_DP_P2	I/O	USB port2 differential serial data bus (plus)
V2	USB_DM_P2	I/O	USB port2 differential serial data bus (minus)
V3	NO_USE	-	Not used
V4	NO_USE	-	Not used
V5	DGND12_K	-	Digital ground
V6	NO_USE	-	Not used
V7	NO_USE	-	Not used
V8	NO_USE	-	Not used
V9	NO_USE	-	Not used
V10	NO_USE	-	Not used
V11	NO_USE	-	Not used
V12	NO_USE	-	Not used
V13	NO_USE	-	Not used
V14	DDRVCCIO	-	1.5 V digital IO power
V15	NO_USE	-	Not used
V16	DDRVCCIO	-	1.5 V digital IO power
V17	DDRVCCIO	-	1.5 V digital IO power
V18	DDRVCCIO	-	1.5 V digital IO power
V19	NO_USE	-	Not used
V20	NO_USE	-	Not used
V21	NO_USE	-	Not used
V22	RA11	O	Memory address bit 11
V23	RDQ1	I/O	Memory data bit 1
V24	RDQ0	I/O	Memory data bit 0
V25	NO_USE	-	Not used
W1	USB_DP_P0	I/O	USB port0 differential serial data bus (plus)
W2	USB_DM_P0	I/O	USB port0 differential serial data bus (minus)
W3	NO_USE	-	Not used
W4	AVSS33_USB	-	Analog ground for USB
W5	NO_USE	-	Not used
W6	NO_USE	-	Not used
W7	GND EFPWRQ	-	2.5 V power for E-fuse programming
W8	RBA1_B	O	Memory bank address bit 1
W9	NO_USE	-	Not used
W10	RA8_B	O	Memory address bit 8
W11	NO_USE	-	Not used
W12	RA11_B	O	Memory address bit 11

Pin No.	Pin Name	I/O	Description
W13	NO_USE	-	Not used
W14	NO_USE	-	Not used
W15	DDRVCCIO	-	1.5 V digital IO power
W16	DDRVCCIO	-	1.5 V digital IO power
W17	NO_USE	-	Not used
W18	DDRVCCIO	-	1.5 V digital IO power
W19	NO_USE	-	Not used
W20	RA8	O	Memory address bit 8
W21	RA4	O	Memory address bit 4
W22	RA6	O	Memory address bit 6
W23	NO_USE	-	Not used
W24	RODT_B	O	Memory on die termination enable
W25	RRAS_B	O	Memory row address strobe
Y1	USB_DP_P1	I/O	USB port1 differential serial data bus (plus)
Y2	USB_DM_P1	I/O	USB port1 differential serial data bus (minus)
Y3	NO_USE	-	Not used
Y4	NO_USE	-	Not used
Y5	NO_USE	-	Not used
Y6	USB_PCONT GPIO7	I/O	GPIO
Y7	NO_USE	-	Not used
Y8	RA12_B	O	Memory address bit 12
Y9	NO_USE	-	Not used
Y10	RA1_B	O	Memory address bit 1
Y11	NO_USE	-	Not used
Y12	RCAS_B	O	Memory column address strobe
Y13	DGND12_K	-	Digital ground
Y14	DDRVCCIO	-	1.5 V digital IO power
Y15	DGND12_K	-	Digital ground
Y16	NO_USE	-	Not used
Y17	DGND12_K	-	Digital ground
Y18	RVREF0_B	I	Memory VREF
Y19	DGND12_K	-	Digital ground
Y20	NO_USE	-	Not used
Y21	NO_USE	-	Not used
Y22	NO_USE	-	Not used
Y23	RCS_	O	Memory chip select
Y24	RBA0	O	Memory bank address bit 0
Y25	NO_USE	-	Not used
AA1	MFI_SCL	I/O	Serial interface control line
AA2	MFI_SDA	I/O	Serial interface data line
AA3	AVDD33_USB	-	3.3 V Analog power for USB
AA4	JIGMODE0 GPIO4	I/O	GPIO
AA5	XVMUTE GPIO3	I/O	GPIO
AA6	RCKE_B	O	Memory clock enable
AA7	NO_USE	-	Not used
AA8	RA6_B	O	Memory address bit 6
AA9	NO_USE	-	Not used
AA10	RA4_B	O	Memory address bit 4
AA11	NO_USE	-	Not used
AA12	RWE_B	O	Memory write enable
AA13	NO_USE	-	Not used
AA14	NO_USE	-	Not used
AA15	RDQM1_B	O	Memory data mask bit 1

Pin No.	Pin Name	I/O	Description
AA16	NO_USE	-	Not used
AA17	NO_USE	-	Not used
AA18	NO_USE	-	Not used
AA19	DGND12_K	-	Digital ground
AA20	RA12	O	Memory address bit 12
AA21	AVDD33_MEMPLL	-	3.3 V Analog Power for MEMPLL
AA22	NO_USE	-	Not Used
AA23	RA3	O	Memory address bit 3
AA24	RA5	O	Memory address bit 5
AA25	RA0	O	Memory address bit 0
AB1	JIGMODE1 GPIO5	I/O	GPIO
AB2	UPG_STATUS GPIO6	I/O	GPIO
AB3	NFD6	I/O	NAND Flash Data input/output bit6
AB4	DVCC33_IO	-	3.3 V digital IO power
AB5	NO_USE	-	Not used
AB6	RA10_B	O	Memory address bit 10
AB7	NO_USE	-	Not used
AB8	RBA0_B	O	Memory bank address bit 0
AB9	NO_USE	-	Not used
AB10	RA3_B	O	Memory address bit 3
AB11	RA13_B	O	Memory address bit 13
AB12	NO_USE	-	Not used
AB13	DGND12_K	-	Digital ground
AB14	RDQ11_B	I/O	Memory data bit 11
AB15	RDQ10_B	I/O	Memory data bit 10
AB16	RDQM0_B	O	Memory data mask bit 0
AB17	NO_USE	-	Not used
AB18	NO_USE	-	Not used
AB19	AVSS33_MEMPLL	-	Analog Ground for MEMPLL
AB20	NO_USE	-	Not used
AB21	NO_USE	-	Not used
AB22	NO_USE	-	Not used
AB23	NO_USE	-	Not used
AB24	RA7	O	Memory address bit 7
AB25	RA2	O	Memory address bit 2
AC1	NFD7	I/O	NAND Flash Data input/output bit7
AC2	NFD4	I/O	NAND Flash Data input/output bit4
AC3	NFD0	I/O	NAND Flash Data input/output bit0
AC4	NO_USE	-	Not used
AC5	DVCC33_IO	-	3.3 V digital IO power
AC6	NFALE	I/O	NAND Flash address latch enable
AC7	NO_USE	-	Not used
AC8	RA5_B	O	Memory address bit 5
AC9	NO_USE	-	Not used
AC10	RA0_B	O	Memory address bit 9
AC11	RBA2_B	O	Memory bank address bit 2
AC12	RDQ0_B	I/O	Memory data bit 0
AC13	RDQ1_B	I/O	Memory data bit 1
AC14	NO_USE	-	Not used
AC15	RDQ8_B	I/O	Memory data bit 8
AC16	RDQ9_B	I/O	Memory data bit 9
AC17	RDQS1_B	I/O	Memory negative data strobe bit 1
AC18	DGND12_K	-	Digital ground
AC19	RDQ12_B	I/O	Memory data bit 12

HBD-E385/E390/T39

Pin No.	Pin Name	I/O	Description
AC20	RDQ7_B	I/O	Memory data bit 7
AC21	RDQ5_B	I/O	Memory data bit 5
AC22	RCAS_	O	Memory column address strobe
AC23	NO_USE	-	Not used
AC24	RA9	O	Memory address bit 9
AC25	RRESET	O	Memory reset
AD1	NFD5	I/O	NAND Flash Data input/output bit5
AD2	NFD2	I/O	NAND Flash Data input/output bit2
AD3	NFRBN	I/O	NAND Flash ready / busy
AD4	NFCEN	I/O	NAND Flash chip enable
AD5	NFCLE	I/O	NAND Flash command latch enable
AD6	NFWEN	I/O	NAND Flash write enable
AD7	RA9_B	O	Memory address bit 9
AD8	RA7_B	O	Memory address bit 7
AD9	NO_USE	-	Not used
AD10	RODT_B	O	Memory on die termination enable
AD11	NO_USE	-	Not used
AD12	NO_USE	-	Not used
AD13	RDQ2_B	I/O	Memory data bit 2
AD14	NO_USE	-	Not used
AD15	NO_USE	-	Not used
AD16	RDQS0_B	I/O	Memory positive data strobe bit 0
AD17	RDQS1_B	I/O	Memory positive data strobe bit 1
AD18	RDQ15_B	I/O	Memory data bit 15
AD19	NO_USE	-	Not used
AD20	RDQ6_B	I/O	Memory data bit 6
AD21	RDQ4_B	I/O	Memory data bit 4
AD22	RCLK0_B	O	Memory clock 0 positive
AD23	RA10	O	Memory address bit 10
AD24	RBA2	O	Memory bank address bit 2
AD25	RA13	O	Memory address bit 13
AE1	NFD3	I/O	NAND Flash Data input/output bit3
AE2	NFD1	I/O	NAND Flash Data input/output bit1
AE3	NFRBN2	I/O	NAND Flash 2nd ready / busy
AE4	NFREN	I/O	NAND Flash read enable
AE5	NFCEN2	I/O	NAND Flash 2nd chip enable
AE6	NO_USE	-	Not used
AE7	RRESET_B	O	Memory reset
AE8	RA2_B	O	Memory address bit 2
AE9	NO_USE	-	Not used
AE10	RCS_B	O	Memory chip select
AE11	RRAS_B	O	Memory row address strobe
AE12	NO_USE	-	Not used
AE13	RDQ3_B	I/O	Memory data bit 3
AE14	NO_USE	-	Not used
AE15	NO_USE	-	Not used
AE16	RDQS0_B	I/O	Memory negative data strobe bit 0
AE17	NO_USE	-	Not used
AE18	RDQ13_B	I/O	Memory data bit 13
AE19	RDQ14_B	I/O	Memory data bit 14
AE20	NO_USE	-	Not used
AE21	NO_USE	-	Not used
AE22	RCLK0_B	O	Memory clock 0 negative
AE23	RCKE	O	Memory clock enable
AE24	RBA1	O	Memory bank address bit 1
AE25	RWE_	O	Memory write enable

MB148 BOARD (1/9) IC106, IC206 K4B2G1646C-HCH9 (SD-RAM)

Pin No.	Pin Name	I/O	Description
A1	VDDQ	-	DQ Power Supply: 1.5V +/-0.075V
A2	DQU5	I/O	Data Input/output: Bi-directional data bus.
A3	DQU7	I/O	Data Input/output: Bi-directional data bus.
A4	NO_USE	-	Not used
A5	NO_USE	-	Not used
A6	NO_USE	-	Not used
A7	DQU4	I/O	Data Input/output: Bi-directional data bus.
A8	VDDQ	-	DQ Power Supply: 1.5V +/-0.075V
A9	VSS	-	Ground
B1	VSSQ	-	DQ Ground
B2	VDD	-	Power Supply: 1.5V +/-0.075
B3	VSS	-	Ground
B4	NO_USE	-	Not used
B5	NO_USE	-	Not used
B6	NO_USE	-	Not used
B7	$\overline{\text{DQS}}_{\text{U}}$	I/O	Data Strobe: Output with read data, input with write data. Edge-aligned with read data, centered in write data. For the x16, $\overline{\text{DQSL}}$: corresponds to the data on DQL0-DQL7; $\overline{\text{DQSU}}$ corresponds to the data on DQU0-DQU7. The data strobe $\overline{\text{DQS}}$, $\overline{\text{DQSL}}$ and $\overline{\text{DQSU}}$ are paired with differential signals $\overline{\text{DQS}}$, $\overline{\text{DQSL}}$ and $\overline{\text{DQSU}}$, respectively, to provide differential pair signaling to the system during reads and writes. DDR3 SDRAM supports differential data strobe only and does not support single-ended.
B8	DQU6	I/O	Data Input/output: Bi-directional data bus.
B9	VSSQ	-	DQ Ground
C1	VDDQ	-	DQ Power Supply: 1.5V +/-0.075V
C2	DQU3	I/O	Data Input/output: Bi-directional data bus.
C3	DQU1	I/O	Data Input/output: Bi-directional data bus.
C4	NO_USE	-	Not used
C5	NO_USE	-	Not used
C6	NO_USE	-	Not used
C7	$\overline{\text{DQS}}_{\text{U}}$	I/O	Data Strobe: Output with read data, input with write data. Edge-aligned with read data, centered in write data. For the x16, $\overline{\text{DQSL}}$: corresponds to the data on DQL0-DQL7; $\overline{\text{DQSU}}$ corresponds to the data on DQU0-DQU7. The data strobe $\overline{\text{DQS}}$, $\overline{\text{DQSL}}$ and $\overline{\text{DQSU}}$ are paired with differential signals $\overline{\text{DQS}}$, $\overline{\text{DQSL}}$ and $\overline{\text{DQSU}}$, respectively, to provide differential pair signaling to the system during reads and writes. DDR3 SDRAM supports differential data strobe only and does not support single-ended.
C8	DQU2	I/O	Data Input/output: Bi-directional data bus.
C9	VDDQ	-	DQ Power Supply: 1.5V +/-0.075V
D1	VSSQ	-	DQ Ground
D2	VDDQ	-	DQ Power Supply: 1.5V +/-0.075V
D3	DMU	I	Input Data Mask: DM is an input mask signal for write data. Input data is masked when DM is sampled HIGH coincident with that input data during a Write access. DM is sampled on both edges of $\overline{\text{DQS}}$. For x8 device, the function of DM or $\overline{\text{TDQS}}$ / $\overline{\text{TDQS}}$ is enabled by Mode Register A11 setting in MR1.
D4	NO_USE	-	Not used
D5	NO_USE	-	Not used
D6	NO_USE	-	Not used
D7	DQU0	I/O	Data Input/output: Bi-directional data bus.
D8	VSSQ	-	DQ Ground
D9	VDD	-	Power Supply: 1.5V +/-0.075
E1	VSS	-	Ground
E2	VSSQ	-	DQ Ground
E3	DQL0	I/O	Data Input/output: Bi-directional data bus.
E4	NO_USE	-	Not used
E5	NO_USE	-	Not used
E6	NO_USE	-	Not used
E7	DML	I	Input Data Mask: DM is an input mask signal for write data. Input data is masked when DM is sampled HIGH coincident with that input data during a Write access. DM is sampled on both edges of $\overline{\text{DQS}}$. For x8 device, the function of DM or $\overline{\text{TDQS}}$ / $\overline{\text{TDQS}}$ is enabled by Mode Register A11 setting in MR1.
E8	VSSQ	-	DQ Ground

Pin No.	Pin Name	I/O	Description
E9	VDDQ	-	DQ Power Supply: 1.5V +/-0.075V
F1	VDDQ	-	DQ Power Supply: 1.5V +/-0.075V
F2	DQL2	I/O	Data Input/output: Bi-directional data bus.
F3	DQSL	I/O	Data Strobe: Output with read data, input with write data. Edge-aligned with read data, centered in write data. For the x16, DQSL: corresponds to the data on DQL0-DQL7; DQSU corresponds to the data on DQU0-DQU7. The data strobe DQS, DQSL and DQSU are paired with differential signals DQS, DQSL and DQSU, respectively, to provide differential pair signaling to the system during reads and writes. DDR3 SDRAM supports differential data strobe only and does not support single-ended.
F4	NO_USE	-	Not used
F5	NO_USE	-	Not used
F6	NO_USE	-	Not used
F7	DQL1	I/O	Data Input/output: Bi-directional data bus.
F8	DQL3	I/O	Data Input/output: Bi-directional data bus.
F9	VSSQ	-	DQ Ground
G1	VSSQ	-	DQ Ground
G2	DQL6	I/O	Data Input/output: Bi-directional data bus.
G3	$\overline{\text{DQSL}}$	I/O	Data Strobe: Output with read data, input with write data. Edge-aligned with read data, centered in write data. For the x16, DQSL: corresponds to the data on DQL0-DQL7; DQSU corresponds to the data on DQU0-DQU7. The data strobe DQS, DQSL and DQSU are paired with differential signals DQS, DQSL and DQSU, respectively, to provide differential pair signaling to the system during reads and writes. DDR3 SDRAM supports differential data strobe only and does not support single-ended.
G4	NO_USE	-	Not used
G5	NO_USE	-	Not used
G6	NO_USE	-	Not used
G7	VDD	-	Power Supply: 1.5V +/-0.075
G8	VSS	-	Ground
G9	VSSQ	-	DQ Ground
H1	VREFDQ	-	Reference voltage for DQ
H2	VDDQ	-	DQ Power Supply: 1.5V +/-0.075V
H3	DQL4	I/O	Data Input/output: Bi-directional data bus.
H4	NO_USE	-	Not used
H5	NO_USE	-	Not used
H6	NO_USE	-	Not used
H7	DQL7	I/O	Data Input/output: Bi-directional data bus.
H8	DQL5	I/O	Data Input/output: Bi-directional data bus.
H9	VDDQ	-	DQ Power Supply: 1.5V +/-0.075V
J1	NC	-	No Connect: No internal electrical connection is present.
J2	VSS	-	Ground
J3	$\overline{\text{RAS}}$	I	Command Input: $\overline{\text{RAS}}$ (along with $\overline{\text{CS}}$) define the command being entered.
J4	NO_USE	-	Not used
J5	NO_USE	-	Not used
J6	NO_USE	-	Not used
J7	CK	I	Clock: CK is differential clock input. All address and control input signals are sampled on the crossing of the positive edge of CK. Output (read) data is referenced to the crossing of CK.
J8	VSS	-	Ground
J9	NC	-	No Connect: No internal electrical connection is present.
K1	ODT	I	On Die Termination: ODT (registered HIGH) enables termination resistance internal to the DDR3 SDRAM. When enabled, ODT is only applied to each DQ, DQS, DQS and DM/ TDQS, NU/TDQS (When TDQS is enabled via Mode Register A11=1 in MR1) signal for x8 configurations. The ODT pin will be ignored if the Mode Register (MR1) is programmed to disable ODT.
K2	VDD	-	Power Supply: 1.5V +/-0.075
K3	$\overline{\text{CAS}}$	I	Command Input: $\overline{\text{CAS}}$ (along with $\overline{\text{CS}}$) define the command being entered.
K4	NO_USE	-	Not used
K5	NO_USE	-	Not used
K6	NO_USE	-	Not used
K7	$\overline{\text{CK}}$	I	Clock: $\overline{\text{CK}}$ is differential clock input. All address and control input signals are sampled on the crossing of the negative edge of $\overline{\text{CK}}$. Output (read) data is referenced to the crossing of $\overline{\text{CK}}$.
K8	VDD	-	Power Supply: 1.5V +/-0.075

Pin No.	Pin Name	I/O	Description
K9	CKE	I	Clock Enable: CKE HIGH activates, and CKE LOW deactivates, internal clock signal and device input buffers and output drivers. Talking CKE LOW provides Precharge Power-Down and Self Refresh operation (all banks idle), or Active Power-Down (Row Active in any bank). CKE is asynchronous for self refresh exit. After V _{REFCA} has become stable during the power on and initialization sequence, it must be maintained during all operations (including Self-Refresh). CKE must be maintained high throughout read and write accesses. Input buffers, excluding CK, CK, ODT and CKE are disabled during power-down. Input buffers, excluding CKE, are disabled during Self-Refresh.
L1	NC	-	No Connect: No internal electrical connection is present.
L2	$\overline{CS}$	I	Chip Select: All commands are masked when $\overline{CS}$ is registered HIGH. $\overline{CS}$ provides for external Rank selection on system with multiple Ranks. $\overline{CS}$ is considered part of the command code.
L3	$\overline{WE}$	I	Command Input: $\overline{WE}$ (along with $\overline{CS}$) define the command being entered.
L4	NO_USE	-	Not used
L5	NO_USE	-	Not used
L6	NO_USE	-	Not used
L7	A10	I	Address inputs: Provided the row address for active commands and the column address for Read/Write commands to select one location out of the memory array in the respective bank. The address inputs also provide the op-code during Mode Register Set commands. Autoprecharge: A10 is sampled during Read/Write commands to determine whether Auto-precharge should be performed to the accessed bank after the Read/Write operation. (HIGH: Autoprecharge; LOW: No Autoprecharge) A10 is sampled during a Precharge command to determine the Precharge applies to one bank (A10 LOW) or all banks (A10 HIGH). If only one bank is to be precharged, the bank is selected by bank addresses.
L8	ZQ	-	Reference Pin for ZQ calibration
L9	NC	-	No Connect: No internal electrical connection is present.
M1	VSS	-	Ground
M2	BA0	I	Bank Address Inputs: BA0 define to which bank an Active, Read, Write or Precharge command is being applied. Bank address also determines if the mode register or extended mode register is to be accessed during a MRS cycle.
M3	BA2	I	Bank Address Inputs: BA2 define to which bank an Active, Read, Write or Precharge command is being applied. Bank address also determines if the mode register or extended mode register is to be accessed during a MRS cycle.
M4	NO_USE	-	Not used
M5	NO_USE	-	Not used
M6	NO_USE	-	Not used
M7	NC	-	No Connect: No internal electrical connection is present.
M8	VREFCA	-	Reference voltage for CA
M9	VSS	-	Ground
N1	VDD	-	Power Supply: 1.5V +/-0.075
N2	A3	I	Address inputs: Provided the row address for active commands and the column address for Read/Write commands to select one location out of the memory array in the respective bank. The address inputs also provide the op-code during Mode Register Set commands.
N3	A0	I	Address inputs: Provided the row address for active commands and the column address for Read/Write commands to select one location out of the memory array in the respective bank. The address inputs also provide the op-code during Mode Register Set commands.
N4	NO_USE	-	Not used
N5	NO_USE	-	Not used
N6	NO_USE	-	Not used
N7	A12	I	Address inputs: Provided the row address for active commands and the column address for Read/Write commands to select one location out of the memory array in the respective bank. The address inputs also provide the op-code during Mode Register Set commands. Burst Chop: A12 is sampled during Read and Write commands to determine if burst chop (on-the-fly) will be performed. (HIGH: no burst chop, LOW: burst chopped).
N8	BA1	I	Bank Address Inputs: BA1 define to which bank an Active, Read, Write or Precharge command is being applied. Bank address also determines if the mode register or extended mode register is to be accessed during a MRS cycle.
N9	VDD	-	Power Supply: 1.5V +/-0.075
P1	VSS	-	Ground
P2	A5	I	Address inputs: Provided the row address for active commands and the column address for Read/Write commands to select one location out of the memory array in the respective bank. The address inputs also provide the op-code during Mode Register Set commands.
P3	A2	I	Address inputs: Provided the row address for active commands and the column address for Read/Write commands to select one location out of the memory array in the respective bank. The address inputs also provide the op-code during Mode Register Set commands.


Pin No.	Pin Name	I/O	Description
P4	NO_USE	-	Not used
P5	NO_USE	-	Not used
P6	NO_USE	-	Not used
P7	A1	I	Address inputs: Provided the row address for active commands and the column address for Read/Write commands to select one location out of the memory array in the respective bank. The address inputs also provide the op-code during Mode Register Set commands.
P8	A4	I	Address inputs: Provided the row address for active commands and the column address for Read/Write commands to select one location out of the memory array in the respective bank. The address inputs also provide the op-code during Mode Register Set commands.
P9	VSS	-	Ground
R1	VDD	-	Power Supply: 1.5V +/-0.075
R2	A7	I	Address inputs: Provided the row address for active commands and the column address for Read/Write commands to select one location out of the memory array in the respective bank. The address inputs also provide the op-code during Mode Register Set commands.
R3	A9	I	Address inputs: Provided the row address for active commands and the column address for Read/Write commands to select one location out of the memory array in the respective bank. The address inputs also provide the op-code during Mode Register Set commands.
R4	NO_USE	-	Not used
R5	NO_USE	-	Not used
R6	NO_USE	-	Not used
R7	A11	I	Address inputs: Provided the row address for active commands and the column address for Read/Write commands to select one location out of the memory array in the respective bank. The address inputs also provide the op-code during Mode Register Set commands.
R8	A6	I	Address inputs: Provided the row address for active commands and the column address for Read/Write commands to select one location out of the memory array in the respective bank. The address inputs also provide the op-code during Mode Register Set commands.
R9	VDD	-	Power Supply: 1.5V +/-0.075
T1	VSS	-	Ground
T2	$\overline{\text{RESET}}$	I	Active Low Asynchronous Reset: Reset is active when $\overline{\text{RESET}}$ is LOW, and inactive when $\overline{\text{RESET}}$ is HIGH. $\overline{\text{RESET}}$ must be HIGH during normal operation. $\overline{\text{RESET}}$ is CMOS rail to rail signal with DC high and low at 80% and 20% of V_{DD} , example, 1.20V for DC high and 0.30V for DC low.
T3	A13	I	Address inputs: Provided the row address for active commands and the column address for Read/Write commands to select one location out of the memory array in the respective bank. The address inputs also provide the op-code during Mode Register Set commands.
T4	NO_USE	-	Not used
T5	NO_USE	-	Not used
T6	NO_USE	-	Not used
T7	NC	-	No Connect: No internal electrical connection is present.
T8	A8	I	Address inputs: Provided the row address for active commands and the column address for Read/Write commands to select one location out of the memory array in the respective bank. The address inputs also provide the op-code during Mode Register Set commands.
T9	VSS	-	Ground

MB148 BOARD (9/9) IC6301 R5F3650KCDFB (SYSTEM CONTROLLER)

Pin No.	Pin Name	I/O	Description
1	SIRCS_IN	I	SIRCS signal input from the remote control receiver
2	FAN CONT2	O	Fan motor speed control signal output terminal control by DA converter Port output higher, speed slower
3	FL_D_OUT	O	Serial data output to the fluorescent indicator tube driver
4	NO_USE	-	No used
5	FL_CLK	O	Serial data transfer clock signal output to the fluorescent indicator tube driver
6	BYTE	I	External data bus width selection signal input terminal
7	CNVss	I	Processor mode selection signal input terminal
8	NO_USE	-	No used
9	NO_USE	-	No used
10	RESET	I	System reset signal input from the reset signal generator and reset switch "L": reset For several hundreds msec. After the power supply rises, "L" is input, then it change to "H"
11	Xout	O	System clock output terminal (8MHz)
12	Vss	-	Ground terminal
13	Xin	I	System clock input terminal (5MHz)
14	Vcc1	-	Power supply terminal (+3.3V)
15	CEC_TX_RX	I/O	CEC serial data input/output with the HDMI connector
16	NO_USE	-	No used
17	KEY_INT	I	Key wake-up signal input terminal
18	AC_CUT	I	AC cut detection signal input terminal "L": AC cut
19	BD_IF_START	O	Ready signal output to the BD decoder "H": ready
20	NO_USE	-	No used
21	NO_USE	-	No used
22	NO_USE	-	No used
23	BD_IF_REQ	I	Request signal input from the BD decoder
24	NO_USE	-	No used
25	PCONT_FL	O	Power supply on/off control signal output terminal for fluorescent indicator tube driver "H": power on
26	LED_PWM 1	O	LED drive signal output terminal
27	NO_USE	-	No used
28	NO_USE	-	No used
29	TXD1	O	No used
30	RXD1	I	No used
31	ON CHIP DEBUG / CLK1	I	No used
32	NO USE / RTS1	O	No used
33	DAMP_SDAO	I/O	Two-way data bus with the DAMP processor
34	DAMP_SCLO	I/O	Serial data transfer clock signal output to the DAMP processor
35	DC_DET	I	Speaker DC detection signal input terminal "L": speaker DC is detected
36	PCONT1	O	Power supply on/off control signal output terminal "H": power on
37	PCONT2	O	Power supply control signal output terminal
38	PCONT3	O	Power supply on/off control signal output terminal "H": power on
39	EPM	O	EPM for update used
40	STA516_POWER	O	STA516 IC Power Control, "H": power on
41	NO_USE	-	No used
42	FAN_ON	O	Power supply on/off control signal output terminal for fan motor "H": power on
43	NO_USE	-	No used
44	CE	I	Chip enable signal input terminal
45	ST_SDA	I/O	Two-way data bus with the FM receiver
46	ST_SCL	I/O	Serial data transfer clock signal output to the FM receiver
47	PVDD_CONT	O	Power Supply PVDD control for eco used
48	DRIVER_RST (EN)	O	Reset signal output to the power amplifier "L": reset
49	NO_USE	-	No used
50	DAMP_PDN	O	DAMP Driver Standby Control
51	DAMP_XRST	O	Reset signal output to the DAMP processor "L": reset
52	DAMP_XMUTE	O	Muting on/off control signal output to DAMP processor "L": muting on
53	NO_USE	-	No used

Pin No.	Pin Name	I/O	Description
54	NO_USE	-	No used
55	NO_USE	-	No used
56	KARAOKE_MODE	I	Karaoke mode information input terminal
57	MIC_CLK	I/O	Clock signal output terminal
58	MIC_DATA	I/O	Serial data output terminal
59	MIC-DET_OUT	O	Microphone detection signal output terminal
60	Vcc	-	Power supply terminal (+3.3V)
61	NJU72341_POWER	O	Power control for MIC IC
62	Vss	-	Ground terminal
63	PLUG DET / PLUG1 DET / PLUG2 DET	I	Microphone A or B plug insert detection signal input terminal Detection by AD
64	NO_USE	-	No used
65	DRIVE_SD / POW- ER_DET	I	Shut down signal input from the power amplifier "L": shut down
66	NO_USE	-	No used
67	STA516_TH_WARN	I	Thermal warning for temperature of the IC STA516 more than 130 °C
68	FL_CS	O	Chip select signal output to the fluorescent indicator tube driver
69	ASEL0	O	Audio selection signal output terminal "L": external audio input, "H": FM
70	ASEL1	O	Audio selection signal output terminal
71	NO_USE	-	No used
72	NO_USE	-	No used
73	ST_RDS_INT	I	RDS interrupt signal input from the FM receiver
74	NO_USE	-	No used
75	BD_SDI (IF_SDO)	O	Serial data output to the BD decoder
76	BD_SDO (IF_SDI)	I	Serial data input from the BD decoder
77	BD_SCLK	I	Serial data transfer clock signal input from the BD decoder
78	BD_CS	O	Chip select signal output to the BD decoder
79	NO_USE	-	No used
80	NO_USE	-	No used
81	BD_RESET	O	Reset signal output to the BD decoder, NAND flash and EEPROM "L": reset
82	JIG MODE1	I/O	Jig mode selection signal input from the BD decoder
83	OPWRSB	I	Power control signal input from the BD decoder
84	FE EJECT	O	Eject/ stop key input detection signal output to the BD decoder
85	UPG STATUS	I	UPG status signal input from the BD decoder
86	NO_USE	-	No used
87	NO_USE	-	No used
88	NO_USE	-	No used
89	BD_TEMP	I	Temperature detection signal input terminal
90	DESTINATION	I	Destination setting terminal
91	MODEL	I	Model setting terminal Fixed at "L" in this unit
92, 93	KEY2, KEY1	I	Key input terminal
94	Vss	-	Ground terminal
95	KEY0	I	Power supply key input terminal
96	Vref	I	Reference voltage (+3.3V) input terminal
97	Vcc	-	Power supply terminal (+3.3V)
98	NO_USE	-	No used
99	NO_USE	-	No used
100	NO_USE	-	No used


6-2. FRONT PANEL SECTION

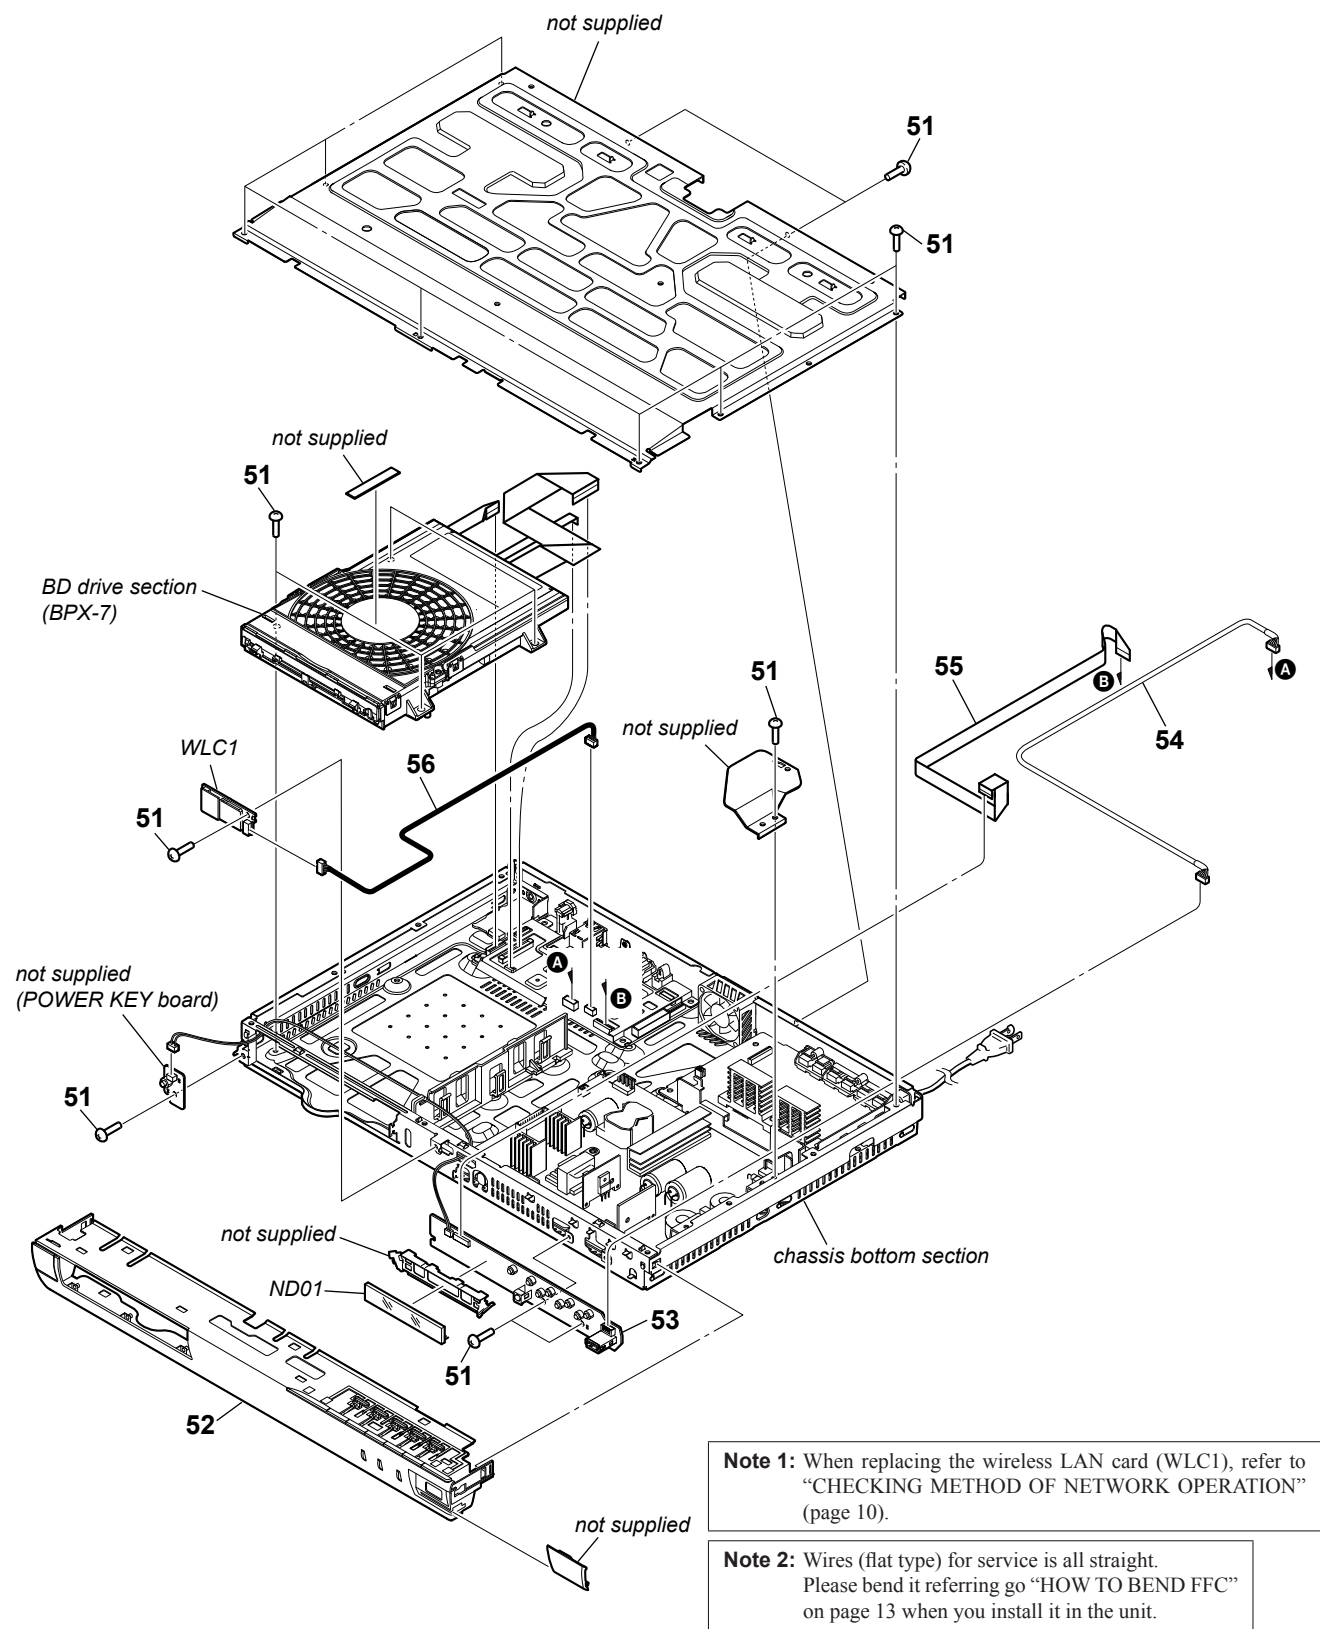

Ref. No.	Part No.	Description	Remark
51	3-077-331-71	+BV3 (3-CR)	
52	X-2582-882-2	FRONT PANEL ASSY (E390)	
52	X-2582-920-2	FRONT PANEL ASSY (T39)	
52	X-2582-921-2	FRONT PANEL ASSY (E385)	
53	A-1848-680-A	PANEL BOARD, COMPLETE	

Ref. No.	Part No.	Description	Remark
54	1-968-135-11	HARNESS (USB)	
55	1-828-333-51	WIRE (FLAT TYPE) (13 CORE)	
56	1-968-113-11	HARNESS (USB)	
ND01	1-483-411-11	VACUUM FLUORESCENT DISPLAY	
WLC1	1-458-494-11	CARD, WIRELESS LAN	


6-3. CHASSIS BOTTOM SECTION

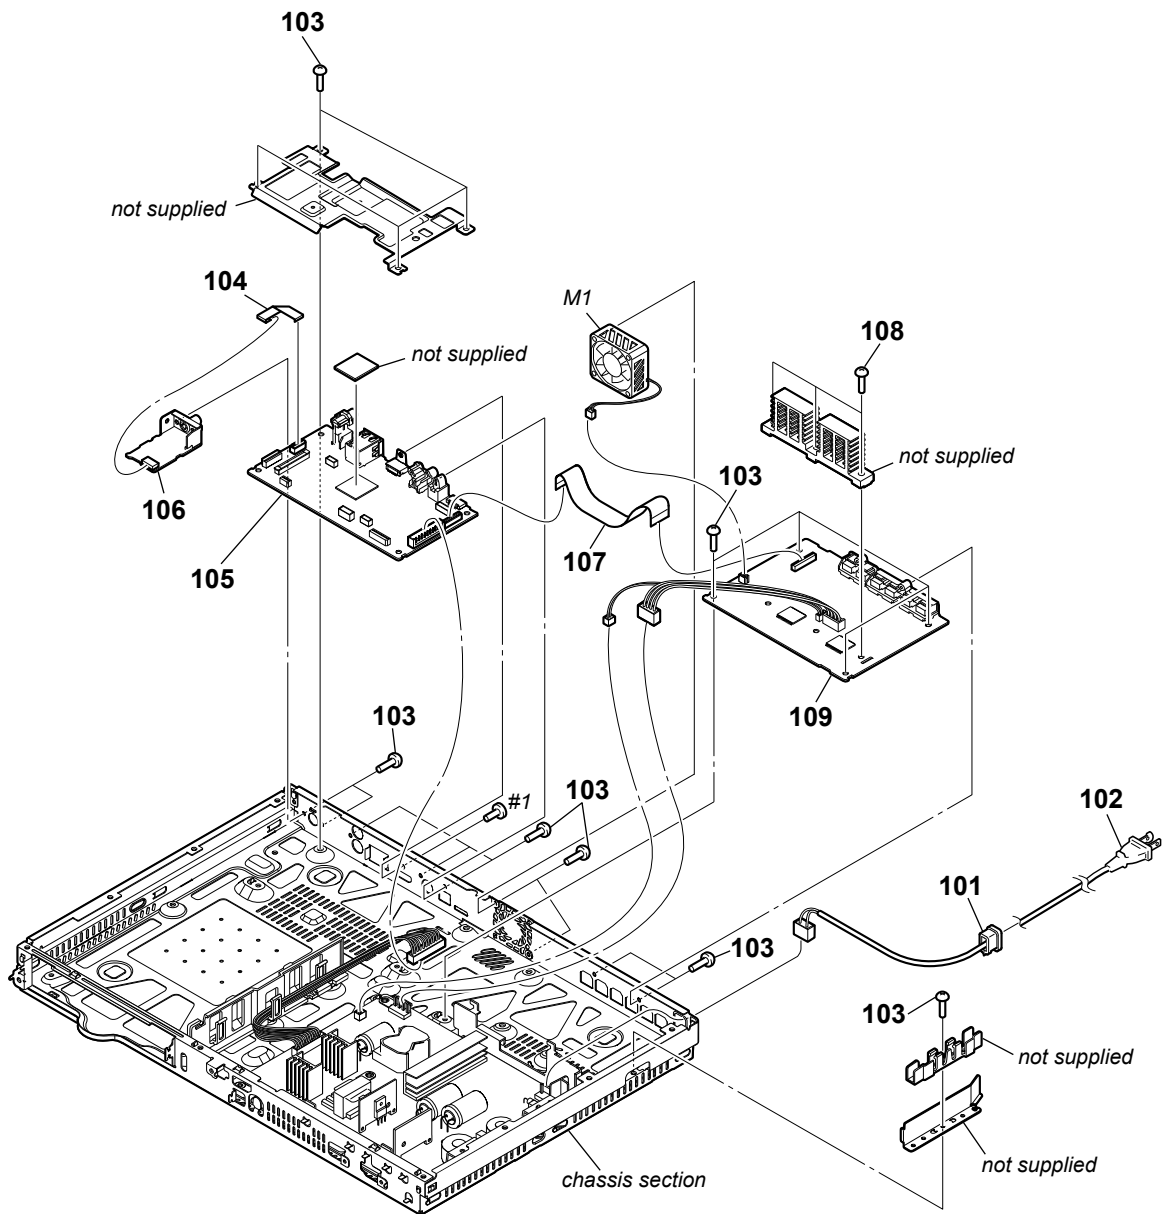

Note: Wires (flat type) for service is all straight.
Please bend it referring go “HOW TO BEND FFC”
on page 13 when you install it in the unit.


Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
△ 101	4-966-267-12	BUSHING (FBS001), CORD		105	A-1871-182-A	MB148 BOARD, COMPLETE (E385)	
△ 102	1-837-308-11	CORD, POWER-SUPPLY		106	A-1846-434-A	TUNER2FMF-NS BOARD, COMPLETE	
103	3-077-331-71	+BV3 (3-CR)		107	1-828-799-51	WIRE (FLAT TYPE) (30 CORE)	
104	1-828-296-51	WIRE (FLAT TYPE) (7 CORE)		108	3-077-331-81	+BV3 (3-CR)	
105	A-1871-179-A	MB148 BOARD, COMPLETE (E390: US)		109	A-1848-679-A	AMP BOARD, COMPLETE	
105	A-1871-180-A	MB148 BOARD, COMPLETE (CND)		△ M1	1-855-134-11	FAN, DC	
105	A-1871-181-A	MB148 BOARD, COMPLETE (T39)		#1	7-682-546-09	SCREW +B 3X5	

6-4. CHASSIS SECTION

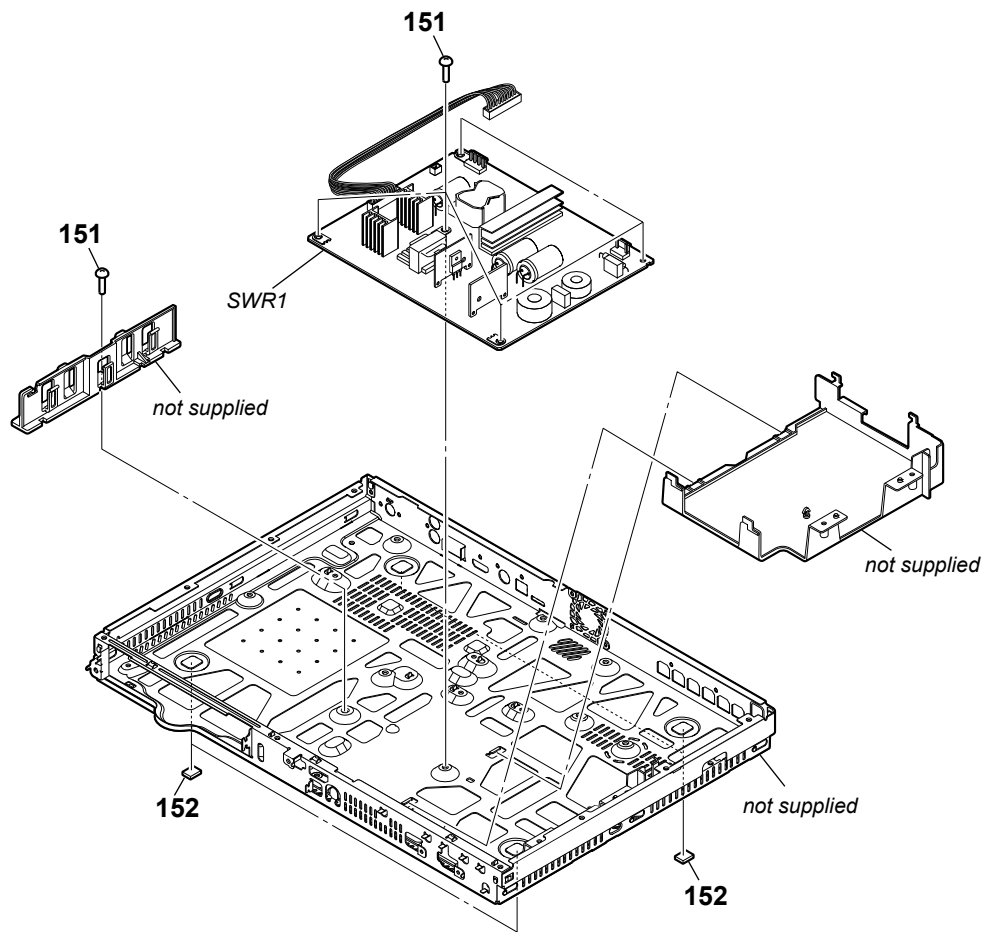

Ref. No.	Part No.	Description	Remark
151	3-077-331-71	+BV3 (3-CR)	
152	4-295-590-01	FOOT	
△ SWR1	1-474-368-11	SWITCHING REGULATOR (3L382W-1)	

6-5. BD DRIVE SECTION (BPX-7)

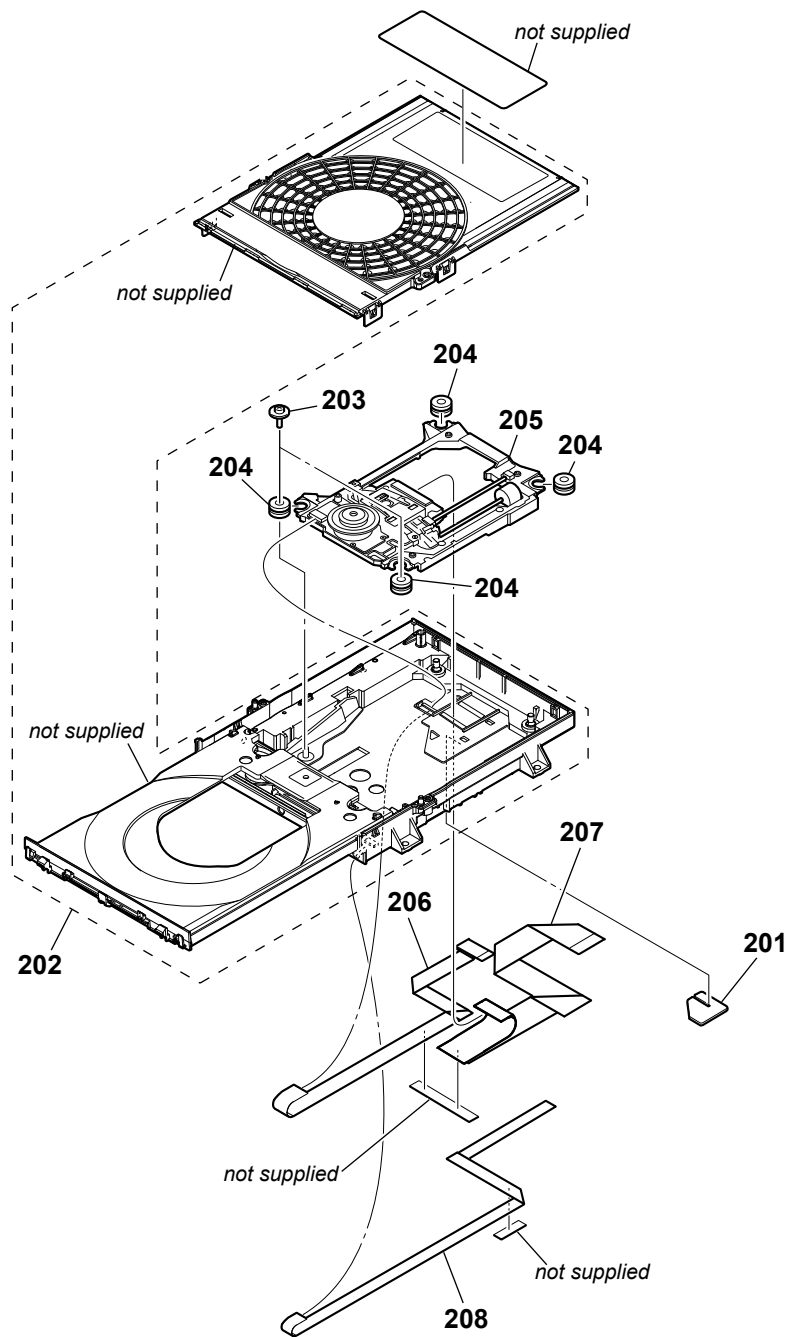

Note: Wires (flat type) for service is all straight.
Please bend it referring go “HOW TO BEND FFC”
on page 13 when you install it in the unit.

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
201	4-295-426-01	COVER, DRIVE		206	1-839-608-61	WIRE (FLAT TYPE) (9 CORE)	
202	A-1850-153-A	LOADING FOR SERVICE (BPX-7)		207	1-839-609-11	FLEXIBLE FLAT CABLE (45 CORE)	
203	2-345-115-01	SCREW (S), FLOAT		208	1-839-611-61	WIRE (FLAT TYPE) (5 CORE)	
204	4-175-937-31	INSULATOR					
△ 205	8-820-452-03	DEVICE, OPTICAL KEM480AAA/C2RP1					

SECTION 7

ELECTRICAL PARTS LIST

AMP

Note:

- Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.
- -XX and -X mean standardized parts, so they may have some difference from the original one.
- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- RESISTORS
All resistors are in ohms.
METAL: Metal-film resistor.
METAL OXIDE: Metal oxide-film resistor.
F: nonflammable
- CAPACITORS
uF: μF
- COILS
uH: μH
- SEMICONDUCTORS
In each case, u: μ , for example:
uA. . . : μA . . . , uPA. . . , μPA . . . ,
uPB. . . : μPB . . . , uPC. . . , μPC . . . ,
uPD. . . : μPD . . .
- Abbreviation
CND : Canadian model

When indicating parts by reference number, please include the board name.

The components identified by mark $\triangle$ or dotted line with mark $\triangle$ are critical for safety.
Replace only with part number specified.

Les composants identifiés par une marque $\triangle$ sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.

The components identified by mark $\hat{\triangle}$ contain confidential information.
Strictly follow the instructions whenever the components are repaired and/or replaced.

Les composants identifiés par la marque $\hat{\triangle}$ contiennent des informations confidentielles.
Suivre scrupuleusement les instructions chaque fois qu'un composant est remplacé et / ou réparé.

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
	A-1848-679-A	AMP BOARD, COMPLETE *****				C3134	1-118-066-11	CERAMIC CHIP 0.1uF	10%	100V	
		< CAPACITOR >				C3135	1-118-066-11	CERAMIC CHIP 0.1uF	10%	100V	
C3013	1-116-717-11	CERAMIC CHIP 10uF	20%	10V		C3136	1-114-868-11	CERAMIC CHIP 0.1uF	10%	50V	
C3014	1-114-868-11	CERAMIC CHIP 0.1uF	10%	50V		C3138	1-114-868-11	CERAMIC CHIP 0.1uF	10%	50V	
C3021	1-116-717-11	CERAMIC CHIP 10uF	20%	10V		C3139	1-114-868-11	CERAMIC CHIP 0.1uF	10%	50V	
C3022	1-116-717-11	CERAMIC CHIP 10uF	20%	10V		C3140	1-118-066-11	CERAMIC CHIP 0.1uF	10%	100V	
C3023	1-116-717-11	CERAMIC CHIP 10uF	20%	10V		C3141	1-118-066-11	CERAMIC CHIP 0.1uF	10%	100V	
C3025	1-114-868-11	CERAMIC CHIP 0.1uF	10%	50V		C3156	1-118-066-11	CERAMIC CHIP 0.1uF	10%	100V	
C3026	1-112-779-11	CERAMIC CHIP 0.047uF	10%	25V		C3157	1-118-066-11	CERAMIC CHIP 0.1uF	10%	100V	
C3027	1-112-776-11	CERAMIC CHIP 0.0047uF	10%	50V		C3163	1-118-119-91	CERAMIC CHIP 0.47uF	10%	100V	
C3028	1-112-779-11	CERAMIC CHIP 0.047uF	10%	25V		C3164	1-118-119-91	CERAMIC CHIP 0.47uF	10%	100V	
C3029	1-112-776-11	CERAMIC CHIP 0.0047uF	10%	50V		C3228	1-100-909-11	CERAMIC CHIP 10uF	10%	6.3V	
C3031	1-114-868-11	CERAMIC CHIP 0.1uF	10%	50V		C3251	1-118-122-11	ELECT 270uF	20%	63V	
C3032	1-114-868-11	CERAMIC CHIP 0.1uF	10%	50V		C3253	1-118-122-11	ELECT 270uF	20%	63V	
C3033	1-114-868-11	CERAMIC CHIP 0.1uF	10%	50V		C3271	1-100-154-91	CERAMIC CHIP 330PF	5%	100V	
C3041	1-114-868-11	CERAMIC CHIP 0.1uF	10%	50V		C3272	1-100-154-91	CERAMIC CHIP 330PF	5%	100V	
C3042	1-114-868-11	CERAMIC CHIP 0.1uF	10%	50V		C3281	1-100-154-91	CERAMIC CHIP 330PF	5%	100V	
C3050	1-117-681-11	ELECT CHIP 100uF	20%	16V		C3282	1-100-154-91	CERAMIC CHIP 330PF	5%	100V	
C3051	1-116-405-11	CERAMIC CHIP 0.01uF	10%	100V		C3306	1-118-066-11	CERAMIC CHIP 0.1uF	10%	100V	
C3099	1-114-831-91	CERAMIC CHIP 1uF	10%	100V		C3307	1-118-066-11	CERAMIC CHIP 0.1uF	10%	100V	
C3106	1-118-066-11	CERAMIC CHIP 0.1uF	10%	100V		C3308	1-114-831-91	CERAMIC CHIP 1uF	10%	100V	
C3107	1-118-066-11	CERAMIC CHIP 0.1uF	10%	100V		C3309	1-114-831-91	CERAMIC CHIP 1uF	10%	100V	
C3108	1-114-831-91	CERAMIC CHIP 1uF	10%	100V		C3315	1-114-868-11	CERAMIC CHIP 0.1uF	10%	50V	
C3109	1-114-831-91	CERAMIC CHIP 1uF	10%	100V		C3317	1-118-066-11	CERAMIC CHIP 0.1uF	10%	100V	
C3115	1-114-868-11	CERAMIC CHIP 0.1uF	10%	50V		C3318	1-114-831-91	CERAMIC CHIP 1uF	10%	100V	
C3117	1-118-066-11	CERAMIC CHIP 0.1uF	10%	100V		C3319	1-114-831-91	CERAMIC CHIP 1uF	10%	100V	
C3118	1-114-831-91	CERAMIC CHIP 1uF	10%	100V		C3320	1-114-868-11	CERAMIC CHIP 0.1uF	10%	50V	
C3119	1-114-831-91	CERAMIC CHIP 1uF	10%	100V		C3322	1-118-066-11	CERAMIC CHIP 0.1uF	10%	100V	
C3120	1-118-066-11	CERAMIC CHIP 0.1uF	10%	100V		C3323	1-118-119-91	CERAMIC CHIP 0.47uF	10%	100V	
C3122	1-114-868-11	CERAMIC CHIP 0.1uF	10%	50V		C3324	1-118-119-91	CERAMIC CHIP 0.47uF	10%	100V	
C3123	1-118-119-91	CERAMIC CHIP 0.47uF	10%	100V		C3328	1-114-869-11	CERAMIC CHIP 2.2uF	10%	6.3V	
C3124	1-118-119-91	CERAMIC CHIP 0.47uF	10%	100V		C3331	1-116-717-11	CERAMIC CHIP 10uF	20%	10V	
C3127	1-114-869-11	CERAMIC CHIP 2.2uF	10%	6.3V		C3333	1-116-717-11	CERAMIC CHIP 10uF	20%	10V	
C3131	1-116-717-11	CERAMIC CHIP 10uF	20%	10V		C3334	1-118-066-11	CERAMIC CHIP 0.1uF	10%	100V	
C3133	1-116-717-11	CERAMIC CHIP 10uF	20%	10V		C3335	1-118-066-11	CERAMIC CHIP 0.1uF	10%	100V	
						C3336	1-114-868-11	CERAMIC CHIP 0.1uF	10%	50V	
						C3338	1-114-868-11	CERAMIC CHIP 0.1uF	10%	50V	

Note: When the AMP board is replaced, spread the compound referring to "NOTE OF REPLACING THE IC3102 AND IC3302 ON THE AMP BOARD AND THE COMPLETE AMP BOARD" on servicing notes (page 10).

Note: When the IC3102 and IC3302 on the AMP board are replaced, spread the compound referring to "NOTE OF REPLACING THE IC3102 AND IC3302 ON THE AMP BOARD AND THE COMPLETE AMP BOARD" on servicing notes (page 10).

HBD-E385/E390/T39

AMP MB148

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
R3153	1-220-281-11	METAL CHIP	4.7K	5%	1/4W	R3530	1-216-295-91	SHORT CHIP	0		
R3154	1-220-281-11	METAL CHIP	4.7K	5%	1/4W	R3531	1-216-295-91	SHORT CHIP	0		
R3155	1-220-281-11	METAL CHIP	4.7K	5%	1/4W	R3532	1-216-295-91	SHORT CHIP	0		
R3156	1-220-281-11	METAL CHIP	4.7K	5%	1/4W	R3543	1-218-853-11	METAL CHIP	1.8K	0.5%	1/10W
R3157	1-218-232-91	METAL CHIP	4.7	10%	1/2W	R3544	1-216-864-11	SHORT CHIP	0		
R3158	1-218-232-91	METAL CHIP	4.7	10%	1/2W	R3555	1-218-973-11	METAL CHIP	47K	5%	1/16W
R3161	1-218-965-11	METAL CHIP	10K	5%	1/16W	R3556	1-218-969-11	METAL CHIP	22K	5%	1/16W
R3162	1-218-965-11	METAL CHIP	10K	5%	1/16W	R3557	1-208-927-11	METAL CHIP	47K	0.5%	1/16W
R3212	1-218-977-11	METAL CHIP	100K	5%	1/16W	R3558	1-208-911-11	METAL CHIP	10K	0.5%	1/16W
R3271	1-218-282-11	METAL CHIP	22	5%	1/2W	R3559	1-208-683-11	METAL CHIP	1K	0.5%	1/16W
R3272	1-218-282-11	METAL CHIP	22	5%	1/2W	R3560	1-218-977-11	METAL CHIP	100K	5%	1/16W
R3281	1-218-282-11	METAL CHIP	22	5%	1/2W	R3561	1-216-296-11	SHORT CHIP	0		
R3282	1-218-282-11	METAL CHIP	22	5%	1/2W	R3562	1-216-296-11	SHORT CHIP	0		
R3283	1-218-232-91	METAL CHIP	4.7	10%	1/2W	R3563	1-216-296-11	SHORT CHIP	0		
R3284	1-218-232-91	METAL CHIP	4.7	10%	1/2W	R3564	1-216-296-11	SHORT CHIP	0		
R3301	1-219-365-11	SHORT CHIP	0			R3902	1-216-839-11	METAL CHIP	33K	5%	1/10W
R3311	1-219-365-11	SHORT CHIP	0			R3903	1-216-839-11	METAL CHIP	33K	5%	1/10W
R3312	1-218-977-11	METAL CHIP	100K	5%	1/16W	R3904	1-216-839-11	METAL CHIP	33K	5%	1/10W
R3345	1-216-296-11	SHORT CHIP	0			R3905	1-216-839-11	METAL CHIP	33K	5%	1/10W
R3348	1-216-864-11	SHORT CHIP	0			< COMPOSITION CIRCUIT BLOCK >					
R3353	1-220-281-11	METAL CHIP	4.7K	5%	1/4W	RB3001	1-234-372-11	RES, NETWORK 100 (1005X4)			
R3354	1-220-281-11	METAL CHIP	4.7K	5%	1/4W	RB3002	1-234-372-11	RES, NETWORK 100 (1005X4)			
R3355	1-220-281-11	METAL CHIP	4.7K	5%	1/4W	RB3003	1-239-409-11	RES, CHIP NETWORK 47 (3216)			
R3356	1-220-281-11	METAL CHIP	4.7K	5%	1/4W	RB3102	1-233-575-11	RES, CHIP NETWORK 22 (3216)			
R3357	1-218-232-91	METAL CHIP	4.7	10%	1/2W	RB3302	1-233-575-11	RES, CHIP NETWORK 22 (3216)			
R3358	1-218-232-91	METAL CHIP	4.7	10%	1/2W	RB3303	1-234-381-11	RES, NETWORK 100K (1005X4)			
R3361	1-218-965-11	METAL CHIP	10K	5%	1/16W	RB3304	1-234-381-11	RES, NETWORK 100K (1005X4)			
R3371	1-218-282-11	METAL CHIP	22	5%	1/2W	RB3305	1-234-381-11	RES, NETWORK 100K (1005X4)			
R3372	1-218-282-11	METAL CHIP	22	5%	1/2W	< TERMINAL >					
R3381	1-218-282-11	METAL CHIP	22	5%	1/2W	TB3401	1-780-452-11	TERMINAL BOARD (SPEAKER) 2P			
R3382	1-218-282-11	METAL CHIP	22	5%	1/2W			(SPEAKERS SUR R/SUR L)			
R3383	1-218-232-91	METAL CHIP	4.7	10%	1/2W	TB3451	1-780-951-11	TERMINAL BOARD (SPEAKER) 4P			
R3384	1-218-232-91	METAL CHIP	4.7	10%	1/2W			(SPEAKERS FRONT R/FRONT L/SUBWOOFER/ CENTER)			
R3501	1-218-953-11	METAL CHIP	1K	5%	1/16W	*****					
R3502	1-218-953-11	METAL CHIP	1K	5%	1/16W	Ⓔ	A-1871-179-A	MB148 BOARD, COMPLETE (for SERVICE)			
R3504	1-208-703-11	METAL CHIP	6.8K	0.5%	1/16W			(E390: US)			
R3505	1-218-990-81	SHORT CHIP	0			Ⓔ	A-1871-180-A	MB148 BOARD, COMPLETE (for SERVICE) (CND)			
R3506	1-218-990-81	SHORT CHIP	0			Ⓔ	A-1871-181-A	MB148 BOARD, COMPLETE (for SERVICE) (T39)			
R3507	1-208-675-11	METAL CHIP	470	0.5%	1/16W	Ⓔ	A-1871-182-A	MB148 BOARD, COMPLETE (for SERVICE) (E385)			
R3509	1-216-295-91	SHORT CHIP	0					*****			
R3510	1-216-295-91	SHORT CHIP	0			< CAPACITOR >					
R3511	1-216-295-91	SHORT CHIP	0			C114	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
R3512	1-216-295-91	SHORT CHIP	0			C115	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
R3513	1-216-295-91	SHORT CHIP	0			C118	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
R3514	1-216-295-91	SHORT CHIP	0			C119	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
R3515	1-216-295-91	SHORT CHIP	0			C120	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
R3516	1-216-295-91	SHORT CHIP	0			C121	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
R3517	1-216-295-91	SHORT CHIP	0			C122	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
R3518	1-216-295-91	SHORT CHIP	0			C123	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
R3519	1-216-295-91	SHORT CHIP	0			C124	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
R3520	1-216-295-91	SHORT CHIP	0			C125	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
R3521	1-216-295-91	SHORT CHIP	0			* C128	1-116-719-11	CERAMIC CHIP	10uF	10%	6.3V
R3522	1-216-295-91	SHORT CHIP	0			C129	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
R3523	1-216-295-91	SHORT CHIP	0			C159	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
R3524	1-216-295-91	SHORT CHIP	0			C202	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
R3525	1-216-295-91	SHORT CHIP	0			C203	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
R3526	1-216-295-91	SHORT CHIP	0								
R3527	1-216-295-91	SHORT CHIP	0								
R3528	1-216-295-91	SHORT CHIP	0								
R3529	1-216-295-91	SHORT CHIP	0								

Ref. No.	Part No.	Description			Remark	Ref. No.	Part No.	Description			Remark
C204	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V	C806	1-112-777-11	CERAMIC CHIP	0.01uF	10%	25V
C206	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V	C811	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
C207	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V	C812	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
C211	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V	C1101	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
* C214	1-116-719-11	CERAMIC CHIP	10uF	10%	6.3V	C1102	1-100-905-11	CERAMIC CHIP	0.001uF	10%	50V
C215	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V	C1105	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
* C217	1-116-738-11	CERAMIC CHIP	1uF	10%	6.3V	C1106	1-100-905-11	CERAMIC CHIP	0.001uF	10%	50V
C307	1-112-777-11	CERAMIC CHIP	0.01uF	10%	25V	C1110	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
* C318	1-116-714-11	CERAMIC CHIP	22uF	20%	6.3V	C1112	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
C340	1-116-717-11	CERAMIC CHIP	10uF	20%	10V	C1118	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
C341	1-116-717-11	CERAMIC CHIP	10uF	20%	10V	C1121	1-112-298-91	CERAMIC CHIP	1uF	10%	16V
C343	1-116-717-11	CERAMIC CHIP	10uF	20%	10V	C1122	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
C346	1-112-777-11	CERAMIC CHIP	0.01uF	10%	25V	C1123	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
C347	1-112-298-91	CERAMIC CHIP	1uF	10%	16V	C1129	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
C348	1-112-776-11	CERAMIC CHIP	0.0047uF	10%	50V	C1134	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
C349	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V	C1152	1-112-298-91	CERAMIC CHIP	1uF	10%	16V
C350	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V	C1153	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
* C351	1-116-714-11	CERAMIC CHIP	22uF	20%	6.3V	C1155	1-112-298-91	CERAMIC CHIP	1uF	10%	16V
* C352	1-116-714-11	CERAMIC CHIP	22uF	20%	6.3V	C1172	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
* C353	1-116-714-11	CERAMIC CHIP	22uF	20%	6.3V	C1174	1-112-298-91	CERAMIC CHIP	1uF	10%	16V
C362	1-112-775-11	CERAMIC CHIP	0.0022uF	10%	50V	C1175	1-112-777-11	CERAMIC CHIP	0.01uF	10%	25V
C373	1-112-777-11	CERAMIC CHIP	0.01uF	10%	25V	C1176	1-112-298-91	CERAMIC CHIP	1uF	10%	16V
C385	1-112-777-11	CERAMIC CHIP	0.01uF	10%	25V	C1177	1-112-777-11	CERAMIC CHIP	0.01uF	10%	25V
C442	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V	C1178	1-112-777-11	CERAMIC CHIP	0.01uF	10%	25V
C446	1-164-850-11	CERAMIC CHIP	10PF	0.5PF	50V	C1190	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
C447	1-164-852-11	CERAMIC CHIP	12PF	5%	50V	C1201	1-116-716-11	CERAMIC CHIP	10uF	10%	16V
C452	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V	C1202	1-116-716-11	CERAMIC CHIP	10uF	10%	16V
C456	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V	C1203	1-112-298-91	CERAMIC CHIP	1uF	10%	16V
C457	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V	C1205	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
C458	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V	C1206	1-112-298-91	CERAMIC CHIP	1uF	10%	16V
C459	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V	C1207	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
C460	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V	C1209	1-112-298-91	CERAMIC CHIP	1uF	10%	16V
C461	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V	C1211	1-112-298-91	CERAMIC CHIP	1uF	10%	16V
C462	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V	C1213	1-112-298-91	CERAMIC CHIP	1uF	10%	16V
C463	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V	C1222	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
C464	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V	C1223	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
C465	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V	C1224	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
C466	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V	C1226	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
C467	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V	C1229	1-112-777-11	CERAMIC CHIP	0.01uF	10%	25V
C468	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V	C1230	1-112-777-11	CERAMIC CHIP	0.01uF	10%	25V
C469	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V	C1270	1-112-777-11	CERAMIC CHIP	0.01uF	10%	25V
* C470	1-116-719-11	CERAMIC CHIP	10uF	10%	6.3V	C1280	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
* C471	1-116-719-11	CERAMIC CHIP	10uF	10%	6.3V	C1290	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
C504	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V	C5301	1-116-716-11	CERAMIC CHIP	10uF	10%	16V
* C603	1-116-719-11	CERAMIC CHIP	10uF	10%	6.3V	C5302	1-116-716-11	CERAMIC CHIP	10uF	10%	16V
* C632	1-116-719-11	CERAMIC CHIP	10uF	10%	6.3V	C5307	1-112-775-11	CERAMIC CHIP	0.0022uF	10%	50V
* C633	1-116-719-11	CERAMIC CHIP	10uF	10%	6.3V	C5310	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
C702	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V	C5311	1-100-905-11	CERAMIC CHIP	0.001uF	10%	50V
C713	1-112-067-11	CERAMIC CHIP	0.22uF	10%	16V	C5312	1-112-298-91	CERAMIC CHIP	1uF	10%	16V
C715	1-112-067-11	CERAMIC CHIP	0.22uF	10%	16V	C5313	1-112-777-11	CERAMIC CHIP	0.01uF	10%	25V
C716	1-112-777-11	CERAMIC CHIP	0.01uF	10%	25V	* C5314	1-116-714-11	CERAMIC CHIP	22uF	20%	6.3V
C717	1-112-067-11	CERAMIC CHIP	0.22uF	10%	16V	* C5315	1-116-714-11	CERAMIC CHIP	22uF	20%	6.3V
C719	1-112-777-11	CERAMIC CHIP	0.01uF	10%	25V	C5317	1-116-717-11	CERAMIC CHIP	10uF	20%	10V
C720	1-112-067-11	CERAMIC CHIP	0.22uF	10%	16V	C5319	1-112-298-91	CERAMIC CHIP	1uF	10%	16V
C723	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V	C5320	1-116-717-11	CERAMIC CHIP	10uF	20%	10V
C724	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V	C5321	1-100-905-11	CERAMIC CHIP	0.001uF	10%	50V
* C801	1-116-738-11	CERAMIC CHIP	1uF	10%	6.3V	* C5325	1-116-719-11	CERAMIC CHIP	10uF	10%	6.3V
C802	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V	C5362	1-112-775-11	CERAMIC CHIP	0.0022uF	10%	50V
* C804	1-116-738-11	CERAMIC CHIP	1uF	10%	6.3V	C5601	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V
C805	1-100-916-11	CERAMIC CHIP	0.1uF	10%	16V	* C5602	1-116-719-11	CERAMIC CHIP	10uF	10%	6.3V

HBD-E385/E390/T39

MB148

Ref. No.	Part No.	Description	Remark
* C5603	1-116-719-11	CERAMIC CHIP 10uF 10%	6.3V
C5604	1-114-130-11	CERAMIC CHIP 1uF 10%	6.3V
* C5605	1-116-719-11	CERAMIC CHIP 10uF 10%	6.3V
* C5606	1-116-719-11	CERAMIC CHIP 10uF 10%	6.3V
C5701	1-112-777-11	CERAMIC CHIP 0.01uF 10%	25V
C5703	1-100-916-11	CERAMIC CHIP 0.1uF 10%	16V
* C5705	1-116-738-11	CERAMIC CHIP 1uF 10%	6.3V
* C5706	1-116-738-11	CERAMIC CHIP 1uF 10%	6.3V
C5708	1-100-916-11	CERAMIC CHIP 0.1uF 10%	16V
C5901	1-100-916-11	CERAMIC CHIP 0.1uF 10%	16V
C5905	1-164-939-11	CERAMIC CHIP 0.0022uF 10%	50V
C5906	1-100-916-11	CERAMIC CHIP 0.1uF 10%	16V
* C5909	1-116-719-11	CERAMIC CHIP 10uF 10%	6.3V
* C5910	1-116-719-11	CERAMIC CHIP 10uF 10%	6.3V
C5913	1-164-866-11	CERAMIC CHIP 47PF 5%	50V
C5914	1-164-866-11	CERAMIC CHIP 47PF 5%	50V
* C5915	1-116-719-11	CERAMIC CHIP 10uF 10%	6.3V
* C5916	1-116-719-11	CERAMIC CHIP 10uF 10%	6.3V
C5917	1-116-717-11	CERAMIC CHIP 10uF 20%	10V
C5920	1-112-298-91	CERAMIC CHIP 1uF 10%	16V
C5922	1-112-298-91	CERAMIC CHIP 1uF 10%	16V
C5923	1-100-916-11	CERAMIC CHIP 0.1uF 10%	16V
* C5924	1-116-719-11	CERAMIC CHIP 10uF 10%	6.3V
* C5927	1-116-719-11	CERAMIC CHIP 10uF 10%	6.3V
C5928	1-100-916-11	CERAMIC CHIP 0.1uF 10%	16V
C5929	1-100-916-11	CERAMIC CHIP 0.1uF 10%	16V
* C5930	1-116-719-11	CERAMIC CHIP 10uF 10%	6.3V
* C5931	1-116-719-11	CERAMIC CHIP 10uF 10%	6.3V
* C5932	1-100-916-11	CERAMIC CHIP 0.1uF 10%	16V
* C5933	1-116-719-11	CERAMIC CHIP 10uF 10%	6.3V
C5936	1-112-777-11	CERAMIC CHIP 0.01uF 10%	25V
* C5937	1-116-719-11	CERAMIC CHIP 10uF 10%	6.3V
C6205	1-137-765-21	ELECT CHIP 47uF 20%	16V
C6212	1-137-765-21	ELECT CHIP 47uF 20%	16V
C6304	1-100-916-11	CERAMIC CHIP 0.1uF 10%	16V
C6305	1-100-916-11	CERAMIC CHIP 0.1uF 10%	16V
C6306	1-100-916-11	CERAMIC CHIP 0.1uF 10%	16V
C6307	1-100-916-11	CERAMIC CHIP 0.1uF 10%	16V
C6308	1-100-916-11	CERAMIC CHIP 0.1uF 10%	16V
C6309	1-100-916-11	CERAMIC CHIP 0.1uF 10%	16V
C6310	1-100-916-11	CERAMIC CHIP 0.1uF 10%	16V
C6311	1-100-905-11	CERAMIC CHIP 0.001uF 10%	50V
C6312	1-112-067-11	CERAMIC CHIP 0.22uF 10%	16V
C6313	1-112-777-11	CERAMIC CHIP 0.01uF 10%	25V
C6316	1-100-916-11	CERAMIC CHIP 0.1uF 10%	16V
C6319	1-100-916-11	CERAMIC CHIP 0.1uF 10%	16V
C6320	1-112-298-91	CERAMIC CHIP 1uF 10%	16V
C6321	1-112-777-11	CERAMIC CHIP 0.01uF 10%	25V
C6324	1-112-298-91	CERAMIC CHIP 1uF 10%	16V
C6325	1-107-819-11	CERAMIC CHIP 0.022uF 10%	16V
C6401	1-100-916-11	CERAMIC CHIP 0.1uF 10%	16V
C6402	1-100-916-11	CERAMIC CHIP 0.1uF 10%	16V
* C6403	1-116-719-11	CERAMIC CHIP 10uF 10%	6.3V
C6405	1-100-916-11	CERAMIC CHIP 0.1uF 10%	16V
C6410	1-164-866-11	CERAMIC CHIP 47PF 5%	50V
C6412	1-100-905-11	CERAMIC CHIP 0.001uF 10%	50V
C6413	1-164-866-11	CERAMIC CHIP 47PF 5%	50V
C8001	1-100-916-11	CERAMIC CHIP 0.1uF 10%	16V
C8002	1-100-916-11	CERAMIC CHIP 0.1uF 10%	16V
* C8004	1-116-719-11	CERAMIC CHIP 10uF 10%	6.3V

Ref. No.	Part No.	Description	Remark
C8005	1-112-777-11	CERAMIC CHIP 0.01uF 10%	25V
C8006	1-112-777-11	CERAMIC CHIP 0.01uF 10%	25V
C8007	1-164-856-81	CERAMIC CHIP 18PF 5%	50V
C8008	1-164-852-11	CERAMIC CHIP 12PF 5%	50V
* C8009	1-116-719-11	CERAMIC CHIP 10uF 10%	6.3V
C8010	1-100-916-11	CERAMIC CHIP 0.1uF 10%	16V
C8011	1-100-916-11	CERAMIC CHIP 0.1uF 10%	16V
* C8012	1-116-719-11	CERAMIC CHIP 10uF 10%	6.3V
C8013	1-100-916-11	CERAMIC CHIP 0.1uF 10%	16V
< CONNECTOR/JACK >			
CN602	1-573-768-21	PIN, CONNECTOR (1.5MM) (SMD) 5P	
CN603	1-573-768-61	PIN, CONNECTOR (1.5MM) (SMD) 5P	
CN701	1-821-398-21	HDMI CONNECTOR (HDMI OUT ARC)	
CN801	1-819-875-31	UDE ETHERNET CONNECTOR (8P) (LAN (100))	
CN1001	1-573-806-21	PIN, CONNECTOR (1.5MM) (SMD) 6P	
CN1101	1-843-036-11	FFC/FPC CONNECTOR 45P	
CN1260	1-820-112-51	CONNECTOR, FFC/FPC 9P	
CN1270	1-794-362-51	CONNECTOR, FFC/FPC 5P	
CN5301	1-794-032-21	PIN, CONNECTOR (PC BOARD) 11P	
CN5902	1-785-466-51	CONNECTOR, FFC/FPC 7P	
CN6302	1-784-861-51	CONNECTOR, FFC (LIF (NON-ZIF)) 9P	
CN6303	1-785-468-51	CONNECTOR, FFC/FPC 13P	
< DIODE >			
D303	6-503-735-01	DI BZT52H-C4V3	
D304	6-503-735-01	DI BZT52H-C4V3	
D5302	6-503-752-01	DI BZT52H-C6V2	
D5303	6-502-961-01	DI DA2J10100L	
D5901	6-500-848-01	DIODE MC2840-T112-1	
D6301	6-502-961-01	DI DA2J10100L	
D6302	6-502-961-01	DI DA2J10100L	
D6304	6-502-961-01	DI DA2J10100L	
D6308	6-502-961-01	DI DA2J10100L	
< FUSE >			
△ F5301	1-523-132-31	FUSE (1A/50V)	
△ F5303	1-523-135-31	FUSE (3.15A/32V)	
△ F5304	1-523-132-31	FUSE (1A/50V)	
△ F5305	1-523-135-31	FUSE (3.15A/32V)	
△ F5306	1-523-132-31	FUSE (1A/50V)	
△ F5307	1-523-132-31	FUSE (1A/50V)	
< RESISTOR/FERRITE BEAD >			
FB1190	1-216-864-11	SHORT CHIP 0	
FB1199	1-216-864-11	SHORT CHIP 0	
FB1200	1-244-161-81	METAL CHIP 2.2 5% 1/16W	
FB1210	1-216-295-91	SHORT CHIP 0	
FB1212	1-216-864-11	SHORT CHIP 0	
FB5903	1-400-462-21	FERRITE, EMI (SMD) (1005)	
FB8001	1-469-152-11	FERRITE, EMI (SMD) (2012)	
FB8002	1-469-152-11	FERRITE, EMI (SMD) (2012)	
FB8003	1-500-283-11	INDUCTOR, FERRITE BEAD	
< IC >			
IC101	(Not supplied)	IC CXD90008G-AA	
@*IC106	6-716-964-01	IC K4B2G1646C-HCH9	
@ IC106	6-718-284-01	IC H5TQ2G63BFR-H9CR-C	
@*IC206	6-716-964-01	IC K4B2G1646C-HCH9	
@ IC206	6-718-284-01	IC H5TQ2G63BFR-H9CR-C	

@ Replacement of IC106 and IC206 on the MB148 board used in this unit requires a special tool.

Note: IC101 on the MB148 board cannot exchange with single. When this part is damaged, exchange the complete mounted board.

Ref. No.	Part No.	Description	Remark				Ref. No.	Part No.	Description	Remark			
IC307	6-717-879-01	IC RT8293ALZSP					R207	1-208-668-11	METAL CHIP	240	0.5%	1/16W	
IC308	6-714-935-01	IC TPS54225PWPR					R302	1-216-295-91	SHORT CHIP	0			
IC501	(Not supplied)	IC TC58NVG1S3ETA00B3Q					R327	1-218-953-11	METAL CHIP	1K	5%	1/16W	
IC501	(Not supplied)	IC H27U2G8F2CTR-BCR					* R330	1-250-507-11	METAL CHIP	3.3K	1%	1/16W	
IC704	6-702-302-01	IC TK11133CSCL-G											
IC705	6-705-337-01	IC TK11150CSCL-G					* R331	1-250-511-11	METAL CHIP	4.7K	1%	1/16W	
IC1151	6-718-188-01	IC BD80GA3WEFJ-E2					* R332	1-250-499-11	METAL CHIP	1.5K	1%	1/16W	
IC1201	6-718-022-11	IC TPIC2050RDFDRG4					R333	1-208-695-11	METAL CHIP	3.3K	0.5%	1/16W	
IC5301	6-717-879-01	IC RT8293ALZSP					R334	1-208-695-11	METAL CHIP	3.3K	0.5%	1/16W	
IC5302	6-716-739-01	IC BD00GC0WEFJ-SE2					R335	1-208-859-81	METAL CHIP	68	0.5%	1/16W	
IC5303	6-711-049-01	IC S-1170B33UC-OTSTFG					* R336	1-250-507-11	METAL CHIP	3.3K	1%	1/16W	
IC5601	6-717-848-01	IC NCP380HSNAJAAT1G					R340	1-218-953-11	METAL CHIP	1K	5%	1/16W	
IC5602	6-717-848-01	IC NCP380HSNAJAAT1G					R341	1-216-864-11	SHORT CHIP	0			
IC5702	6-709-888-01	IC TC7WHU04FK					R342	1-216-791-11	METAL CHIP	3.3	5%	1/10W	
IC5901	6-600-827-01	IC JSR1124 (TV OPTICAL DIGITAL IN)					R343	1-218-953-11	METAL CHIP	1K	5%	1/16W	
IC5902	6-705-313-01	IC S-T111B50MC-OHJTFG					* R370	1-250-499-11	METAL CHIP	1.5K	1%	1/16W	
IC5903	6-712-384-01	IC TC74VHC4052AFT (EK)					R371	1-218-957-11	METAL CHIP	2.2K	5%	1/16W	
IC5904	6-710-554-01	IC PCM1808PWR					R374	1-218-971-11	METAL CHIP	33K	5%	1/16W	
IC5905	6-715-041-01	IC TC7SZ125FU, RSOYJ					R375	1-218-971-11	METAL CHIP	33K	5%	1/16W	
IC6301	A-1857-997-A	IC R5F3650KCDFB (for SERVICE)					R376	1-218-953-11	METAL CHIP	1K	5%	1/16W	
IC6303	6-713-333-01	IC PST8429UL					R378	1-218-953-11	METAL CHIP	1K	5%	1/16W	
IC6305	6-702-302-01	IC TK11133CSCL-G					R390	1-218-971-11	METAL CHIP	33K	5%	1/16W	
IC6401	6-713-560-01	IC MFI341S2162					R391	1-218-971-11	METAL CHIP	33K	5%	1/16W	
IC8001	(Not supplied)	IC CS8422					R392	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	
		< JACK >					R393	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	
J5901	1-780-853-11	JACK, PIN 2P (AUDIO IN L/R)					R404	1-218-956-11	METAL CHIP	1.8K	5%	1/16W	
J6401	1-794-970-11	JACK, PIN 1P (VIDEO OUT)					R405	1-218-977-11	METAL CHIP	100K	5%	1/16W	
		< COIL >					R516	1-218-990-81	SHORT CHIP	0			
L303	1-457-995-11	INDUCTOR	10uH				R519	1-218-965-11	METAL CHIP	10K	5%	1/16W	
L304	1-457-771-11	INDUCTOR	2.2uH				R523	1-208-695-11	METAL CHIP	3.3K	0.5%	1/16W	
L305	1-400-789-21	INDUCTOR	2.2uH				R609	1-218-864-11	METAL CHIP	5.1K	0.5%	1/10W	
L306	1-400-789-21	INDUCTOR	2.2uH				R734	1-218-953-11	METAL CHIP	1K	5%	1/16W	
L5301	1-400-789-21	INDUCTOR	2.2uH				R735	1-218-956-11	METAL CHIP	1.8K	5%	1/16W	
L5302	1-457-995-11	INDUCTOR	10uH				R736	1-218-956-11	METAL CHIP	1.8K	5%	1/16W	
L6402	1-412-982-21	INDUCTOR	1.8uH				R738	1-218-953-11	METAL CHIP	1K	5%	1/16W	
		< CONTACT TERMINAL >					R743	1-218-933-11	METAL CHIP	22	5%	1/16W	
PT303	1-780-945-11	TERMINAL, CONTACT					R744	1-218-933-11	METAL CHIP	22	5%	1/16W	
PT304	1-780-945-11	TERMINAL, CONTACT					R749	1-218-973-11	METAL CHIP	47K	5%	1/16W	
		< TRANSISTOR >					R805	1-208-920-81	METAL CHIP	24K	0.5%	1/16W	
Q302	6-553-007-01	TR	PMG85XP				R1002	1-218-965-11	METAL CHIP	10K	5%	1/16W	
Q305	6-552-430-01	TR	DRC5114E0L				R1008	1-218-965-11	METAL CHIP	10K	5%	1/16W	
Q310	6-552-430-01	TR	DRC5114E0L				R1010	1-218-965-11	METAL CHIP	10K	5%	1/16W	
Q311	6-553-007-01	TR	PMG85XP				R1012	1-218-965-11	METAL CHIP	10K	5%	1/16W	
Q312	6-552-433-01	TR	DRC5115E0L				R1014	1-218-965-11	METAL CHIP	10K	5%	1/16W	
Q702	6-551-714-01	TR	INK0001AC1-T112-1				R1016	1-218-965-11	METAL CHIP	10K	5%	1/16W	
Q5301	6-552-430-01	TR	DRC5114E0L				R1018	1-218-941-81	METAL CHIP	100	5%	1/16W	
Q5901	6-551-690-01	TRANSISTOR	RT3N11M-TP-1				R1019	1-218-941-81	METAL CHIP	100	5%	1/16W	
Q6301	6-552-408-01	TR	DSC500100L				R1020	1-218-941-81	METAL CHIP	100	5%	1/16W	
		< RESISTOR >					R1021	1-218-941-81	METAL CHIP	100	5%	1/16W	
R102	1-208-683-11	METAL CHIP	1K	0.5%	1/16W		R1022	1-218-990-81	SHORT CHIP	0			
R103	1-208-683-11	METAL CHIP	1K	0.5%	1/16W		R1023	1-218-990-81	SHORT CHIP	0			
R106	1-218-941-81	METAL CHIP	100	5%	1/16W		R1028	1-218-965-11	METAL CHIP	10K	5%	1/16W	
R108	1-208-668-11	METAL CHIP	240	0.5%	1/16W		R1033	1-218-965-11	METAL CHIP	10K	5%	1/16W	
R110	1-216-864-11	SHORT CHIP	0				R1036	1-218-990-81	SHORT CHIP	0			
R206	1-218-941-81	METAL CHIP	100	5%	1/16W		R1037	1-218-990-81	SHORT CHIP	0			
							R1038	1-218-965-11	METAL CHIP	10K	5%	1/16W	
							R1110	1-218-957-11	METAL CHIP	2.2K	5%	1/16W	
							R1112	1-218-961-11	METAL CHIP	4.7K	5%	1/16W	
							R1120	1-250-535-11	METAL CHIP	47K	1%	1/16W	
							R1121	1-250-531-11	METAL CHIP	33K	1%	1/16W	
							R1134	1-250-519-11	METAL CHIP	10K	1%	1/16W	

Note: IC501 and IC8001 on the MB148 board cannot exchange with single. When these parts are damaged, exchange the complete mounted board.

HBD-E385/E390/T39

MB148

Ref. No.	Part No.	Description			Remark	Ref. No.	Part No.	Description			Remark
R1153	1-218-965-11	METAL CHIP	10K	5%	1/16W	R5934	1-218-973-11	METAL CHIP	47K	5%	1/16W
R1191	1-250-512-11	METAL CHIP	5.1K	1%	1/16W	R5935	1-218-973-11	METAL CHIP	47K	5%	1/16W
R1192	1-218-961-11	METAL CHIP	4.7K	5%	1/16W	R5937	1-218-953-11	METAL CHIP	1K	5%	1/16W
R1199	1-218-990-81	SHORT CHIP	0			R5938	1-218-953-11	METAL CHIP	1K	5%	1/16W
R1210	1-248-476-11	RES-CHIP	0.16	1%	1/3W	R5941	1-218-941-81	METAL CHIP	100	5%	1/16W
R1213	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R5942	1-218-933-11	METAL CHIP	22	5%	1/16W
R1214	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R5944	1-218-990-81	SHORT CHIP	0		
R1215	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R5945	1-218-990-81	SHORT CHIP	0		
R1216	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R5946	1-218-933-11	METAL CHIP	22	5%	1/16W
R1217	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R5947	1-218-933-11	METAL CHIP	22	5%	1/16W
R1218	1-216-825-11	METAL CHIP	2.2K	5%	1/10W	R5951	1-218-933-11	METAL CHIP	22	5%	1/16W
R5301	1-208-909-11	METAL CHIP	8.2K	0.5%	1/16W	R5957	1-218-941-81	METAL CHIP	100	5%	1/16W
R5302	1-208-927-11	METAL CHIP	47K	0.5%	1/16W	R5958	1-218-941-81	METAL CHIP	100	5%	1/16W
R5303	1-208-911-11	METAL CHIP	10K	0.5%	1/16W	R5962	1-218-941-81	METAL CHIP	100	5%	1/16W
R5304	1-218-953-11	METAL CHIP	1K	5%	1/16W	R5963	1-218-941-81	METAL CHIP	100	5%	1/16W
R5311	1-216-791-11	METAL CHIP	3.3	5%	1/10W	R5964	1-218-941-81	METAL CHIP	100	5%	1/16W
R5312	1-218-966-11	METAL CHIP	12K	5%	1/16W	R5969	1-218-933-11	METAL CHIP	22	5%	1/16W
R5317	1-218-977-11	METAL CHIP	100K	5%	1/16W	R5970	1-218-933-11	METAL CHIP	22	5%	1/16W
R5323	1-208-715-11	METAL CHIP	22K	0.5%	1/16W	R5971	1-218-941-81	METAL CHIP	100	5%	1/16W
R5325	1-208-911-11	METAL CHIP	10K	0.5%	1/16W	R5972	1-218-941-81	METAL CHIP	100	5%	1/16W
R5327	1-208-911-11	METAL CHIP	10K	0.5%	1/16W	R5973	1-218-941-81	METAL CHIP	100	5%	1/16W
R5352	1-216-295-91	SHORT CHIP	0			R5974	1-218-941-81	METAL CHIP	100	5%	1/16W
R5353	1-218-953-11	METAL CHIP	1K	5%	1/16W	R5975	1-218-941-81	METAL CHIP	100	5%	1/16W
R5354	1-216-295-91	SHORT CHIP	0			R5976	1-218-941-81	METAL CHIP	100	5%	1/16W
R5355	1-216-295-91	SHORT CHIP	0			R5977	1-218-941-81	METAL CHIP	100	5%	1/16W
R5601	1-218-953-11	METAL CHIP	1K	5%	1/16W	R5978	1-218-941-81	METAL CHIP	100	5%	1/16W
R5603	1-208-715-11	METAL CHIP	22K	0.5%	1/16W	R5981	1-208-859-81	METAL CHIP	68	0.5%	1/16W
R5604	1-218-990-81	SHORT CHIP	0			R5982	1-218-933-11	METAL CHIP	22	5%	1/16W
R5605	1-218-965-11	METAL CHIP	10K	5%	1/16W	R5983	1-218-933-11	METAL CHIP	22	5%	1/16W
R5606	1-218-965-11	METAL CHIP	10K	5%	1/16W	R5984	1-218-933-11	METAL CHIP	22	5%	1/16W
R5608	1-208-927-11	METAL CHIP	47K	0.5%	1/16W	R5985	1-218-933-11	METAL CHIP	22	5%	1/16W
R5609	1-218-990-81	SHORT CHIP	0			R5986	1-218-933-11	METAL CHIP	22	5%	1/16W
R5611	1-218-965-11	METAL CHIP	10K	5%	1/16W	R5987	1-218-933-11	METAL CHIP	22	5%	1/16W
R5613	1-218-977-11	METAL CHIP	100K	5%	1/16W	R5988	1-218-933-11	METAL CHIP	22	5%	1/16W
R5701	1-218-965-11	METAL CHIP	10K	5%	1/16W	R6301	1-218-989-11	METAL CHIP	1M	5%	1/16W
R5703	1-218-981-91	METAL CHIP	220K	5%	1/16W	R6302	1-218-941-81	METAL CHIP	100	5%	1/16W
R5705	1-218-949-11	METAL CHIP	470	5%	1/16W	R6307	1-218-961-11	METAL CHIP	4.7K	5%	1/16W
R5707	1-218-973-11	METAL CHIP	47K	5%	1/16W	R6308	1-218-965-11	METAL CHIP	10K	5%	1/16W
R5708	1-208-859-81	METAL CHIP	68	0.5%	1/16W	R6309	1-218-965-11	METAL CHIP	10K	5%	1/16W
R5709	1-208-859-81	METAL CHIP	68	0.5%	1/16W	R6310	1-218-965-11	METAL CHIP	10K	5%	1/16W
R5710	1-218-953-11	METAL CHIP	1K	5%	1/16W	R6311	1-218-941-81	METAL CHIP	100	5%	1/16W
R5901	1-218-933-11	METAL CHIP	22	5%	1/16W	R6312	1-218-961-11	METAL CHIP	4.7K	5%	1/16W
R5902	1-218-941-81	METAL CHIP	100	5%	1/16W	R6313	1-218-953-11	METAL CHIP	1K	5%	1/16W
R5903	1-218-933-11	METAL CHIP	22	5%	1/16W	R6314	1-218-953-11	METAL CHIP	1K	5%	1/16W
R5909	1-218-969-11	METAL CHIP	22K	5%	1/16W	R6315	1-218-941-81	METAL CHIP	100	5%	1/16W
R5910	1-218-969-11	METAL CHIP	22K	5%	1/16W	R6316	1-218-965-11	METAL CHIP	10K	5%	1/16W
R5911	1-218-941-81	METAL CHIP	100	5%	1/16W	R6317	1-218-941-81	METAL CHIP	100	5%	1/16W
R5912	1-218-973-11	METAL CHIP	47K	5%	1/16W	R6319	1-218-953-11	METAL CHIP	1K	5%	1/16W
R5913	1-218-973-11	METAL CHIP	47K	5%	1/16W	R6320	1-218-941-81	METAL CHIP	100	5%	1/16W
R5914	1-218-973-11	METAL CHIP	47K	5%	1/16W	R6321	1-218-941-81	METAL CHIP	100	5%	1/16W
R5915	1-218-973-11	METAL CHIP	47K	5%	1/16W	R6322	1-218-941-81	METAL CHIP	100	5%	1/16W
R5920	1-218-968-11	METAL CHIP	18K	5%	1/16W	R6323	1-218-965-11	METAL CHIP	10K	5%	1/16W
R5921	1-218-968-11	METAL CHIP	18K	5%	1/16W	R6324	1-218-941-81	METAL CHIP	100	5%	1/16W
R5922	1-218-968-11	METAL CHIP	18K	5%	1/16W	R6326	1-218-941-81	METAL CHIP	100	5%	1/16W
R5923	1-218-968-11	METAL CHIP	18K	5%	1/16W	R6328	1-218-941-81	METAL CHIP	100	5%	1/16W
R5924	1-218-953-11	METAL CHIP	1K	5%	1/16W	R6329	1-218-965-11	METAL CHIP	10K	5%	1/16W
R5929	1-218-973-11	METAL CHIP	47K	5%	1/16W	R6332	1-218-965-11	METAL CHIP	10K	5%	1/16W
R5930	1-218-973-11	METAL CHIP	47K	5%	1/16W	R6333	1-218-977-11	METAL CHIP	100K	5%	1/16W
R5931	1-218-973-11	METAL CHIP	47K	5%	1/16W	R6334	1-218-977-11	METAL CHIP	100K	5%	1/16W
R5932	1-218-973-11	METAL CHIP	47K	5%	1/16W	R6336	1-218-989-11	METAL CHIP	1M	5%	1/16W

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
R6341	1-218-941-81	METAL CHIP	100	5%	1/16W			< THERMISTOR >			
R6342	1-218-990-81	SHORT CHIP	0								
R6343	1-218-970-11	METAL CHIP	27K	5%	1/16W	TH6301	1-804-949-11	THERMISTOR, NTC (SMD)			
R6347	1-218-965-11	METAL CHIP	10K	5%	1/16W			< VIBRATOR >			
R6348	1-218-941-81	METAL CHIP	100	5%	1/16W	X401	1-814-278-11	VIBRATOR, CRYSTAL (27MHz)			
R6350	1-218-977-11	METAL CHIP	100K	5%	1/16W	X6301	1-795-313-21	VIBRATOR, CERAMIC (8MHz)			
R6355	1-218-973-11	METAL CHIP	47K	5%	1/16W	X8001	1-814-130-11	QUARTZ CRYSTAL UNIT (24.576MHz)			
R6356	1-218-965-11	METAL CHIP	10K	5%	1/16W	*****					
R6357	1-218-965-11	METAL CHIP	10K	5%	1/16W						
R6358	1-218-977-11	METAL CHIP	100K	5%	1/16W	A-1848-680-A		PANEL BOARD, COMPLETE			
R6359	1-218-973-11	METAL CHIP	47K	5%	1/16W			*****			
R6360	1-218-965-11	METAL CHIP	10K	5%	1/16W			< CAPACITOR >			
R6361	1-218-973-11	METAL CHIP	47K	5%	1/16W						
* R6366	1-250-507-11	METAL CHIP	3.3K	1%	1/16W	C02	1-114-325-11	CERAMIC CHIP	0.1uF	10%	25V
R6367	1-218-977-11	METAL CHIP	100K	5%	1/16W	C03	1-165-908-11	CERAMIC CHIP	1uF	10%	10V
R6368	1-218-965-11	METAL CHIP	10K	5%	1/16W	C04	1-100-611-91	CERAMIC CHIP	22uF	20%	6.3V
R6369	1-218-973-11	METAL CHIP	47K	5%	1/16W	C05	1-165-908-11	CERAMIC CHIP	1uF	10%	10V
R6370	1-218-965-11	METAL CHIP	10K	5%	1/16W	C06	1-165-908-11	CERAMIC CHIP	1uF	10%	10V
R6371	1-218-941-81	METAL CHIP	100	5%	1/16W						
R6372	1-218-941-81	METAL CHIP	100	5%	1/16W	C08	1-114-325-11	CERAMIC CHIP	0.1uF	10%	25V
R6374	1-218-977-11	METAL CHIP	100K	5%	1/16W	C10	1-114-324-11	CERAMIC CHIP	0.022uF	10%	50V
R6377	1-208-699-11	METAL CHIP	4.7K	0.5%	1/16W	C13	1-114-323-11	CERAMIC CHIP	0.01uF	10%	50V
R6382	1-208-709-11	METAL CHIP	12K	0.5%	1/16W	C14	1-114-323-11	CERAMIC CHIP	0.01uF	10%	50V
R6384	1-218-953-11	METAL CHIP	1K	5%	1/16W	C15	1-119-772-91	ELECT	47uF	20%	35V
R6388	1-218-941-81	METAL CHIP	100	5%	1/16W						
R6389	1-218-977-11	METAL CHIP	100K	5%	1/16W	C17	1-114-325-11	CERAMIC CHIP	0.1uF	10%	25V
R6390	1-218-990-81	SHORT CHIP	0			C18	1-165-989-11	CERAMIC CHIP	10uF	10%	6.3V
R6391	1-218-965-11	METAL CHIP	10K	5%	1/16W	C20	1-114-323-11	CERAMIC CHIP	0.01uF	10%	50V
R6392	1-218-965-11	METAL CHIP	10K	5%	1/16W	C25	1-114-325-11	CERAMIC CHIP	0.1uF	10%	25V
R6393	1-218-958-11	METAL CHIP	2.7K	5%	1/16W	C27	1-126-176-11	ELECT	220uF	20%	10V
R6394	1-218-941-81	METAL CHIP	100	5%	1/16W						
R6395	1-218-961-11	METAL CHIP	4.7K	5%	1/16W	C30	1-112-746-11	CERAMIC CHIP	4.7uF	10%	6.3V
R6396	1-218-961-11	METAL CHIP	4.7K	5%	1/16W	C31	1-114-323-11	CERAMIC CHIP	0.01uF	10%	50V
R6397	1-218-957-11	METAL CHIP	2.2K	5%	1/16W	C40	1-114-325-11	CERAMIC CHIP	0.1uF	10%	25V
R6398	1-218-957-11	METAL CHIP	2.2K	5%	1/16W	C43	1-114-325-11	CERAMIC CHIP	0.1uF	10%	25V
R6403	1-218-990-81	SHORT CHIP	0					< CONNECTOR >			
R6406	1-218-961-11	METAL CHIP	4.7K	5%	1/16W	CN02	1-779-550-21	CONNECTOR, FFC (LIF (NON-ZIF)) 13P			
R6407	1-218-961-11	METAL CHIP	4.7K	5%	1/16W	CN03	1-564-721-11	PIN, CONNECTOR (SMALL TYPE) 5P			
R6411	1-218-990-81	SHORT CHIP	0			CN04	1-819-866-11	USB CONNECTOR (A) (↓)			
R6416	1-218-990-81	SHORT CHIP	0					< DIODE >			
R6420	1-208-860-81	METAL CHIP	75	0.5%	1/16W	D03	6-501-579-01	DIODE MC2837			
R6421	1-218-990-81	SHORT CHIP	0			D04	6-501-579-01	DIODE MC2837			
R8002	1-218-941-81	METAL CHIP	100	5%	1/16W	D05	6-503-012-01	DI DZ2J04300L			
R8003	1-218-941-81	METAL CHIP	100	5%	1/16W			< IC >			
R8005	1-218-989-11	METAL CHIP	1M	5%	1/16W	IC01	6-715-891-01	IC MM3464A50NRE			
R8006	1-218-957-11	METAL CHIP	2.2K	5%	1/16W	IC02	6-715-134-01	IC MM3404A33URE			
R8007	1-218-941-81	METAL CHIP	100	5%	1/16W	IC03	6-701-729-01	IC PT6315			
R8008	1-218-937-11	METAL CHIP	47	5%	1/16W	IC30	6-600-665-01	IC GP1UE27XK0VF			
R8009	1-218-941-81	METAL CHIP	100	5%	1/16W			< JUMPER RESISTOR >			
R8010	1-218-937-11	METAL CHIP	47	5%	1/16W	JR01	1-216-864-11	SHORT CHIP	0		
R8016	1-218-967-11	METAL CHIP	15K	5%	1/16W	JR02	1-216-864-11	SHORT CHIP	0		
R8017	1-218-967-11	METAL CHIP	15K	5%	1/16W	JR03	1-216-864-11	SHORT CHIP	0		
R8029	1-218-941-81	METAL CHIP	100	5%	1/16W	JR04	1-216-864-11	SHORT CHIP	0		
		< COMPOSITION CIRCUIT BLOCK >				JR06	1-216-864-11	SHORT CHIP	0		
RB1001	1-234-378-21	RES, NETWORK 10K (1005X4)				JR07	1-216-864-11	SHORT CHIP	0		
RB1002	1-234-378-21	RES, NETWORK 10K (1005X4)				JR08	1-216-864-11	SHORT CHIP	0		
RB6301	1-234-372-11	RES, NETWORK 100 (1005X4)				JR09	1-216-296-11	SHORT CHIP	0		
RB6304	1-234-372-11	RES, NETWORK 100 (1005X4)				JR10	1-216-295-91	SHORT CHIP	0		
						JR11	1-216-295-91	SHORT CHIP	0		

HBD-E385/E390/T39

PANEL	POWER KEY	TUNER2FMF-NS
-------	-----------	--------------

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
JR12	1-216-864-11	SHORT CHIP	0	S41	1-771-410-21	SWITCH, TACTILE (VOL -)	
JR13	1-216-295-91	SHORT CHIP	0	S42	1-771-410-21	SWITCH, TACTILE (VOL +)	
JR15	1-216-295-91	SHORT CHIP	0	S43	1-771-410-21	SWITCH, TACTILE (▶)	
JR16	1-216-296-11	SHORT CHIP	0	S44	1-771-410-21	SWITCH, TACTILE (■)	
JR17	1-216-296-11	SHORT CHIP	0				
JR18	1-216-296-11	SHORT CHIP	0	S45	1-771-410-21	SWITCH, TACTILE (FUNCTION)	
JR19	1-216-296-11	SHORT CHIP	0	S46	1-771-410-21	SWITCH, TACTILE (◀◀)	
JR20	1-216-296-11	SHORT CHIP	0	S47	1-771-410-21	SWITCH, TACTILE (▶▶)	
JR22	1-216-296-11	SHORT CHIP	0			< TRANSFORMER >	
JR23	1-216-296-11	SHORT CHIP	0				
JR24	1-216-296-11	SHORT CHIP	0	T01	1-697-104-11	DC-DC CONVERTER TRANSFORMER	
JR25	1-216-296-11	SHORT CHIP	0			*****	
JR26	1-216-296-11	SHORT CHIP	0			POWER KEY BOARD	
JR27	1-216-296-11	SHORT CHIP	0			*****	
JR28	1-216-296-11	SHORT CHIP	0			< CAPACITOR >	
JR29	1-216-296-11	SHORT CHIP	0				
JR30	1-216-296-11	SHORT CHIP	0	C303	1-114-325-11	CERAMIC CHIP 0.1uF 10% 25V	
JR31	1-216-296-11	SHORT CHIP	0			< CONNECTOR >	
JR33	1-216-296-11	SHORT CHIP	0				
JR34	1-216-296-11	SHORT CHIP	0	CN301	1-564-718-11	PIN, CONNECTOR (SMALL TYPE) 2P	
JR35	1-216-296-11	SHORT CHIP	0			< RESISTOR >	
JR36	1-216-296-11	SHORT CHIP	0				
JR37	1-216-296-11	SHORT CHIP	0				
JR38	1-216-296-11	SHORT CHIP	0	R301	1-216-809-11	METAL CHIP 100 5% 1/10W	
JR39	1-216-296-11	SHORT CHIP	0			< SWITCH >	
JR40	1-216-296-11	SHORT CHIP	0				
JR41	1-216-296-11	SHORT CHIP	0	S301	1-771-410-21	SWITCH, TACTILE (I/⌂)	
		< COIL >				*****	
L01	1-481-781-21	INDUCTOR 47uH			A-1846-434-A	TUNER2FMF-NS BOARD, COMPLETE	
		< FLUORESCENT INDICATOR TUBE >				*****	
ND01	1-483-411-11	VACUUM FLUORESCENT DISPLAY				< CAPACITOR >	
		< TRANSISTOR >					
Q03	6-552-713-01	TR QS5W2TR		C101	1-100-155-91	CERAMIC CHIP 470PF 5% 100V	
		< RESISTOR >		C102	1-116-734-11	CERAMIC CHIP 1uF 20% 16V	
R04	1-216-821-11	METAL CHIP 1K 5% 1/10W		C103	1-116-734-11	CERAMIC CHIP 1uF 20% 16V	
R06	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		C105	1-116-734-11	CERAMIC CHIP 1uF 20% 16V	
R13	1-216-833-11	METAL CHIP 10K 5% 1/10W		C107	1-100-158-91	CERAMIC CHIP 1000PF 5% 100V	
R14	1-216-805-11	METAL CHIP 47 5% 1/10W					
R17	1-216-805-11	METAL CHIP 47 5% 1/10W		C108	1-116-734-11	CERAMIC CHIP 1uF 20% 16V	
				C109	1-114-325-11	CERAMIC CHIP 0.1uF 10% 25V	
R22	1-216-845-11	METAL CHIP 100K 5% 1/10W		C110	1-114-325-11	CERAMIC CHIP 0.1uF 10% 25V	
R29	1-216-813-11	METAL CHIP 220 5% 1/10W		C111	1-116-734-11	CERAMIC CHIP 1uF 20% 16V	
R30	1-216-805-11	METAL CHIP 47 5% 1/10W		C112	1-116-734-11	CERAMIC CHIP 1uF 20% 16V	
R31	1-216-813-11	METAL CHIP 220 5% 1/10W					
R32	1-216-813-11	METAL CHIP 220 5% 1/10W		C113	1-165-176-11	CERAMIC CHIP 0.047uF 10% 16V	
						< CONNECTOR >	
R40	1-216-809-11	METAL CHIP 100 5% 1/10W					
R41	1-216-821-11	METAL CHIP 1K 5% 1/10W		CN101	1-779-544-21	CONNECTOR, FFC (LIF (NON-ZIF)) 7P	
R42	1-216-825-11	METAL CHIP 2.2K 5% 1/10W				< DIODE >	
R43	1-216-825-11	METAL CHIP 2.2K 5% 1/10W					
R44	1-216-809-11	METAL CHIP 100 5% 1/10W		D103	6-501-579-01	DIODE MC2837	
						< FILTER >	
R45	1-216-821-11	METAL CHIP 1K 5% 1/10W					
R46	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		FL101	1-236-711-21	FILTER, BAND PASS	
R47	1-216-825-11	METAL CHIP 2.2K 5% 1/10W				< IC >	
		< SWITCH >					
S40	1-771-410-21	SWITCH, TACTILE (▲)		IC101	6-717-989-01	IC RZ5B701-0001E2	
				IC102	6-715-134-01	IC MM3404A33URE	

Ref. No.	Part No.	Description	Remark		
< COIL >					
L103	1-481-524-11	INDUCTOR	10uH		
L104	1-481-521-11	INDUCTOR	1uH		
L105	1-481-521-11	INDUCTOR	1uH		
< RESISTOR >					
R101	1-216-809-11	METAL CHIP	100	5%	1/10W
R103	1-216-801-11	METAL CHIP	22	5%	1/10W
R104	1-216-864-11	SHORT CHIP	0		
R105	1-216-801-11	METAL CHIP	22	5%	1/10W
R107	1-216-809-11	METAL CHIP	100	5%	1/10W
R108	1-216-296-11	SHORT CHIP	0		
R109	1-216-864-11	SHORT CHIP	0		
R110	1-216-833-11	METAL CHIP	10K	5%	1/10W
R113	1-216-833-11	METAL CHIP	10K	5%	1/10W
< VIBRATOR >					
X101	1-767-317-11	VIBRATOR, CRYSTAL (32.768kHz)			

MISCELLANEOUS					

54	1-968-135-11	HARNESS (USB)			
55	1-828-333-51	WIRE (FLAT TYPE) (13 CORE)			
56	1-968-113-11	HARNESS (USB)			
△ 102	1-837-308-11	CORD, POWER-SUPPLY			
104	1-828-296-51	WIRE (FLAT TYPE) (7 CORE)			
107	1-828-799-51	WIRE (FLAT TYPE) (30 CORE)			
202	A-1850-153-A	LOADING FOR SERVICE (BPX-7)			
△ 205	8-820-452-03	DEVICE, OPTICAL KEM480AAA/C2RP1			
206	1-839-608-61	WIRE (FLAT TYPE) (9 CORE)			
207	1-839-609-11	FLEXIBLE FLAT CABLE (45 CORE)			
208	1-839-611-61	WIRE (FLAT TYPE) (5 CORE)			
△ M1	1-855-134-11	FAN, DC			
△ SWR1	1-474-368-11	SWITCHING REGULATOR (3L382W-1)			
WLC1	1-458-494-11	CARD, WIRELESS LAN			

Note 2: Wires (flat type) for service is all straight.
Please bend it referring go "HOW TO BEND FFC" on
page 13 when you install it in the unit.

Note 1: When replacing the wireless LAN card (WLC1), refer
to "CHECKING METHOD OF NETWORK OPERATION"
(page 10).

REVISION HISTORY

Checking the version allows you to jump to the revised page.

Also, clicking the version at the top of the revised page allows you to jump to the next revised page.

[illegible]

SS-CTB112/CTB113/TSB117/ TSB118/TSB119

SERVICE MANUAL

Ver. 1.0 2012.02



Photo:
SS-CTB112

Photo:
SS-CTB113

Photo:
SS-TSB117

Photo:
SS-TSB118

Photo:
SS-TSB119

US Model

PX Model

SS-CTB113/TSB118

Canadian Model

AEP Model

UK Model

E Model

SS-CTB112/CTB113/TSB117/TSB118/TSB119

Australian Model

SS-CTB112/SS-CTB113/TSB117/TSB118

- SS-CTB112 is the center speaker in BDV-E190.
- SS-CTB113 is the center speaker in BDV-E290/E385/E390/E490/E690/T39.
- SS-TSB117 is the front and surround speaker in BDV-E190.
- SS-TSB118 is the front and surround speaker in BDV-E290/E385/E390/T39 and the surround speaker in BDV-E490.
- SS-TSB119 is the front speaker in BDV-E490/E690 and the surround speaker in BDV-E690.

SPECIFICATIONS

Center (SS-CTB112) for BDV-E190 only

Dimensions (approx.) 145 mm × 94 mm × 84 mm
(5 3/4 in × 3 3/4 in ×
3 3/8 in) (w/h/d)
Mass (approx.) 0.39 kg (13 3/4 oz) (with
speaker cord)

Center (SS-CTB113) for BDV-E290/BDV-E385/ BDV-E390/BDV-E490/BDV-E690/BDV-T39 only

Dimensions (approx.) 245 mm × 87 mm × 78 mm
(9 3/4 in × 3 1/2 in ×
3 1/8 in) (w/h/d)
Mass (approx.) 0.59 kg (1 lb 4 3/4 oz) (with
speaker cord)

Front/Surround (SS-TSB117) for BDV-E190 only

Dimensions (approx.) 91 mm × 148 mm × 87 mm
(3 5/8 in × 5 7/8 in ×
3 1/2 in) (w/h/d)
Mass (approx.) Front:
0.33 kg (11 5/8 oz) (with
speaker cord)
Surround:
0.38 kg (13 3/8 oz) (with
speaker cord)

Front/Surround (SS-TSB118) for BDV-E290/ BDV-E385/BDV-E390/BDV-T39 only

Surround (SS-TSB118) for BDV-E490 only
Dimensions (approx.) 95 mm × 210 mm × 93 mm
(3 3/4 in × 8 3/8 in ×
3 3/4 in) (w/h/d)

Mass (approx.) Front:
0.54 kg (1 lb 3 oz) (with
speaker cord)
Surround:
0.62 kg (1 lb 5 7/8 oz) (with
speaker cord)

Front/Surround (SS-TSB119) for BDV-E690 only

Front (SS-TSB119) for BDV-E490 only

Dimensions (approx.) 95 mm × 680 mm × 71 mm
(3 3/4 in × 26 7/8 in ×
2 7/8 in) (w/h/d) (wall-
mounted part)
260 mm × 1,190 mm × 260
mm (10 1/4 in × 46 7/8 in ×
10 1/4 in) (w/h/d) (whole speaker)
Mass (approx.) 1.2 kg (2 lb 10 3/8 oz) (wall-
mounted part)
2.9 kg (6 lb 6 1/4 oz) (with
speaker cord and stand)

Design and specifications are subject to change
without notice.

– Refer to next page for part list –

• JIG

When disassembling the set, use the
following jig (for front panel removal).
Part No.: J-2501-238-A
JIG FOR SPEAKER REMOVAL



SPEAKER SYSTEM

9-890-585-01

2012B80-1

© 2012.02

Sony Corporation


Published by Sony EMCS (Malaysia) PG Tec

SONY®

SS-CTB112/CTB113/TSB117/TSB118/TSB119


PART LIST (SS-CTB112)

Ref. No.	Part No.	Description	Remark
1	A-1848-369-A	SS-CTB112 (Center) (E190: AUS)	
1	A-1849-651-A	SS-CTB112 (Center) (E190: SAF, SP)	
1	A-1849-652-A	SS-CTB112 (Center) (E190: AEP, UK)	
1	A-1849-653-A	SS-CTB112 (Center) (E190: MX6)	
1	A-1862-339-A	SS-CTB112 (Center) (E190: CND)	

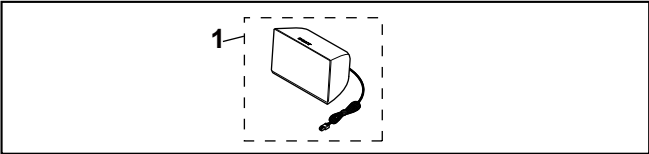


PART LIST (SS-CTB113)

Ref. No.	Part No.	Description	Remark
11	A-1848-455-A	SS-CTB113 (Center) (E390/E490: CND)	
11	A-1848-456-A	SS-CTB113 (Center) (E290: AUS, PX, TW, E12/ E385/E390/T39: US/E490: E12, E15, EA)	
11	A-1849-824-A	SS-CTB113 (Center) (E290: AEP/E490: AEP, UK)	
11	A-1849-828-A	SS-CTB113 (Center) (E290: E3, SAF, SP/E490: E3, SP)	
11	A-1849-832-A	SS-CTB113 (Center) (E290: E32)	
11	A-1849-952-A	SS-CTB113 (Center) (E690: E12, E15, EA)	
11	A-1849-953-A	SS-CTB113 (Center) (E690: AEP)	
11	A-1849-954-A	SS-CTB113 (Center) (E690: E3, SP)	
12	2-893-646-01	FOOT (4 pieces)	

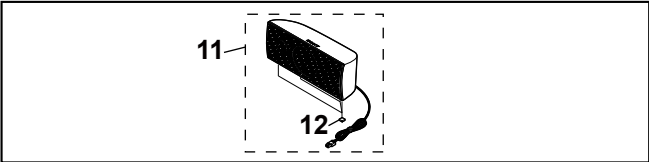

PART LIST (SS-TSB117)


Ref. No.	Part No.	Description	Remark
21	A-1862-335-A	SS-TSB117 (Front Lch) (E190: CND)	
21	A-1849-626-A	SS-TSB117 (Front Lch) (E190: AEP, UK)	
21	A-1849-625-A	SS-TSB117 (Front Lch) (E190: SAF, SP)	
21	A-1849-627-A	SS-TSB117 (Front Lch) (E190: MX6)	
21	A-1848-365-A	SS-TSB117 (Front Lch) (E190: AUS)	
22	A-1862-336-A	SS-TSB117 (Front Rch) (E190: CND)	
22	A-1849-640-A	SS-TSB117 (Front Rch) (E190: AEP, UK)	
22	A-1849-639-A	SS-TSB117 (Front Rch) (E190: SAF, SP)	
22	A-1849-641-A	SS-TSB117 (Front Rch) (E190: MX6)	
22	A-1848-366-A	SS-TSB117 (Front Rch) (E190: AUS)	
23	A-1862-337-A	SS-TSB117 (Surround Lch) (E190: CND)	
23	A-1849-644-A	SS-TSB117 (Surround Lch) (E190: AEP, UK)	
23	A-1849-643-A	SS-TSB117 (Surround Lch) (E190: SAF, SP)	
23	A-1849-645-A	SS-TSB117 (Surround Lch) (E190: MX6)	
23	A-1848-367-A	SS-TSB117 (Surround Lch) (E190: AUS)	
24	A-1862-338-A	SS-TSB117 (Surround Rch) (E190: CND)	
24	A-1849-648-A	SS-TSB117 (Surround Rch) (E190: AEP, UK)	
24	A-1849-647-A	SS-TSB117 (Surround Rch) (E190: SAF, SP)	
24	A-1849-649-A	SS-TSB117 (Surround Rch) (E190: MX6)	
24	A-1848-368-A	SS-TSB117 (Surround Rch) (E190: AUS)	

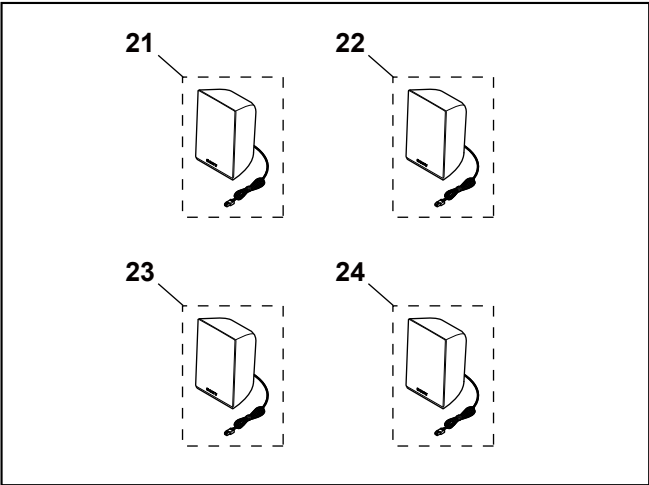

- Abbreviation
 - AUS : Australian model
 - CND : Canadian model
 - E3 : 240 V AC area in E model
 - E12 : 220-240 V AC area in E model
 - E15 : Iran model
 - E32 : 110-240 V AC area in E model
 - EA : Saudi Arabia model
 - MX6 : Latin-American model
 - PX : PX model
 - SAF : South African model
 - SP : Singapore model
 - TW : Taiwan model


PART LIST (SS-TSB118)

Ref. No.	Part No.	Description	Remark
31	A-1848-447-A	SS-TSB118 (Front Lch) (E390: CND)	
31	A-1849-891-A	SS-TSB118 (Front Lch) (E290: AEP)	
31	A-1849-919-A	SS-TSB118 (Front Lch) (E290: E3, SAF, SP)	
31	A-1849-926-A	SS-TSB118 (Front Lch) (E290: E32)	
31	A-1848-448-A	SS-TSB118 (Front Lch) (E290: AUS, E12, PX, TW/E385/E390/T39: US)	
32	A-1848-449-A	SS-TSB118 (Front Rch) (E390: CND)	
32	A-1849-892-A	SS-TSB118 (Front Rch) (E290: AEP)	
32	A-1849-920-A	SS-TSB118 (Front Rch) (E290: E3, SAF, SP)	
32	A-1849-927-A	SS-TSB118 (Front Rch) (E290: E32)	
32	A-1848-450-A	SS-TSB118 (Front Rch) (E290: AUS, E12, PX, TW/E385/E390/T39: US)	
33	A-1848-451-A	SS-TSB118 (Surround Lch) (E390/E490: CND)	
33	A-1849-822-A	SS-TSB118 (Surround Lch) (E290: AEP/E490: AEP, UK)	
33	A-1849-826-A	SS-TSB118 (Surround Lch) (E290: E3, SAF, SP/E490: E3, SP)	
33	A-1849-830-A	SS-TSB118 (Surround Lch) (E290: E32)	
33	A-1848-452-A	SS-TSB118 (Surround Lch) (E290: AUS, PX, TW, E12/E385/E390/T39: US/E490: E12, E15 EA3)	
34	A-1848-453-A	SS-TSB118 (Surround Rch) (E390/E490: CND)	
34	A-1849-823-A	SS-TSB118 (Surround Rch) (E290: AEP/E490: AEP, UK)	
34	A-1849-827-A	SS-TSB118 (Surround Rch) (E290: E3, SAF, SP/E490: E3, SP)	
34	A-1849-831-A	SS-TSB118 (Surround Rch) (E290: E32)	
34	A-1848-454-A	SS-TSB118 (Surround Rch) (E290: AUS, PX, TW, E12/E385/E390/T39: US/E490: E12, E15 EA3)	
35	2-893-646-01	FOOT (4 pieces)	

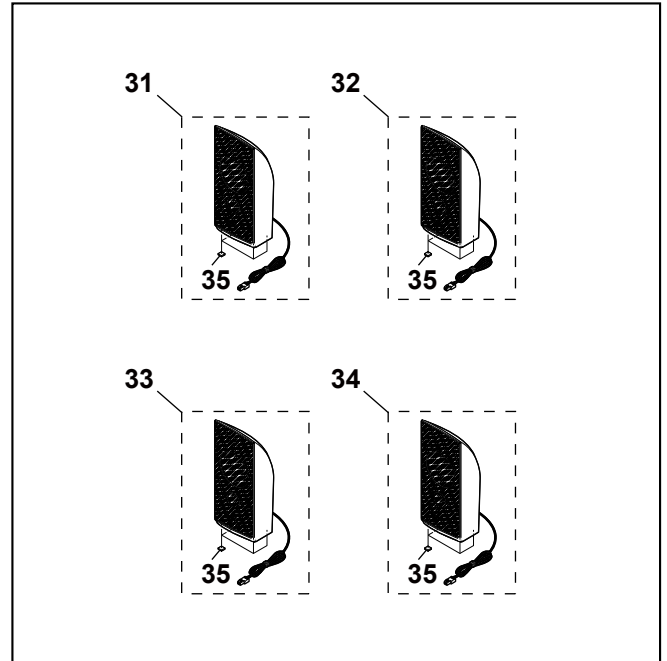

PART LIST (SS-TSB119)

Ref. No.	Part No.	Description	Remark
41	A-1862-416-A	SS-TSB119 (Front Lch) (E490: CND)	
41	A-1849-656-A	SS-TSB119 (Front Lch) (E490: AEP, UK/E690: AEP)	
41	A-1849-661-A	SS-TSB119 (Front Lch) (E490/E690: E3, SP)	
41	A-1849-524-A	SS-TSB119 (Front Lch) (E490/E690: E12, E15, EA)	
42	A-1862-417-A	SS-TSB119 (Front Rch) (E490: CND)	
42	A-1849-657-A	SS-TSB119 (Front Rch) (E490: AEP, UK/E690: AEP)	
42	A-1849-662-A	SS-TSB119 (Front Rch) (E490/E690: E3, SP)	
42	A-1849-525-A	SS-TSB119 (Front Rch) (E490/E690: E12, E15, EA)	
43	A-1849-947-A	SS-TSB119 (Surround Lch) (E690: AEP)	
43	A-1849-948-A	SS-TSB119 (Surround Lch) (E690: E3, SP)	
43	A-1849-946-A	SS-TSB119 (Surround Lch) (E690: E12, E15, EA)	
44	A-1849-950-A	SS-TSB119 (Surround Rch) (E690: AEP)	
44	A-1849-951-A	SS-TSB119 (Surround Rch) (E690: E3, SP)	
44	A-1849-949-A	SS-TSB119 (Surround Rch) (E690: E12, E15, EA)	

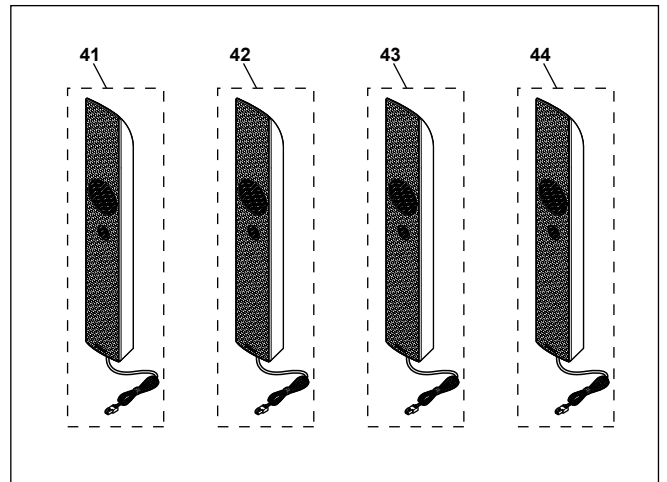

REVISION HISTORY

Checking the version allows you to jump to the revised page.

Also, clicking the version at the top of the revised page allows you to jump to the next revised page.

[illegible]