

PS-X50

*AEP Model
E Model
Canadian Model
US Model*



STEREO TURNTABLE SYSTEM

SPECIFICATIONS

GENERAL

Power Requirements:	120, 220V ac adjustable, 50/60Hz (AEP, E model) 120V ac, 60Hz (Canadian, US model)
Power Consumption:	12W (AEP, E model) 8W (Canadian, US model)
Dimensions:	Approx. 480(w) x 165(h) x 420(d) mm 18 ¹⁵ / ₁₆ x 6 ¹ / ₂ x 16 ⁹ / ₁₆ inches including projecting parts and controls
Weight:	Approx. 11.5kg, 25 lb 6 oz (net) Approx. 13kg, 28 lb 11 oz (in shipping carton)

TURNTABLE

Platter:	32 cm (12 ⁵ / ₈ inches) diecasting aluminum-alloy
-----------------	--

SAFETY-RELATED COMPONENT WARNING !!

COMPONENTS IDENTIFIED BY SHADING AND MARK  ON THE SCHEMATIC DIAGRAMS, EXPLODED VIEWS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY.

ATTENTION AU COMPOSANT AYANT RAPPORT
A LA SÉCURITÉ !

LES COMPOSANTS IDENTIFIÉS PAR UN TRAMÉ ET UNE MARQUE  SUR LES DIAGRAMMES SCHEMATIQUES, LES VUES EXPLOSÉES ET LA LISTE DES PIÈCES SONT CRITIQUES POUR LA SÉCURITÉ DE FONCTIONNEMENT. NE REMPLACER CES COMPOSANTS QUE PAR DES PIÈCES SONY DONT LES NUMÉROS SONT DONNÉS DANS CE MANUEL OU DES SUPPLÉMENTS PUBLIÉS PAR SONY.

Motor:	Linear BSL (brushless and slotless) motor
Drive System:	Direct drive, crystal lock control system
Speed:	33 ¹ / ₃ rpm, 45 rpm
Starting Characteristics:	Comes to nominal speed within a second revolution (33 ¹ / ₃ rpm)
Wow and Flutter:	±0.045% (DIN) (AEP, E model) 0.025% (WRMS)
S/N Ratio:	75dB (DIN-B)
Load Characteristics:	0% at 150g tracking force
Automatic System:	Arm return reject

TONEARM

Type:	Statically balanced, universal
Pivot-to-Stylus Length:	235mm, 9 ¹ / ₄ inches
Overall Arm Length:	330mm, 13 inches
Overhang:	14 mm, ⁹ / ₁₆ inch
Tracking Error:	+2°27', -1°30'
Tracking Force Adjustment Range:	0–2.5g
Shell Weight:	11g
Cartridge Weight Range: (including shell weight)	11–19.5g 19–27.5g (with extra weight)

SONY®

SERVICE MANUAL

PS-X50

PS-X50

AEP Model
E Model
Canadian Model
US Model



STEREO TURNTABLE SYSTEM

SPECIFICATIONS

GENERAL

Power Requirements:	120, 220V ac adjustable, 50/60Hz (AEP, E model) 120V ac, 60Hz (Canadian, US model)
Power Consumption:	12W (AEP, E model) 8W (Canadian, US model)
Dimensions:	Approx. 480(w) x 165(h) x 420(d) mm 18 ⁵ / ₁₆ x 6 ¹ / ₂ x 16 ⁹ / ₁₆ inches including projecting parts and controls
Weight:	Approx. 11.5kg, 25 lb 6 oz (net) Approx. 13kg, 28 lb 11 oz (in shipping carton)

TURNTABLE

Platter:	32 cm (12 ⁵ / ₈ inches) diecasting aluminum-alloy
-----------------	--

SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY SHADING AND MARK  ON THE SCHEMATIC DIAGRAMS, EXPLODED VIEWS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY.

ATTENTION AU COMPOSANT AYANT RAPPORT
À LA SÉCURITÉ !

LES COMPOSANTS IDENTIFIÉS PAR UN TRAMÉ ET UNE MARQUE  SUR LES DIAGRAMMES SCHEMATIQUES, LES VUES EXPLOSÉES ET LA LISTE DES PIÈCES SONT CRITIQUES POUR LA SÉCURITÉ DE FONCTIONNEMENT. NE REMPLACER CES COMPOSANTS QUE PAR DES PIÈCES SONY DONT LES NUMÉROS SONT DONNÉS DANS CE MANUEL OU DES SUPPLÉMENTS PUBLIÉS PAR SONY.

Motor:	Linear BSL (brushless and slotless) motor
Drive System:	Direct drive, crystal lock control system
Speed:	33 ¹ / ₃ rpm, 45 rpm
Starting Characteristics:	Comes to nominal speed within a second revolution (33 ¹ / ₃ rpm)
Wow and Flutter:	± 0.045% (DIN) (AEP, E model) 0.025% (WRMS)
S/N Ratio:	75dB (DIN-B)
Load Characteristics:	0% at 150g tracking force
Automatic System:	Arm return reject

TONEARM


Type:	Statically balanced, universal
Pivot-to-Stylus Length:	235mm, 9 ¹ / ₄ inches
Overall Arm Length:	330mm, 13 inches
Overhang:	14 mm, ⁹ / ₁₆ inch
Tracking Error:	+2°27', -1°30'
Tracking Force Adjustment Range:	0-2.5g
Shell Weight:	11g
Cartridge Weight Range:	11-19.5g
(including shell weight)	19-27.5g (with extra weight)

SONY
SERVICE MANUAL


SERVICING NOTE

1. Perform the checking of the adjustment a few minutes after the power switch is turned on.
2. When replacing the pilot lamp of automatic-return detection, adjust the automatic-return adjustment (13 page).
3. Platter handling.
4. When adjusting the set, confirm that the transit screws are removed.

bottom view of platter



Be sure not to spoil the magnetic coating (dark brown color).

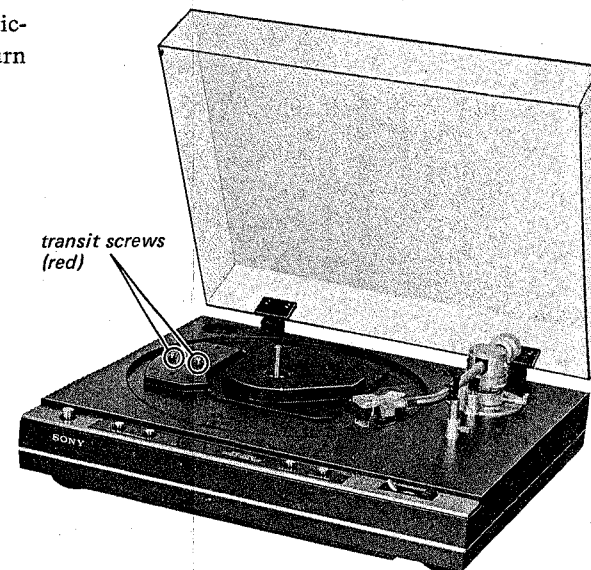

MODEL IDENTIFICATIONS

— Specification Label —

US, Canadian model

SONY	STEREO TURNTABLE SYSTEM MODEL NO. PS-X50 AC 120V 60Hz 8W SERIAL NO. _____ MADE IN JAPAN
-------------	---


AEP, E model

SONY	STEREO TURNTABLE SYSTEM MODEL NO. PS-X50 ~120, 220V 50/60Hz 12W SERIAL NO. _____ MADE IN JAPAN
-------------	--


MODEL IDENTIFICATIONS

— Power Cord —

E1 model: euro-plug
1-551-530-11




E2 model: parallel-blade plug
1-551-473-31



SECTION 1 OUTLINE

1. BLOCK DIAGRAM

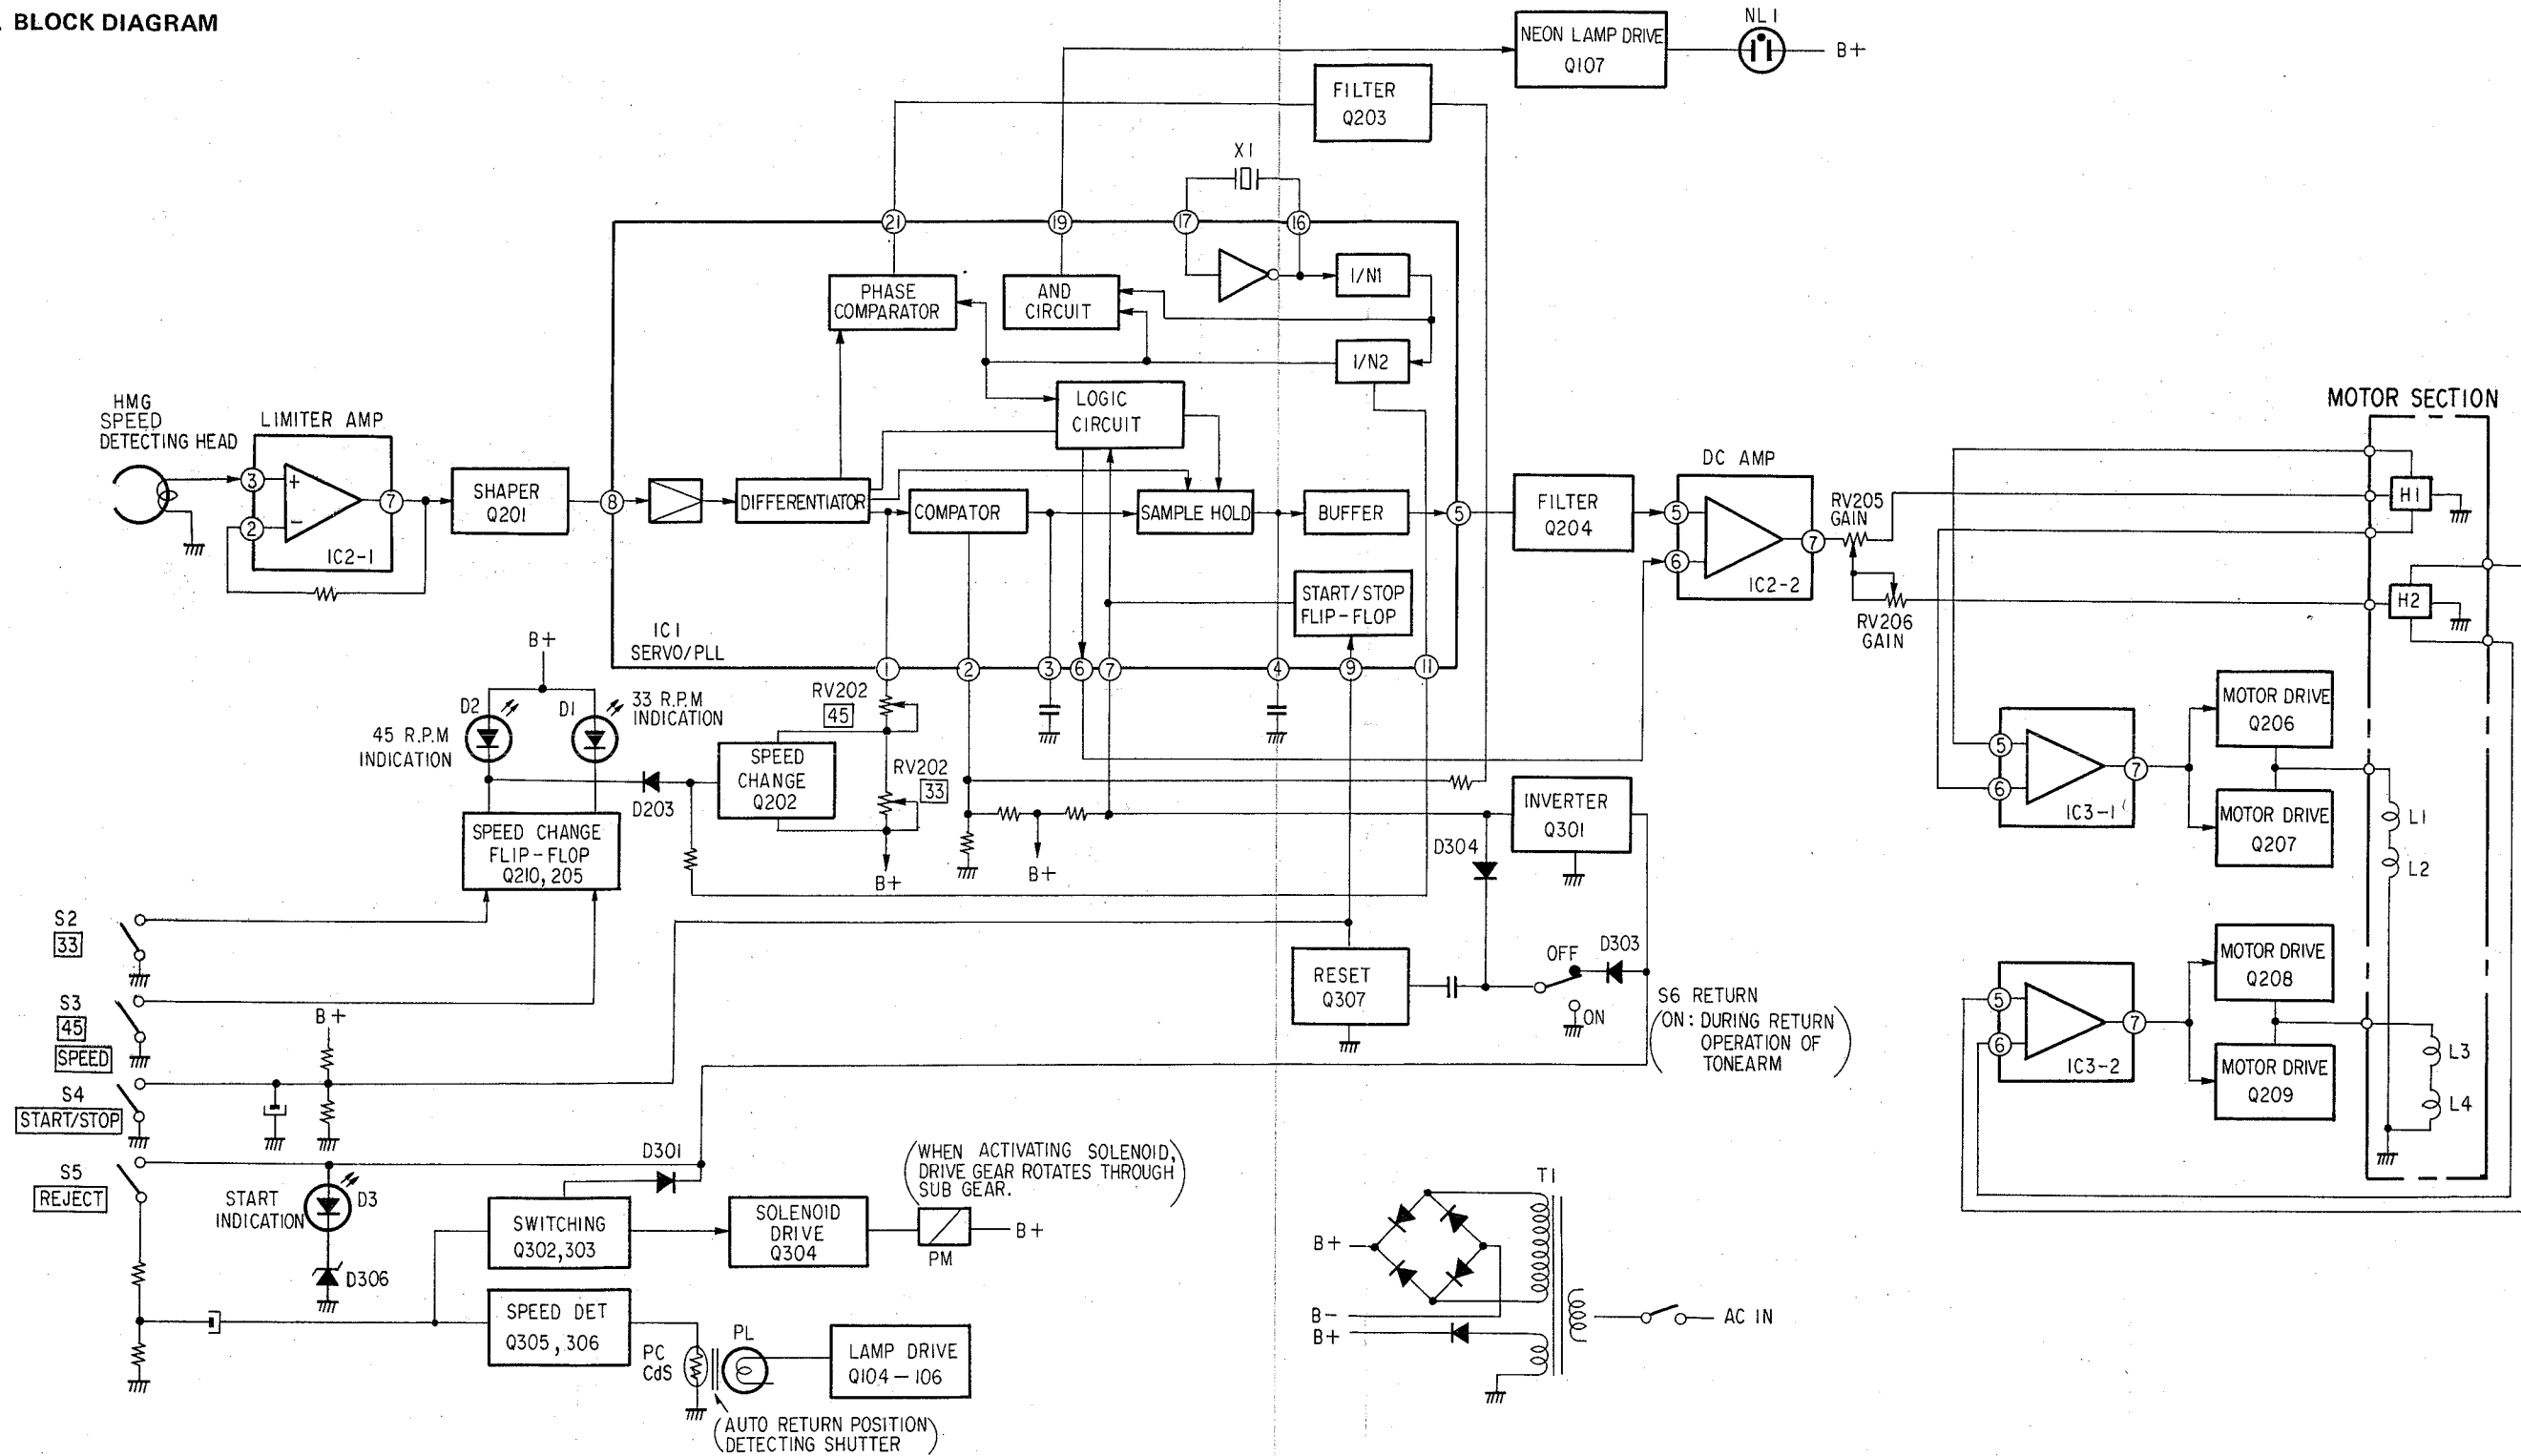


SECTION 2 DISASSEMBLY

PS-X50 PS-X50



- Follow the disassembly procedure in the numerical order given.

Remove the dust cover, turntable sheet and turntable.


BOTTOM PLATE REMOVAL

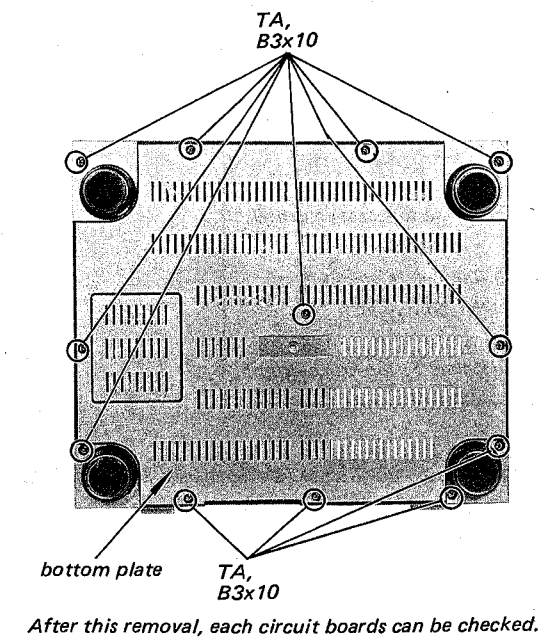


TONELARM REMOVAL (1)

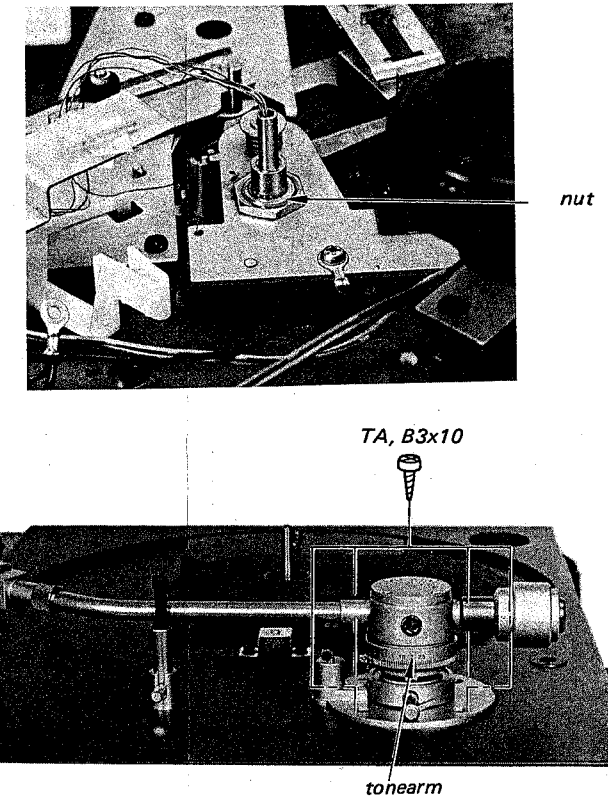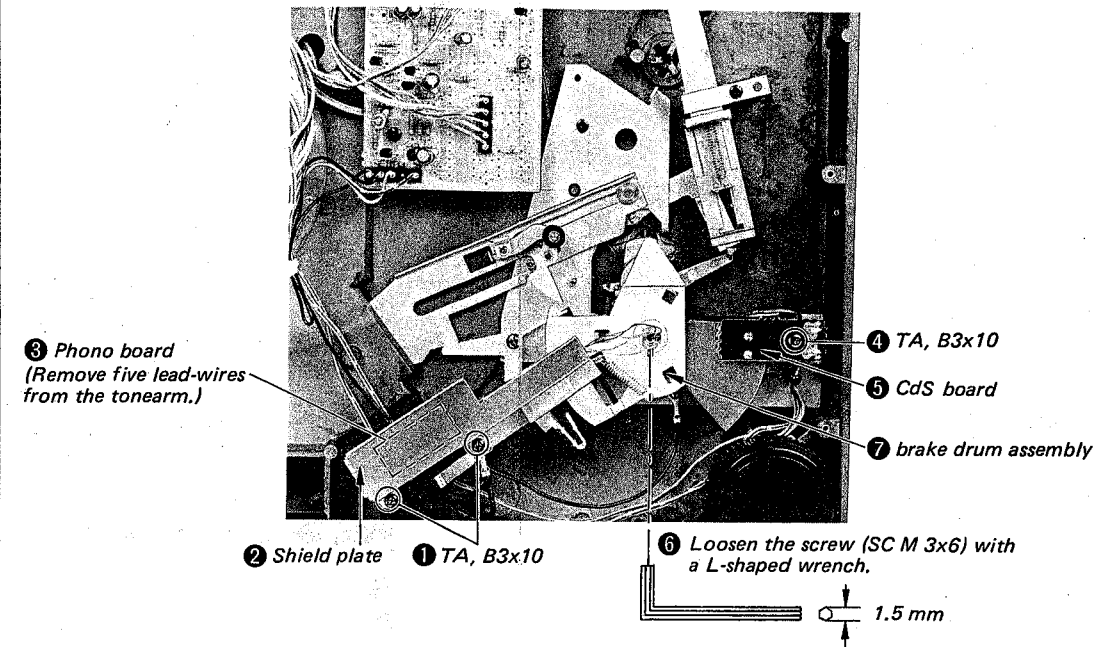


SPEED SWITCH (S2, 3), START/STOP SWITCH (S4) AND REJECT SWITCH (S5) REMOVAL

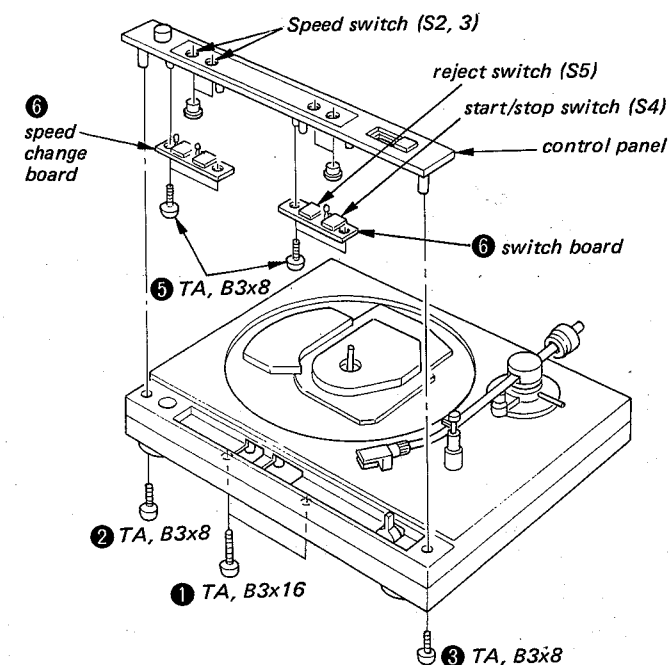

NEON LAMP (NL1) AND POWER SWITCH (S1) REMOVAL

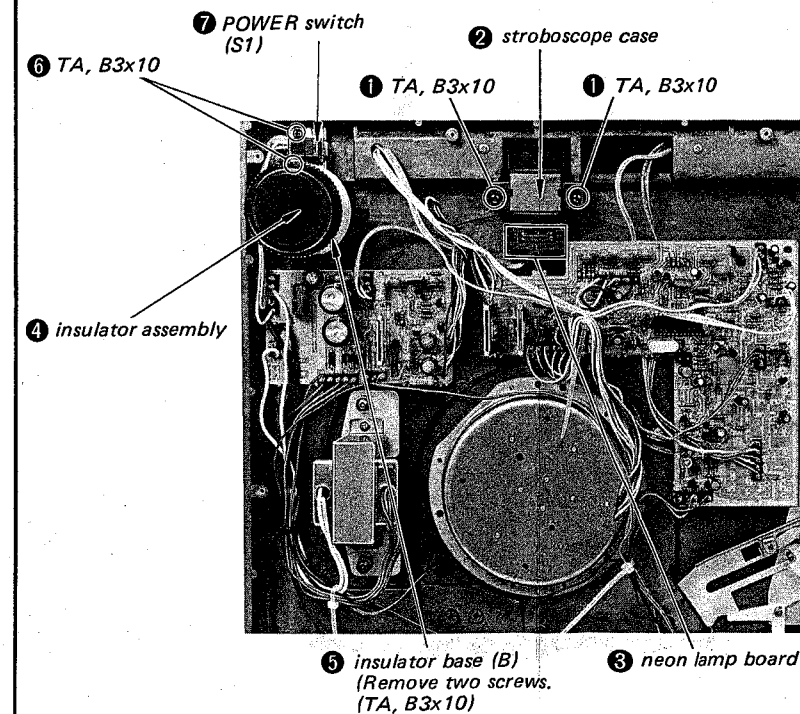


TOP COVER REMOVAL

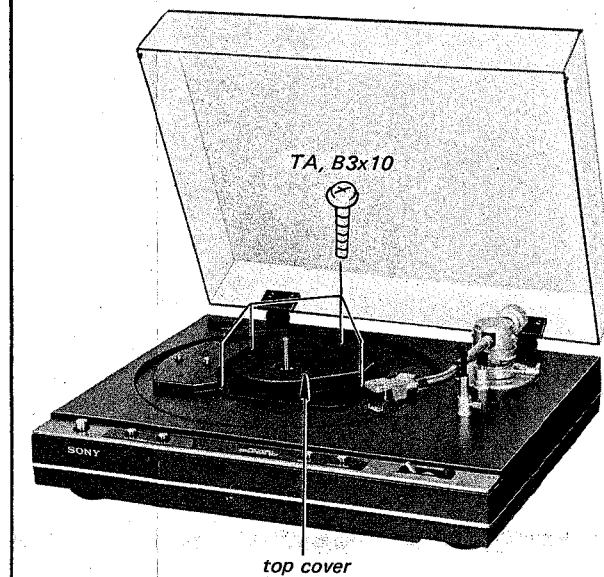


After this removal, drive gear, miniature switch (S6), solenoid (PM) and motor can be replaced.

TONEARM REMOVAL (2)


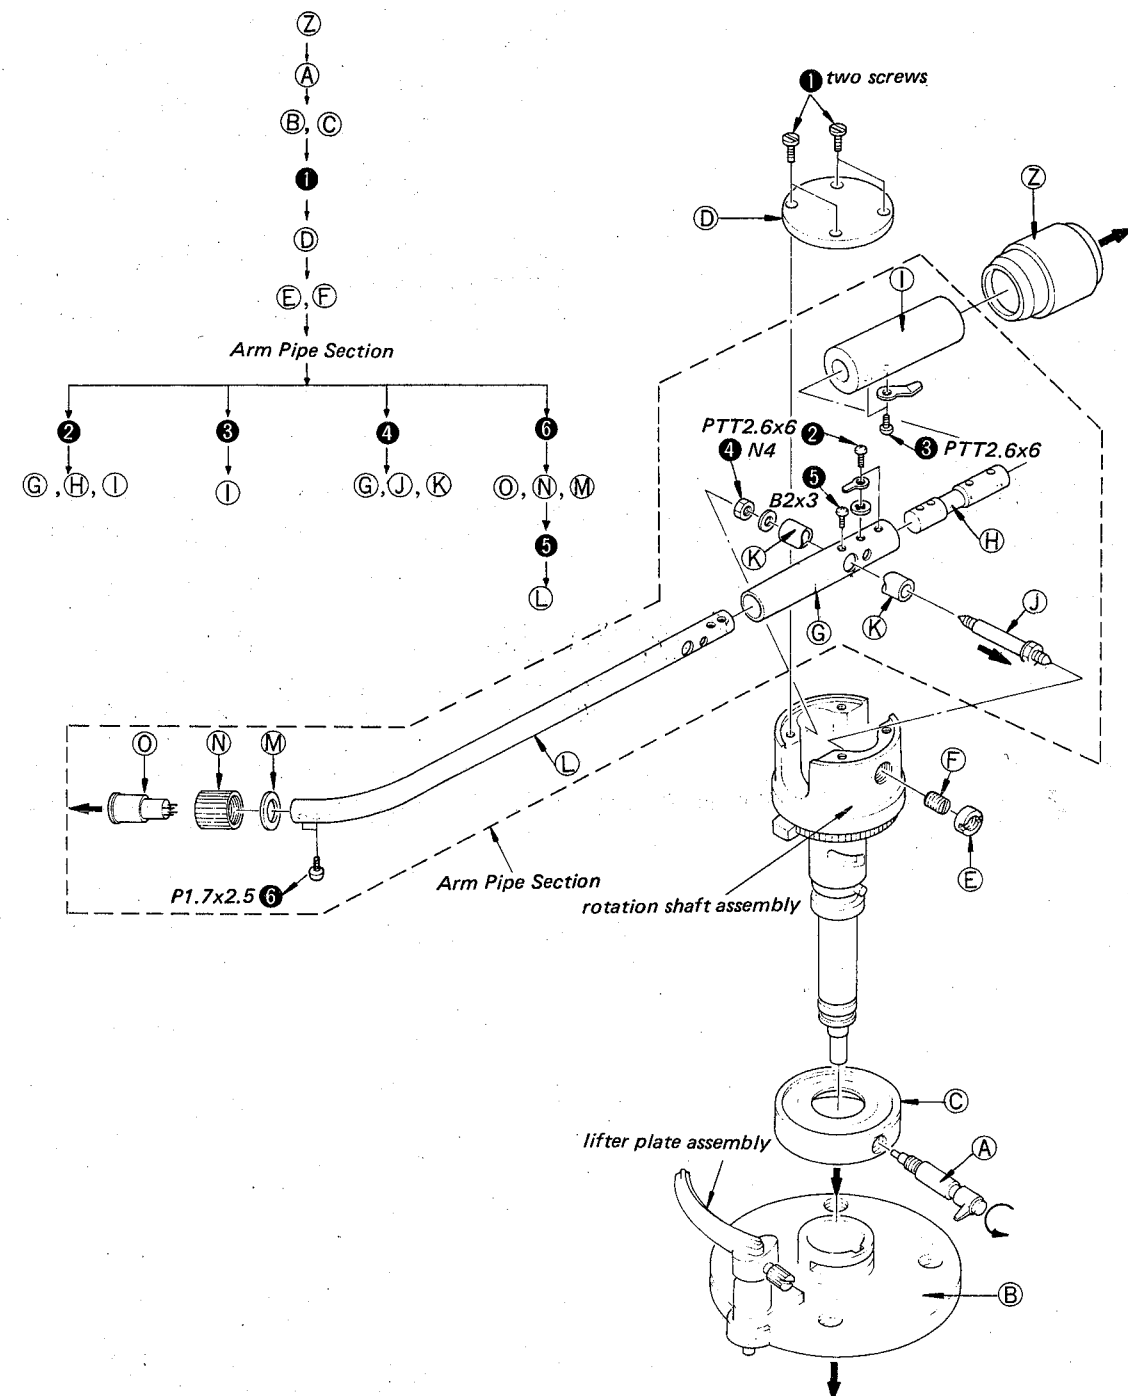


AUTOMATIC RETURN DETECTING LAMP (PL) REPLACEMENT

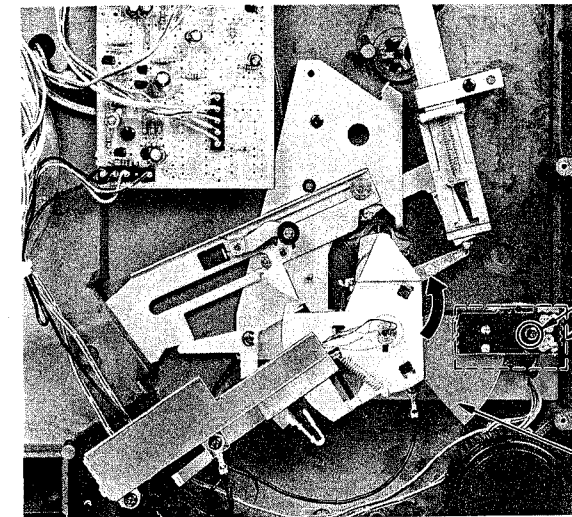



- ① TA, B3x10
 - ② CdS board
 - ③ Set the tonearm to center spindle side.
 - ④ Remove the lamp from the lamp holder.
- Shutter
(attached to the brake drum)

BRAKE MAGNET INSTALLATION

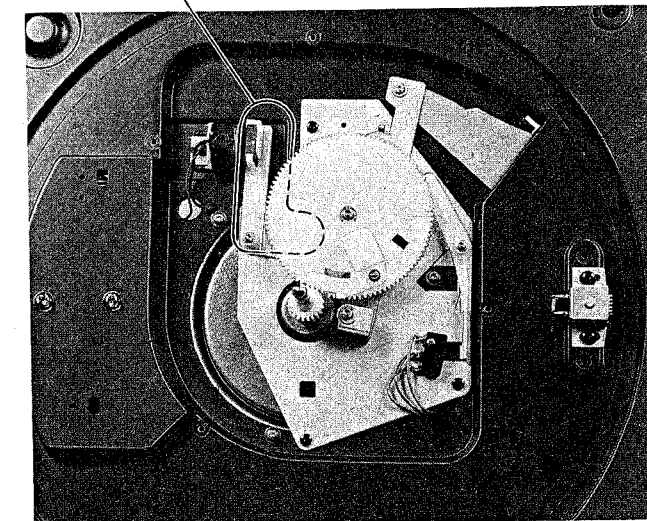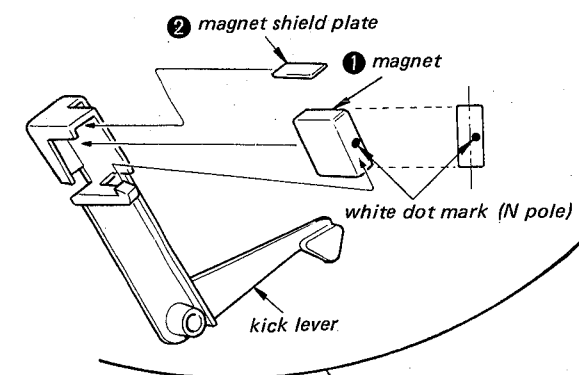

SOLENOID (PM) INSTALLATION

Install the solenoid (PM) parallel to **A** line.

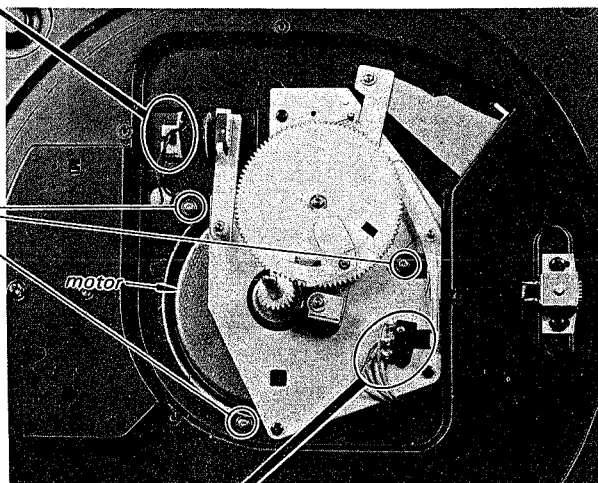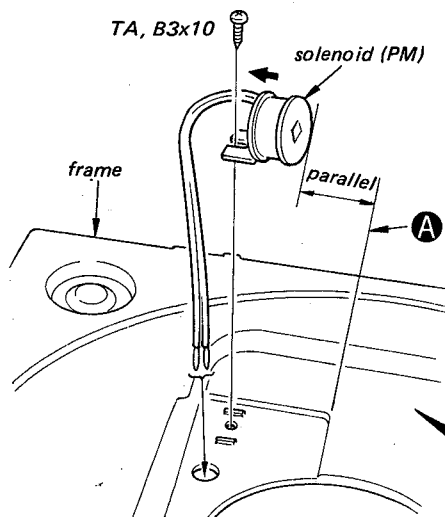


MOTOR REMOVAL

1. Remove the motor lead-wires from the servo amp/ system control/PLL board.
2. Remove three screws (PSW 3x12).
3. Remove the motor.

RETURN SWITCH (S6) INSTALLATION

Install the return switch (S6).


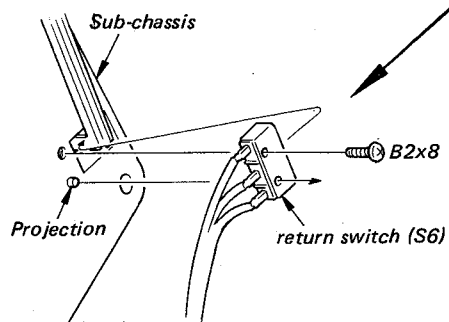


ARM LIFTER MECHANISM

The arm lifter mechanism of this set uses silicone-oil as damper of between the lifter cam assembly and the lifter base assembly.


If the arm lifter moves down too quickly, apply silicone-oil in the numerical order given.

1. Perform the tonearm removal (1).
2. Remove the lifter base assembly.
3. Remove E3 and the lifter cam assembly from the lifter base assembly.
4. Wipe off the silicone-oil on the lifter cam assembly and lifter base assembly.
5. Apply silicone-oil (7-661-012-15) on the lifter cam assembly.
6. Install the lifter cam assembly on the lifter base assembly.

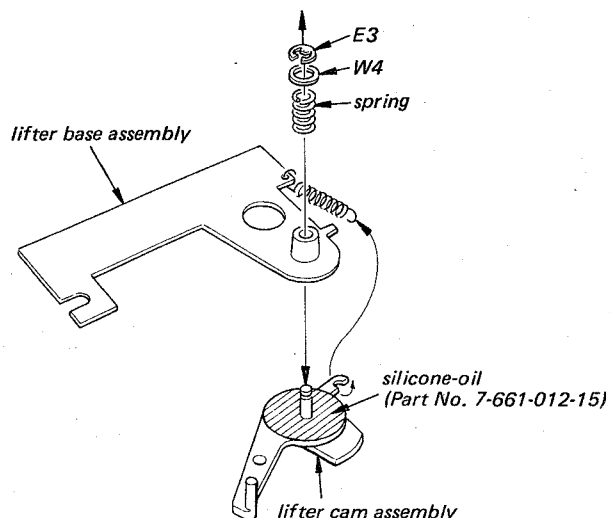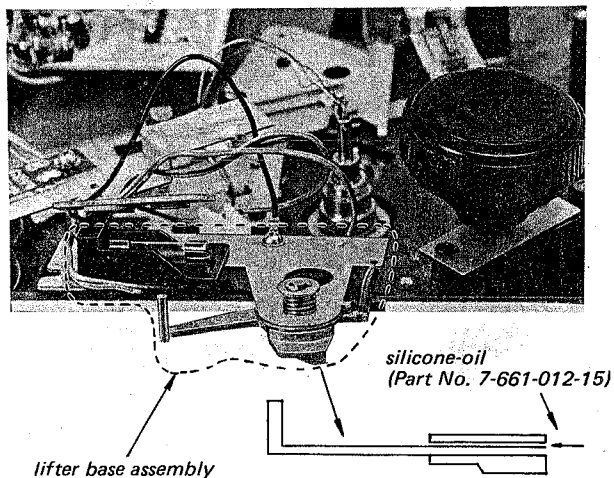


BRAKE DRUM ASSEMBLY INSTALLATION

1. Thread the lead wires of tonearm in the brake drum assembly.
2. Insert the brake drum assembly in the rotation shaft of tonearm.
3. Place the boss of brake drum assembly as shown below and fix the brake drum assembly with screw.
4. Perform the automatic return position adjustment (Refer to the electrical adjustment on page 13).

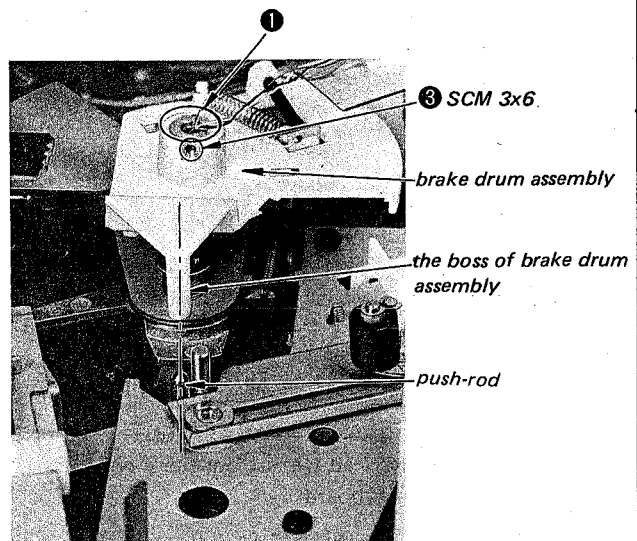


ONEARM INSTALLATION


1. LEAD WIRE THREADING (1)

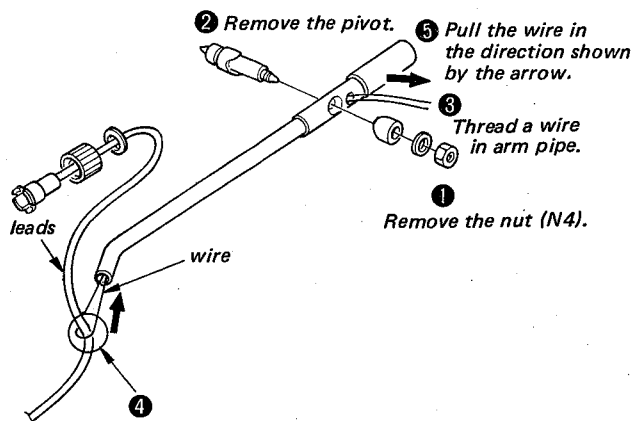

2. LEAD WIRE THREADING (2)

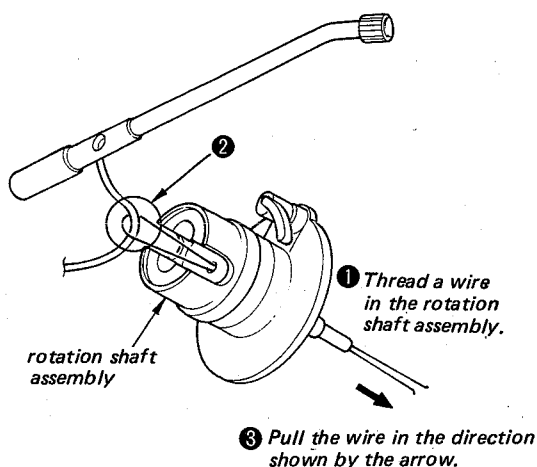



3. PIVOT NEEDLE INSTALLATION




Turn the nuts so that A is equal to B.

4. ARM PIPE INSTALLATION

- 1) Loosen the pivot-locking nuts and the pivot bearings.
- 2) Install the pivot needle to the pivot bearings as shown in Fig. A.
- 3) Tighten the pivot bearings temporarily as shown in Fig. B.

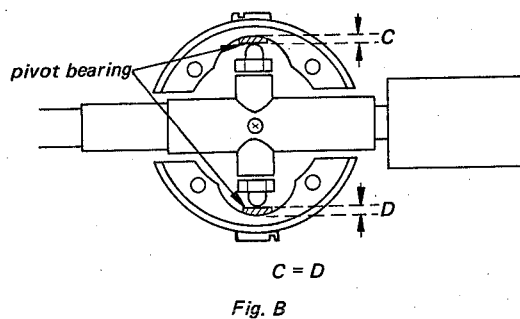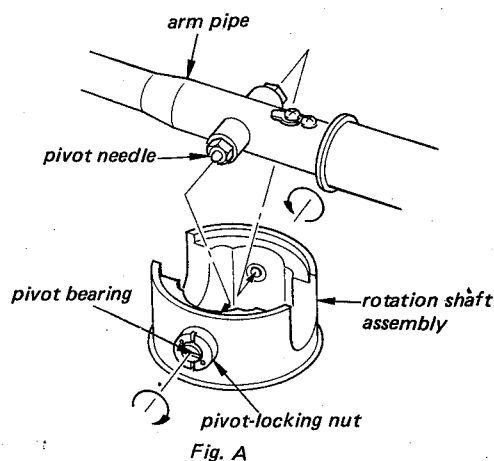

- 4) Install the tonearm on the set and perform the longitudinal balance adjustment.
- 5) Adjust the pivot bearings so that the tonearm sinks 3mm when the 20mg weight is placed on the shell as shown in Fig. C and the tonearm is in a horizontally balanced position when the weight is removed. (Fig. D)

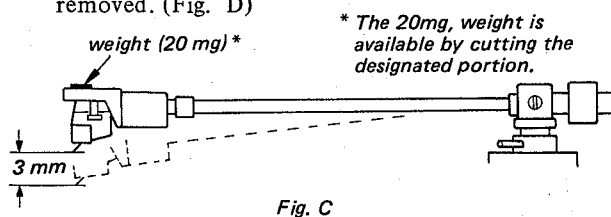

* The 20mg weight is available by cutting the designated portion.


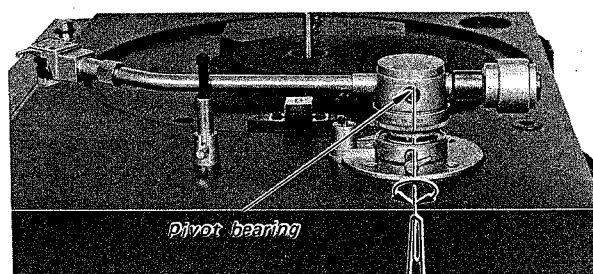



Fig. D

20 mg weight for tonearm balance adjustment




CARTRIDGE WIRE REPLACEMENT

1. CARTRIDGE WIRE CONNECTION

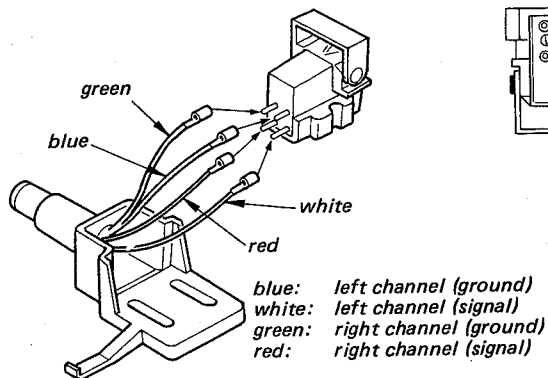

2. CARTRIDGE INSTALLATION

Install the cartridge into the shell with the mounting screws so that the distance between the shell end and the stylus tip is 49mm ($1\frac{15}{16}$ inches).

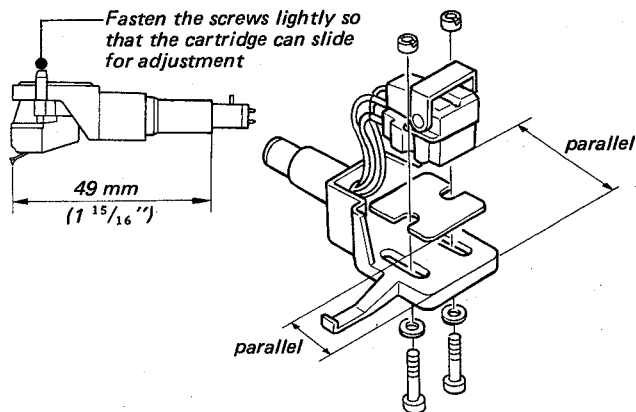


SECTION 3 ADJUSTMENTS

3-1. MECHANICAL ADJUSTMENT

Stylus Height Adjustment


1. Bring the tonearm above the record.
2. Lift the cueing lever up and make sure that the clearance between the stylus tip and the record is 5–9 mm ($\frac{3}{16}$ – $\frac{3}{8}$ inches).
3. If necessary, loosen the lifter plate adjustment screw and adjust the lifter height.

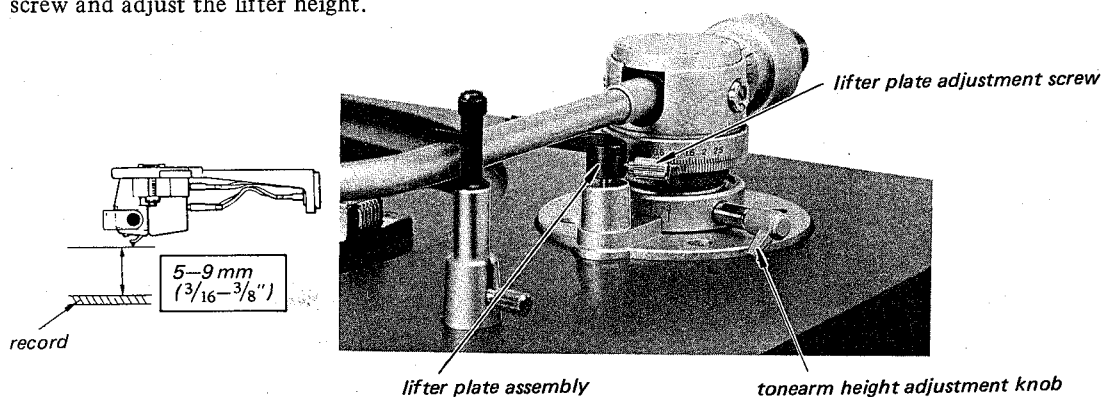

3.2. ELECTRICAL ADJUSTMENT


Voltage Adjustment

Adjust RV101 for 13.5 V dc reading on the VOM (A), and -13.5 V dc reading on the VOM (B).

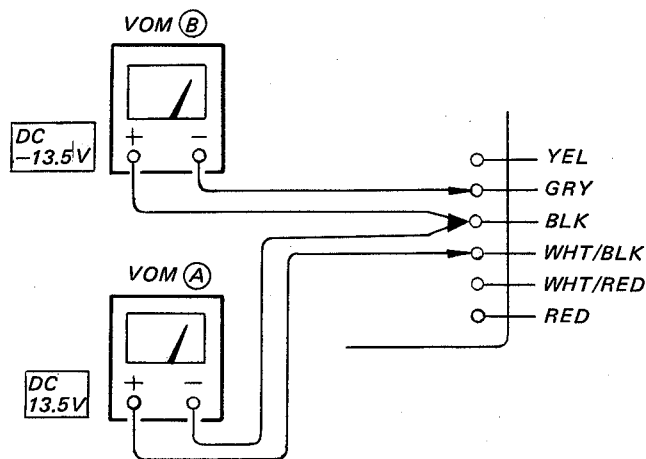

RV101

RV102

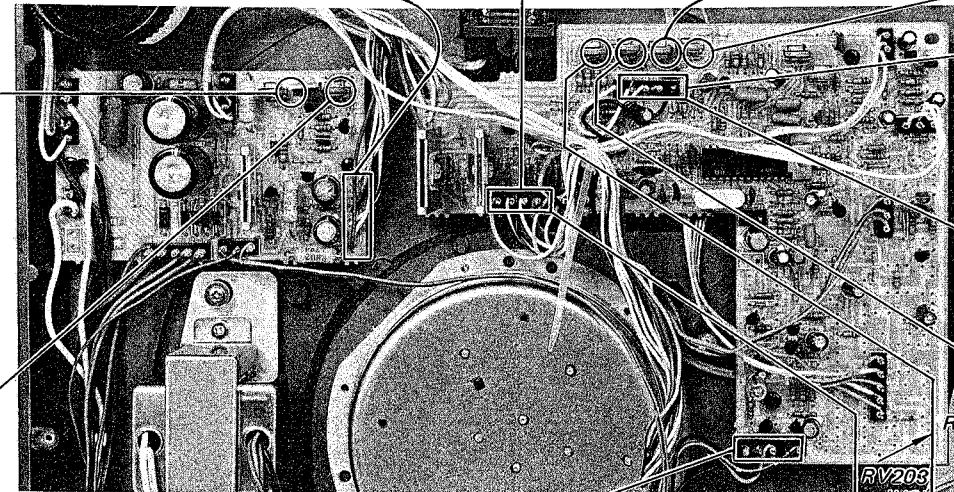

RV206 (H2)


RV205 (H1)

RV204 (H1)


RV203 (H2)

Hall Device Gain Adjustment (33¹/₃ rpm)

1. Disconnect the white lead wire and connect the regulated power supply as shown below.

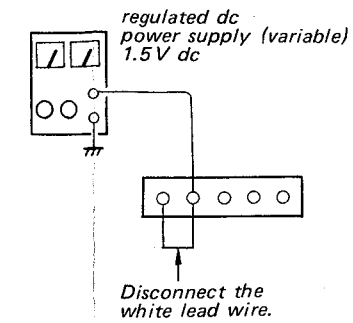


2. Connect VTVM to H1 and adjust RV205 for 1.9 V ac reading on VTVM.
3. Connect VTVM to H2 and adjust RV206 for 1.9 V ac reading on VTVM.


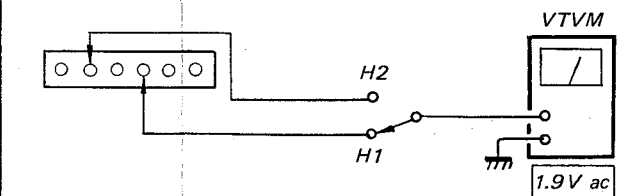


Automatic Return Adjustment

1. Set the power switch on.
2. Set the tonearm to the center spindle side.
3. Adjust RV102 for 1.1 V dc reading on the VOM (C).

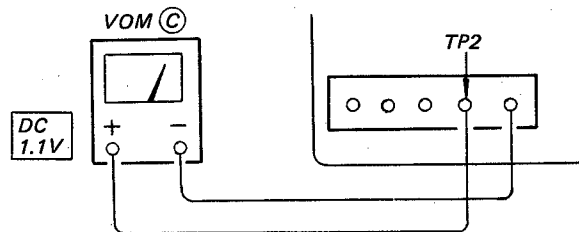


4. Set the stylus position as shown below. Adjust the shutter adjustment screw for 7.3 V dc reading on the VOM (C).

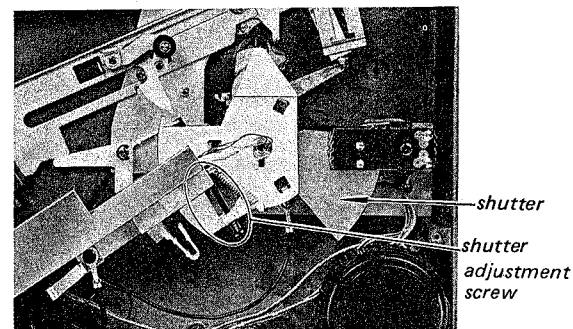

5. Set the test record (YFSB-6, BAND 2, 33 rpm).
6. Turn the shutter adjustment screw so that tonearm starts to return at count of 15-16.
7. Set the test record (YFSB-6, BAND 3, 33 rpm).
8. Adjust RV102 for the tonearm starts to return at only 1kHz playback signal is heard.
9. If RV102 is turned, readjust steps 4 to 7 several times.

Motor Amp Offset Adjustment (33¹/₃ rpm)



1. Disconnect the white lead wire and connect the regulated power supply as shown below.

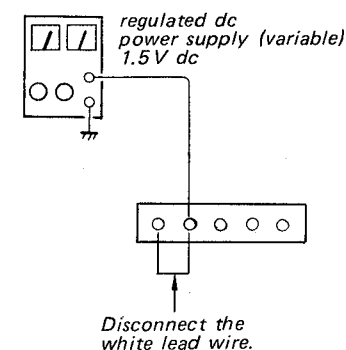


2. Connect VTVM or oscilloscope to H1 and adjust RV204 for 0 V dc VTVM reading or the waveform on oscilloscope as shown below.
3. Connect VTVM or oscilloscope to H2 and adjust RV203 for 0 V dc VTVM reading or the waveform on oscilloscope as shown below.

Waveform on Oscilloscope:


Note: Set the sweep time to longer for easy checking the waveform.

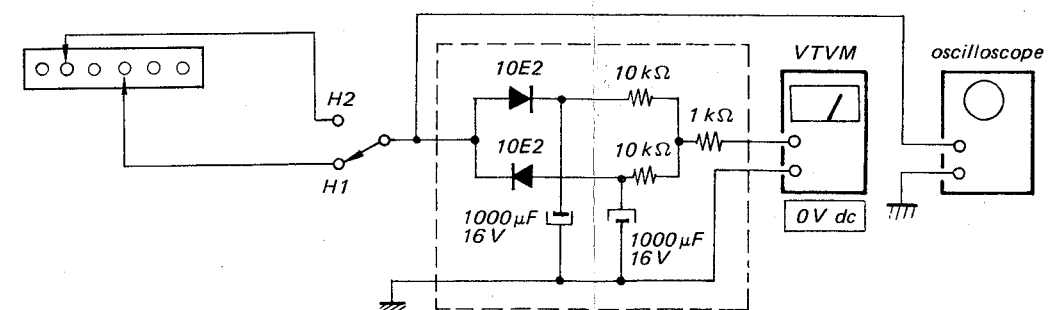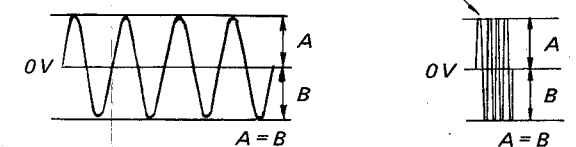

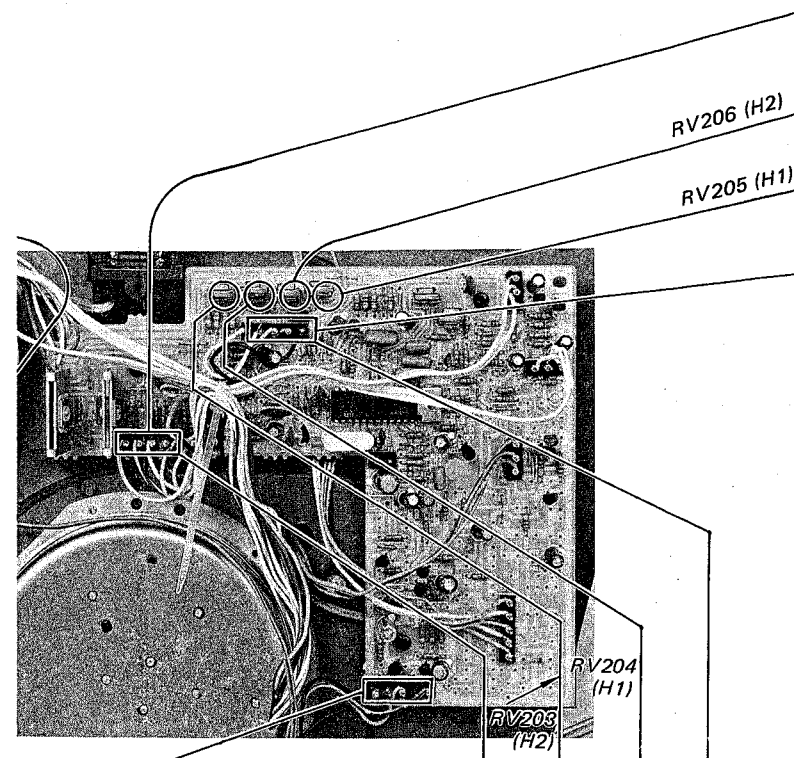


Hall Device Gain Adjustment ($33\frac{1}{3}$ rpm)

1. Disconnect the white lead wire and connect the regulated power supply as shown below.




2. Connect VTVM to H1 and adjust RV205 for 1.9 V ac reading on VTVM.
3. Connect VTVM to H2 and adjust RV206 for 1.9 V ac reading on VTVM.

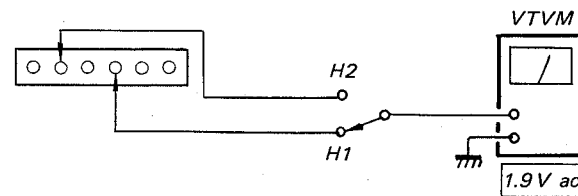

Motor Amp Offset Adjustment ($33\frac{1}{3}$ rpm)



1. Disconnect the white lead wire and connect the regulated power supply as shown below.



2. Connect VTVM or oscilloscope to H1 and adjust RV204 for 0 V dc VTVM reading or the waveform on oscilloscope as shown below.
3. Connect VTVM or oscilloscope to H2 and adjust RV203 for 0 V dc VTVM reading or the waveform on oscilloscope as shown below.

Waveform on Oscilloscope:

Note: Set the sweep time to longer for easy checking the waveform.

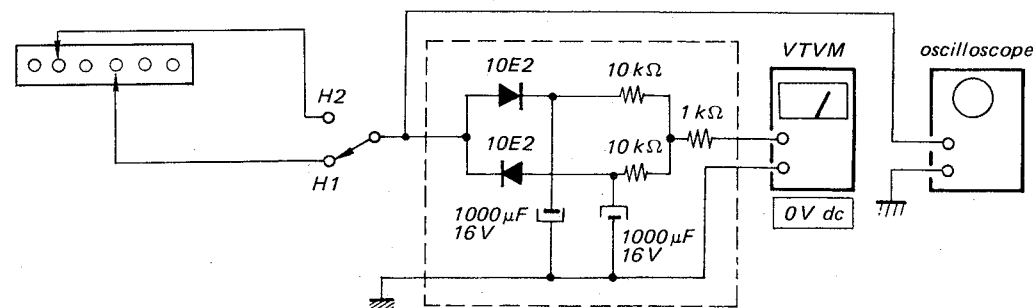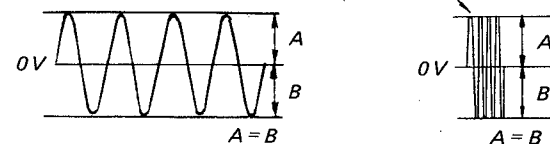

Turntable Speed Adjustment

1. Set the SPEED switch (S2, 3) to "45" position.


2. Reference waveform: **Note:** Waveform must appear ⊕ side.

3. If the correct waveform does not appear, adjust RV202 (45 rpm).

4. Set the SPEED switch (2, 3) to "33" position.

5. Reference waveform: **Note:** Waveform must appear ⊕ side.

6. If the correct waveform does not appear, adjust RV201 (33 rpm) so that the stroboscope pattern appears stationary.

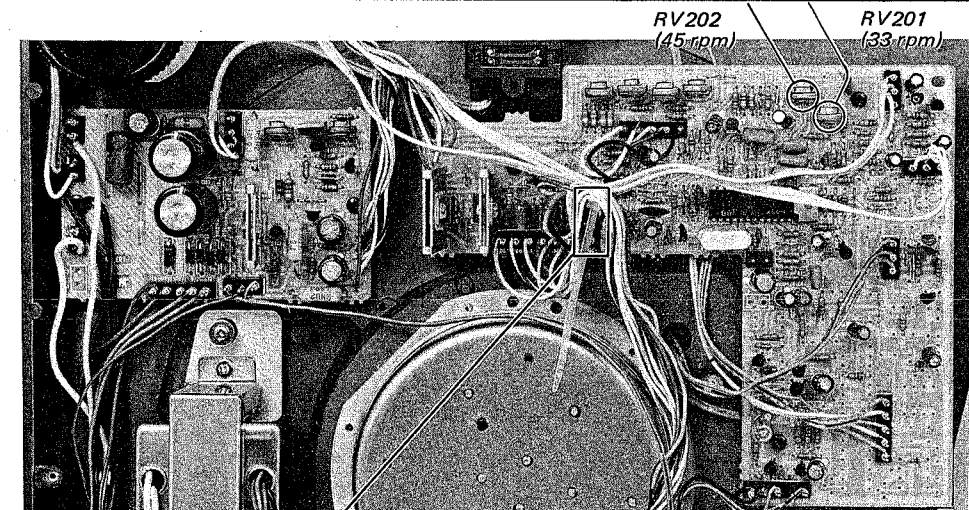


Speed Detecting Head Output Level Adjustment


Power switch: ON


1. Adjust the position of the head so that the VTVM reading is more than 15 mV ac at $33\frac{1}{3}$ rpm.
2. Make sure that the head does not touch the turntable and tighten the screws securely.

Note: The clearance between the magnet coated rim and the speed detecting head is more than 0.3 mm.



—Adjustment Location—

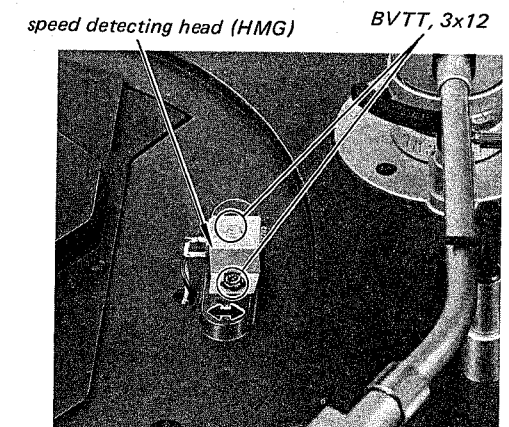


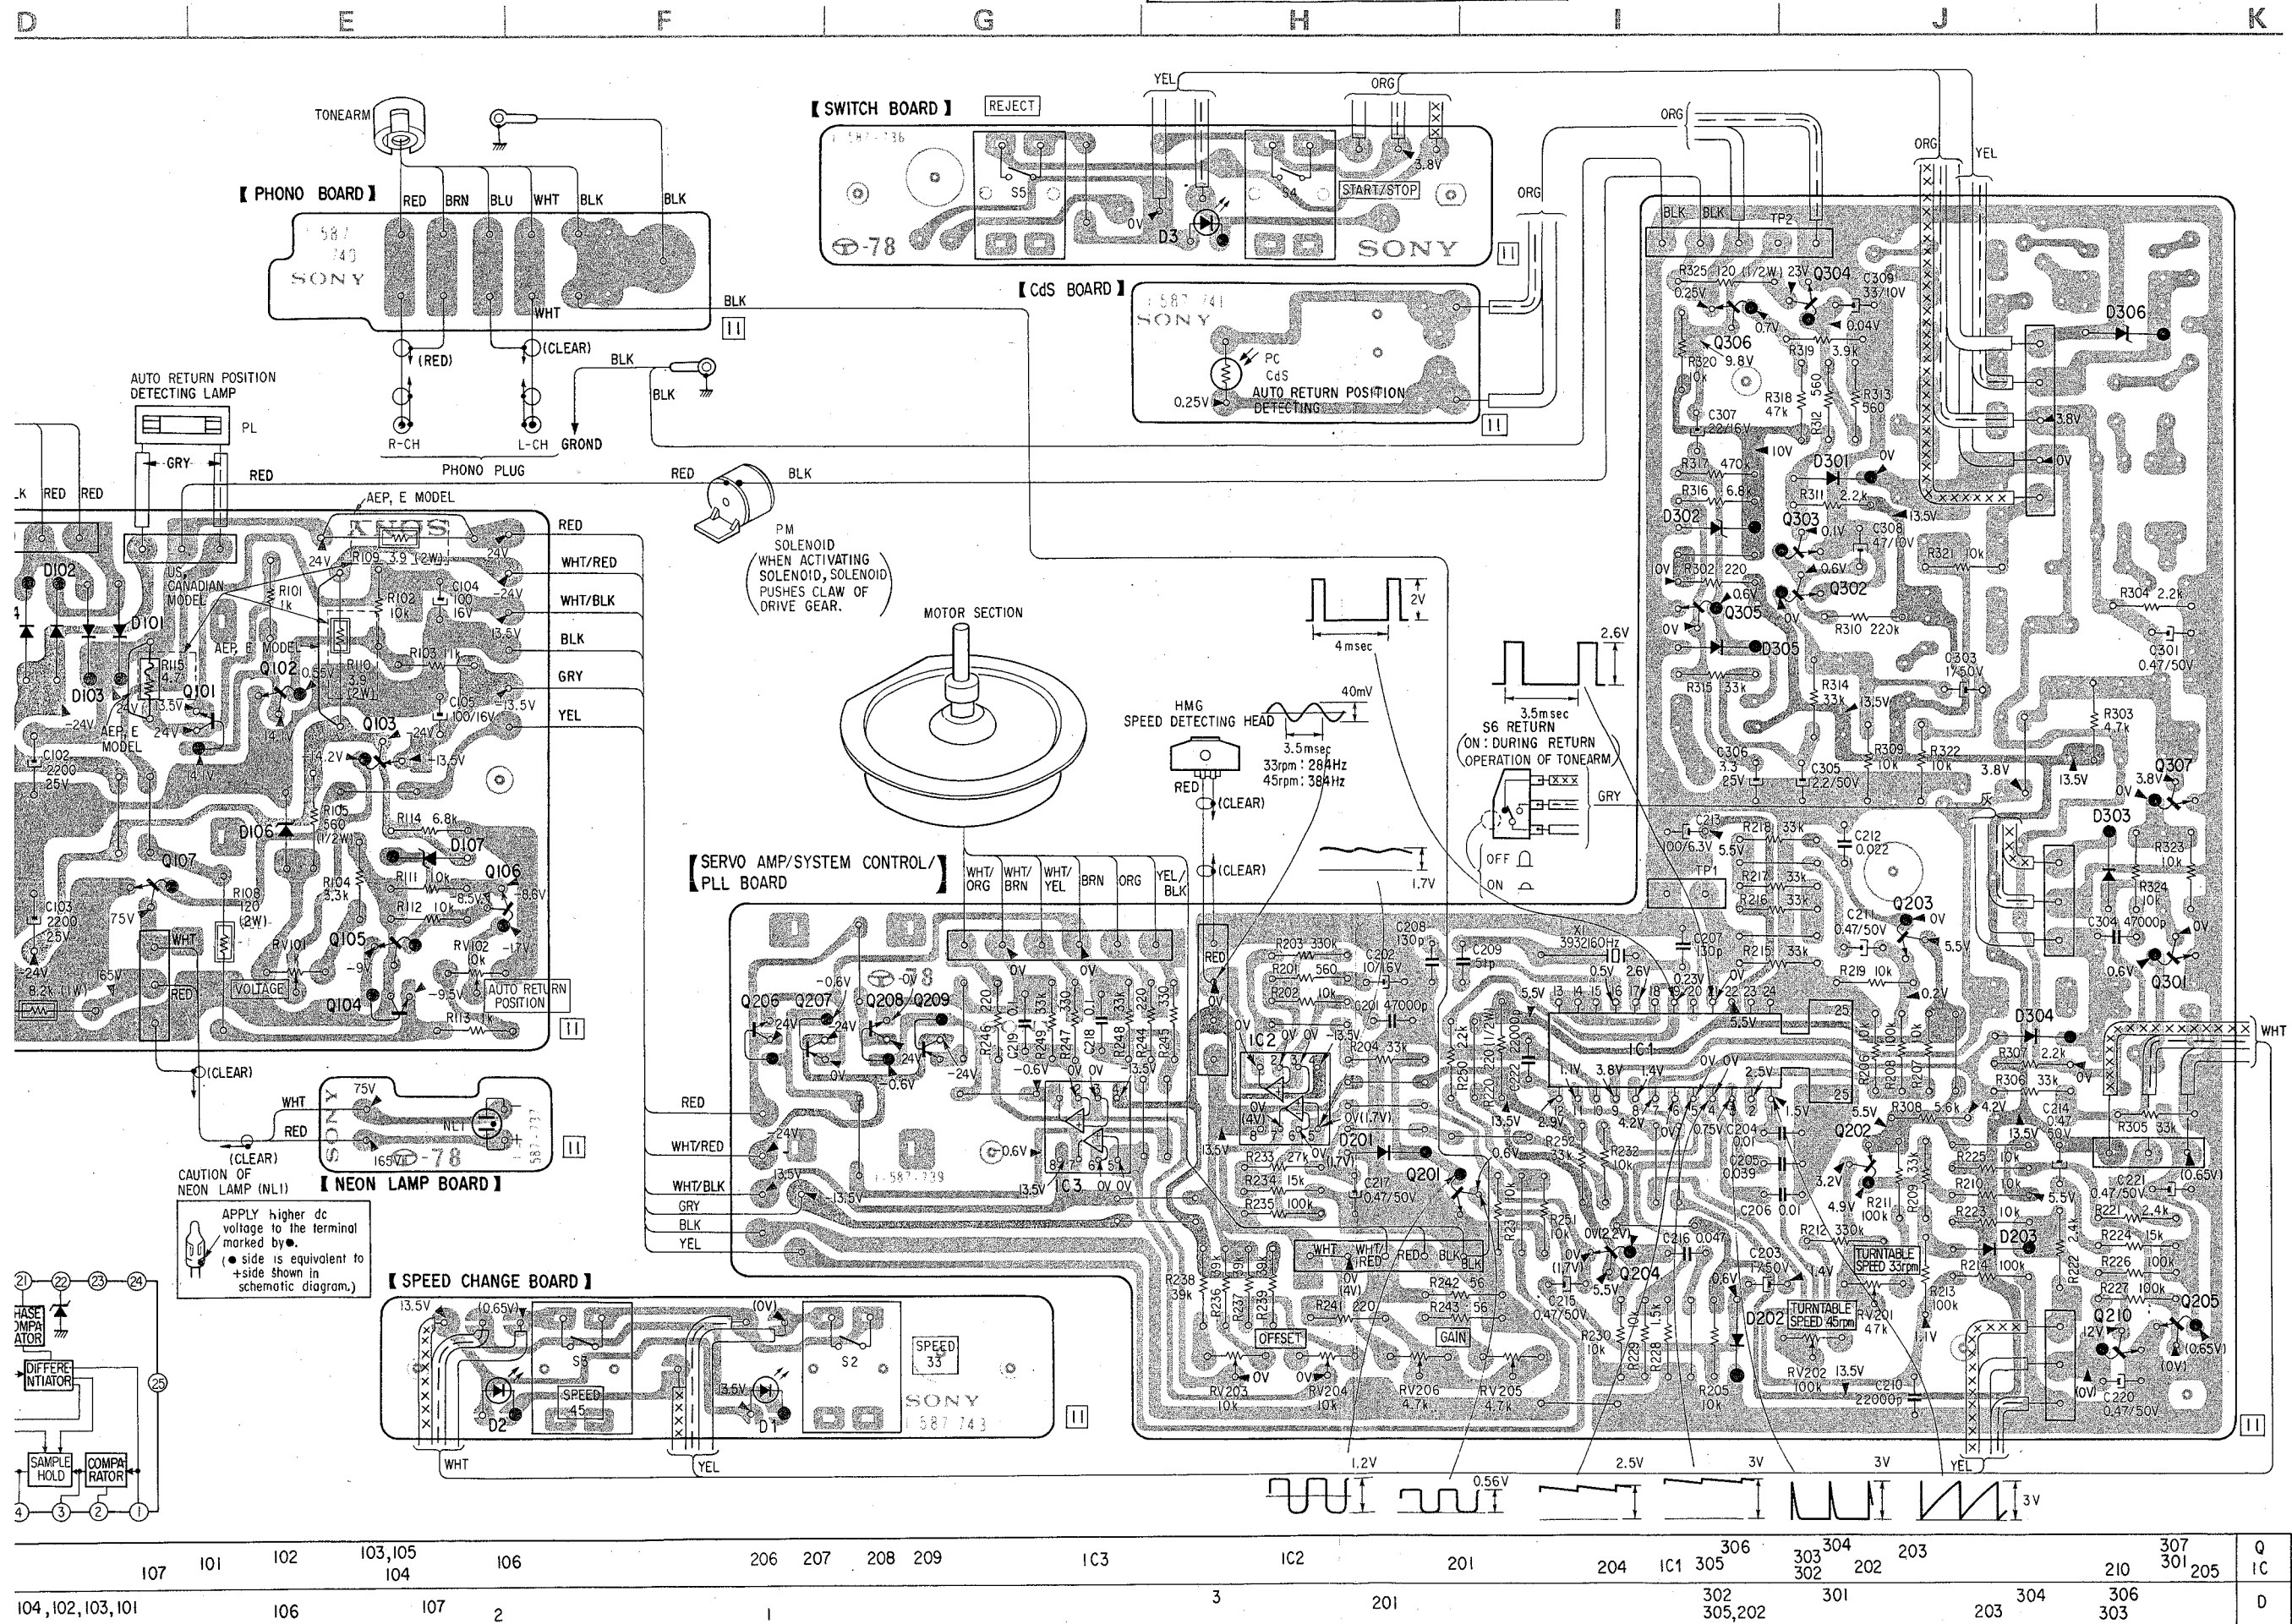

107	101	102	103,105 104	106	206	207	208	209	1C3	1C2	201	204	1C1	305	306	303	304	202	203	210	307 301	205	Q 1C
104, 102, 103, 101		106	107	2	1					3	201				302	301			203	304	306 303		D

4-2. SCHEMATIC DIAGRAM

[SERVO AMP / SYSTEM CONTROL / PLL BOARD]

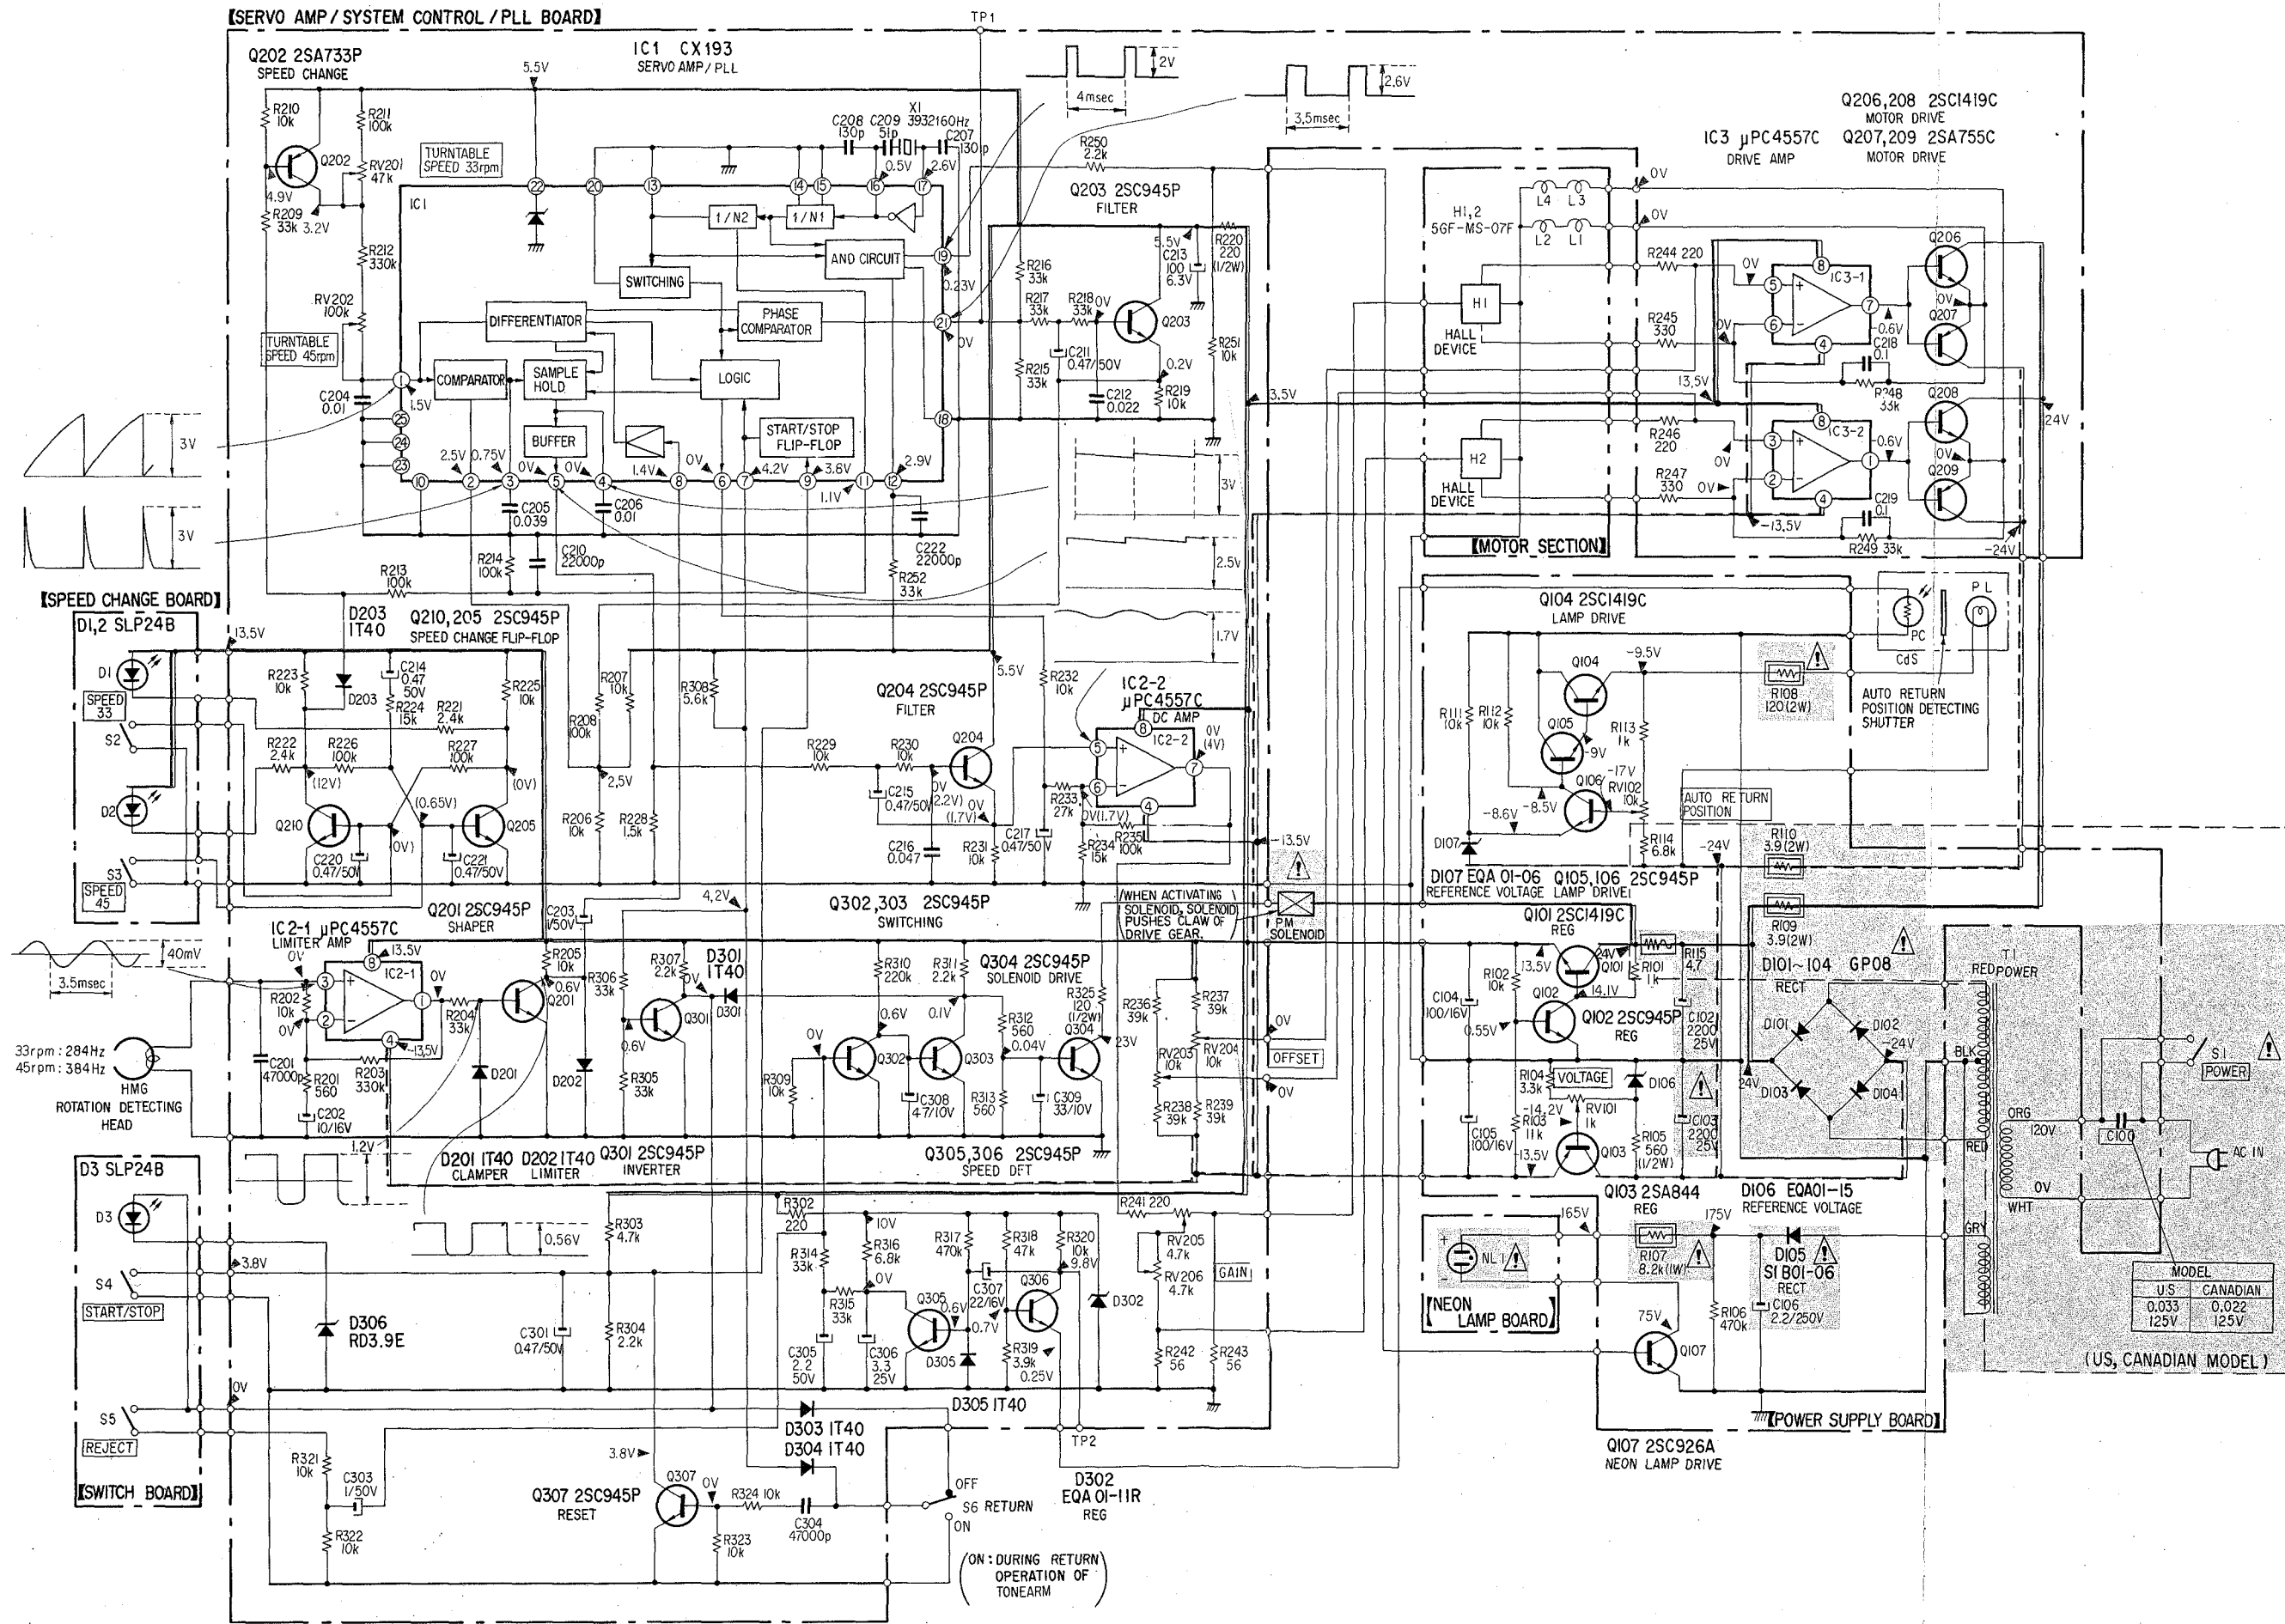

For replacement, use semiconductors except in ().

The diagram shows two representations of a diode. The top representation is a physical component with a cylindrical body and two leads; the lead on the left is labeled 'anode' and the lead on the right is labeled 'cathode'. The bottom representation is the standard electronic symbol for a diode, consisting of a triangle pointing to a vertical line. The left side of the symbol is labeled 'anode' and the right side is labeled 'cathode'.

D101 - 104 : 10E2(GP08)

D105 : 10D6(SIB01-06)

A schematic diagram of a diode symbol. It consists of a vertical line on the left and a vertical line on the right. The right line has a horizontal bar across its middle, forming a triangle shape. The top of the left line is labeled 'cathode' and the bottom is labeled 'anode'.

Q103 : 2SA678(2SA844)

D106 : EQB01-15(EQA01-15)
D107 : EQB01-06(EQA01-06)
D302 : EQB01-11Z(EQA01-11R)

Q107 : 2SC926A

D201 - 203)
D301) 1S1555(1T40)
D303 - 305)
D307
D306 : RD4.3E(RD3.9E)

Q202 : 2SA678(2SA733P)

Q207, 209 : 2SA671(2SA755C)

H1, 2 : 5GF-MS-07F

marking side

IC1 : CX193

(Top view)

IC2, 3 : μ PC4557C

(Top view)

5-1.

(1)

- Items with no part number and/or no description are not stocked because they are seldom required for routine service.
- Circled letters (**A** to **Z**) are applicable to European models only.

1

2

3

4

Note: The components identified by shading and mark  are critical for safety. Replace only with part number specified.

Note: Les composants identifiés par un trame et une marque  sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

5-2.

(2)

- Items with description are seldom re
- Circled letter models only.

2

3

4

4-844-084-00 (A) --
Pad, button

*Complete Circuit Board
speed change*

1-552-174-00 (Switch, keyboard SPEED (S2, 3))


1-552-530-00 (C
1-552-580-11 (A
Switch, pushbut

Note: The

part

SECTION 5

EXPLODED VIEWS

5-1.


A

B

C

(1)

- Items with no part number and/or no description are not stocked because they are seldom required for routine service.
- Circled letters (**A**) to (**Z**) are applicable to European models only.

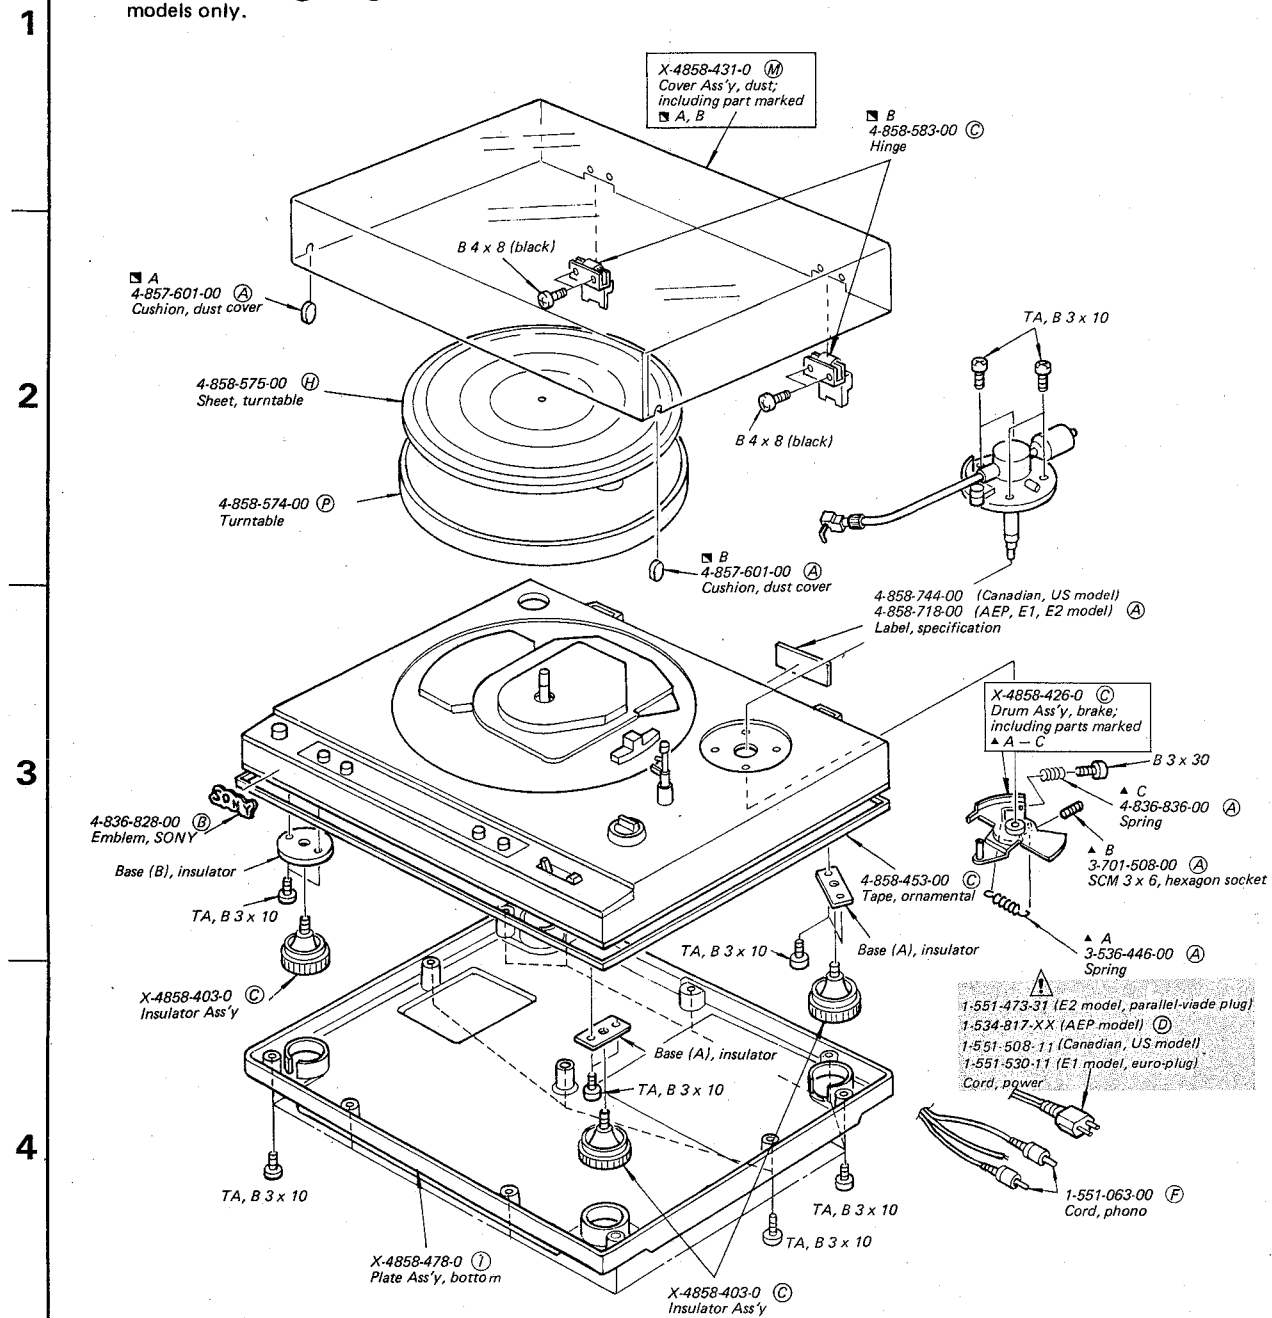

Note: The components identified by shading and mark  are critical for safety. Replace only with part number specified.

Note: Les composants identifiés par un trame et une marque  sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

5-2.

A


B

C

D

(2)

- Items with no part number and/or no description are not stocked because they are seldom required for routine service.
- Circled letters (**A** to **Z**) are applicable to European models only.

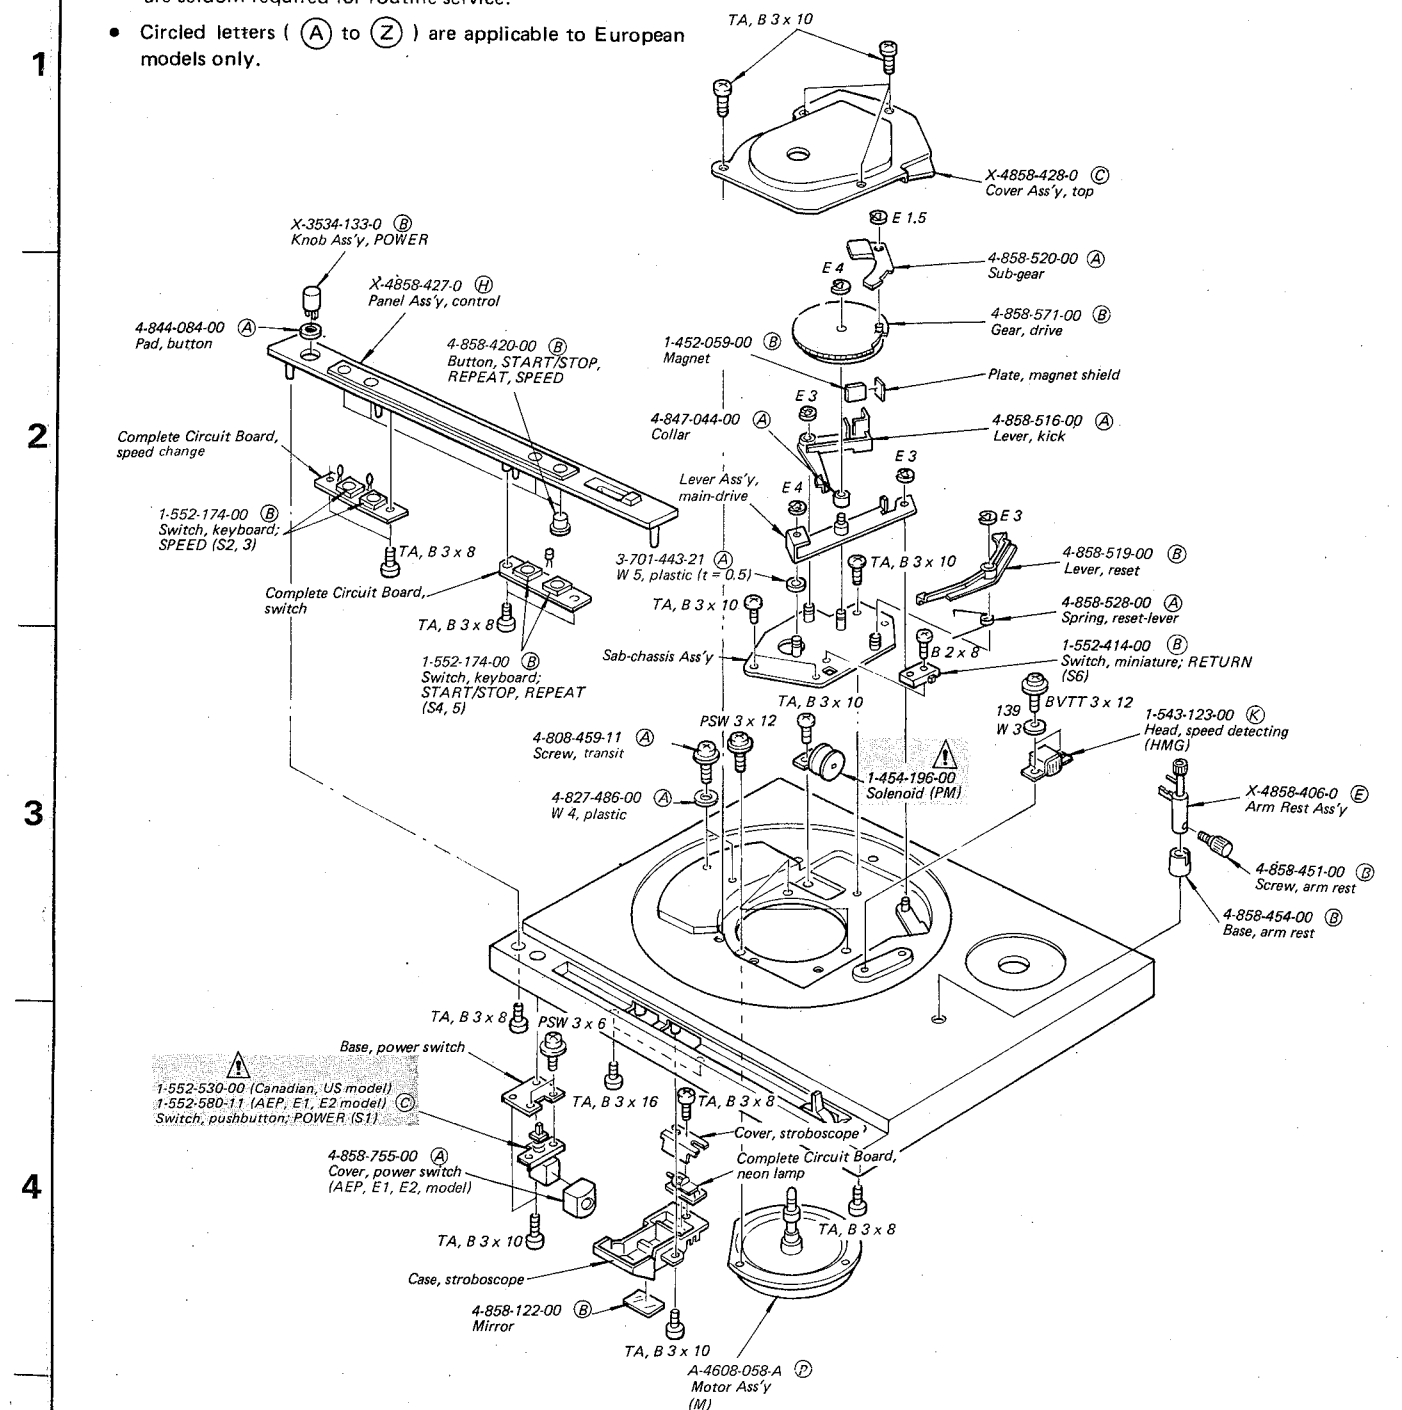

Note: The components identified by shading and mark  are critical for safety. Replace only with part number specified.

Note: Les composants identifiés par un trame et une marque  sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

5-4.

A


B

C

D

(4)

- Items with no part number and/or no description are not stocked because they are seldom required for routine service.
- Circled letters (A to Z) are applicable to European models only.

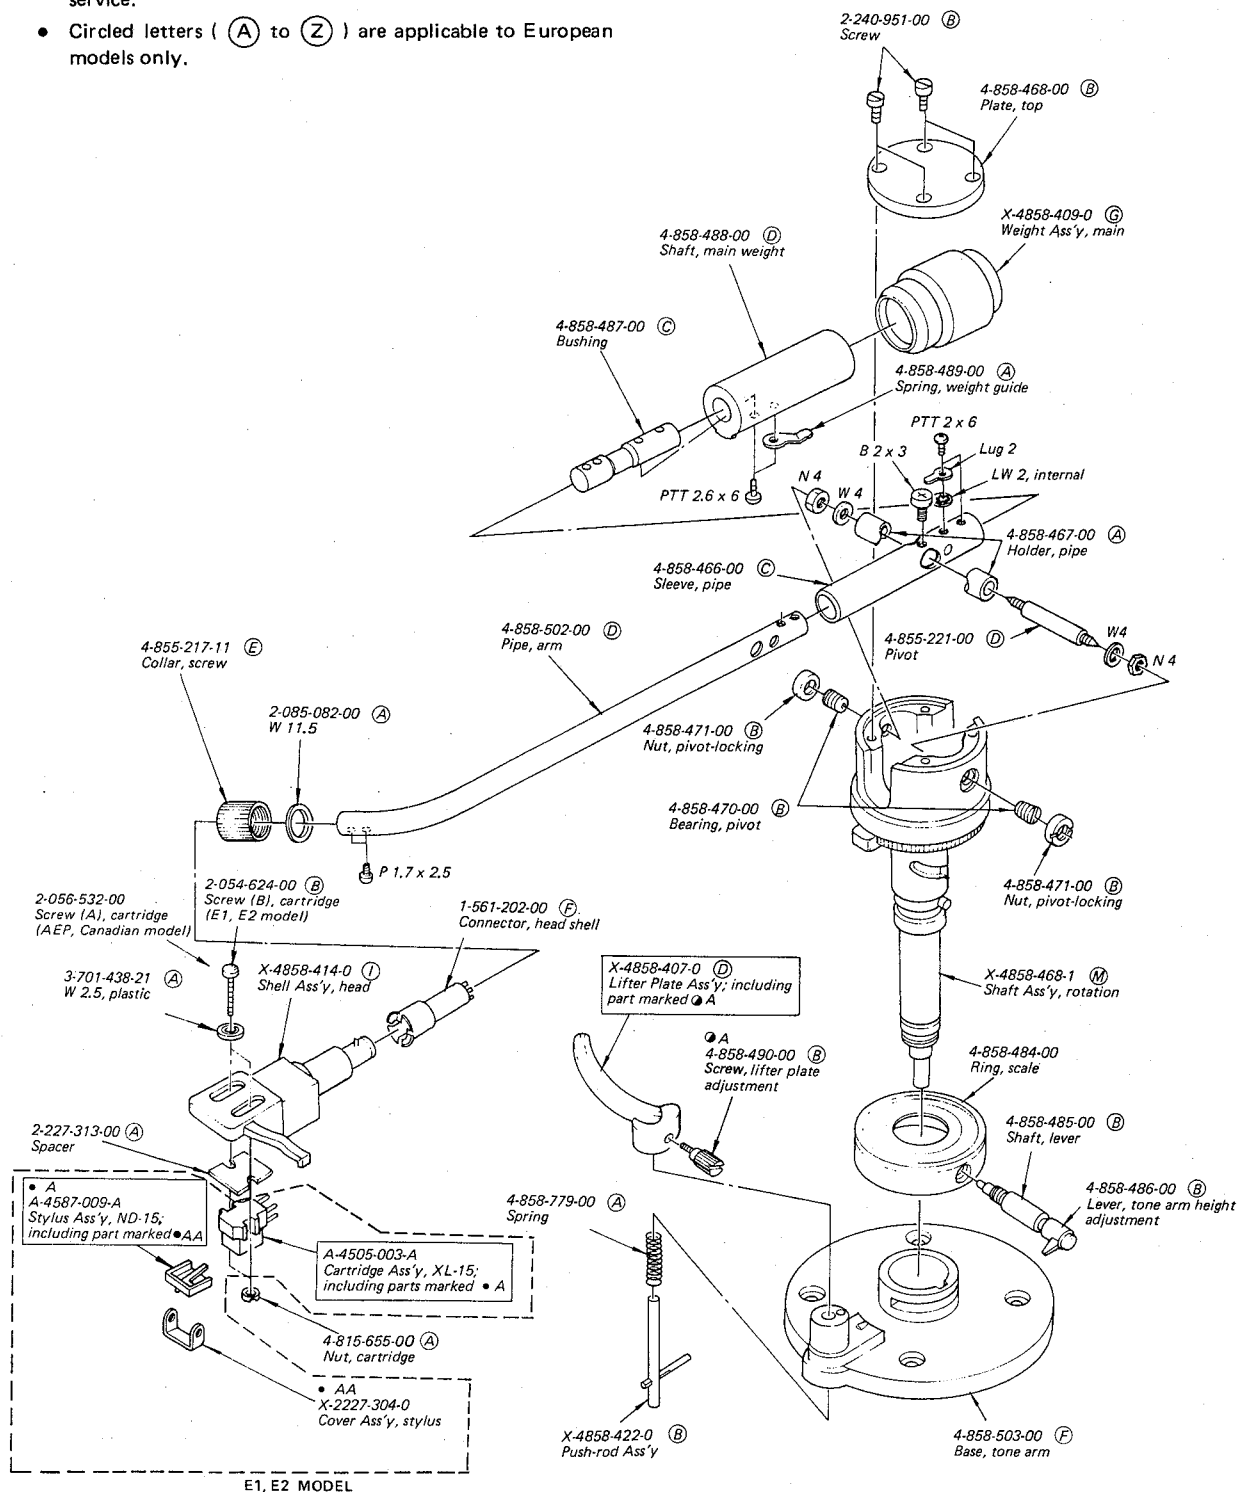

SECTION 6

ELECTRICAL PARTS LIST

• Circled letters (A) to (Z) are applicable to European models only.

5. ELECTRICAL PARTS LIST

Ref. No. Part No. Description

SEMICONDUCTORS

Transistors

⇒ Q101	8-729-316-12	(D)	2SC1061
⇒ Q102	8-729-663-47	(B)	2SC1364
⇒ Q103	8-727-788-00	(B)	2SA678
⇒ Q104	8-729-316-12	(D)	2SC1061
⇒ Q105, 106	8-729-663-47	(B)	2SC1364
Q107	8-720-950-03	(C)	2SC926A
⇒ Q201	8-729-663-47	(B)	2SC1364
⇒ Q202	8-727-788-00	(B)	2SA678
⇒ Q203-205	8-729-663-47	(B)	2SC1364
⇒ Q206	8-729-316-12	(D)	2SC1061
⇒ Q207	8-729-317-12	(E)	2SA671
⇒ Q208	8-729-316-12	(D)	2SC1061
⇒ Q209	8-729-317-12	(E)	2SA671
⇒ Q210	8-729-663-47	(B)	2SC1364

ICs

IC1	8-751-930-00	(K)	CX193
IC2, 3	8-759-145-57	(C)	μPC4557C

Diodes

D1-3	8-719-900-24	(C)	SLP24B
------	--------------	-----	--------

⇒ D101-104	8-719-200-02	(B)	10E2
⇒ D105	8-719-210-06	(B)	10D6
⇒ D106	8-719-931-15	(B)	EQB01-15
⇒ D107	8-719-931-06	(B)	EQB01-06

⇒ D201-203	8-719-815-55	(B)	1S1555
------------	--------------	-----	--------

⇒ D301	8-719-815-55	(B)	1S1555
⇒ D302	8-719-930-11	(B)	EQB01-11Z
⇒ D303-305	8-719-815-55	(B)	1S1555
⇒ D306	8-719-143-07	(B)	RD4.3E
⇒ D307	8-719-815-55	(B)	1S1555

H1, H2	8-719-905-07	(D)	5GF-MS-07F
--------	--------------	-----	------------

TRANSFORMERS

T1	1-442-877-11		Transformer, power (Canadian, US model)
T1	1-446-175-11	(L)	Transformer, power (AEP, E1, E2 model)

Note: The components identified by shading and mark **A** are critical for safety. Replace only with part number specified.

• ⇒ : Due to standardization, interchangeable replacements may be substituted for parts specified in the diagrams.

Ref. No. Part No. Description

CAPACITORS

• All capacitors are in μF and ceramic unless otherwise noted. 50WV or less are not indicated except for electrolytics. p : μμF, elect : electrolytic.

C100	1-108-750-11	(A)	0.033	125V	mylar (US model)
C100	1-130-098-00	(A)	0.022	125V	polyethylene (Canadian model)
C100, 101	1-115-148-00	(C)	0.01	451V	paper (AEP model)
C100, 101	1-108-779-00	(A)	0.01	300V	polyethylene (E1/E2 model)
C102, 103	1-123-047-00	(B)	2200	32V	elect
C104, 105	1-121-415-00	(A)	100	16V	elect
C106	1-123-027-00	(B)	2.2	250V	elect

C201	1-101-925-00	(A)	47,000p		
C202	1-121-651-00	(A)	10	16V	elect
C203	1-121-391-00	(A)	1	50V	elect
C204	1-108-804-00	(A)	0.01		mylar
C205	1-108-360-00	(A)	0.039		mylar
C206	1-108-804-00	(A)	0.01		mylar
C207, 208	1-101-081-00	(A)	130p		
C209	1-102-491-00	(A)	51p		
C210	1-101-924-00	(A)	22,000p		
C211	1-121-726-00	(A)	0.47	50V	elect
C212	1-108-242-00	(A)	0.022		mylar
C213	1-121-413-00	(A)	100	6.3V	elect
C214, 215	1-121-726-00	(A)	0.47	50V	elect
C216	1-108-812-00	(A)	0.047		mylar
C217	1-121-726-00	(A)	0.47	50V	elect
C218, 219	1-108-870-00	(A)	0.1		mylar
C220, 221	1-121-726-00	(A)	0.47	50V	elect
C222	1-101-924-00	(A)	22,000p		

C301	1-121-726-00	(A)	0.47	50V	elect
C303	1-121-391-00	(A)	1	50V	elect
C304	1-101-925-00	(A)	47,000p		
C305	1-121-450-00	(A)	2.2	50V	elect
C306	1-121-392-00	(A)	3.3	25V	elect
C307	1-121-726-00	(A)	22	16V	elect
C308	1-121-352-00	(A)	47	10V	elect
C309	1-121-402-00	(A)	33	10V	elect

Note: Les composants identifiés par un trame et une marque **A** sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

Ref. No. Part No. Description

RESISTORS

• All resistors are in ohms. Common 1/4 W carbon resistors are omitted. Refer to the list on the last page for their part numbers.

All variable and adjustable resistors have characteristic curve B, unless otherwise noted.

kΩ : 1000 Ω, MΩ : 1000 kΩ

R105	1-244-867-00	(A)	560	1/2 W	carbon
R107	1-213-154-00	(B)	8.2K	1 W	metal oxide (nonflammable)
R108	1-206-642-00	(A)	120	2 W	metal oxide (nonflammable)
R109, 110	1-212-948-00	(A)	3.9	1/2 W	fusible (Canadian, US model)
R115	1-217-383-00	(B)	4.7	1/4 W	fusible (Canadian, US model)
R220	1-244-857-00	(A)	220	1/2 W	carbon
R325	1-244-851-00	(A)	120	1/2 W	
RV101	1-244-631-00	(B)	1K	adjustable	VOLTAGE
RV102	1-244-645-XX	(B)	10K	adjustable	AUTO RETURN
RV201	1-224-636-00	(A)	47K	adjustable	SPEED
RV202	1-224-648-XX	(B)	100K	adjustable	SPEED
RV203, 204	1-224-645-XX	(B)	10K	adjustable	OFFSET
RV205, 206	1-224-633-00	(B)	4.7K	adjustable	GAIN

SWITCHES

S1	1-552-530-00	(A)		Push button, POWER (Canadian, US model)
S1	1-552-580-11	(C)		Push button, POWER (AEP, E1, E2 model)
S2-5	1-552-174-00	(B)		Keyboard, SPEED, START/STOP, REPEAT
S6	1-552-414-00	(B)		Miniature, RETURN

S8	1-552-535-00	(C)		Voltage Selector (AEP, E1, E2 model)
----	--------------	-----	--	---

MISCELLANEOUS

M	A-4608-058-A	(P)		Motor Ass'y.
NL1	1-519-152-00	(B)		Lamp, neon
HMG	1-534-123-00	(K)		Head, speed detecting
PL	1-518-234-00	(B)	Lamp 6V	100mA
PM	1-454-196-00	(B)		Solenoid
X1	1-527-380-00	(C)	Crystal	3932160Hz
	1-452-059-00	(B)		Magnet
	1-533-051-XX	(A)		Holder, lamp

Note: The components identified by shading and mark **A** are critical for safety. Replace only with part number specified.

• Circled letters (A) to (Z) are applicable to European models only.

1-534-817-XX	(D)	Cord, power (AEP model)
1-551-063-00	(F)	Cord, phone
1-551-473-31		Cord, power (E2 model) (parallel-blade plug)
1-551-508-11		Cord, power (Canadian, US model)
1-551-530-11		Cord, power (E1 model) (euro plug)
1-561-202-00	(F)	Connector, head shell
1-800-652-00	(C)	CdS

ACCESSORIES & PACKING MATERIALS

Part No.	Description
A-4505-003-A	Cartridge Ass'y, XL-15 (E1, E2 model)
X-4858-409-0	(G) Weight Ass'y, main
X-4858-414-0	(I) Shell Ass'y, head
2-011-002-00	(A) Bag, plastic (AEP, Canadian model)
2-054-624-00	Screw (B), cartridge (E1, E2 model)
2-056-532-00	(B) Screw (A), cartridge (AEP, Canadian model)
2-224-081-00	(B) Screw (E), cartridge (AEP, Canadian model)
2-227-313-00	(A) Spacer
3-701-438-21	(A) W2.6, plastic (AEP, Canadian, US model)
3-701-613-00	(A) Bag, plastic (for extra weight)
3-701-616-00	(A) Bag, plastic (for shell, main weight)
3-701-630-00	(A) Bag, plastic
3-701-634-00	(A) Bag, plastic
3-701-806-00	(A) Adaptor, 45 rpm
3-770-541-11	Manual, instruction (AEP, E1, E2 model)
3-770-541-21	Manual, instruction (Canadian, US model)
3-794-265-11	Sheet, XL-15 (E1, E2 model)
3-794-288-31	Manual, instruction; French (Canadian model)
4-815-655-00	(A) Nut (A), cartridge
4-858-483-00	(C) Extra Weight
4-858-585-00	(C) Cushion, right
4-858-586-00	(C) Cushion, left
4-858-587-00	(B) Case, accessory
4-858-588-00	(C) Bag, protection
4-858-590-00	(C) Box, accessory
4-858-593-00	(A) Cushion, main weight shaft
4-858-734-00	(F) Carton



Note: Les composants identifiés par un trame et une marque **A** sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

1/4 WATT CARBON RESISTORS Ⓐ

Note: Circled letter Ⓐ is applicable to European models only.

Ω	Part No.	Ω	Part No.	Ω	Part No.	Ω	Part No.	Ω	Part No.	Ω	Part No.
1.0	1-246-401-00	10	1-246-425-00	100	1-246-449-00	1.0k	1-246-473-00	10k	1-246-497-00	100k	1-246-521-00
1.1	1-246-402-00	11	1-246-426-00	110	1-246-450-00	1.1k	1-246-474-00	11k	1-246-498-00	110k	1-246-522-00
1.2	1-246-403-00	12	1-246-427-00	120	1-246-451-00	1.2k	1-246-475-00	12k	1-246-499-00	120k	1-246-523-00
1.3	1-246-404-00	13	1-246-428-00	130	1-246-452-00	1.3k	1-246-476-00	13k	1-246-500-00	130k	1-246-524-00
1.5	1-246-405-00	15	1-246-429-00	150	1-246-453-00	1.5k	1-246-477-00	15k	1-246-501-00	150k	1-246-525-00
1.6	1-246-406-00	16	1-246-430-00	160	1-246-454-00	1.6k	1-246-478-00	16k	1-246-502-00	160k	1-246-526-00
1.8	1-246-407-00	18	1-246-431-00	180	1-246-455-00	1.8k	1-246-479-00	18k	1-246-503-00	180k	1-246-527-00
2.0	1-246-408-00	20	1-246-432-00	200	1-246-456-00	2.0k	1-246-480-00	20k	1-246-504-00	200k	1-246-528-00
2.2	1-246-409-00	22	1-246-433-00	220	1-246-457-00	2.2k	1-246-481-00	22k	1-246-505-00	220k	1-246-529-00
2.4	1-246-410-00	24	1-246-434-00	240	1-246-458-00	2.4k	1-246-482-00	24k	1-246-506-00	240k	1-246-530-00
2.7	1-246-411-00	27	1-246-435-00	270	1-246-459-00	2.7k	1-246-483-00	27k	1-246-507-00	270k	1-246-531-00
3.0	1-246-412-00	30	1-246-436-00	300	1-246-460-00	3.0k	1-246-484-00	30k	1-246-508-00	300k	1-246-532-00
3.3	1-246-413-00	33	1-246-437-00	330	1-246-461-00	3.3k	1-246-485-00	33k	1-246-509-00	330k	1-246-533-00
3.6	1-246-414-00	36	1-246-438-00	360	1-246-462-00	3.6k	1-246-486-00	36k	1-246-510-00	360k	1-246-534-00
3.9	1-246-415-00	39	1-246-439-00	390	1-246-463-00	3.9k	1-246-487-00	39k	1-246-511-00	390k	1-246-535-00
4.3	1-246-416-00	43	1-246-440-00	430	1-246-464-00	4.3k	1-246-488-00	43k	1-246-512-00	430k	1-246-536-00
4.7	1-246-417-00	47	1-246-441-00	470	1-246-465-00	4.7k	1-246-489-00	47k	1-246-513-00	470k	1-246-537-00
5.1	1-246-418-00	51	1-246-442-00	510	1-246-466-00	5.1k	1-246-490-00	51k	1-246-514-00	510k	1-246-538-00
5.6	1-246-419-00	56	1-246-443-00	560	1-246-467-00	5.6k	1-246-491-00	56k	1-246-515-00	560k	1-246-539-00
6.2	1-246-420-00	62	1-246-444-00	620	1-246-468-00	6.2k	1-246-492-00	62k	1-246-516-00	620k	1-246-540-00
6.8	1-246-421-00	68	1-246-445-00	680	1-246-469-00	6.8k	1-246-493-00	68k	1-246-517-00	680k	1-246-541-00
7.5	1-246-422-00	75	1-246-446-00	750	1-246-470-00	7.5k	1-246-494-00	75k	1-246-518-00	750k	1-246-542-00
8.2	1-246-423-00	82	1-246-447-00	820	1-246-471-00	8.2k	1-246-495-00	82k	1-246-519-00	820k	1-246-543-00
9.1	1-246-424-00	91	1-246-448-00	910	1-246-472-00	9.1k	1-246-496-00	91k	1-246-520-00	910k	1-246-544-00

HARDWARE NOMENCLATURE

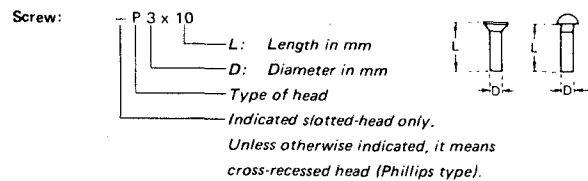

Reference Designation	Shape	Description	Remarks
SCREWS			
P		pan-head screw	binding-head (B) screw for replacement
PWH		pan-head screw with washer face	binding-head (B) screw and flat washer for replacement
PS PSP		pan-head screw with spring washer	binding-head (B) screw and spring washer for replacement
PSW PSPW		pan-head screw with spring and flat washers	binding-head (B) screw and spring and flat washers for replacement
R		round-head screw	binding-head (B) screw for replacement
K		flat-countersunk-head screw	
RK		oval-countersunk-head screw	
B		binding-head screw	
T		truss-head screw	binding-head (B) screw for replacement
F		flat-fillister-head screw	
RF		fillister-head screw	
BV		brazer-head screw	

Reference Designation	Shape	Description	Remarks
SELF-TAPPING SCREWS			
TA		self-tapping screw	ex: TA, P 3 x 10
PTP		pan-head self-tapping screw	binding-head self-tapping (TA, B) screw for replacement
PTPWH		pan-head self-tapping screw with washer face	binding-head self-tapping (TA, B) screw and flat washer for replacement
PTTWH		pan-head thread-rolling screw with washer face	binding-head (B) screw and flat washer for replacement
SET SCREWS			
SC		set screw	
SC		hexagon-socket set screw	ex: SC 2.6 x 4, hexagon socket
NUT			
N		nut	
WASHERS			
W		flat washer	
SW		spring washer	
LW		internal-tooth lock washer	ex: LW3, internal
LW		external-tooth lock washer	ex: LW3, external
RETAINING RINGS			
E		retaining ring	
G		grip-type retaining ring	