

4-4. PRINTED WIRING BOARD – MASTER SECTION –

4-4. PRINTED WIRING BOARD – MASTER SECTION –

Ref. No.	Location
D650	B-4
D701	I-6
D801	H-6
D901	G-6
D1001	F-6
IC706	I-8
IC707	I-8
IC806	H-8
IC807	H-8
IC906	G-8
IC907	G-8
IC1006	F-8
IC1007	F-8
Q001	A-2
Q550	A-3
Q551	A-3
Q552	A-3
Q553	A-2




MASTER BOARD (SIDE B)


[illegible]

11	(11)
----	------




【 MASTER BOARD 】 (2/6)

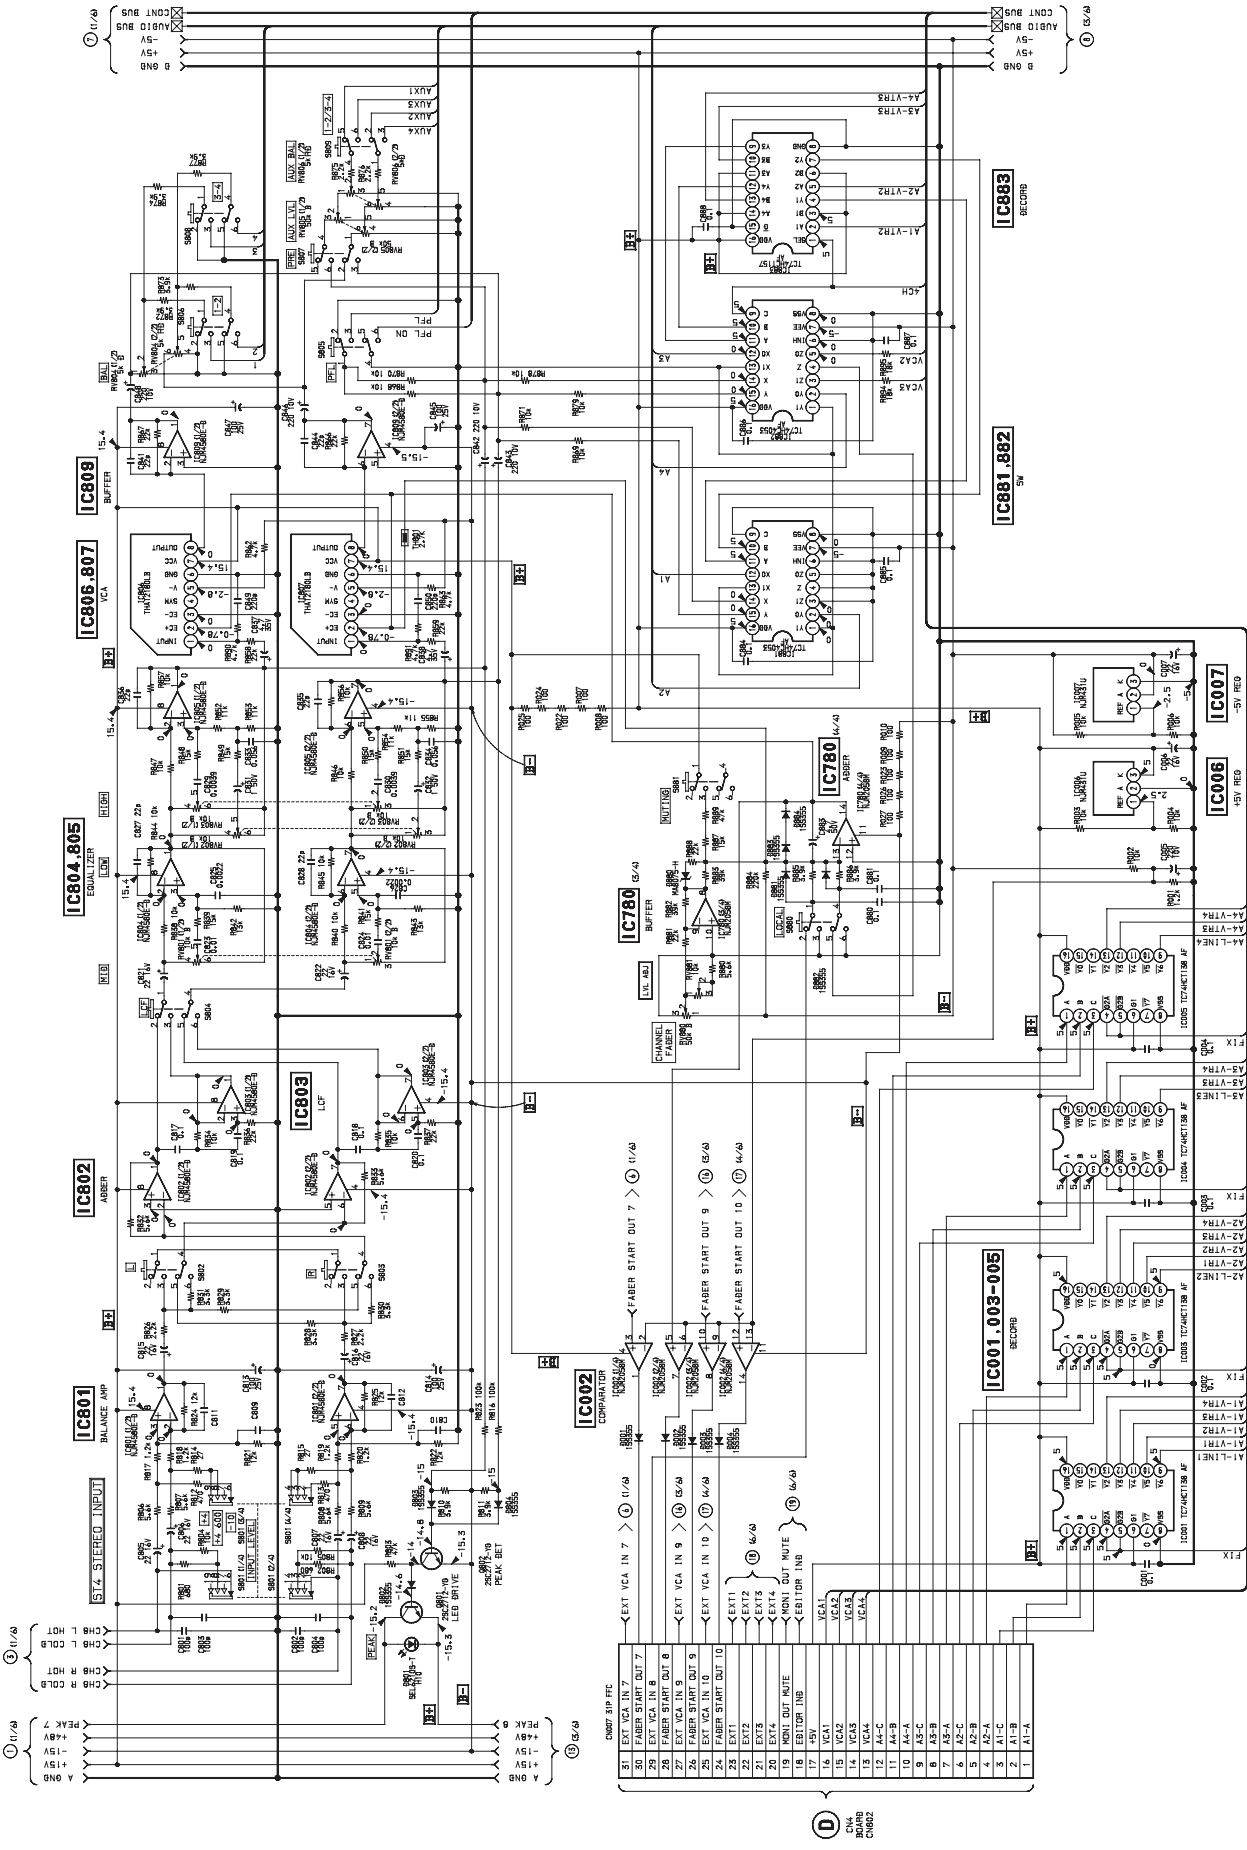

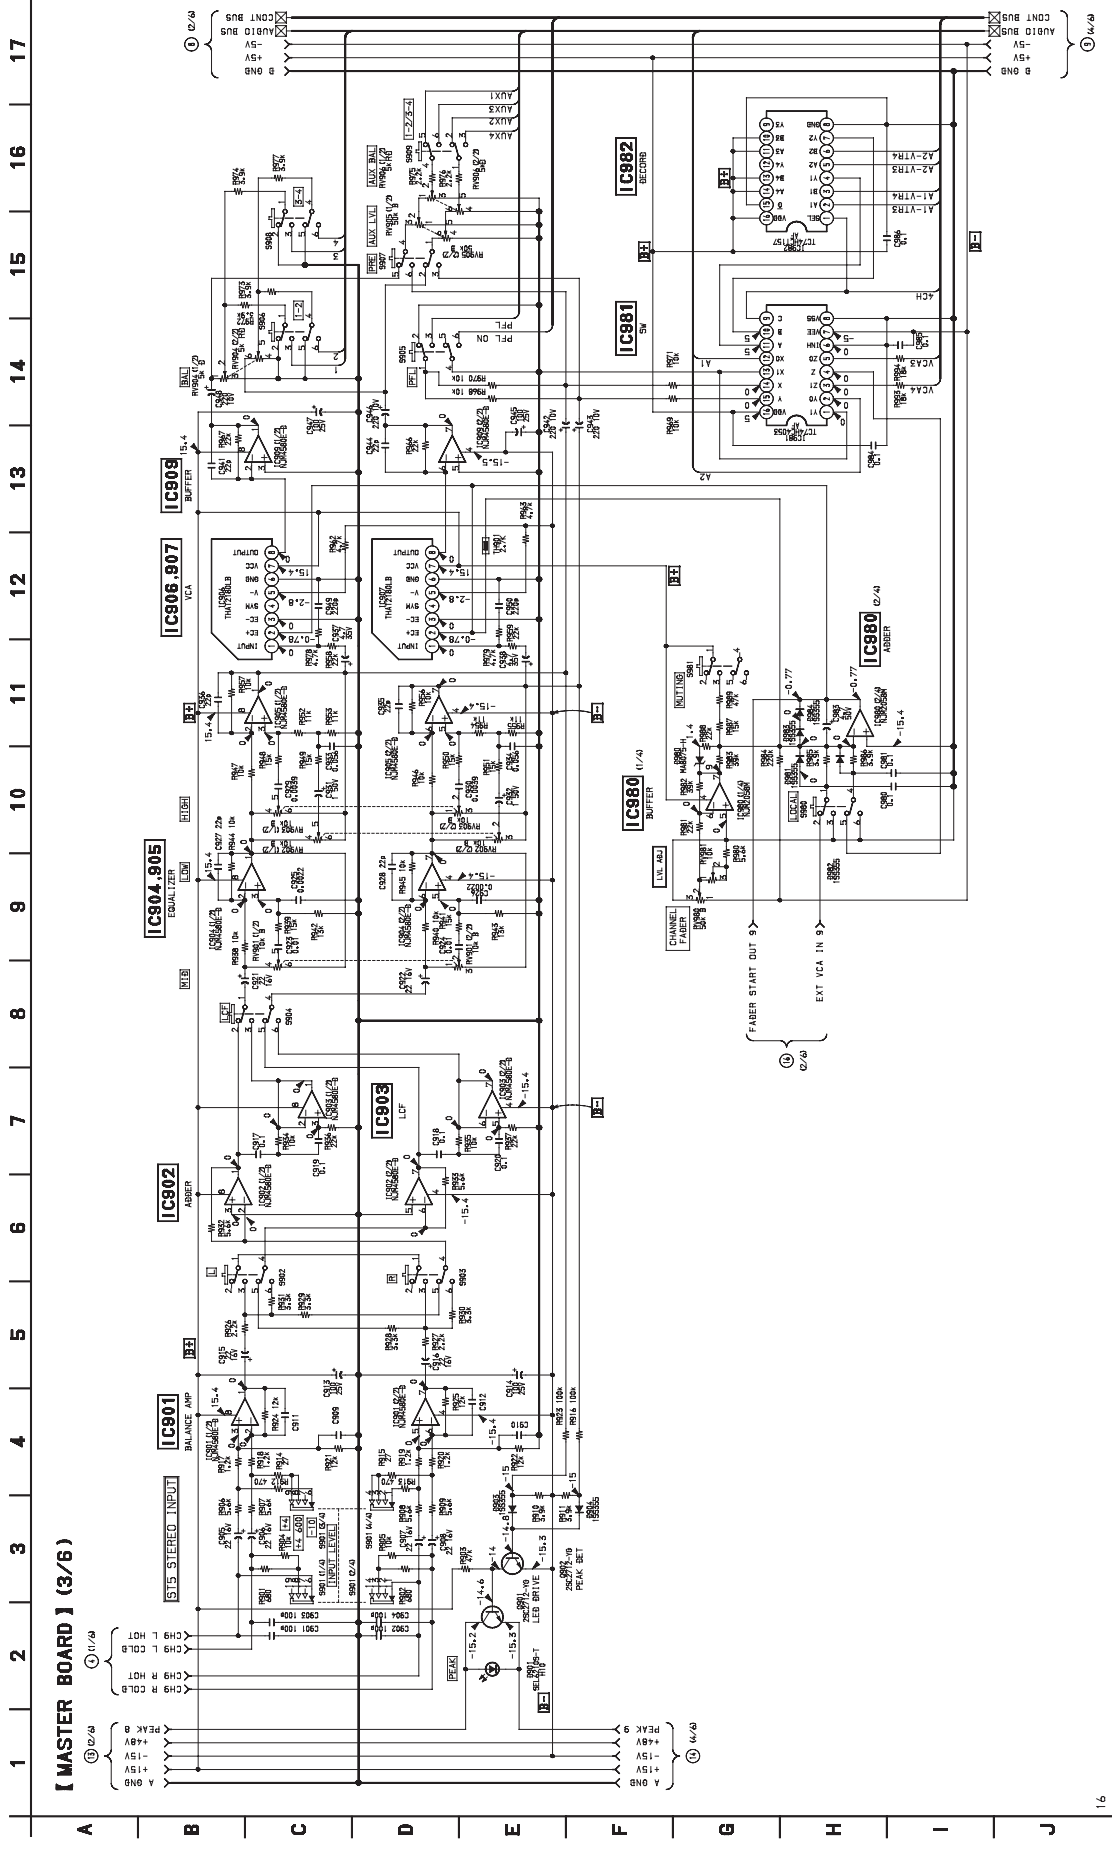

【MASTER BOARD】 (4/6)




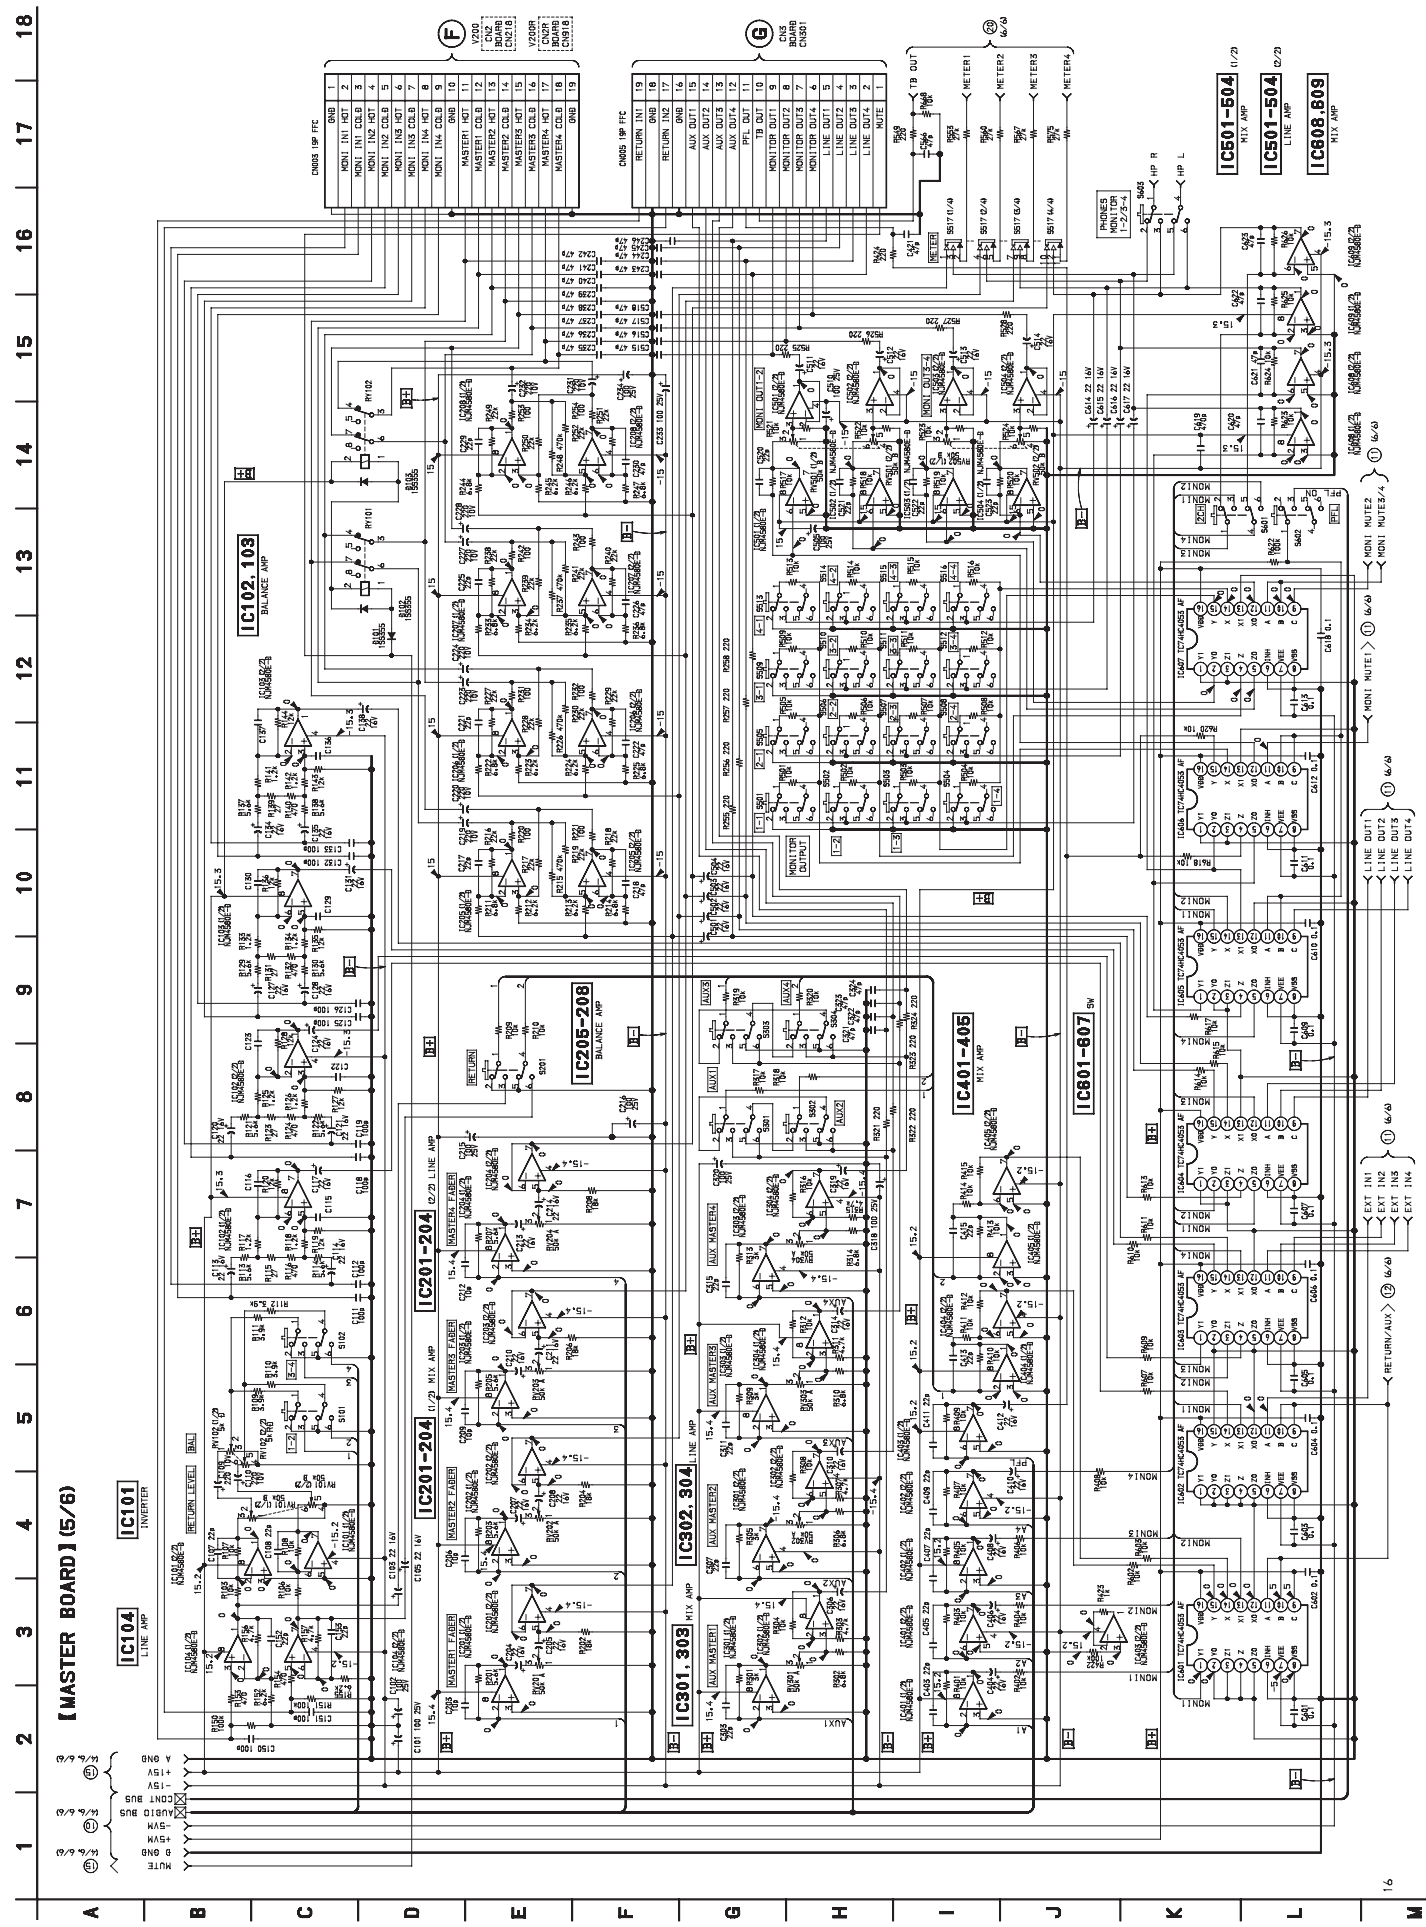


E
H
BUS
BUS

(15) (19) (15)


64/6 5/6 44/6 5/6 44/6 5/6

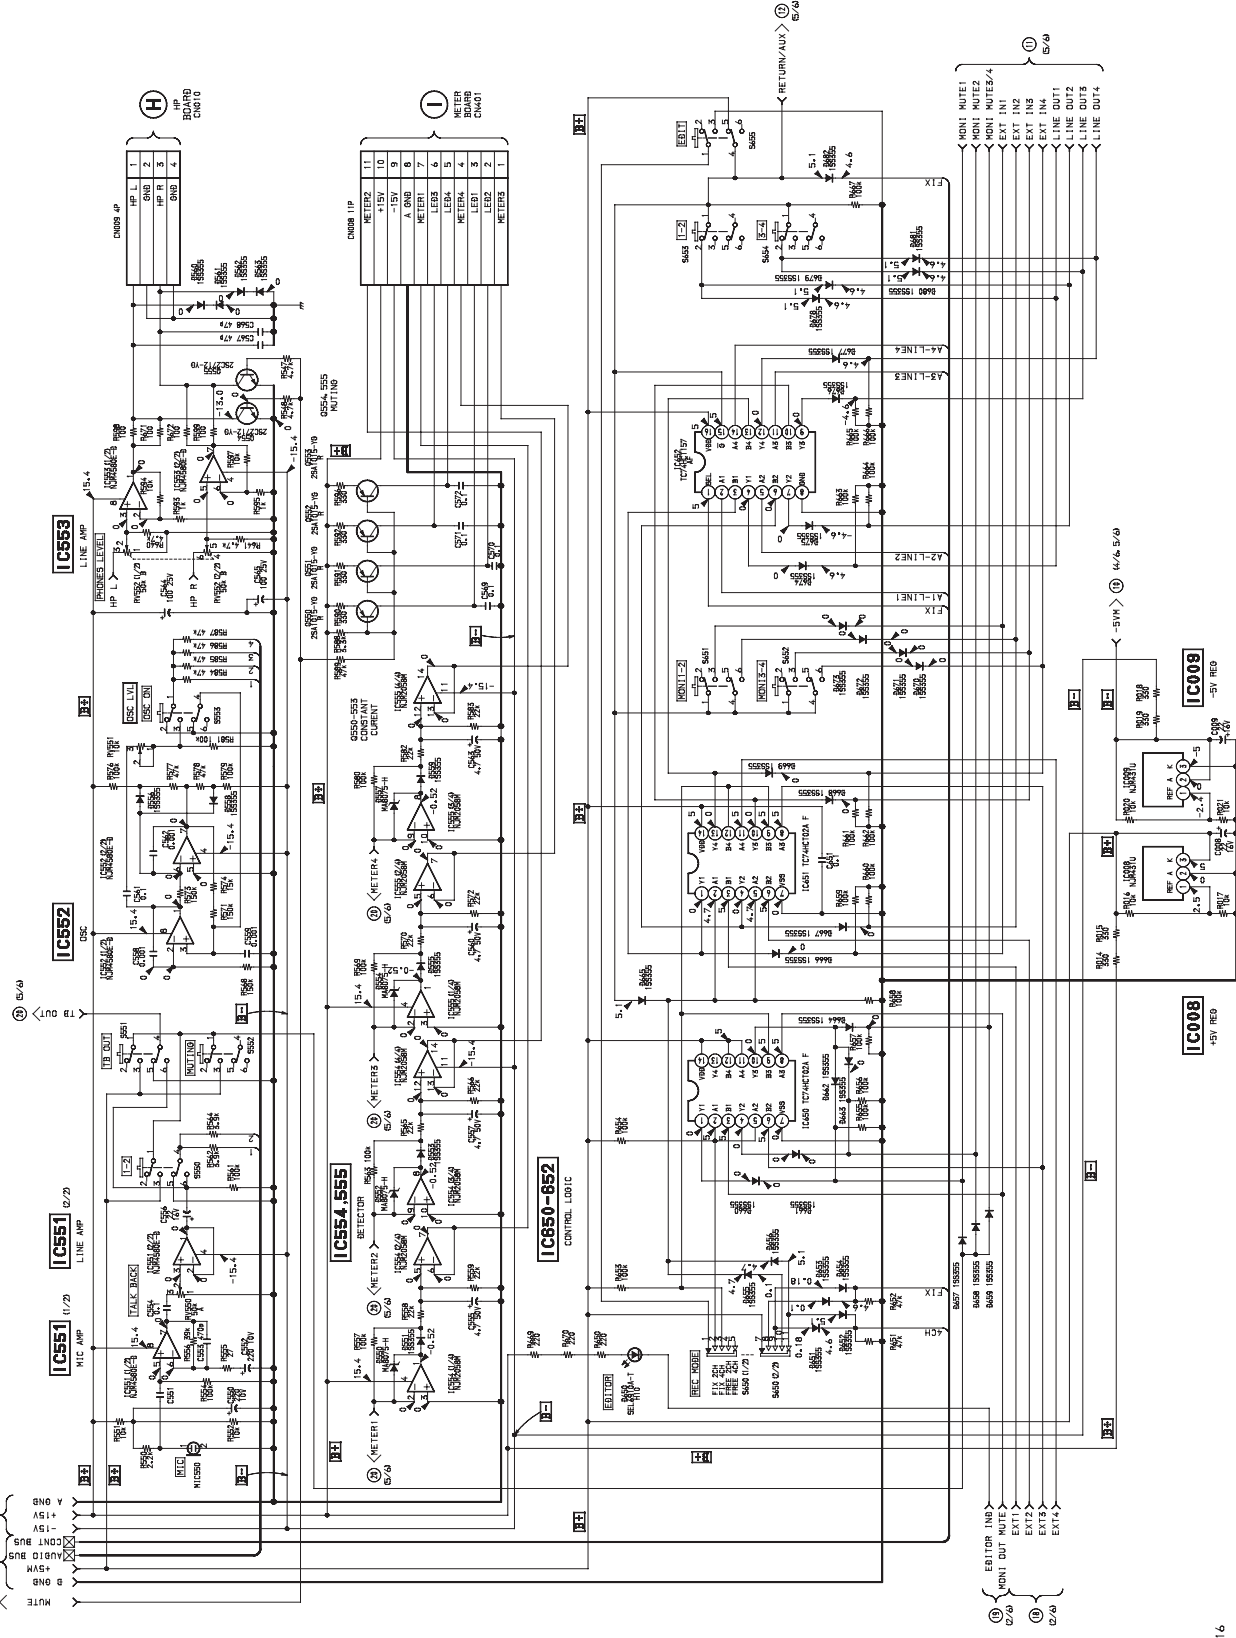

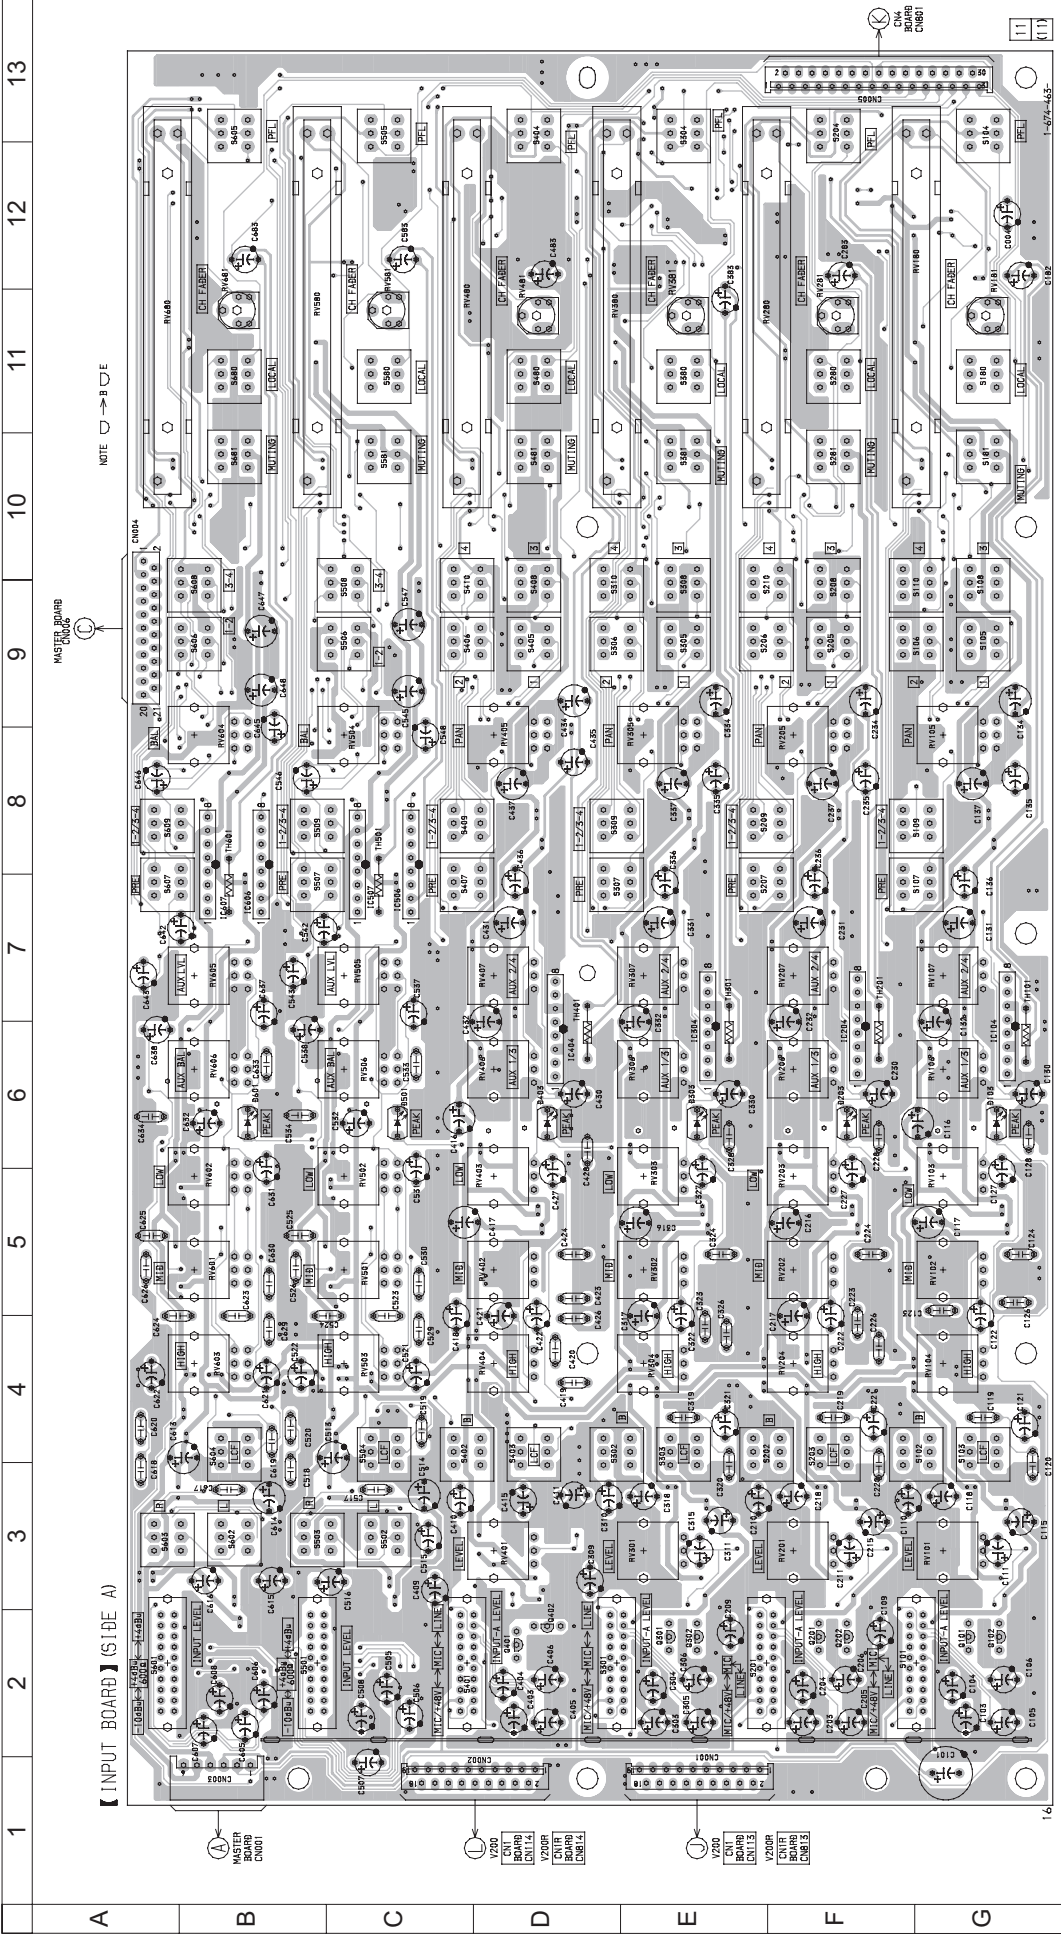


• Semiconductor Location

Ref. No.	Location	Ref. No.	Location
D103	G-6	IC507	C-7
IC506	F-6	IC606	B-7
D203	F-6	IC607	B-7
D303	E-6		
D403	D-6		
D501	C-6	Q101	G-2
D601	B-6	Q102	G-2
		Q201	F-2
IC104	G-6	Q202	F-2
IC204	F-6	Q301	E-2
IC304	E-6	Q302	E-2
IC404	D-6	Q401	D-2
IC506	C-7	Q402	D-2

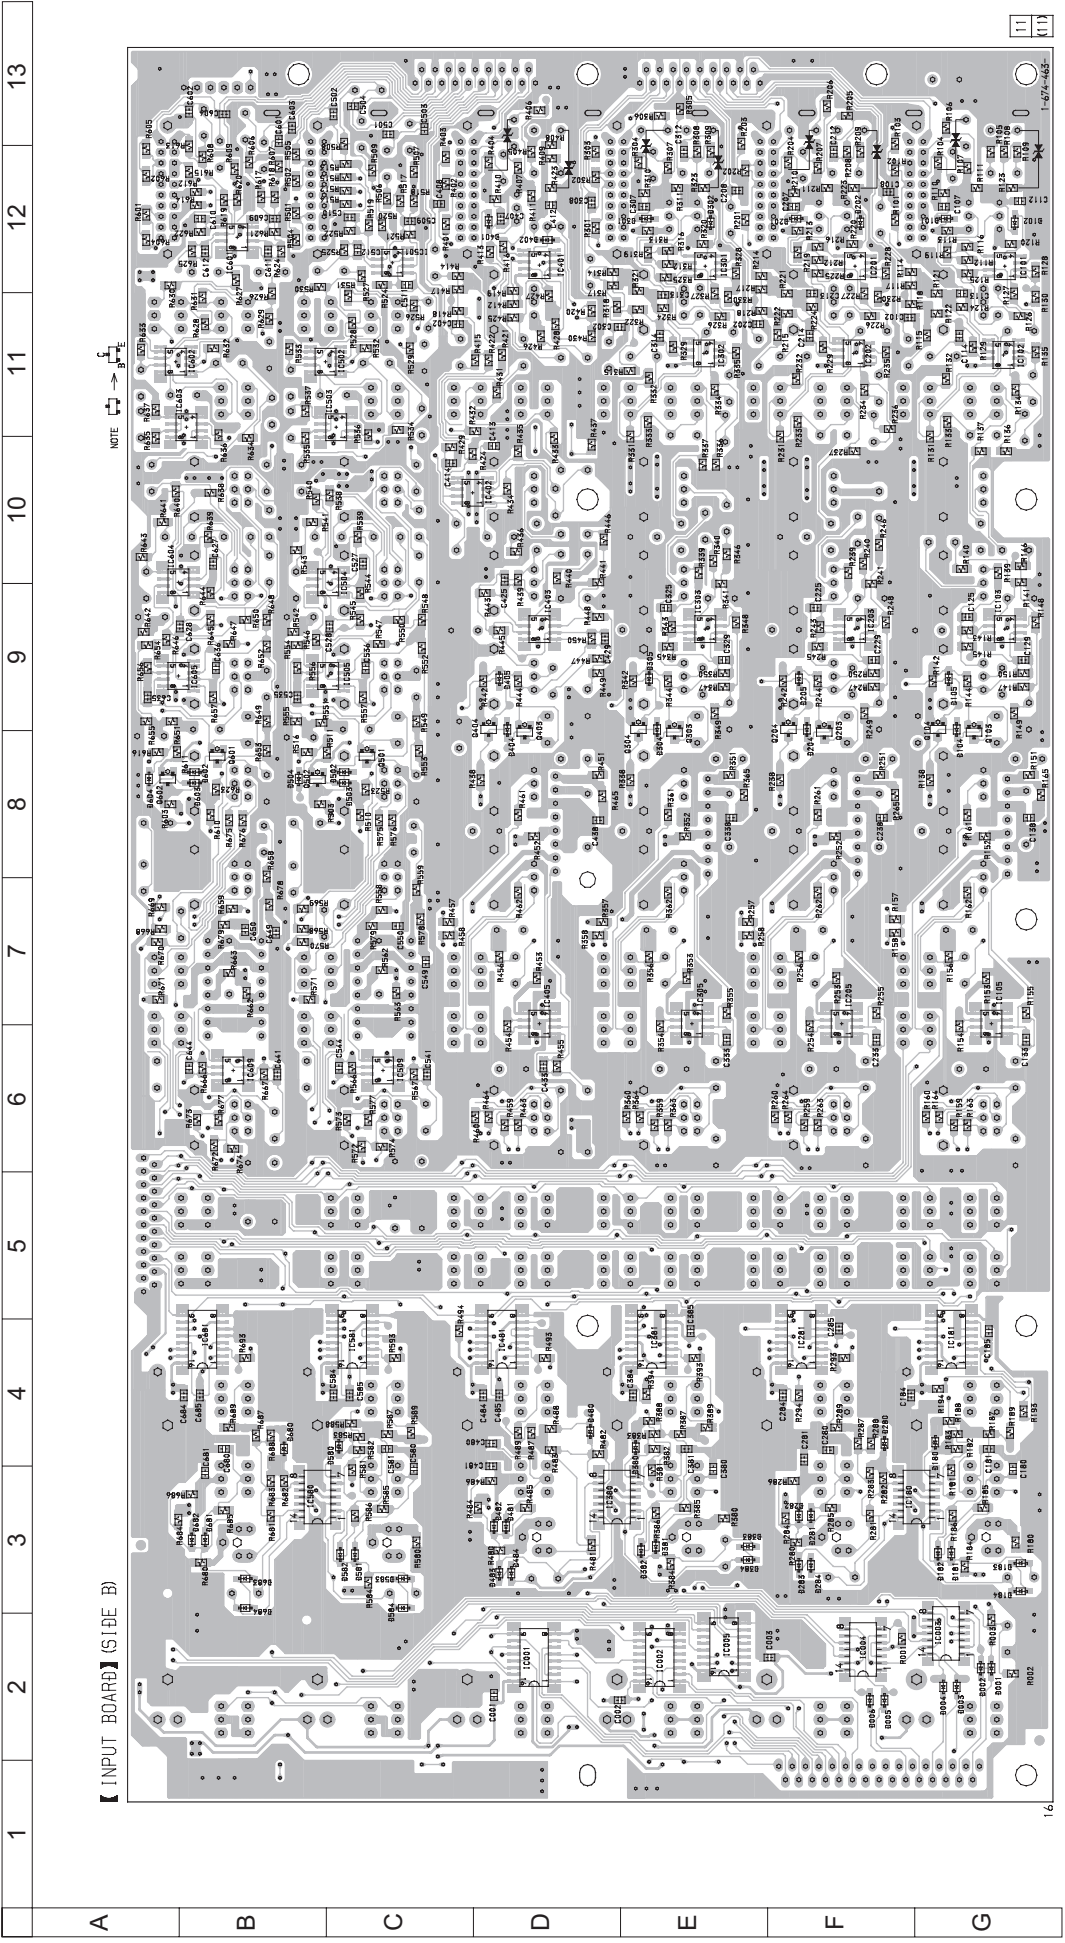

• Semiconductor Location

Ref. No.	Location	Ref. No.	Location	Ref. No.	Location	Ref. No.	Location	Ref. No.	Location	Ref. No.	Location
D001	G-2	D201	F-12	D382	E-3	D580	C-4	IC002	E-2	IC505	C-9
D002	G-2	D202	F-12	D383	E-3	D581	C-3	IC003	G-2	IC509	C-6
D003	G-2	D204	F-8	D384	E-3	D582	C-3	IC004	F-2	IC580	B-3
D004	G-2	D205	F-9	D401	D-12	D583	C-3	IC005	E-2	IC581	C-4
D005	F-2	D280	F-4	D402	D-12	D584	C-3	IC101	G-12	IC601	B-12
D006	F-2	D281	F-3	D404	D-8	D602	B-8	IC102	G-11	IC602	B-11
D101	G-12	D282	F-3	D405	D-9	D603	B-8	IC103	G-9	IC603	B-11
D102	G-12	D283	F-3	D480	D-4	D604	A-8	IC105	G-7	IC604	A-10
D104	G-8	D284	F-3	D481	D-3	D680	B-4	IC180	F-3	IC685	B-9
D105	G-9	D301	E-12	D482	D-3	D681	B-3	IC181	G-4	IC689	B-6
D180	G-4	D302	E-12	D483	D-3	D682	B-3	IC201	F-12	IC681	B-4
D181	G-3	D304	E-8	D484	D-3	D683	B-3	IC202	F-11	IC501	C-12
D182	G-3	D305	E-9	D502	C-8	D684	B-3	IC203	F-9	Q103	G-8
D183	G-3	D380	E-4	D503	C-8	D504	B-8	IC205	F-7	Q104	G-8
D184	G-3	D381	E-3	D504	B-8	IC001	D-2	IC281	F-4	Q203	F-8

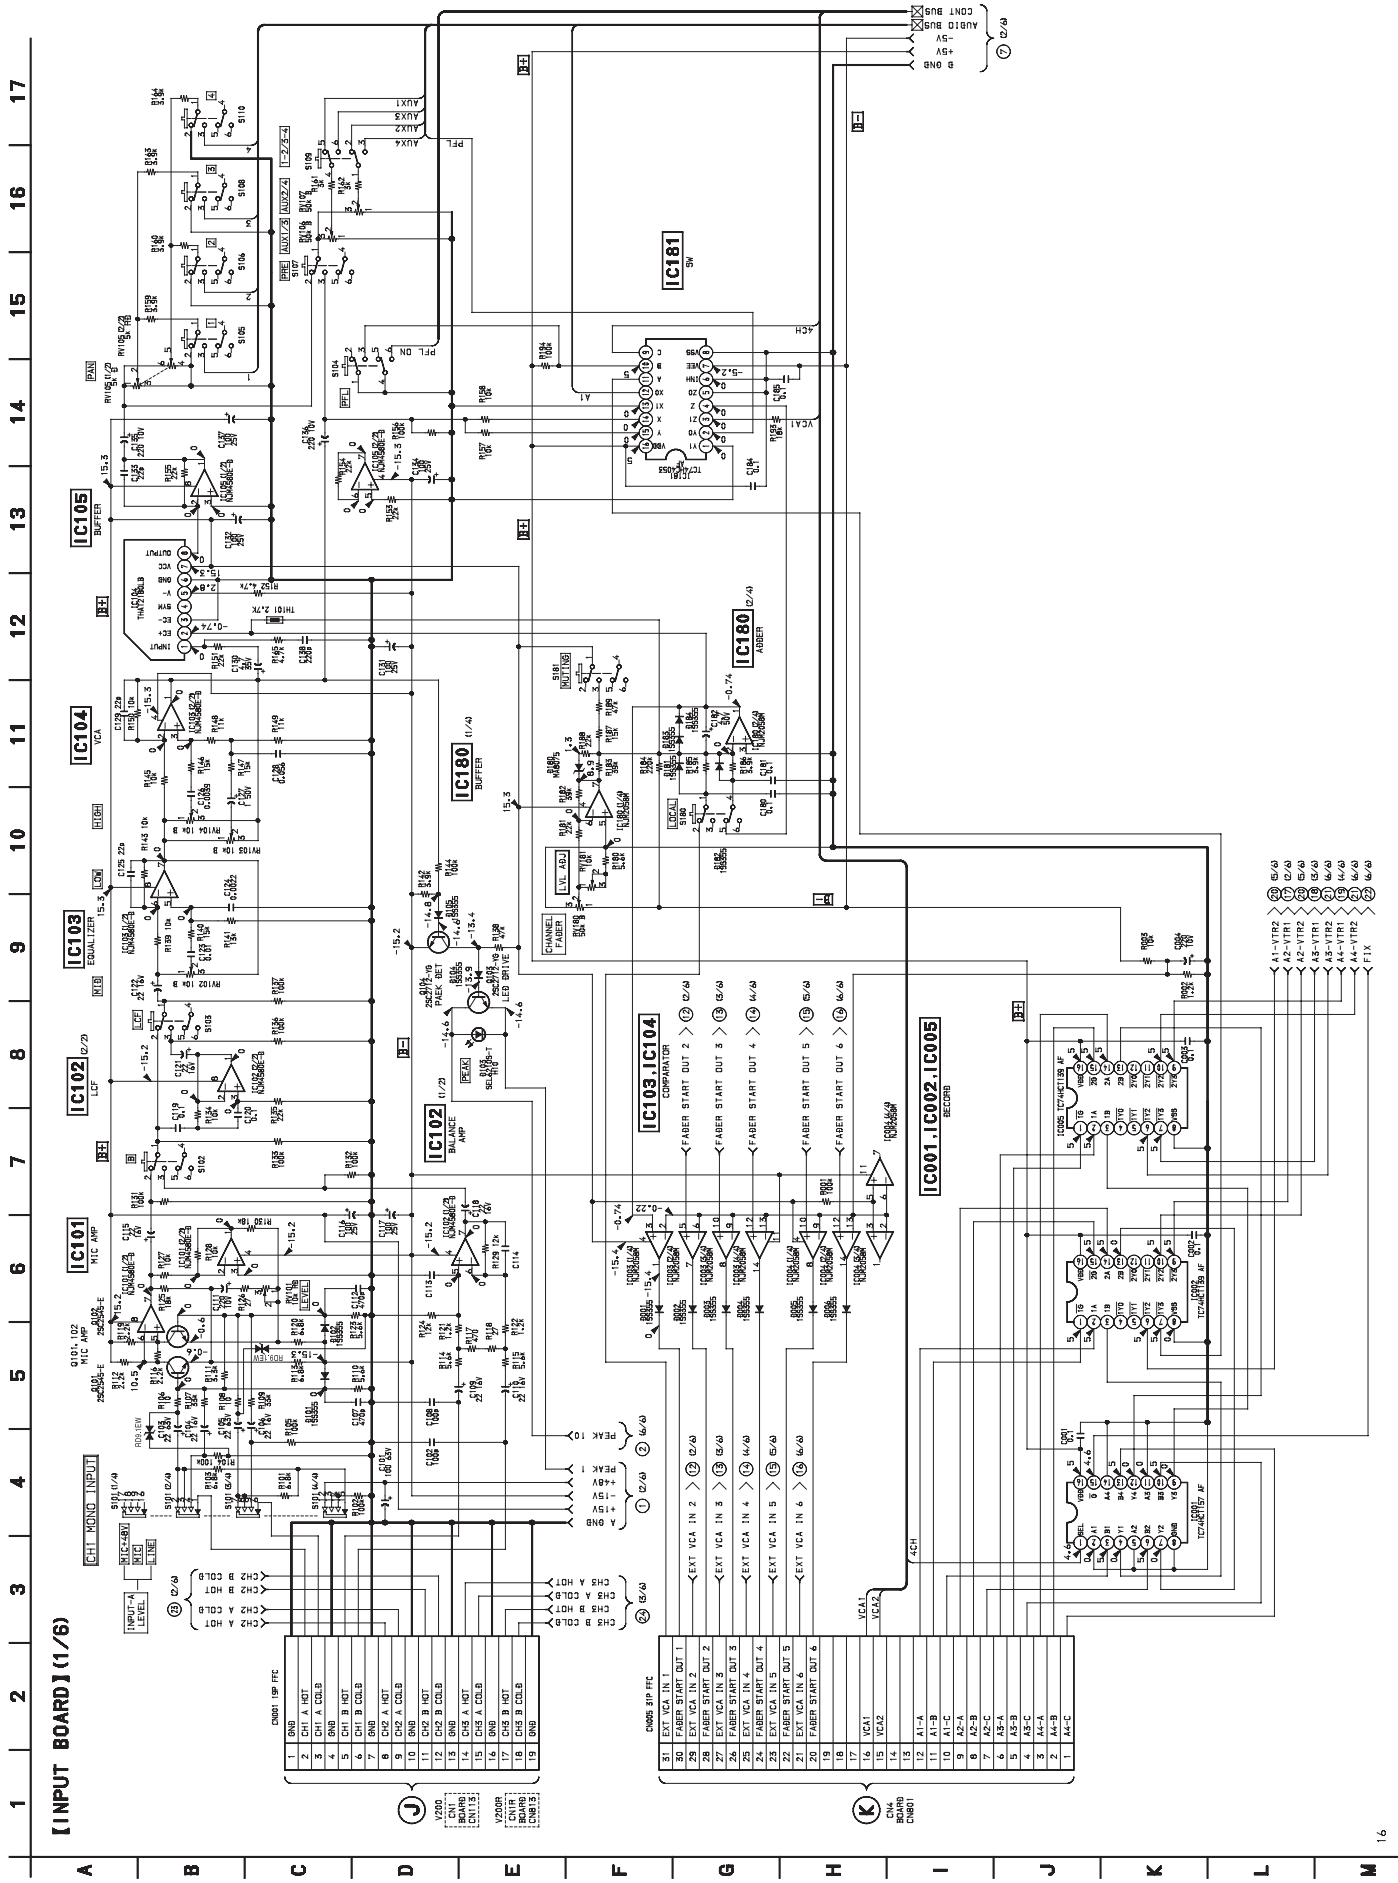





【INPUT BOARD】(4/6)



4-16. SCHEMATIC DIAGRAM – INPUT SECTION (5/6) –









Ref. No.	Location	Ref. No.	Location	Ref. No.	Location	Ref. No.	Location	Ref. No.	Location	Ref. No.	Location	Ref. No.	Location	Ref. No.	Location
D103	G-6	D117	H-2	D127	G-5	D141	H-2	D803	G-13	D817	H-9	D827	G-13	D841	H-9
D104	G-6	D118	H-2	D128	G-5	D142	H-2	D804	G-13	D818	H-9	D828	G-13	D842	H-9
D105	G-6	D119	G-5	D129	G-5	D143	G-2	D807	G-12	D819	G-9	D831	G-12	D843	G-9
D106	G-5	D120	G-2	D131	G-5	D144	G-2	D808	G-12	D820	G-9	D832	G-12	D844	G-9
D111	G-4	D121	G-1	D135	G-5	D145	H-2	D811	G-11	D821	G-8	D835	G-11	D845	H-8
D112	G-4	D122	G-1	D136	G-4	D146	G-2	D812	G-11	D822	G-8	D836	G-11	D846	H-8
D115	G-3	D123	G-1	D139	G-4	D147	G-1	D815	G-10	D824	G-8	D839	G-10	D847	G-8
D116	G-3	D124	G-1	D140	G-3	D148	G-1	D816	G-10	D824	G-8	D840	G-10	D848	G-8

4-19. SCHEMATIC DIAGRAM – CN1, CN1R SECTION –

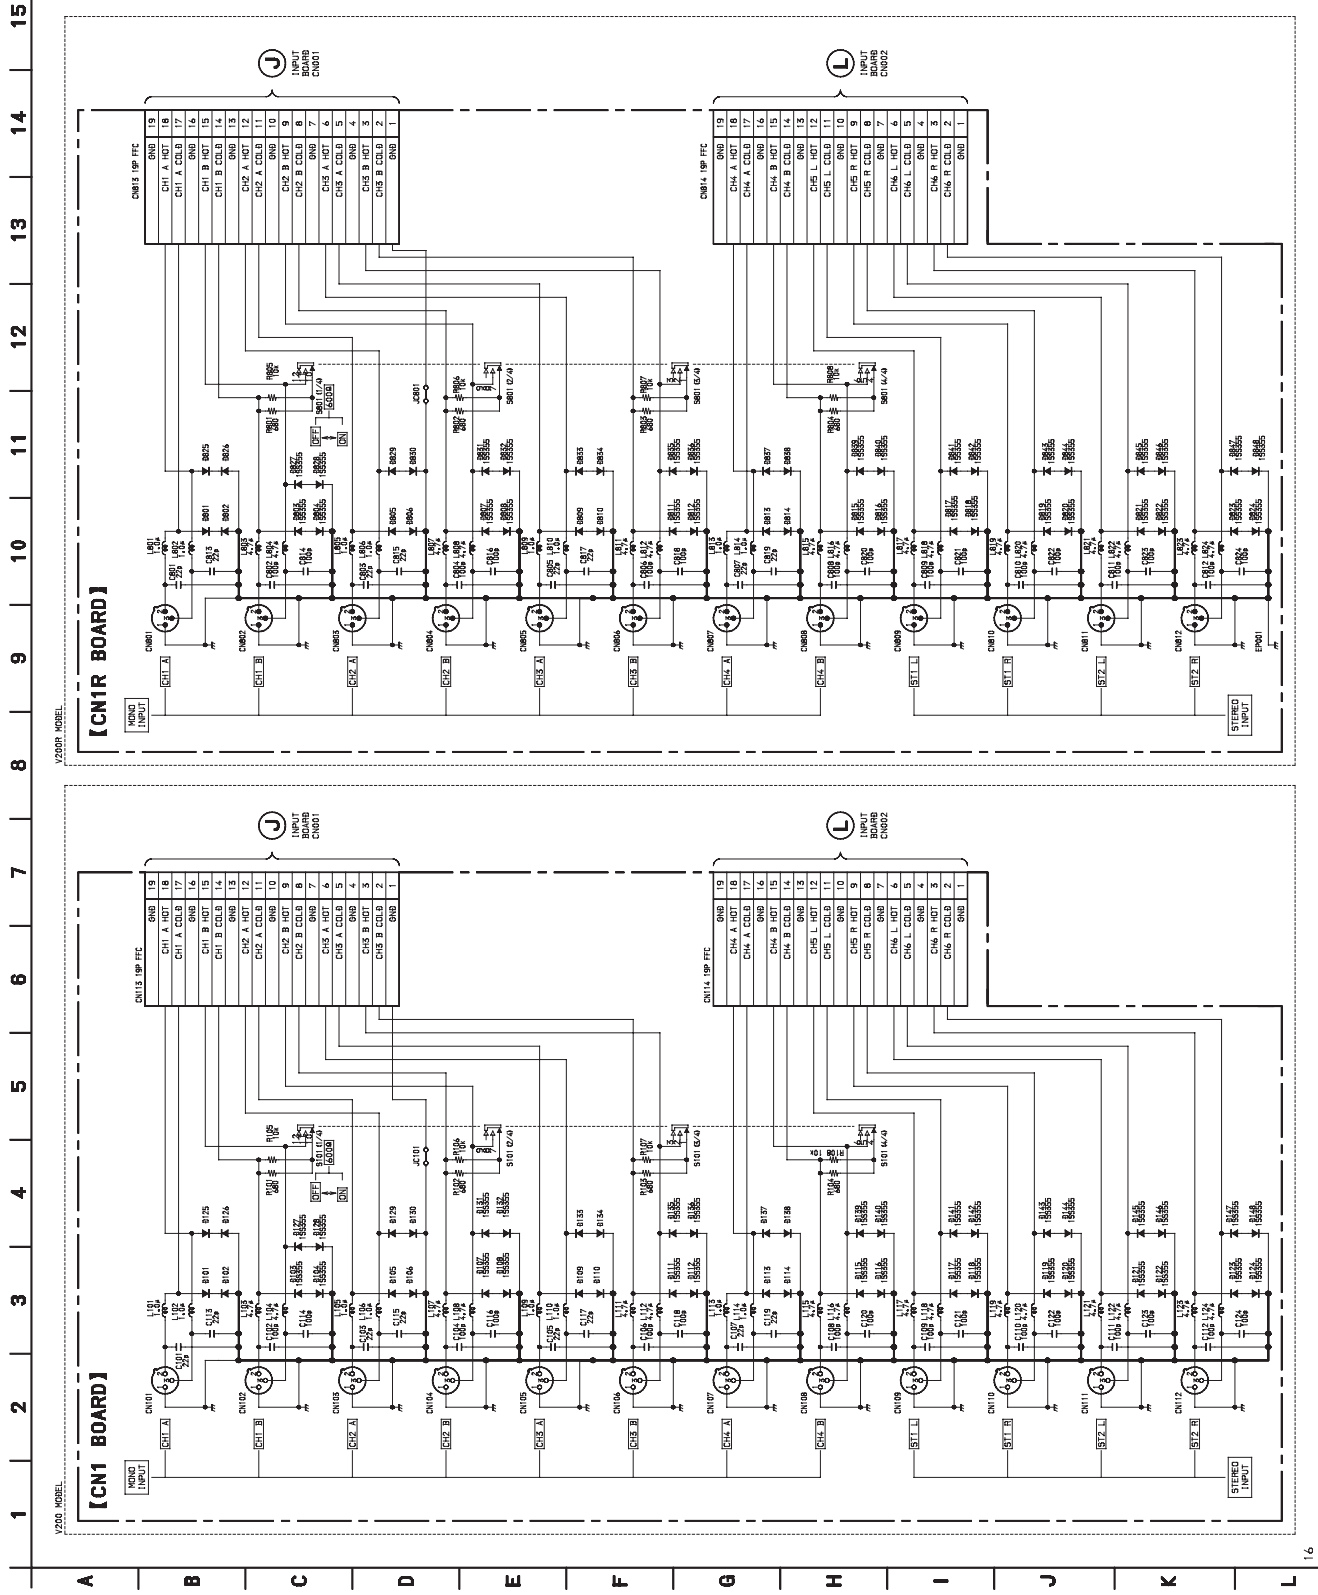

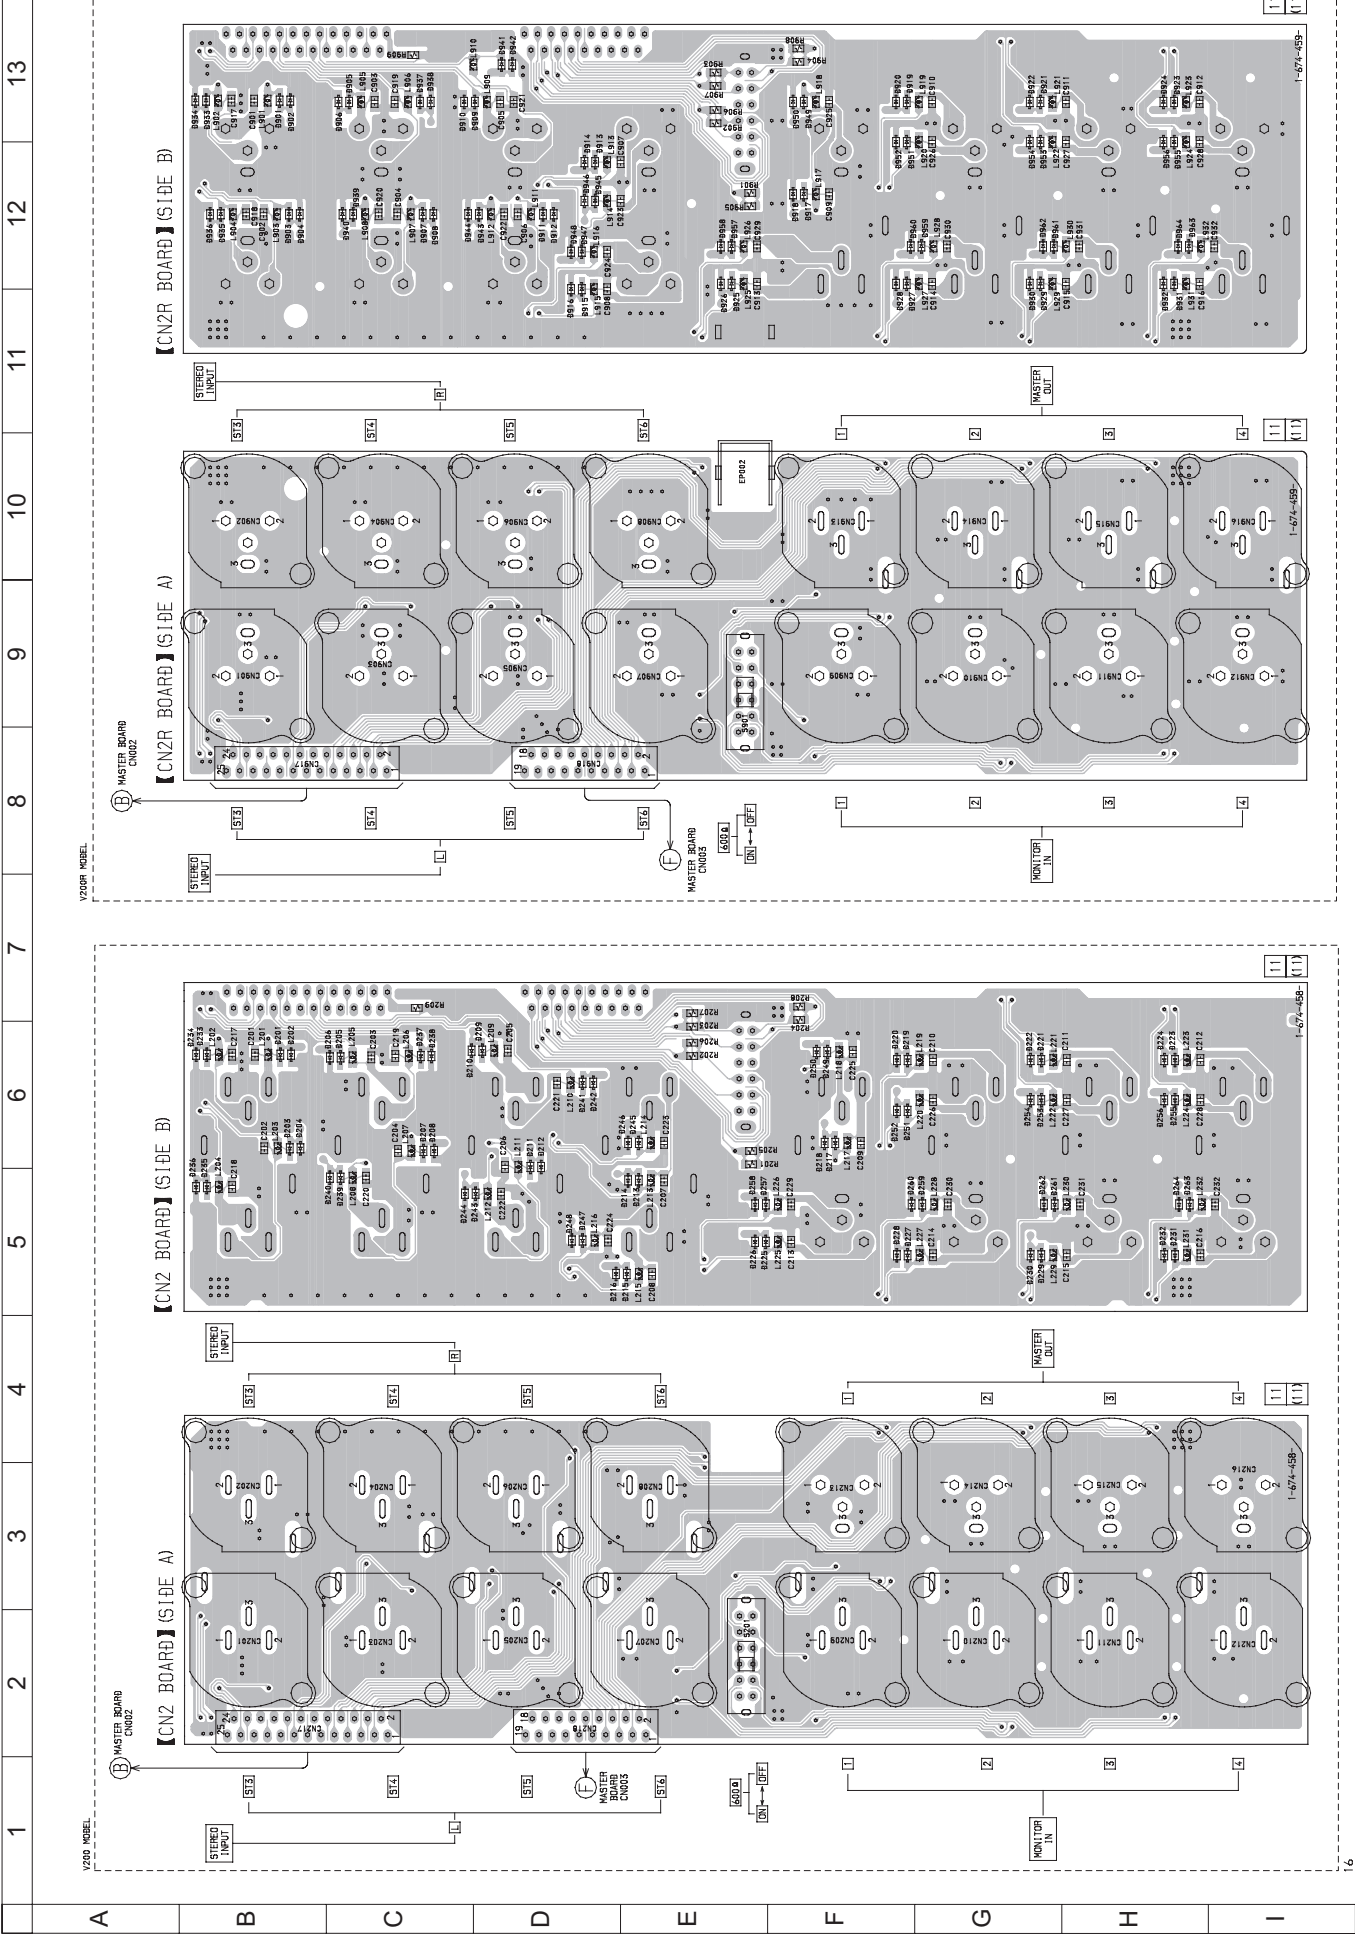





	1	2	3	4	5	6	7	8	9	10	11	12	13
--	---	---	---	---	---	---	---	---	---	----	----	----	----

A


【AC BOARD】(SIDE B)

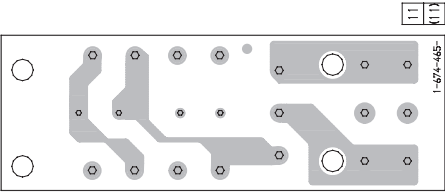


【AC BOARD】(SIDE A)

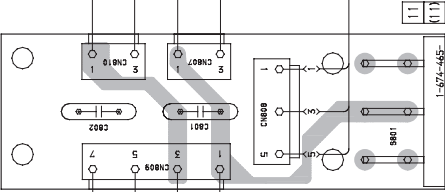

【PS BOARD】(SIDE A)

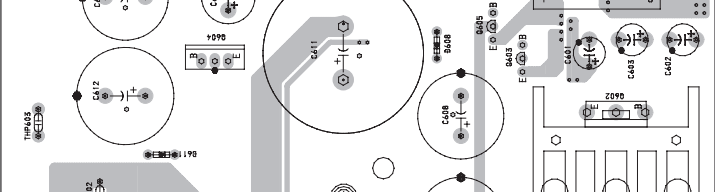


【PS BOARD】(SIDE B)

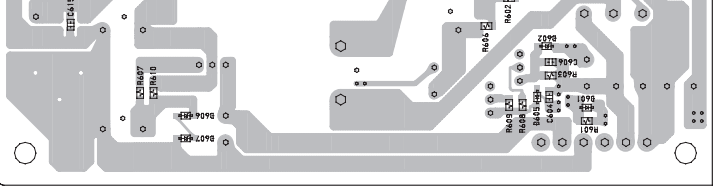


• Semiconductor Location


Ref. No.	Location	Ref. No.	Location
D301	H-13	D601	E-10
D302	H-13	D602	E-11
D303	H-12	D603	E-12
D304	H-12	D604	E-11
D305	H-12	D605	E-10
D306	H-12	D606	C-10
D307	H-12	D607	C-10
D308	H-12	D608	D-8
D309	H-11	D609	E-6
D310	H-11	D610	C-7
D311	H-11	D611	C-7
D312	H-11	Q301	H-13
D313	H-10	Q302	H-12
D314	H-10	Q303	H-12
D315	H-10	Q304	H-11
D316	H-9	Q305	H-11
D317	H-13	Q306	H-10
D318	H-13	Q307	H-10
D319	H-12	Q308	H-13
D320	H-12	Q309	H-12
D321	H-12	Q310	H-12
D322	H-12	Q311	H-11
D323	H-11	Q312	H-10
D324	H-11	Q313	H-10
D325	H-11	Q314	H-9
D326	H-11	Q601	F-6
D327	H-10	Q602	F-8
D328	H-10	Q603	E-8
D329	H-10	Q604	C-8
D330	H-10	Q605	E-8
D331	H-9		
D332	H-9		

【CN3 BOARD】(SIDE A)

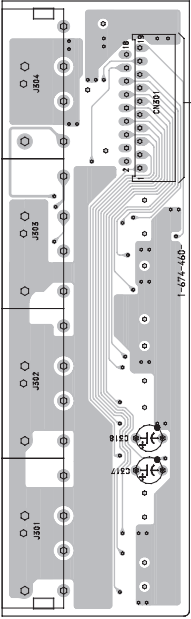


【CN3 BOARD】(SIDE B)

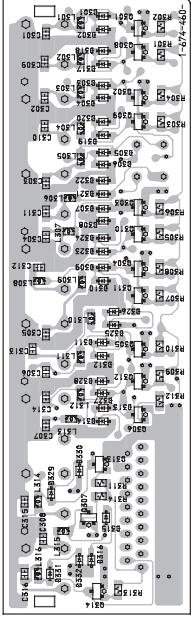

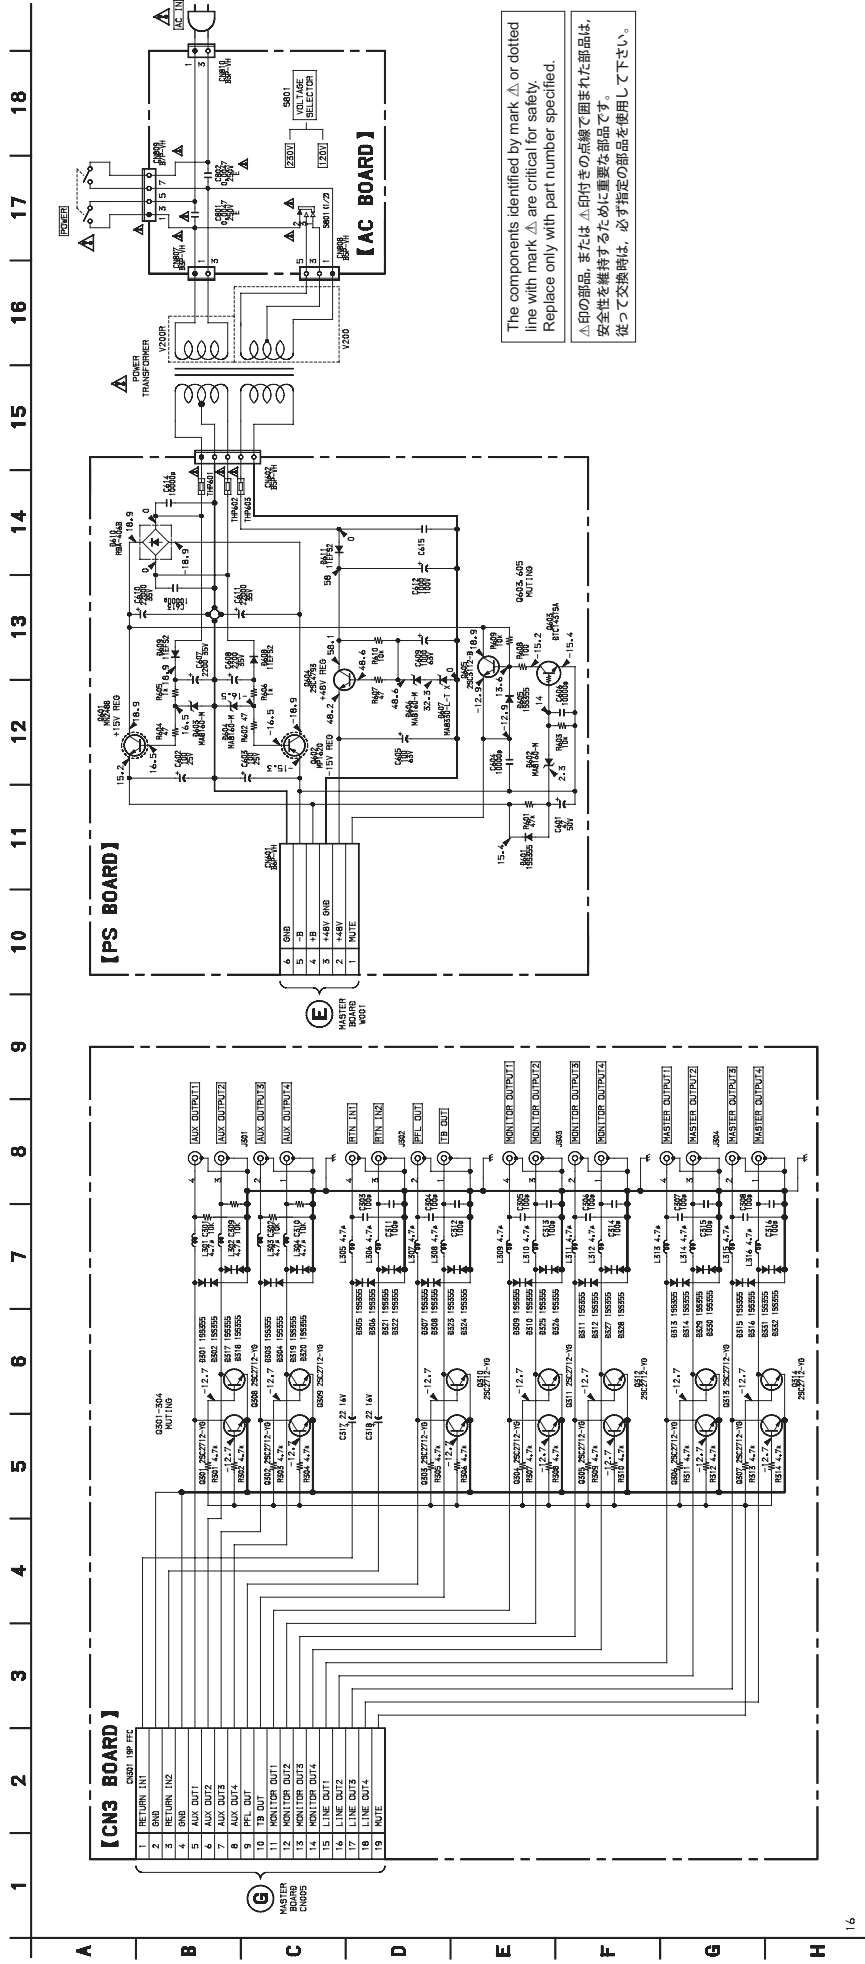

The components identified by mark Δ or dotted line with mark Δ are critical for safety. Replace only with part number specified.

△△印の部品、または △印付きの点線で囲まれた部品は、安全性を維持するために重要な部品です。
従って交換時は、必ず指定の部品を使用して下さい。


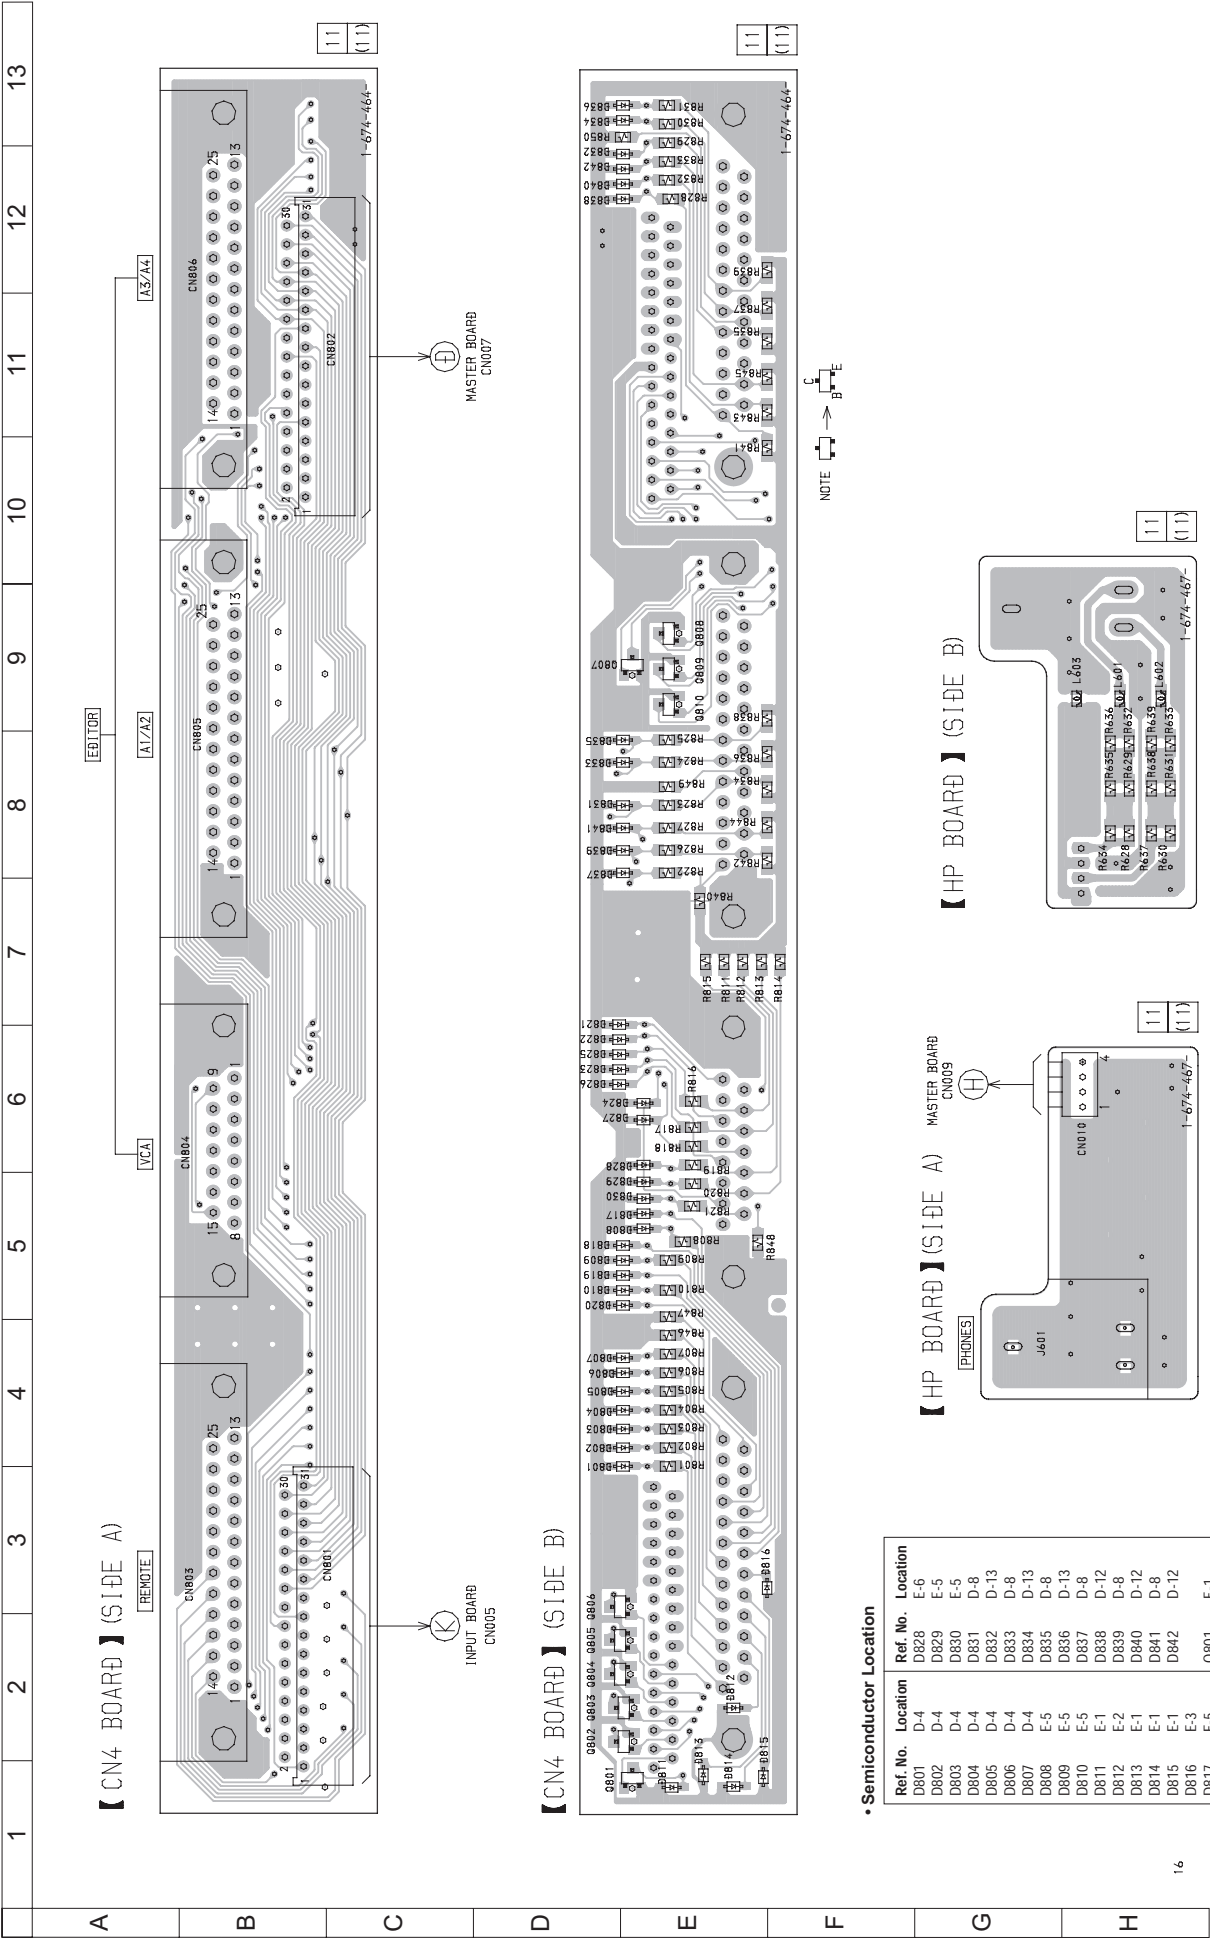



• Semiconductor Location

Ref. No.	Location	Ref. No.	Location
D801	D-4	D828	E-6
D802	D-4	D829	E-5
D803	D-4	D830	E-5
D804	D-4	D831	D-8
D805	D-4	D832	D-13
D806	D-4	D833	D-8
D807	D-4	D834	D-13
D808	E-5	D835	D-8
D809	E-5	D836	D-13
D810	E-5	D837	D-8
D811	E-1	D838	D-12
D812	E-2	D839	D-8
D813	E-1	D840	D-12
D814	E-1	D841	D-8
D815	E-1	D842	D-12
D816	E-3		
D817	E-5	Q801	E-1
D818	E-5	Q802	D-2
D819	E-5	Q803	D-2
D820	E-5	Q804	D-2
D821	D-6	Q805	D-2
D822	D-6	Q806	D-3
D823	D-6	Q807	E-9
D824	E-6	Q808	E-9
D825	D-6	Q809	E-9
D826	D-6	Q810	E-9
D827	E-6		


4-25. SCHEMATIC DIAGRAM – CN4, HP SECTION –

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

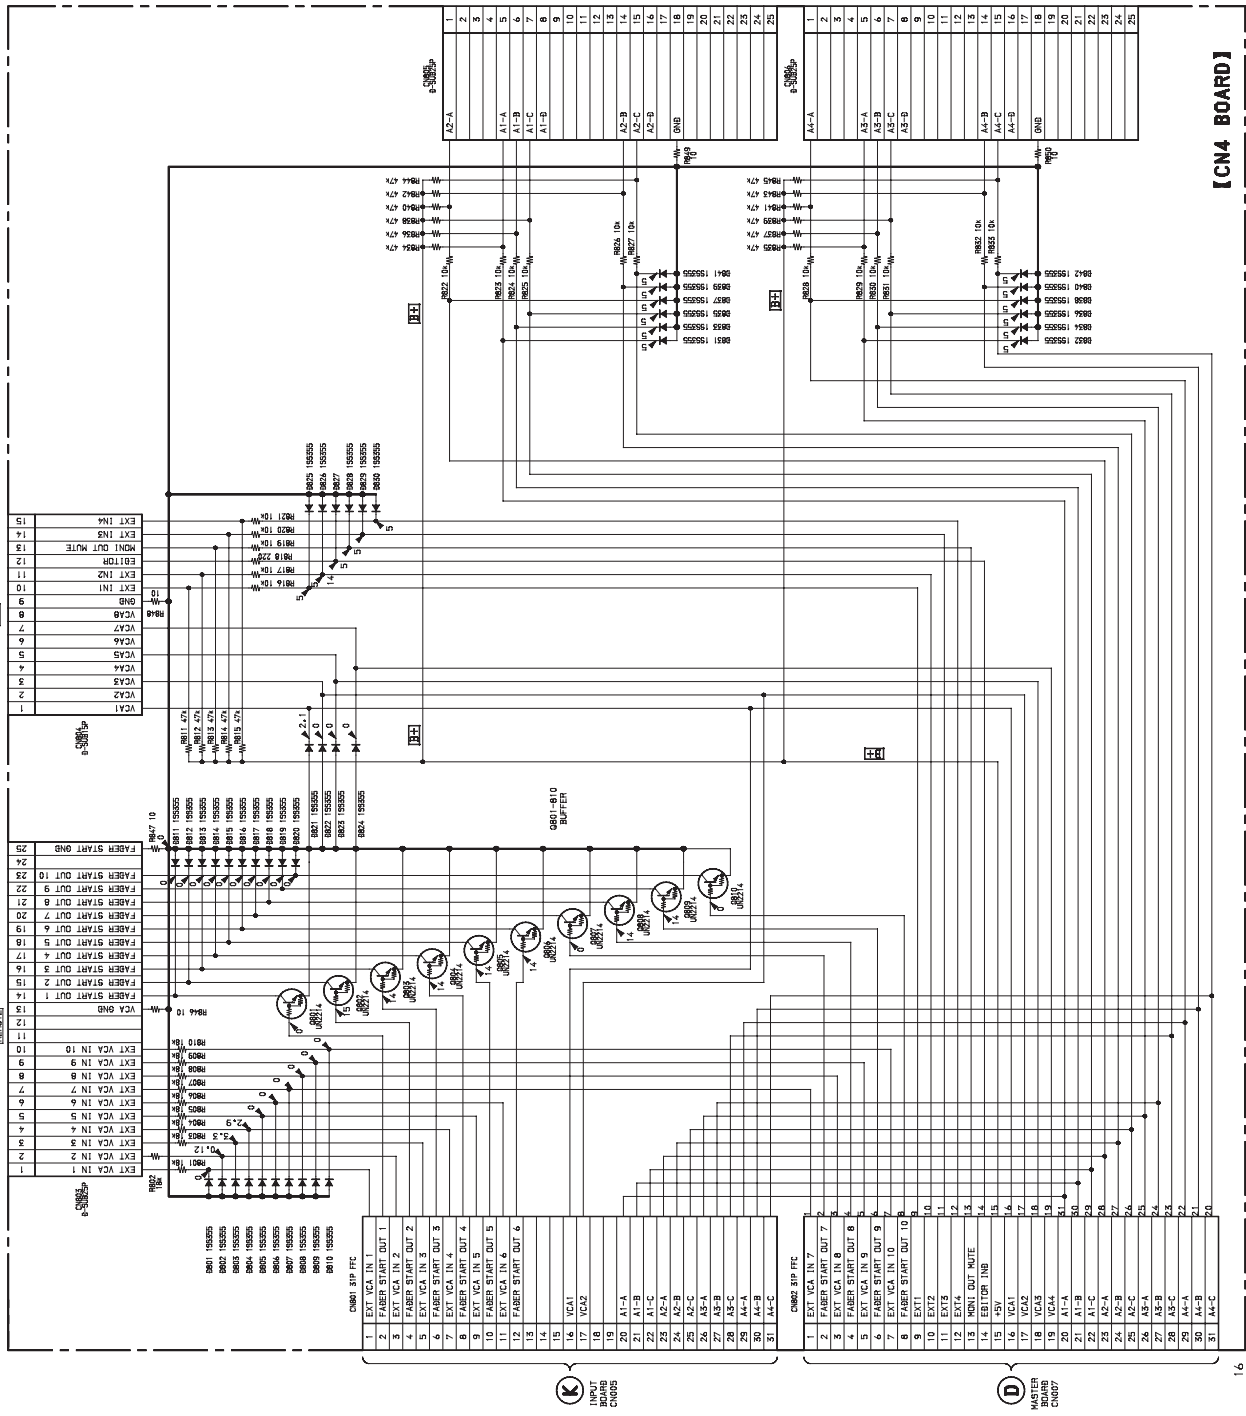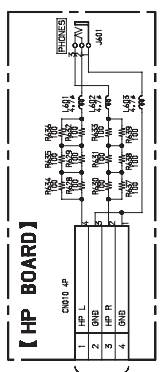

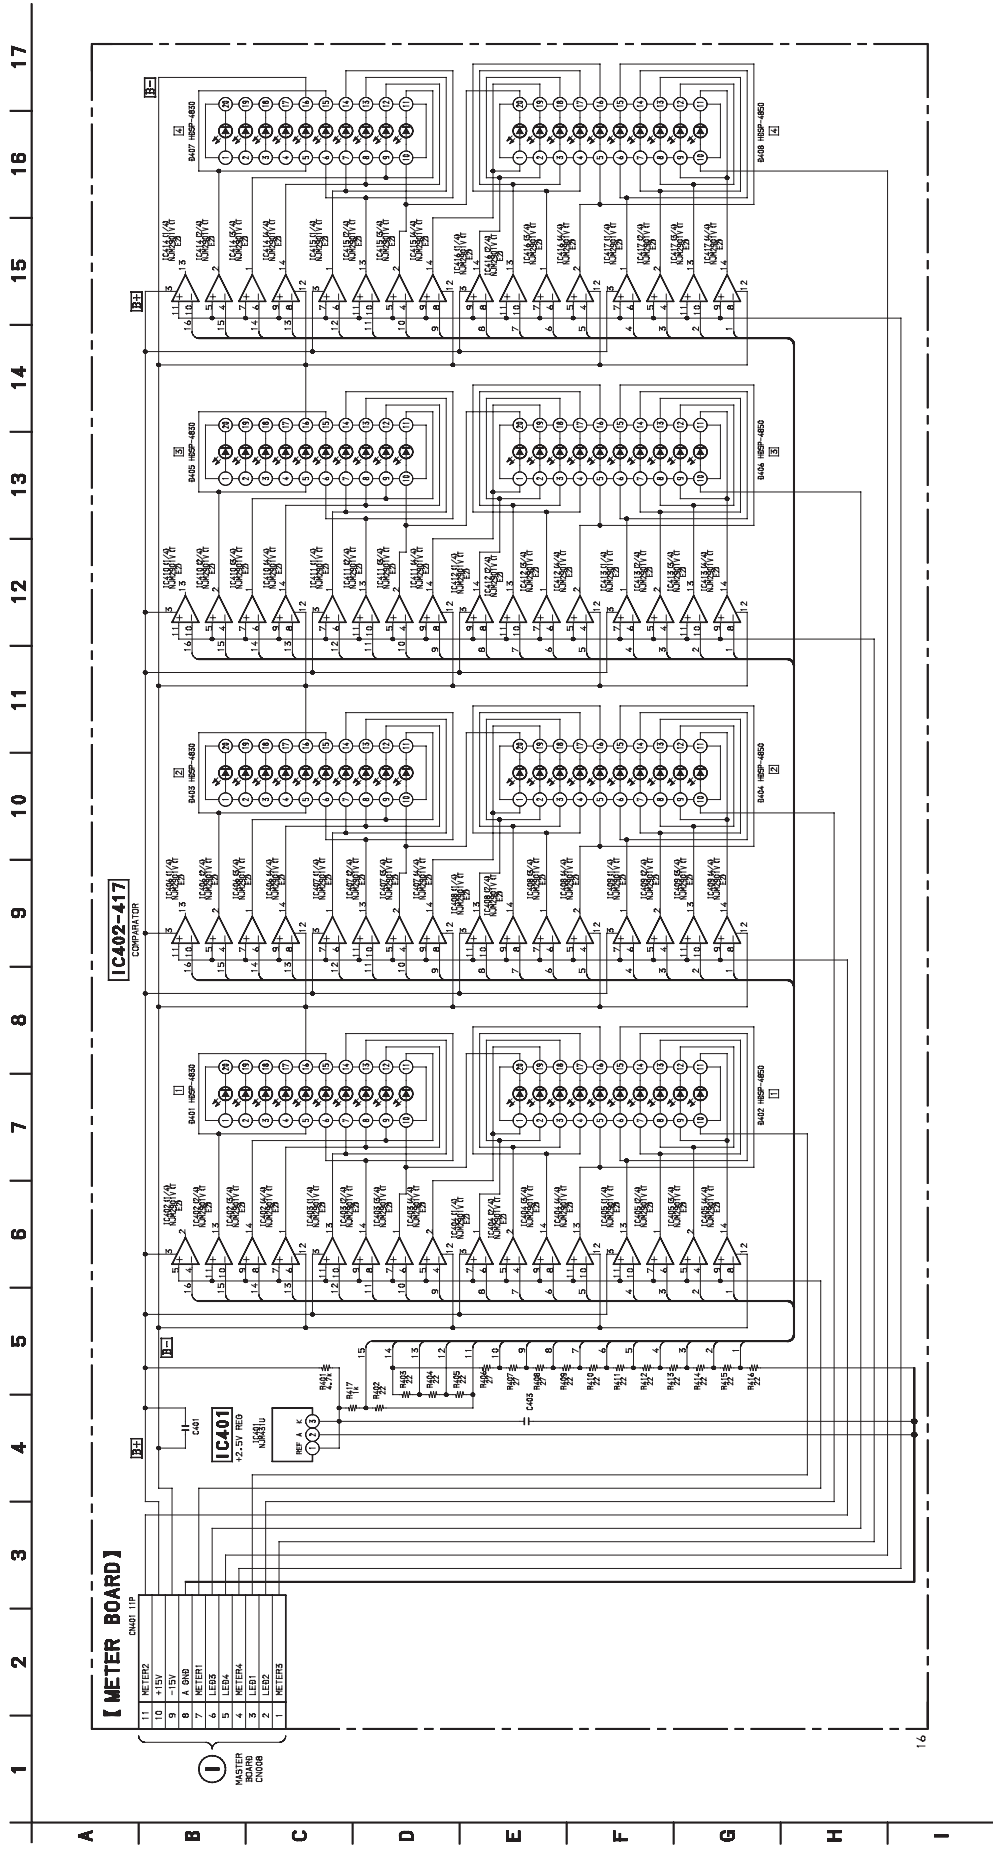

4-27. PRINTED WIRING BOARD – METER SECTION –

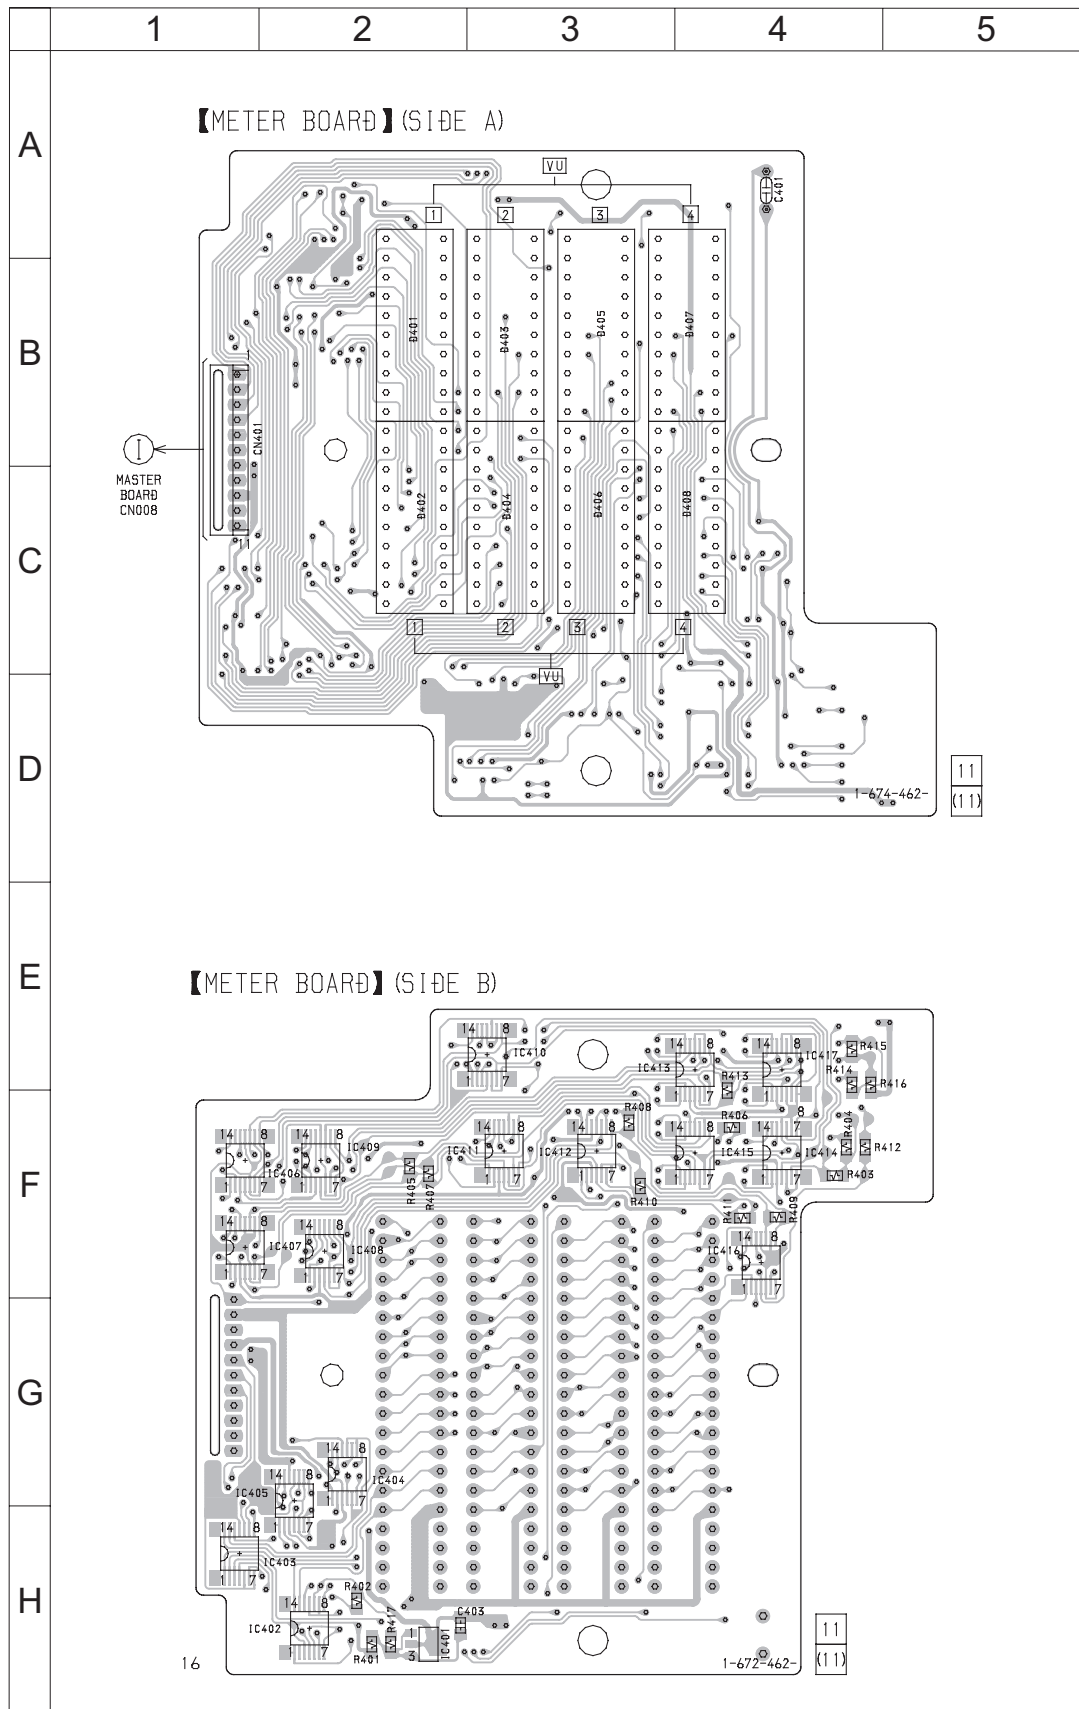

• Semiconductor Location

Ref. No.	Location
D401	B-2
D402	C-2
D403	B-3
D404	C-3
D405	B-3
D406	C-3
D407	B-4
D408	C-4
IC401	H-2
IC402	H-2
IC403	H-1
IC404	G-2
IC405	G-2
IC406	F-1
IC407	F-1
IC408	F-2
IC409	F-2
IC410	E-3
IC411	F-3
IC412	F-3
IC413	E-4
IC414	F-4
IC415	F-4
IC416	F-4
IC417	E-4

SECTION 5 EXPLODED VIEWS

Note:

- -XX, -X mean standardized parts, so they may have some differences from the original one.
- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- The mechanical parts with no reference number in the exploded views are not supplied.
- Hardware (# mark) list and accessories and packing materials are given in the last of this parts list.

The components identified by mark $\triangle$ or dotted line with mark $\triangle$ are critical for safety. Replace only with part number specified.


【使用上の注意】

- -XX, -Xは標準化部品のため、セットについている部品と異なる場合があります。
- *印の部品は常時在庫しておりません。
- 外装部品色表示
例 バランスツマミ (ホワイト) …… (レッド)
↑ ↑
部品の色を表わす。セットの色を表わす。

- 分解図中の機構部品で、図面番号のない部品は供給しません。
- ねじ一覧表と付属梱包部は、部品表の最後にあります。


$\triangle$ 印の部品、または $\triangle$ 印付の点線で囲まれた部品は、安全性を維持するために、重要な部品です。従って交換時は、必ず指定の部品を使用して下さい。

5-1. PANEL SECTION

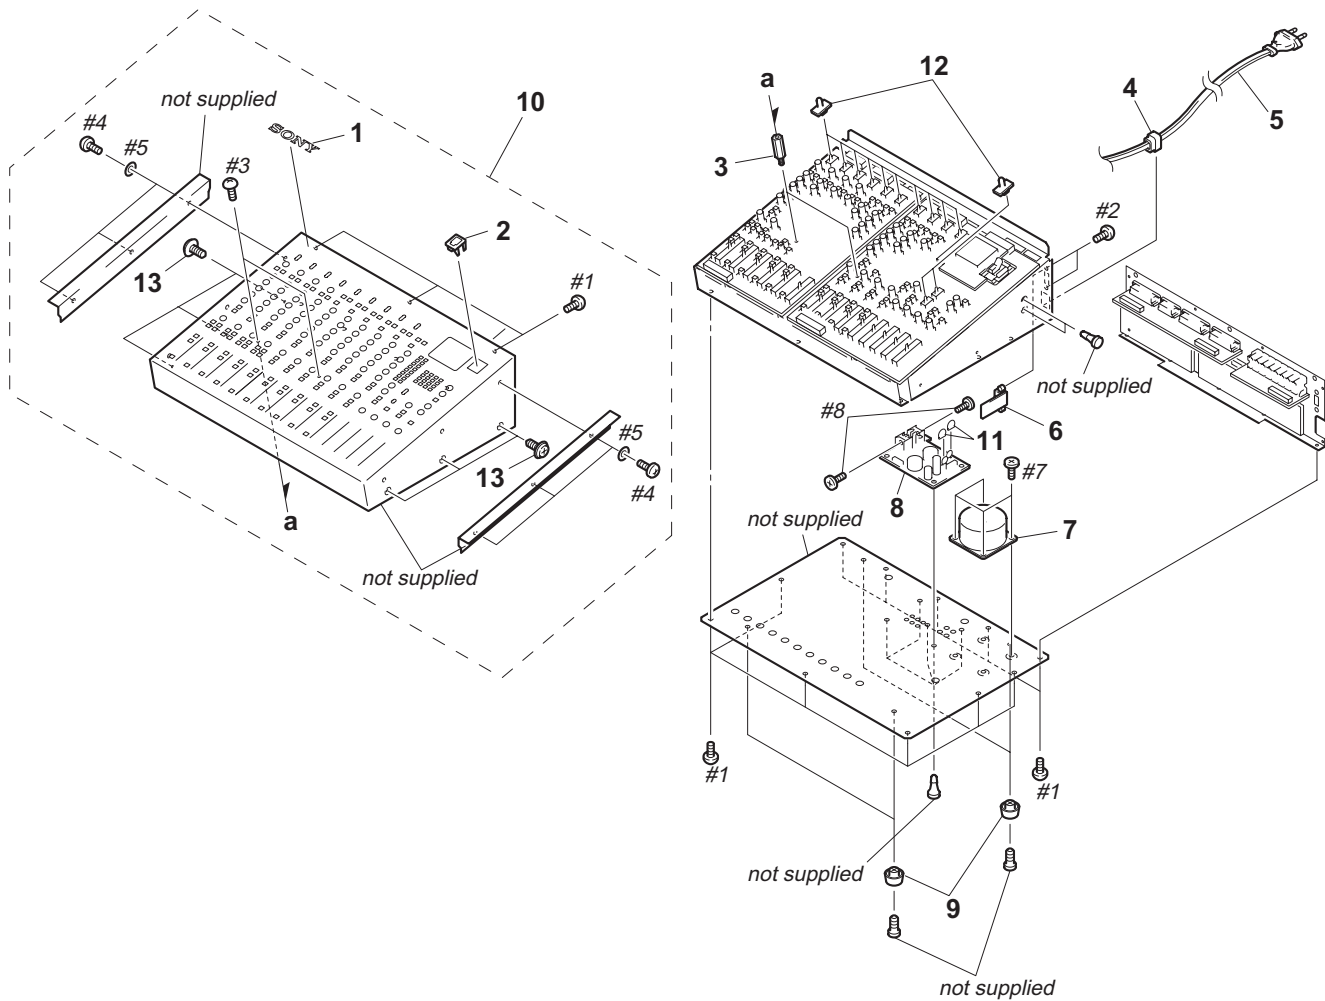

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
1	4-942-568-41	EMBLEM (NO.5), SONY		$\triangle$ 7	1-433-926-11	TRANSFORMER, POWER (V200)	
* 2	3-681-054-01	POWER SW GUARD		* 8	A-4591-202-A	PS BOARD, COMPLETE	
* 3	4-949-000-01	BOSS(B)		9	2-337-554-01	FOOT	
4	3-703-244-00	BUSHING (2104), CORD		10	A-4587-731-A	PANEL ASSY	
$\triangle$ 5	1-776-095-11	CORD, POWER (V200)		* 11	4-374-846-21	COVER, CAPACITOR, CAP TYPE (V200)	
$\triangle$ 5	1-790-345-11	CORD, POWER (V200R)		12	3-917-216-11	KNOB(TIMER)	
* 6	1-674-465-11	AC BOARD		13	3-704-366-01	SCREW (CASE) (M3X8)	
$\triangle$ 7	1-431-820-11	TRANSFORMER, POWER (V200R)					

5-2. MASTER/REAR SECTION

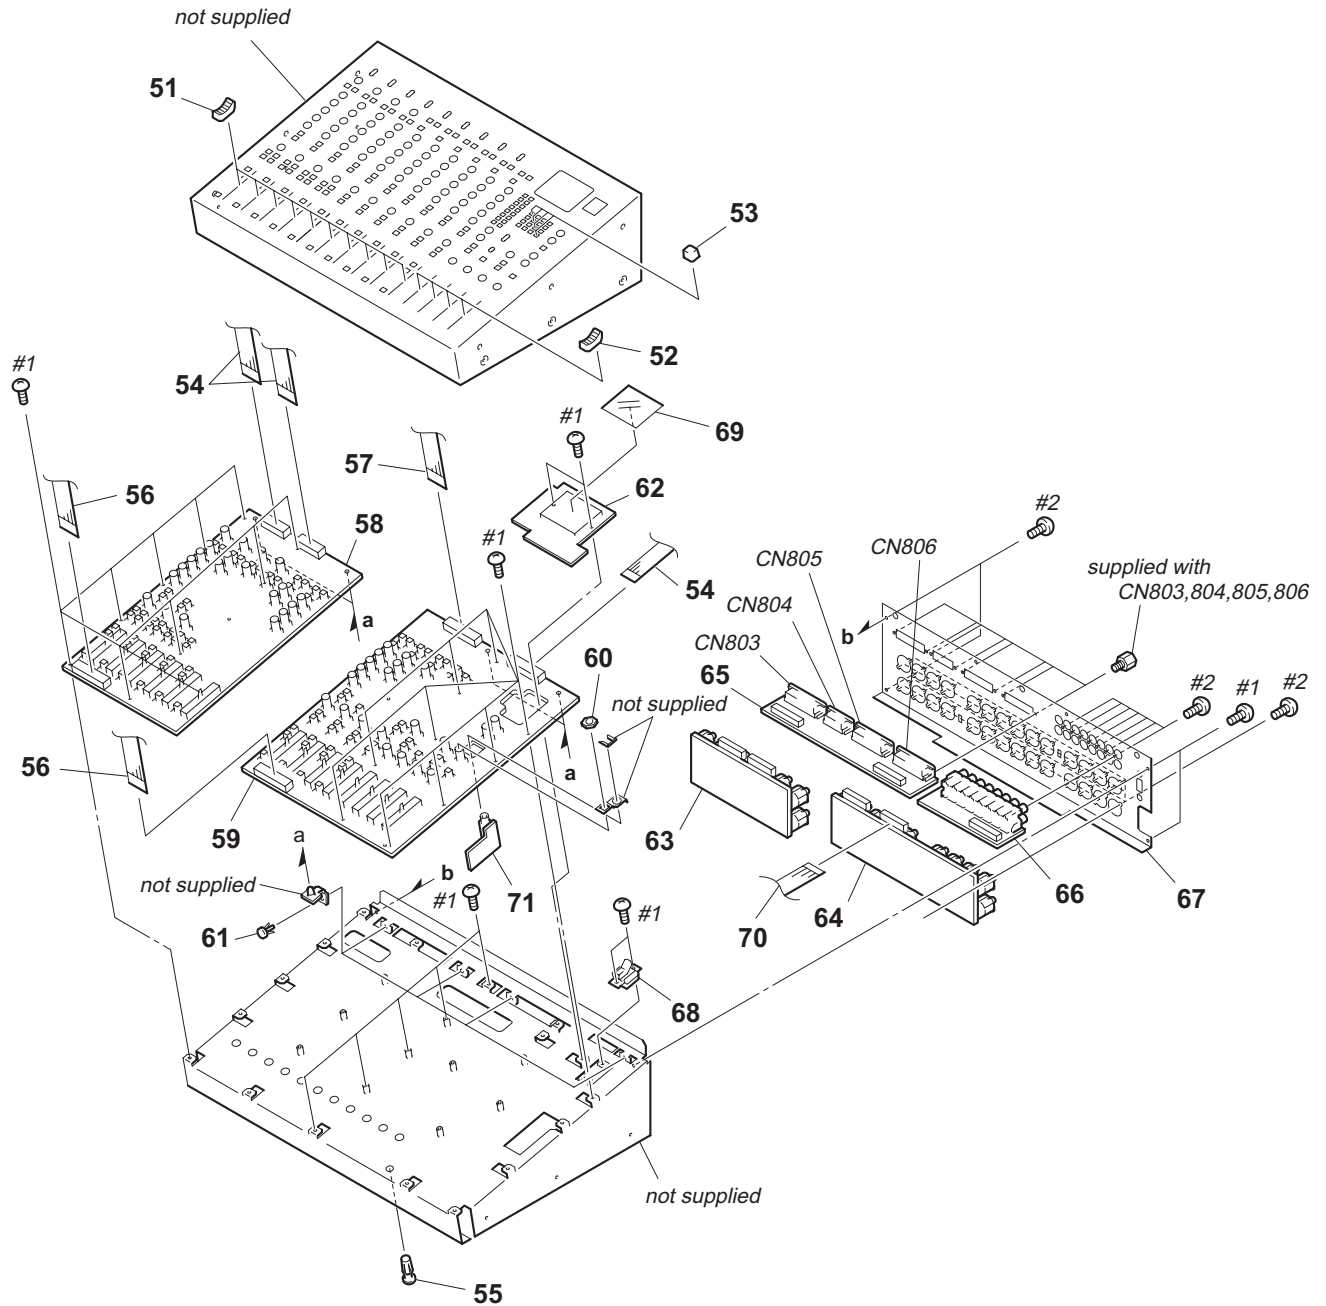


Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
51	2-346-345-02	KNOB, FADER		* 63	A-4591-199-A	CN1 BOARD, COMPLETE (V200)	
52	2-346-345-12	KNOB, FADER		* 63	A-4591-209-A	CN1R BOARD, COMPLETE (V200R)	
53	2-346-290-22	KNOB		* 64	A-4591-200-A	CN2 BOARD, COMPLETE (V200)	
54	1-773-117-11	WIRE(FLAT TYPE) (19 CORE)		* 64	A-4591-210-A	CN2R BOARD, COMPLETE (V200R)	
55	3-831-441-11	SPACER (10X160X0.5)		* 65	A-4591-205-A	CN4 BOARD, COMPLETE	
56	1-769-281-11	WIRE(FLAT TYPE) (31 CORE)		* 66	A-4591-201-A	CN3 BOARD, COMPLETE	
57	1-773-232-11	WIRE(FLAT TYPE) (25 CORE)		* 67	2-346-932-01	PANEL, BACK	
* 58	A-4591-204-A	INPUT BOARD, COMPLETE		△ 68	1-570-743-21	SWITCH, AC POWER (POWER)	
* 59	A-4591-207-A	MASTER BOARD, COMPLETE		* 69	2-346-935-01	SHEET, LED	
60	4-857-437-00	NUT(9)		70	1-773-133-11	WIRE(FLAT TYPE) (19 CORE)	
61	3-531-576-11	RIVET		* 71	1-674-467-11	HP BOARD	
* 62	A-4591-203-A	METER BOARD, COMPLETE					

The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified.

△印の部品、または △印付きの点線で囲まれた部品は、安全性を維持するために重要な部品です。従って交換時は、必ず指定の部品を使用して下さい。

5-3. PANEL KNOB SECTION

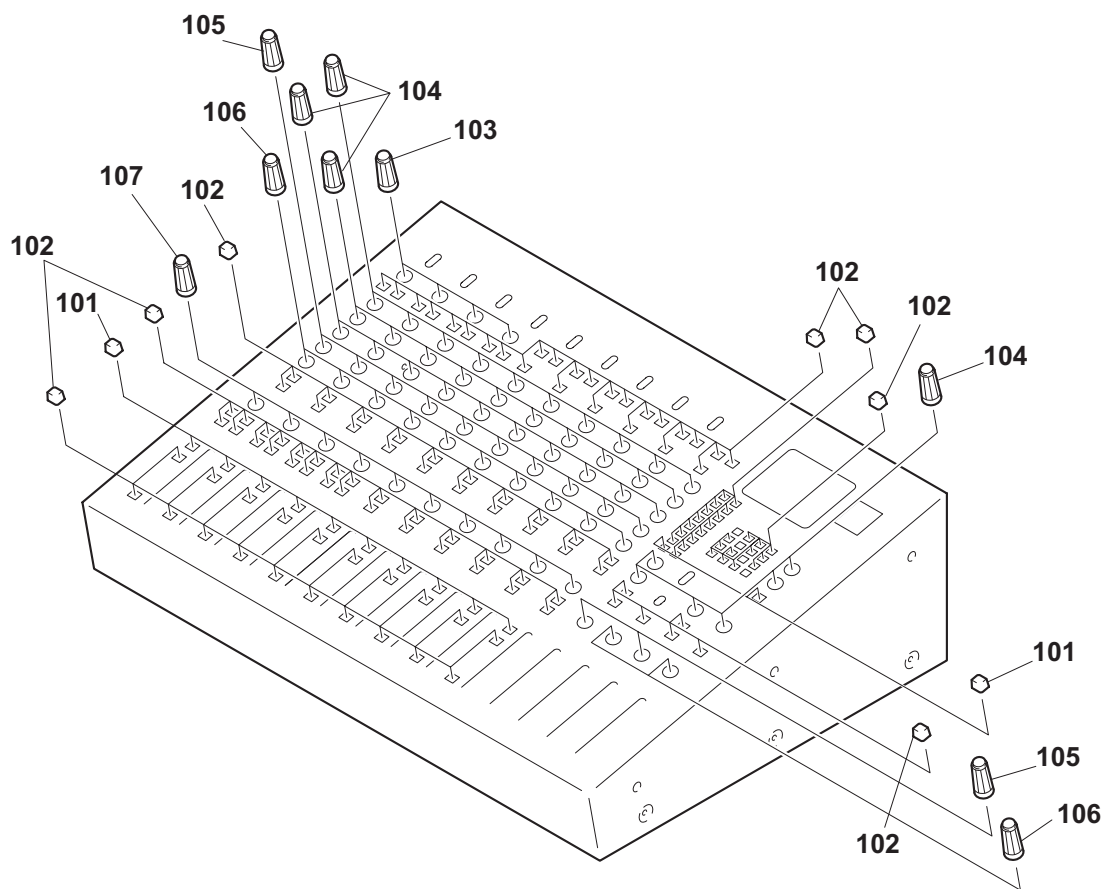

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
101	2-346-290-12	KNOB		105	4-935-181-01	KNOB (SMALL), ROTARY	
102	2-346-290-02	KNOB		106	4-935-181-11	KNOB (SMALL), ROTARY	
103	4-935-181-21	KNOB (SMALL), ROTARY		107	2-346-329-31	KNOB (DIA. 11), ROTARY	
104	4-935-181-41	KNOB (SMALL), ROTARY					

SECTION 6 ELECTRICAL PARTS LIST

AC

CN1

Note:

When indicating parts by reference number, please include the board name.

The components identified by mark $\triangle$ or dotted line with mark $\triangle$ are critical for safety. Replace only with part number specified.

- Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.
- XX, -X mean standardized parts, so they may have some difference from the original one.
- Items marked “*” are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- CAPACITORS:
uF: μ F
- RESISTORS
All resistors are in ohms.
METAL: metal-film resistor
METAL OXIDE: Metal Oxide-film resistor
F: nonflammable
- COILS
uH: μ H
- SEMICONDUCTORS
In each case, u: μ , for example:
uA...: μ A..., uPA...: μ PA...,
uPB...: μ PB..., uPC...: μ PC...,
uPD...: μ PD...

【使用上の注意】

- ここに記載されている部品は、補修用部品であるため、回路図及びセットに付いている部品と異なる場合があります。
- XX, -Xは標準化部品のため、セットに付いている部品と異なる場合があります。
- *印の部品は常備在庫しておりません。
- コンデンサの単位でuFは μ Fを示します。
- 抵抗の単位 Ω は省略してあります。
METAL: 金属被膜抵抗。
METAL OXIDE: 酸化金属被膜抵抗。

- インダクタの単位でuHは μ Hを示します。
- 半導体の名称でuA..., uPA..., uPB..., uPC..., uPD...等はそれぞれ μ A..., μ PA..., μ PB..., μ PC..., μ PD...を示します。

お願い
図面番号で部品を指定するときは基板名又はブロックを併せて指定してください。

$\triangle$ 印の部品、または $\triangle$ 印付の点線で囲まれた部品は、安全性を維持するために、重要な部品です。従って交換時は、必ず指定の部品を使用して下さい。

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
*	1-674-465-11	AC BOARD *****		C116	1-163-251-11	CERAMIC CHIP 100PF 5%	50V
		< CAPACITOR >		C117	1-128-699-91	CAP,CHIP 22PF 5%	100V
$\triangle$ C801	1-113-924-11	CERAMIC 0.0047uF 20% 250V		C118	1-163-251-11	CERAMIC CHIP 100PF 5%	50V
$\triangle$ C802	1-113-924-11	CERAMIC 0.0047uF 20% 250V		C119	1-128-699-91	CAP,CHIP 22PF 5%	100V
		< CONNECTOR >		C120	1-163-251-11	CERAMIC CHIP 100PF 5%	50V
$\triangle$ CN807	1-564-321-21	PIN, CONNECTOR 2P		C121	1-163-251-11	CERAMIC CHIP 100PF 5%	50V
$\triangle$ CN808	1-564-687-11	PIN, CONNECTOR 3P		C122	1-163-251-11	CERAMIC CHIP 100PF 5%	50V
$\triangle$ CN809	1-568-106-11	PIN, CONNECTOR 4P		C123	1-163-251-11	CERAMIC CHIP 100PF 5%	50V
$\triangle$ CN810	1-564-321-00	PIN, CONNECTOR 2P		C124	1-163-251-11	CERAMIC CHIP 100PF 5%	50V
		< SWITCH >				< CONNECTOR >	
$\triangle$ S801	1-571-309-11	SWITCH (VOLTAGE SELECTOR)		* CN101	1-778-307-11	CONNECTOR (RECEPTACLE) 3P (MONO INPUT A : CH1)	
*****				* CN102	1-778-307-11	CONNECTOR (RECEPTACLE) 3P (MONO INPUT B : CH1)	
				* CN103	1-778-307-11	CONNECTOR (RECEPTACLE) 3P (MONO INPUT A : CH2)	
*	A-4591-199-A	CN1 BOARD, COMPLETE (V200) *****		* CN104	1-778-307-11	CONNECTOR (RECEPTACLE) 3P (MONO INPUT B : CH2)	
		< CAPACITOR >		* CN105	1-778-307-11	CONNECTOR (RECEPTACLE) 3P (MONO INPUT A : CH3)	
C101	1-128-699-91	CAP,CHIP 22PF 5%	100V	* CN106	1-778-307-11	CONNECTOR (RECEPTACLE) 3P (MONO INPUT B : CH3)	
C102	1-163-251-11	CERAMIC CHIP 100PF 5%	50V	* CN107	1-778-307-11	CONNECTOR (RECEPTACLE) 3P (MONO INPUT A : CH4)	
C103	1-128-699-91	CAP,CHIP 22PF 5%	100V	* CN108	1-778-307-11	CONNECTOR (RECEPTACLE) 3P (MONO INPUT B : CH4)	
C104	1-163-251-11	CERAMIC CHIP 100PF 5%	50V	* CN109	1-778-307-11	CONNECTOR (RECEPTACLE) 3P (STEREO INPUT L : ST1)	
C105	1-128-699-91	CAP,CHIP 22PF 5%	100V	* CN110	1-778-307-11	CONNECTOR (RECEPTACLE) 3P (STEREO INPUT R : ST1)	
C106	1-163-251-11	CERAMIC CHIP 100PF 5%	50V	* CN111	1-778-307-11	CONNECTOR (RECEPTACLE) 3P (STEREO INPUT L : ST2)	
C107	1-128-699-91	CAP,CHIP 22PF 5%	100V	* CN112	1-778-307-11	CONNECTOR (RECEPTACLE) 3P (STEREO INPUT R : ST2)	
C108	1-163-251-11	CERAMIC CHIP 100PF 5%	50V	CN113	1-691-650-11	SOCKET, CONNECTOR 19P	
C109	1-163-251-11	CERAMIC CHIP 100PF 5%	50V	CN114	1-691-650-11	SOCKET, CONNECTOR 19P	
C110	1-163-251-11	CERAMIC CHIP 100PF 5%	50V				
C111	1-163-251-11	CERAMIC CHIP 100PF 5%	50V				
C112	1-163-251-11	CERAMIC CHIP 100PF 5%	50V				
C113	1-128-699-91	CAP,CHIP 22PF 5%	100V				
C114	1-163-251-11	CERAMIC CHIP 100PF 5%	50V				
C115	1-128-699-91	CAP,CHIP 22PF 5%	100V				

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
< DIODE >							
D103	8-719-988-61	DIODE 1SS355TE-17		L121	1-412-002-31	INDUCTOR CHIP 4.7uH	
D104	8-719-988-61	DIODE 1SS355TE-17		L122	1-412-002-31	INDUCTOR CHIP 4.7uH	
D107	8-719-988-61	DIODE 1SS355TE-17		L123	1-412-002-31	INDUCTOR CHIP 4.7uH	
D108	8-719-988-61	DIODE 1SS355TE-17		L124	1-412-002-31	INDUCTOR CHIP 4.7uH	
D111	8-719-988-61	DIODE 1SS355TE-17		< RESISTOR >			
D112	8-719-988-61	DIODE 1SS355TE-17		R101	1-216-647-11	METAL CHIP 680 0.5% 1/10W	
D115	8-719-988-61	DIODE 1SS355TE-17		R102	1-216-647-11	METAL CHIP 680 0.5% 1/10W	
D116	8-719-988-61	DIODE 1SS355TE-17		R103	1-216-647-11	METAL CHIP 680 0.5% 1/10W	
D117	8-719-988-61	DIODE 1SS355TE-17		R104	1-216-647-11	METAL CHIP 680 0.5% 1/10W	
D118	8-719-988-61	DIODE 1SS355TE-17		R105	1-208-462-61	RES,CHIP 10K 2% 1/10W	
D119	8-719-988-61	DIODE 1SS355TE-17		R106	1-208-462-61	RES,CHIP 10K 2% 1/10W	
D120	8-719-988-61	DIODE 1SS355TE-17		R107	1-208-462-61	RES,CHIP 10K 2% 1/10W	
D121	8-719-988-61	DIODE 1SS355TE-17		R108	1-208-462-61	RES,CHIP 10K 2% 1/10W	
D122	8-719-988-61	DIODE 1SS355TE-17		< SWITCH >			
D123	8-719-988-61	DIODE 1SS355TE-17		S101	1-572-044-11	SWITCH, SLIDE (600 Ω)	
D124	8-719-988-61	DIODE 1SS355TE-17		*****			
D127	8-719-988-61	DIODE 1SS355TE-17		*	A-4591-209-A	CN1R BOARD, COMPLETE (V200R)	
D128	8-719-988-61	DIODE 1SS355TE-17		*****			
D131	8-719-988-61	DIODE 1SS355TE-17		< CAPACITOR >			
D132	8-719-988-61	DIODE 1SS355TE-17		C801	1-128-699-91	CAP,CHIP 22PF 5% 100V	
D135	8-719-988-61	DIODE 1SS355TE-17		C802	1-163-251-11	CERAMIC CHIP 100PF 5% 50V	
D136	8-719-988-61	DIODE 1SS355TE-17		C803	1-128-699-91	CAP,CHIP 22PF 5% 100V	
D139	8-719-988-61	DIODE 1SS355TE-17		C804	1-163-251-11	CERAMIC CHIP 100PF 5% 50V	
D140	8-719-988-61	DIODE 1SS355TE-17		C805	1-128-699-91	CAP,CHIP 22PF 5% 100V	
D141	8-719-988-61	DIODE 1SS355TE-17		C806	1-163-251-11	CERAMIC CHIP 100PF 5% 50V	
D142	8-719-988-61	DIODE 1SS355TE-17		C807	1-128-699-91	CAP,CHIP 22PF 5% 100V	
D143	8-719-988-61	DIODE 1SS355TE-17		C808	1-163-251-11	CERAMIC CHIP 100PF 5% 50V	
D144	8-719-988-61	DIODE 1SS355TE-17		C809	1-163-251-11	CERAMIC CHIP 100PF 5% 50V	
D145	8-719-988-61	DIODE 1SS355TE-17		C810	1-163-251-11	CERAMIC CHIP 100PF 5% 50V	
D146	8-719-988-61	DIODE 1SS355TE-17		C811	1-163-251-11	CERAMIC CHIP 100PF 5% 50V	
D147	8-719-988-61	DIODE 1SS355TE-17		C812	1-163-251-11	CERAMIC CHIP 100PF 5% 50V	
D148	8-719-988-61	DIODE 1SS355TE-17		C813	1-128-699-91	CAP,CHIP 22PF 5% 100V	
< JUMPER RESISTOR >				C814	1-163-251-11	CERAMIC CHIP 100PF 5% 50V	
JC101	1-216-295-91	SHORT 0		C815	1-128-699-91	CAP,CHIP 22PF 5% 100V	
< COIL >				C816	1-163-251-11	CERAMIC CHIP 100PF 5% 50V	
L101	1-410-993-22	INDUCTOR CHIP 1uH		C817	1-128-699-91	CAP,CHIP 22PF 5% 100V	
L102	1-410-993-22	INDUCTOR CHIP 1uH		C818	1-163-251-11	CERAMIC CHIP 100PF 5% 50V	
L103	1-412-002-31	INDUCTOR CHIP 4.7uH		C819	1-128-699-91	CAP,CHIP 22PF 5% 100V	
L104	1-412-002-31	INDUCTOR CHIP 4.7uH		C820	1-163-251-11	CERAMIC CHIP 100PF 5% 50V	
L105	1-410-993-22	INDUCTOR CHIP 1uH		C821	1-163-251-11	CERAMIC CHIP 100PF 5% 50V	
L106	1-410-993-22	INDUCTOR CHIP 1uH		C822	1-163-251-11	CERAMIC CHIP 100PF 5% 50V	
L107	1-412-002-31	INDUCTOR CHIP 4.7uH		C823	1-163-251-11	CERAMIC CHIP 100PF 5% 50V	
L108	1-412-002-31	INDUCTOR CHIP 4.7uH		C824	1-163-251-11	CERAMIC CHIP 100PF 5% 50V	
L109	1-410-993-22	INDUCTOR CHIP 1uH		< CONNECTOR >			
L110	1-410-993-22	INDUCTOR CHIP 1uH		* CN801	1-778-308-11	CONNECTOR (PLUG) 3P (MONO INPUT A : CH1)	
L111	1-412-002-31	INDUCTOR CHIP 4.7uH		* CN802	1-778-308-11	CONNECTOR (PLUG) 3P (MONO INPUT B : CH1)	
L112	1-412-002-31	INDUCTOR CHIP 4.7uH		* CN803	1-778-308-11	CONNECTOR (PLUG) 3P (MONO INPUT A : CH2)	
L113	1-410-993-22	INDUCTOR CHIP 1uH		* CN804	1-778-308-11	CONNECTOR (PLUG) 3P (MONO INPUT B : CH2)	
L114	1-410-993-22	INDUCTOR CHIP 1uH		* CN805	1-778-308-11	CONNECTOR (PLUG) 3P (MONO INPUT A : CH3)	
L115	1-412-002-31	INDUCTOR CHIP 4.7uH					
L116	1-412-002-31	INDUCTOR CHIP 4.7uH					
L117	1-412-002-31	INDUCTOR CHIP 4.7uH					
L118	1-412-002-31	INDUCTOR CHIP 4.7uH					
L119	1-412-002-31	INDUCTOR CHIP 4.7uH					
L120	1-412-002-31	INDUCTOR CHIP 4.7uH					

— 73 —

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
C221	1-163-251-11	CERAMIC CHIP 100PF 5%	50V	D216	8-719-988-61	DIODE 1SS355TE-17	
C222	1-163-251-11	CERAMIC CHIP 100PF 5%	50V	D217	8-719-988-61	DIODE 1SS355TE-17	
C223	1-163-251-11	CERAMIC CHIP 100PF 5%	50V	D218	8-719-988-61	DIODE 1SS355TE-17	
C224	1-163-251-11	CERAMIC CHIP 100PF 5%	50V	D219	8-719-988-61	DIODE 1SS355TE-17	
C225	1-163-251-11	CERAMIC CHIP 100PF 5%	50V	D220	8-719-988-61	DIODE 1SS355TE-17	
C226	1-163-251-11	CERAMIC CHIP 100PF 5%	50V	D221	8-719-988-61	DIODE 1SS355TE-17	
C227	1-163-251-11	CERAMIC CHIP 100PF 5%	50V	D222	8-719-988-61	DIODE 1SS355TE-17	
C228	1-163-251-11	CERAMIC CHIP 100PF 5%	50V	D223	8-719-988-61	DIODE 1SS355TE-17	
C229	1-163-251-11	CERAMIC CHIP 100PF 5%	50V	D224	8-719-988-61	DIODE 1SS355TE-17	
C230	1-163-251-11	CERAMIC CHIP 100PF 5%	50V	D225	8-719-988-61	DIODE 1SS355TE-17	
C231	1-163-251-11	CERAMIC CHIP 100PF 5%	50V	D226	8-719-988-61	DIODE 1SS355TE-17	
C232	1-163-251-11	CERAMIC CHIP 100PF 5%	50V	D227	8-719-988-61	DIODE 1SS355TE-17	
< CONNECTOR >				D228	8-719-988-61	DIODE 1SS355TE-17	
* CN201	1-778-307-11	CONNECTOR (RECEPTACLE) 3P	(STEREO INPUT L : ST3)	D229	8-719-988-61	DIODE 1SS355TE-17	
* CN202	1-778-307-11	CONNECTOR (RECEPTACLE) 3P	(STEREO INPUT R : ST3)	D230	8-719-988-61	DIODE 1SS355TE-17	
* CN203	1-778-307-11	CONNECTOR (RECEPTACLE) 3P	(STEREO INPUT L : ST4)	D231	8-719-988-61	DIODE 1SS355TE-17	
* CN204	1-778-307-11	CONNECTOR (RECEPTACLE) 3P	(STEREO INPUT R : ST4)	D232	8-719-988-61	DIODE 1SS355TE-17	
* CN205	1-778-307-11	CONNECTOR (RECEPTACLE) 3P	(STEREO INPUT L : ST5)	D233	8-719-988-61	DIODE 1SS355TE-17	
* CN206	1-778-307-11	CONNECTOR (RECEPTACLE) 3P	(STEREO INPUT R : ST5)	D234	8-719-988-61	DIODE 1SS355TE-17	
* CN207	1-778-307-11	CONNECTOR (RECEPTACLE) 3P	(STEREO INPUT L : ST6)	D235	8-719-988-61	DIODE 1SS355TE-17	
* CN208	1-778-307-11	CONNECTOR (RECEPTACLE) 3P	(STEREO INPUT R : ST6)	D236	8-719-988-61	DIODE 1SS355TE-17	
* CN209	1-778-307-11	CONNECTOR (RECEPTACLE) 3P	(MONITOR IN 1)	D237	8-719-988-61	DIODE 1SS355TE-17	
* CN210	1-778-307-11	CONNECTOR (RECEPTACLE) 3P	(MONITOR IN 2)	D238	8-719-988-61	DIODE 1SS355TE-17	
* CN211	1-778-307-11	CONNECTOR (RECEPTACLE) 3P	(MONITOR IN 3)	D239	8-719-988-61	DIODE 1SS355TE-17	
* CN212	1-778-307-11	CONNECTOR (RECEPTACLE) 3P	(MONITOR IN 4)	D240	8-719-988-61	DIODE 1SS355TE-17	
* CN213	1-778-308-11	CONNECTOR (PLUG) 3P (MASTER OUT 1)		D241	8-719-988-61	DIODE 1SS355TE-17	
* CN214	1-778-308-11	CONNECTOR (PLUG) 3P (MASTER OUT 2)		D242	8-719-988-61	DIODE 1SS355TE-17	
* CN215	1-778-308-11	CONNECTOR (PLUG) 3P (MASTER OUT 3)		D243	8-719-988-61	DIODE 1SS355TE-17	
* CN216	1-778-308-11	CONNECTOR (PLUG) 3P (MASTER OUT 4)		D244	8-719-988-61	DIODE 1SS355TE-17	
* CN217	1-764-412-11	SOCKET, CONNECTOR 25P		D245	8-719-988-61	DIODE 1SS355TE-17	
CN218	1-691-650-11	SOCKET, CONNECTOR 19P		D246	8-719-988-61	DIODE 1SS355TE-17	
< DIODE >				D247	8-719-988-61	DIODE 1SS355TE-17	
D201	8-719-988-61	DIODE 1SS355TE-17		D248	8-719-988-61	DIODE 1SS355TE-17	
D202	8-719-988-61	DIODE 1SS355TE-17		D249	8-719-988-61	DIODE 1SS355TE-17	
D203	8-719-988-61	DIODE 1SS355TE-17		D250	8-719-988-61	DIODE 1SS355TE-17	
D204	8-719-988-61	DIODE 1SS355TE-17		D251	8-719-988-61	DIODE 1SS355TE-17	
D205	8-719-988-61	DIODE 1SS355TE-17		D252	8-719-988-61	DIODE 1SS355TE-17	
D206	8-719-988-61	DIODE 1SS355TE-17		D253	8-719-988-61	DIODE 1SS355TE-17	
D207	8-719-988-61	DIODE 1SS355TE-17		D254	8-719-988-61	DIODE 1SS355TE-17	
D208	8-719-988-61	DIODE 1SS355TE-17		D255	8-719-988-61	DIODE 1SS355TE-17	
D209	8-719-988-61	DIODE 1SS355TE-17		D256	8-719-988-61	DIODE 1SS355TE-17	
D210	8-719-988-61	DIODE 1SS355TE-17		D257	8-719-988-61	DIODE 1SS355TE-17	
D211	8-719-988-61	DIODE 1SS355TE-17		D258	8-719-988-61	DIODE 1SS355TE-17	
D212	8-719-988-61	DIODE 1SS355TE-17		D259	8-719-988-61	DIODE 1SS355TE-17	
D213	8-719-988-61	DIODE 1SS355TE-17		D260	8-719-988-61	DIODE 1SS355TE-17	
D214	8-719-988-61	DIODE 1SS355TE-17		D261	8-719-988-61	DIODE 1SS355TE-17	
D215	8-719-988-61	DIODE 1SS355TE-17		D262	8-719-988-61	DIODE 1SS355TE-17	
< JUMPER RESISTOR >				D263	8-719-988-61	DIODE 1SS355TE-17	
JC201	1-216-295-91	SHORT	0	D264	8-719-988-61	DIODE 1SS355TE-17	
< COIL >				L201	1-412-002-31	INDUCTOR CHIP 4.7uH	
L201	1-412-002-31	INDUCTOR CHIP 4.7uH		L202	1-412-002-31	INDUCTOR CHIP 4.7uH	
L202	1-412-002-31	INDUCTOR CHIP 4.7uH		L203	1-412-002-31	INDUCTOR CHIP 4.7uH	
L203	1-412-002-31	INDUCTOR CHIP 4.7uH		L204	1-412-002-31	INDUCTOR CHIP 4.7uH	
L204	1-412-002-31	INDUCTOR CHIP 4.7uH		L205	1-412-002-31	INDUCTOR CHIP 4.7uH	
L205	1-412-002-31	INDUCTOR CHIP 4.7uH					

Ref. No.	Part No.	Description	Remarks			Ref. No.	Part No.	Description	Remarks		
L206	1-412-002-31	INDUCTOR CHIP 4.7uH				C916	1-163-251-11	CERAMIC CHIP 100PF 5%	50V		
L207	1-412-002-31	INDUCTOR CHIP 4.7uH				C917	1-163-251-11	CERAMIC CHIP 100PF 5%	50V		
L208	1-412-002-31	INDUCTOR CHIP 4.7uH				C918	1-163-251-11	CERAMIC CHIP 100PF 5%	50V		
L209	1-412-002-31	INDUCTOR CHIP 4.7uH				C919	1-163-251-11	CERAMIC CHIP 100PF 5%	50V		
L210	1-412-002-31	INDUCTOR CHIP 4.7uH				C920	1-163-251-11	CERAMIC CHIP 100PF 5%	50V		
L211	1-412-002-31	INDUCTOR CHIP 4.7uH				C921	1-163-251-11	CERAMIC CHIP 100PF 5%	50V		
L212	1-412-002-31	INDUCTOR CHIP 4.7uH				C922	1-163-251-11	CERAMIC CHIP 100PF 5%	50V		
L213	1-412-002-31	INDUCTOR CHIP 4.7uH				C923	1-163-251-11	CERAMIC CHIP 100PF 5%	50V		
L214	1-412-002-31	INDUCTOR CHIP 4.7uH				C924	1-163-251-11	CERAMIC CHIP 100PF 5%	50V		
L215	1-412-002-31	INDUCTOR CHIP 4.7uH				C925	1-163-251-11	CERAMIC CHIP 100PF 5%	50V		
L216	1-412-002-31	INDUCTOR CHIP 4.7uH				C926	1-163-251-11	CERAMIC CHIP 100PF 5%	50V		
L217	1-412-002-31	INDUCTOR CHIP 4.7uH				C927	1-163-251-11	CERAMIC CHIP 100PF 5%	50V		
L218	1-412-002-31	INDUCTOR CHIP 4.7uH				C928	1-163-251-11	CERAMIC CHIP 100PF 5%	50V		
L219	1-412-002-31	INDUCTOR CHIP 4.7uH				C929	1-163-251-11	CERAMIC CHIP 100PF 5%	50V		
L220	1-412-002-31	INDUCTOR CHIP 4.7uH				C930	1-163-251-11	CERAMIC CHIP 100PF 5%	50V		
L221	1-412-002-31	INDUCTOR CHIP 4.7uH				C931	1-163-251-11	CERAMIC CHIP 100PF 5%	50V		
L222	1-412-002-31	INDUCTOR CHIP 4.7uH				C932	1-163-251-11	CERAMIC CHIP 100PF 5%	50V		
L223	1-412-002-31	INDUCTOR CHIP 4.7uH				< CONNECTOR >					
L224	1-412-002-31	INDUCTOR CHIP 4.7uH				* CN901	1-778-308-11	CONNECTOR (PLUG) 3P			
L225	1-412-002-31	INDUCTOR CHIP 4.7uH						(STEREO INPUT L : ST3)			
L226	1-412-002-31	INDUCTOR CHIP 4.7uH				* CN902	1-778-308-11	CONNECTOR (PLUG) 3P			
L227	1-412-002-31	INDUCTOR CHIP 4.7uH						(STEREO INPUT R : ST3)			
L228	1-412-002-31	INDUCTOR CHIP 4.7uH				* CN903	1-778-308-11	CONNECTOR (PLUG) 3P			
L229	1-412-002-31	INDUCTOR CHIP 4.7uH						(STEREO INPUT L : ST4)			
L230	1-412-002-31	INDUCTOR CHIP 4.7uH				* CN904	1-778-308-11	CONNECTOR (PLUG) 3P			
L231	1-412-002-31	INDUCTOR CHIP 4.7uH						(STEREO INPUT R : ST4)			
L232	1-412-002-31	INDUCTOR CHIP 4.7uH				* CN905	1-778-308-11	CONNECTOR (PLUG) 3P			
		< RESISTOR >						(STEREO INPUT L : ST5)			
R201	1-216-647-11	METAL CHIP 680 0.5%	1/10W			* CN906	1-778-308-11	CONNECTOR (PLUG) 3P			
R202	1-216-647-11	METAL CHIP 680 0.5%	1/10W					(STEREO INPUT R : ST5)			
R203	1-216-647-11	METAL CHIP 680 0.5%	1/10W			* CN907	1-778-308-11	CONNECTOR (PLUG) 3P			
R204	1-216-647-11	METAL CHIP 680 0.5%	1/10W					(STEREO INPUT L : ST6)			
R205	1-208-462-61	RES,CHIP 10K 2%	1/10W			* CN908	1-778-308-11	CONNECTOR (PLUG) 3P			
								(STEREO INPUT R : ST6)			
R206	1-208-462-61	RES,CHIP 10K 2%	1/10W			* CN909	1-778-308-11	CONNECTOR (PLUG) 3P (MONITOR IN 1)			
R207	1-208-462-61	RES,CHIP 10K 2%	1/10W			* CN910	1-778-308-11	CONNECTOR (PLUG) 3P (MONITOR IN 2)			
R208	1-208-462-61	RES,CHIP 10K 2%	1/10W			* CN911	1-778-308-11	CONNECTOR (PLUG) 3P (MONITOR IN 3)			
		< SWITCH >				* CN912	1-778-308-11	CONNECTOR (PLUG) 3P (MONITOR IN 4)			
S201	1-572-044-11	SWITCH, SLIDE (600 Ω)				* CN913	1-778-307-11	CONNECTOR (RECEPTACLE) 3P			
		*****						(MASTER OUT 1)			
* A-4591-210-A	CN2R BOARD, COMPLETE (V200R)	*****				* CN914	1-778-307-11	CONNECTOR (RECEPTACLE) 3P			
								(MASTER OUT 2)			
		< CAPACITOR >				* CN915	1-778-307-11	CONNECTOR (RECEPTACLE) 3P			
								(MASTER OUT 3)			
C901	1-163-251-11	CERAMIC CHIP 100PF 5%	50V			* CN916	1-778-307-11	CONNECTOR (RECEPTACLE) 3P			
C902	1-163-251-11	CERAMIC CHIP 100PF 5%	50V					(MASTER OUT 4)			
C903	1-163-251-11	CERAMIC CHIP 100PF 5%	50V			* CN917	1-764-412-11	SOCKET, CONNECTOR 25P			
C904	1-163-251-11	CERAMIC CHIP 100PF 5%	50V			CN918	1-691-650-11	SOCKET, CONNECTOR 19P			
C905	1-163-251-11	CERAMIC CHIP 100PF 5%	50V			< DIODE >					
C906	1-163-251-11	CERAMIC CHIP 100PF 5%	50V			D901	8-719-988-61	DIODE 1SS355TE-17			
C907	1-163-251-11	CERAMIC CHIP 100PF 5%	50V			D902	8-719-988-61	DIODE 1SS355TE-17			
C908	1-163-251-11	CERAMIC CHIP 100PF 5%	50V			D903	8-719-988-61	DIODE 1SS355TE-17			
C909	1-163-251-11	CERAMIC CHIP 100PF 5%	50V			D904	8-719-988-61	DIODE 1SS355TE-17			
C910	1-163-251-11	CERAMIC CHIP 100PF 5%	50V			D905	8-719-988-61	DIODE 1SS355TE-17			
C911	1-163-251-11	CERAMIC CHIP 100PF 5%	50V			D906	8-719-988-61	DIODE 1SS355TE-17			
C912	1-163-251-11	CERAMIC CHIP 100PF 5%	50V			D907	8-719-988-61	DIODE 1SS355TE-17			
C913	1-163-251-11	CERAMIC CHIP 100PF 5%	50V			D908	8-719-988-61	DIODE 1SS355TE-17			
C914	1-163-251-11	CERAMIC CHIP 100PF 5%	50V			D909	8-719-988-61	DIODE 1SS355TE-17			
C915	1-163-251-11	CERAMIC CHIP 100PF 5%	50V			D910	8-719-988-61	DIODE 1SS355TE-17			

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
D911	8-719-988-61	DIODE 1SS355TE-17				< COIL >	
D912	8-719-988-61	DIODE 1SS355TE-17					
D913	8-719-988-61	DIODE 1SS355TE-17		L901	1-412-002-31	INDUCTOR CHIP 4.7uH	
D914	8-719-988-61	DIODE 1SS355TE-17		L902	1-412-002-31	INDUCTOR CHIP 4.7uH	
D915	8-719-988-61	DIODE 1SS355TE-17		L903	1-412-002-31	INDUCTOR CHIP 4.7uH	
				L904	1-412-002-31	INDUCTOR CHIP 4.7uH	
D916	8-719-988-61	DIODE 1SS355TE-17		L905	1-412-002-31	INDUCTOR CHIP 4.7uH	
D917	8-719-988-61	DIODE 1SS355TE-17					
D918	8-719-988-61	DIODE 1SS355TE-17		L906	1-412-002-31	INDUCTOR CHIP 4.7uH	
D919	8-719-988-61	DIODE 1SS355TE-17		L907	1-412-002-31	INDUCTOR CHIP 4.7uH	
D920	8-719-988-61	DIODE 1SS355TE-17		L908	1-412-002-31	INDUCTOR CHIP 4.7uH	
				L909	1-412-002-31	INDUCTOR CHIP 4.7uH	
D921	8-719-988-61	DIODE 1SS355TE-17		L910	1-412-002-31	INDUCTOR CHIP 4.7uH	
D922	8-719-988-61	DIODE 1SS355TE-17					
D923	8-719-988-61	DIODE 1SS355TE-17		L911	1-412-002-31	INDUCTOR CHIP 4.7uH	
D924	8-719-988-61	DIODE 1SS355TE-17		L912	1-412-002-31	INDUCTOR CHIP 4.7uH	
D925	8-719-988-61	DIODE 1SS355TE-17		L913	1-412-002-31	INDUCTOR CHIP 4.7uH	
				L914	1-412-002-31	INDUCTOR CHIP 4.7uH	
D926	8-719-988-61	DIODE 1SS355TE-17		L915	1-412-002-31	INDUCTOR CHIP 4.7uH	
D927	8-719-988-61	DIODE 1SS355TE-17					
D928	8-719-988-61	DIODE 1SS355TE-17		L916	1-412-002-31	INDUCTOR CHIP 4.7uH	
D929	8-719-988-61	DIODE 1SS355TE-17		L917	1-412-002-31	INDUCTOR CHIP 4.7uH	
D930	8-719-988-61	DIODE 1SS355TE-17		L918	1-412-002-31	INDUCTOR CHIP 4.7uH	
				L919	1-412-002-31	INDUCTOR CHIP 4.7uH	
D931	8-719-988-61	DIODE 1SS355TE-17		L920	1-412-002-31	INDUCTOR CHIP 4.7uH	
D932	8-719-988-61	DIODE 1SS355TE-17					
D933	8-719-988-61	DIODE 1SS355TE-17		L921	1-412-002-31	INDUCTOR CHIP 4.7uH	
D934	8-719-988-61	DIODE 1SS355TE-17		L922	1-412-002-31	INDUCTOR CHIP 4.7uH	
D935	8-719-988-61	DIODE 1SS355TE-17		L923	1-412-002-31	INDUCTOR CHIP 4.7uH	
				L924	1-412-002-31	INDUCTOR CHIP 4.7uH	
D936	8-719-988-61	DIODE 1SS355TE-17		L925	1-412-002-31	INDUCTOR CHIP 4.7uH	
D937	8-719-988-61	DIODE 1SS355TE-17					
D938	8-719-988-61	DIODE 1SS355TE-17		L926	1-412-002-31	INDUCTOR CHIP 4.7uH	
D939	8-719-988-61	DIODE 1SS355TE-17		L927	1-412-002-31	INDUCTOR CHIP 4.7uH	
D940	8-719-988-61	DIODE 1SS355TE-17		L928	1-412-002-31	INDUCTOR CHIP 4.7uH	
				L929	1-412-002-31	INDUCTOR CHIP 4.7uH	
D941	8-719-988-61	DIODE 1SS355TE-17		L930	1-412-002-31	INDUCTOR CHIP 4.7uH	
D942	8-719-988-61	DIODE 1SS355TE-17					
D943	8-719-988-61	DIODE 1SS355TE-17		L931	1-412-002-31	INDUCTOR CHIP 4.7uH	
D944	8-719-988-61	DIODE 1SS355TE-17		L932	1-412-002-31	INDUCTOR CHIP 4.7uH	
D945	8-719-988-61	DIODE 1SS355TE-17				< RESISTOR >	
D946	8-719-988-61	DIODE 1SS355TE-17		R901	1-216-647-11	METAL CHIP 680 0.5% 1/10W	
D947	8-719-988-61	DIODE 1SS355TE-17		R902	1-216-647-11	METAL CHIP 680 0.5% 1/10W	
D948	8-719-988-61	DIODE 1SS355TE-17		R903	1-216-647-11	METAL CHIP 680 0.5% 1/10W	
D949	8-719-988-61	DIODE 1SS355TE-17		R904	1-216-647-11	METAL CHIP 680 0.5% 1/10W	
D950	8-719-988-61	DIODE 1SS355TE-17		R905	1-208-462-61	RES,CHIP 10K 2% 1/10W	
D951	8-719-988-61	DIODE 1SS355TE-17		R906	1-208-462-61	RES,CHIP 10K 2% 1/10W	
D952	8-719-988-61	DIODE 1SS355TE-17		R907	1-208-462-61	RES,CHIP 10K 2% 1/10W	
D953	8-719-988-61	DIODE 1SS355TE-17		R908	1-208-462-61	RES,CHIP 10K 2% 1/10W	
D954	8-719-988-61	DIODE 1SS355TE-17					
D955	8-719-988-61	DIODE 1SS355TE-17				< SWITCH >	
				S901	1-572-044-11	SWITCH, SLIDE (600 Ω)	
D956	8-719-988-61	DIODE 1SS355TE-17		*****			
D957	8-719-988-61	DIODE 1SS355TE-17					
D958	8-719-988-61	DIODE 1SS355TE-17		*	A-4591-201-A	CN3 BOARD, COMPLETE	
D959	8-719-988-61	DIODE 1SS355TE-17				*****	
D960	8-719-988-61	DIODE 1SS355TE-17					
						< CAPACITOR >	
D961	8-719-988-61	DIODE 1SS355TE-17		C301	1-208-462-61	RES,CHIP 10K 2% 1/10W	
D962	8-719-988-61	DIODE 1SS355TE-17		C302	1-208-462-61	RES,CHIP 10K 2% 1/10W	
D963	8-719-988-61	DIODE 1SS355TE-17		C303	1-163-251-11	CERAMIC CHIP 100PF 5% 50V	
D964	8-719-988-61	DIODE 1SS355TE-17		C304	1-163-251-11	CERAMIC CHIP 100PF 5% 50V	
		< JUMPER RESISTOR >		C305	1-163-251-11	CERAMIC CHIP 100PF 5% 50V	
JC901	1-216-295-91	SHORT 0					

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
C306	1-163-251-11	CERAMIC CHIP 100PF 5%	50V			< COIL >	
C307	1-163-251-11	CERAMIC CHIP 100PF 5%	50V				
C308	1-163-251-11	CERAMIC CHIP 100PF 5%	50V				
C309	1-208-462-61	RES,CHIP 10K 2%	1/10W	L301	1-412-002-31	INDUCTOR CHIP 4.7uH	
C310	1-208-462-61	RES,CHIP 10K 2%	1/10W	L302	1-412-002-31	INDUCTOR CHIP 4.7uH	
				L303	1-412-002-31	INDUCTOR CHIP 4.7uH	
C311	1-163-251-11	CERAMIC CHIP 100PF 5%	50V	L304	1-412-002-31	INDUCTOR CHIP 4.7uH	
C312	1-163-251-11	CERAMIC CHIP 100PF 5%	50V	L305	1-412-002-31	INDUCTOR CHIP 4.7uH	
C313	1-163-251-11	CERAMIC CHIP 100PF 5%	50V				
C314	1-163-251-11	CERAMIC CHIP 100PF 5%	50V	L306	1-412-002-31	INDUCTOR CHIP 4.7uH	
C315	1-163-251-11	CERAMIC CHIP 100PF 5%	50V	L307	1-412-002-31	INDUCTOR CHIP 4.7uH	
				L308	1-412-002-31	INDUCTOR CHIP 4.7uH	
C316	1-163-251-11	CERAMIC CHIP 100PF 5%	50V	L309	1-412-002-31	INDUCTOR CHIP 4.7uH	
C317	1-126-514-11	ELECT 22uF 20%	16V	L310	1-412-002-31	INDUCTOR CHIP 4.7uH	
C318	1-126-514-11	ELECT 22uF 20%	16V				
		< CONNECTOR >		L311	1-412-002-31	INDUCTOR CHIP 4.7uH	
* CN301	1-568-862-11	SOCKET, CONNECTOR 19P		L312	1-412-002-31	INDUCTOR CHIP 4.7uH	
		< DIODE >		L313	1-412-002-31	INDUCTOR CHIP 4.7uH	
				L314	1-412-002-31	INDUCTOR CHIP 4.7uH	
D301	8-719-988-61	DIODE 1SS355TE-17		L315	1-412-002-31	INDUCTOR CHIP 4.7uH	
D302	8-719-988-61	DIODE 1SS355TE-17					
D303	8-719-988-61	DIODE 1SS355TE-17		L316	1-412-002-31	INDUCTOR CHIP 4.7uH	
D304	8-719-988-61	DIODE 1SS355TE-17				< TRANSISTOR >	
D305	8-719-988-61	DIODE 1SS355TE-17					
				Q301	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
D306	8-719-988-61	DIODE 1SS355TE-17		Q302	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
D307	8-719-988-61	DIODE 1SS355TE-17		Q303	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
D308	8-719-988-61	DIODE 1SS355TE-17		Q304	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
D309	8-719-988-61	DIODE 1SS355TE-17		Q305	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
D310	8-719-988-61	DIODE 1SS355TE-17					
				Q306	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
D311	8-719-988-61	DIODE 1SS355TE-17		Q307	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
D312	8-719-988-61	DIODE 1SS355TE-17		Q308	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
D313	8-719-988-61	DIODE 1SS355TE-17		Q309	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
D314	8-719-988-61	DIODE 1SS355TE-17		Q310	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
D315	8-719-988-61	DIODE 1SS355TE-17					
				Q311	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
D316	8-719-988-61	DIODE 1SS355TE-17		Q312	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
D317	8-719-988-61	DIODE 1SS355TE-17		Q313	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
D318	8-719-988-61	DIODE 1SS355TE-17		Q314	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
D319	8-719-988-61	DIODE 1SS355TE-17				< RESISTOR >	
D320	8-719-988-61	DIODE 1SS355TE-17					
				R301	1-208-453-61	RES,CHIP 4.7K 2% 1/10W	
D321	8-719-988-61	DIODE 1SS355TE-17		R302	1-208-453-61	RES,CHIP 4.7K 2% 1/10W	
D322	8-719-988-61	DIODE 1SS355TE-17		R303	1-208-453-61	RES,CHIP 4.7K 2% 1/10W	
D323	8-719-988-61	DIODE 1SS355TE-17		R304	1-208-453-61	RES,CHIP 4.7K 2% 1/10W	
D324	8-719-988-61	DIODE 1SS355TE-17		R305	1-208-453-61	RES,CHIP 4.7K 2% 1/10W	
D325	8-719-988-61	DIODE 1SS355TE-17					
				R306	1-208-453-61	RES,CHIP 4.7K 2% 1/10W	
D326	8-719-988-61	DIODE 1SS355TE-17		R307	1-208-453-61	RES,CHIP 4.7K 2% 1/10W	
D327	8-719-988-61	DIODE 1SS355TE-17		R308	1-208-453-61	RES,CHIP 4.7K 2% 1/10W	
D328	8-719-988-61	DIODE 1SS355TE-17		R309	1-208-453-61	RES,CHIP 4.7K 2% 1/10W	
D329	8-719-988-61	DIODE 1SS355TE-17		R310	1-208-453-61	RES,CHIP 4.7K 2% 1/10W	
D330	8-719-988-61	DIODE 1SS355TE-17					
				R311	1-208-453-61	RES,CHIP 4.7K 2% 1/10W	
D331	8-719-988-61	DIODE 1SS355TE-17		R312	1-208-453-61	RES,CHIP 4.7K 2% 1/10W	
D332	8-719-988-61	DIODE 1SS355TE-17		R313	1-208-453-61	RES,CHIP 4.7K 2% 1/10W	
				R314	1-208-453-61	RES,CHIP 4.7K 2% 1/10W	

		< JACK >		* A-4591-205-A	CN4 BOARD, COMPLETE		

J301	1-784-017-11	JACK, PIN 4P (AUX OUTPUT)				< CONNECTOR >	
J302	1-784-017-11	JACK, PIN 4P (RTN IN/PFL OUT/TB OUT)					
J303	1-784-017-11	JACK, PIN 4P (MONITOR OUTPUT)					
J304	1-784-017-11	JACK, PIN 4P (MASTER OUTPUT)					
				* CN801	1-568-873-11	SOCKET, CONNECTOR 31P	
				* CN802	1-568-873-11	SOCKET, CONNECTOR 31P	
					1-764-121-41	SOCKET, (D) SUB CONNECTOR 25P (REMOTE)	
				CN804	1-764-117-41	PLUG, (D) SUB CONNECTOR 15P (VCA)	
				CN805	1-764-121-41	SOCKET, (D) SUB CONNECTOR 25P (A1/A2)	

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
CN806	1-764-121-41	SOCKET, (D) SUB CONNECTOR 25P (A3/A4)				< RESISTOR >	
		< DIODE >					
D801	8-719-988-61	DIODE 1SS355TE-17		R801	1-208-812-11	RES,CHIP 18K 2%	1/10W
D802	8-719-988-61	DIODE 1SS355TE-17		R802	1-208-812-11	RES,CHIP 18K 2%	1/10W
D803	8-719-988-61	DIODE 1SS355TE-17		R803	1-208-812-11	RES,CHIP 18K 2%	1/10W
D804	8-719-988-61	DIODE 1SS355TE-17		R804	1-208-812-11	RES,CHIP 18K 2%	1/10W
D805	8-719-988-61	DIODE 1SS355TE-17		R805	1-208-812-11	RES,CHIP 18K 2%	1/10W
D806	8-719-988-61	DIODE 1SS355TE-17		R806	1-208-812-11	RES,CHIP 18K 2%	1/10W
D807	8-719-988-61	DIODE 1SS355TE-17		R807	1-208-812-11	RES,CHIP 18K 2%	1/10W
D808	8-719-988-61	DIODE 1SS355TE-17		R808	1-208-812-11	RES,CHIP 18K 2%	1/10W
D809	8-719-988-61	DIODE 1SS355TE-17		R809	1-208-812-11	RES,CHIP 18K 2%	1/10W
D810	8-719-988-61	DIODE 1SS355TE-17		R810	1-208-812-11	RES,CHIP 18K 2%	1/10W
D811	8-719-988-61	DIODE 1SS355TE-17		R811	1-208-526-61	RES,CHIP 47K 2%	1/10W
D812	8-719-988-61	DIODE 1SS355TE-17		R812	1-208-526-61	RES,CHIP 47K 2%	1/10W
D813	8-719-988-61	DIODE 1SS355TE-17		R813	1-208-526-61	RES,CHIP 47K 2%	1/10W
D814	8-719-988-61	DIODE 1SS355TE-17		R814	1-208-526-61	RES,CHIP 47K 2%	1/10W
D815	8-719-988-61	DIODE 1SS355TE-17		R815	1-208-526-61	RES,CHIP 47K 2%	1/10W
D816	8-719-988-61	DIODE 1SS355TE-17		R816	1-208-462-61	RES,CHIP 10K 2%	1/10W
D817	8-719-988-61	DIODE 1SS355TE-17		R817	1-208-462-61	RES,CHIP 10K 2%	1/10W
D818	8-719-988-61	DIODE 1SS355TE-17		R818	1-216-635-11	METAL CHIP 220 0.5%	1/10W
D819	8-719-988-61	DIODE 1SS355TE-17		R819	1-208-462-61	RES,CHIP 10K 2%	1/10W
D820	8-719-988-61	DIODE 1SS355TE-17		R820	1-208-462-61	RES,CHIP 10K 2%	1/10W
D821	8-719-988-61	DIODE 1SS355TE-17		R821	1-208-462-61	RES,CHIP 10K 2%	1/10W
D822	8-719-988-61	DIODE 1SS355TE-17		R822	1-208-462-61	RES,CHIP 10K 2%	1/10W
D823	8-719-988-61	DIODE 1SS355TE-17		R823	1-208-462-61	RES,CHIP 10K 2%	1/10W
D824	8-719-988-61	DIODE 1SS355TE-17		R824	1-208-462-61	RES,CHIP 10K 2%	1/10W
D825	8-719-988-61	DIODE 1SS355TE-17		R825	1-208-462-61	RES,CHIP 10K 2%	1/10W
D826	8-719-988-61	DIODE 1SS355TE-17		R826	1-208-462-61	RES,CHIP 10K 2%	1/10W
D828	8-719-988-61	DIODE 1SS355TE-17		R827	1-208-462-61	RES,CHIP 10K 2%	1/10W
D829	8-719-988-61	DIODE 1SS355TE-17		R828	1-208-462-61	RES,CHIP 10K 2%	1/10W
D830	8-719-988-61	DIODE 1SS355TE-17		R829	1-208-462-61	RES,CHIP 10K 2%	1/10W
D831	8-719-988-61	DIODE 1SS355TE-17		R830	1-208-462-61	RES,CHIP 10K 2%	1/10W
D832	8-719-988-61	DIODE 1SS355TE-17		R831	1-208-462-61	RES,CHIP 10K 2%	1/10W
D833	8-719-988-61	DIODE 1SS355TE-17		R832	1-208-462-61	RES,CHIP 10K 2%	1/10W
D834	8-719-988-61	DIODE 1SS355TE-17		R833	1-208-462-61	RES,CHIP 10K 2%	1/10W
D835	8-719-988-61	DIODE 1SS355TE-17		R834	1-208-526-61	RES,CHIP 47K 2%	1/10W
D836	8-719-988-61	DIODE 1SS355TE-17		R835	1-208-526-61	RES,CHIP 47K 2%	1/10W
D837	8-719-988-61	DIODE 1SS355TE-17		R836	1-208-526-61	RES,CHIP 47K 2%	1/10W
D838	8-719-988-61	DIODE 1SS355TE-17		R837	1-208-526-61	RES,CHIP 47K 2%	1/10W
D839	8-719-988-61	DIODE 1SS355TE-17		R838	1-208-526-61	RES,CHIP 47K 2%	1/10W
D840	8-719-988-61	DIODE 1SS355TE-17		R839	1-208-526-61	RES,CHIP 47K 2%	1/10W
D841	8-719-988-61	DIODE 1SS355TE-17		R840	1-208-526-61	RES,CHIP 47K 2%	1/10W
D842	8-719-988-61	DIODE 1SS355TE-17		R841	1-208-526-61	RES,CHIP 47K 2%	1/10W
		< TRANSISTOR >		R842	1-208-526-61	RES,CHIP 47K 2%	1/10W
Q801	8-729-900-52	TRANSISTOR UN2214-TX		R843	1-208-526-61	RES,CHIP 47K 2%	1/10W
Q802	8-729-900-52	TRANSISTOR UN2214-TX		R844	1-208-526-61	RES,CHIP 47K 2%	1/10W
Q803	8-729-900-52	TRANSISTOR UN2214-TX		R845	1-208-526-61	RES,CHIP 47K 2%	1/10W
Q804	8-729-900-52	TRANSISTOR UN2214-TX		R846	1-216-603-11	METAL CHIP 10 0.5%	1/10W
Q805	8-729-900-52	TRANSISTOR UN2214-TX		R847	1-216-603-11	METAL CHIP 10 0.5%	1/10W
Q806	8-729-900-52	TRANSISTOR UN2214-TX		R848	1-216-603-11	METAL CHIP 10 0.5%	1/10W
Q807	8-729-900-52	TRANSISTOR UN2214-TX		R849	1-216-603-11	METAL CHIP 10 0.5%	1/10W
Q808	8-729-900-52	TRANSISTOR UN2214-TX		R850	1-216-603-11	METAL CHIP 10 0.5%	1/10W
Q809	8-729-900-52	TRANSISTOR UN2214-TX				< THERMISTOR >	
Q810	8-729-900-52	TRANSISTOR UN2214-TX		TH101	1-808-964-11	THERMISTOR (POSITIVE)	
				TH201	1-808-964-11	THERMISTOR (POSITIVE)	
				TH301	1-808-964-11	THERMISTOR (POSITIVE)	
				TH401	1-808-964-11	THERMISTOR (POSITIVE)	
				TH501	1-808-964-11	THERMISTOR (POSITIVE)	
				TH601	1-808-964-11	THERMISTOR (POSITIVE)	

Ref. No.	Part No.	Description	Remarks			Ref. No.	Part No.	Description	Remarks			
*	1-674-467-11	HP BOARD				C119	1-136-165-00	FILM	0.1uF	5%	50V	
		*****				C120	1-136-165-00	FILM	0.1uF	5%	50V	
		< CONNECTOR >				C121	1-126-514-11	ELECT	22uF	20%	16V	
*	CN010	1-568-453-11	PIN, CONNECTOR (PC BOARD) 4P				C122	1-126-514-11	ELECT	22uF	20%	16V
							C123	1-130-483-00	MYLAR	0.01uF	5%	50V
		< JACK >				C124	1-106-351-00	MYLAR	2200PF	5%	200V	
J601	1-507-796-71	JACK (PHONES)				C125	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
						C126	1-130-478-00	MYLAR	0.0039uF	5%	50V	
		< COIL >				C127	1-115-871-11	ELECT	1uF	20%	50V	
L601	1-412-002-31	INDUCTOR CHIP	4.7uH				C128	1-136-162-00	FILM	0.056uF	5%	50V
L602	1-412-002-31	INDUCTOR CHIP	4.7uH				C129	1-163-235-11	CERAMIC CHIP	22PF	5%	50V
L603	1-412-002-31	INDUCTOR CHIP	4.7uH				C130	1-115-866-11	ELECT	4.7uF	20%	35V
		< RESISTOR >				C131	1-104-665-11	ELECT	100uF	20%	25V	
R628	1-208-365-61	RES,CHIP	100	2%	1/10W	C132	1-104-665-11	ELECT	100uF	20%	25V	
R629	1-208-365-61	RES,CHIP	100	2%	1/10W	C133	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
R630	1-208-365-61	RES,CHIP	100	2%	1/10W	C134	1-104-665-11	ELECT	100uF	20%	25V	
R631	1-208-365-61	RES,CHIP	100	2%	1/10W	C135	1-126-934-11	ELECT	220uF	20%	10V	
R632	1-208-365-61	RES,CHIP	100	2%	1/10W	C136	1-126-934-11	ELECT	220uF	20%	10V	
R633	1-208-365-61	RES,CHIP	100	2%	1/10W	C137	1-104-665-11	ELECT	100uF	20%	25V	
R634	1-208-365-61	RES,CHIP	100	2%	1/10W	C138	1-163-259-91	CERAMIC CHIP	220PF	5%	50V	
R635	1-208-365-61	RES,CHIP	100	2%	1/10W	C180	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
R636	1-208-365-61	RES,CHIP	100	2%	1/10W	C181	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
R637	1-208-365-61	RES,CHIP	100	2%	1/10W	C182	1-107-713-11	ELECT	4.7uF	20%	50V	
R638	1-208-365-61	RES,CHIP	100	2%	1/10W	C184	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
R639	1-208-365-61	RES,CHIP	100	2%	1/10W	C185	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	

*	A-4591-204-A	INPUT BOARD, COMPLETE				C202	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
		*****				C203	1-128-551-11	ELECT	22uF	20%	63V	
	8-719-108-12	DIODE RD9.1EW-T1				C204	1-126-514-11	ELECT	22uF	20%	16V	
		< BUS BAR >				C205	1-128-551-11	ELECT	22uF	20%	63V	
*	BB001	1-560-242-81	BUS BAR 8P				C206	1-126-514-11	ELECT	22uF	20%	16V
							C207	1-163-133-00	CERAMIC CHIP	470PF	5%	50V
		< CAPACITOR >				C208	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C001	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	C209	1-126-514-11	ELECT	22uF	20%	16V	
C002	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	C210	1-126-514-11	ELECT	22uF	20%	16V	
C003	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	C211	1-126-934-11	ELECT	220uF	20%	10V	
C004	1-126-934-11	ELECT	220uF	20%	10V	C212	1-163-133-00	CERAMIC CHIP	470PF	5%	50V	
C101	1-128-576-11	ELECT	100uF	20%	63V	C215	1-126-514-11	ELECT	22uF	20%	16V	
C102	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	C216	1-104-665-11	ELECT	100uF	20%	25V	
C103	1-128-551-11	ELECT	22uF	20%	63V	C217	1-104-665-11	ELECT	100uF	20%	25V	
C104	1-126-514-11	ELECT	22uF	20%	16V	C218	1-126-514-11	ELECT	22uF	20%	16V	
C105	1-128-551-11	ELECT	22uF	20%	63V	C219	1-136-165-00	FILM	0.1uF	5%	50V	
C106	1-126-514-11	ELECT	22uF	20%	16V	C220	1-136-165-00	FILM	0.1uF	5%	50V	
C107	1-163-133-00	CERAMIC CHIP	470PF	5%	50V	C221	1-126-514-11	ELECT	22uF	20%	16V	
C108	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	C222	1-126-514-11	ELECT	22uF	20%	16V	
C109	1-126-514-11	ELECT	22uF	20%	16V	C223	1-130-483-00	MYLAR	0.01uF	5%	50V	
C110	1-126-514-11	ELECT	22uF	20%	16V	C224	1-106-351-00	MYLAR	2200PF	5%	200V	
C111	1-126-934-11	ELECT	220uF	20%	10V	C225	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
C112	1-163-133-00	CERAMIC CHIP	470PF	5%	50V	C226	1-130-478-00	MYLAR	0.0039uF	5%	50V	
C115	1-126-514-11	ELECT	22uF	20%	16V	C227	1-115-871-11	ELECT	1uF	20%	50V	
C116	1-104-665-11	ELECT	100uF	20%	25V	C228	1-136-162-00	FILM	0.056uF	5%	50V	
C117	1-104-665-11	ELECT	100uF	20%	25V	C229	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
C118	1-126-514-11	ELECT	22uF	20%	16V	C230	1-115-866-11	ELECT	4.7uF	20%	35V	
						C231	1-104-665-11	ELECT	100uF	20%	25V	
						C232	1-104-665-11	ELECT	100uF	20%	25V	
						C233	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
						C234	1-104-665-11	ELECT	100uF	20%	25V	
						C235	1-126-934-11	ELECT	220uF	20%	10V	
						C236	1-126-934-11	ELECT	220uF	20%	10V	
						C237	1-104-665-11	ELECT	100uF	20%	25V	
						C238	1-163-259-91	CERAMIC CHIP	220PF	5%	50V	

INPUT

Ref. No.	Part No.	Description	Remarks			
C280	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
C281	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
C283	1-107-713-11	ELECT	4.7uF	20%	50V	
C284	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
C285	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
C302	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C303	1-128-551-11	ELECT	22uF	20%	63V	
C304	1-126-514-11	ELECT	22uF	20%	16V	
C305	1-128-551-11	ELECT	22uF	20%	63V	
C306	1-126-514-11	ELECT	22uF	20%	16V	
C307	1-163-133-00	CERAMIC CHIP	470PF	5%	50V	
C308	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C309	1-126-514-11	ELECT	22uF	20%	16V	
C310	1-126-514-11	ELECT	22uF	20%	16V	
C311	1-126-934-11	ELECT	220uF	20%	10V	
C312	1-163-133-00	CERAMIC CHIP	470PF	5%	50V	
C315	1-126-514-11	ELECT	22uF	20%	16V	
C316	1-104-665-11	ELECT	100uF	20%	25V	
C317	1-104-665-11	ELECT	100uF	20%	25V	
C318	1-126-514-11	ELECT	22uF	20%	16V	
C319	1-136-165-00	FILM	0.1uF	5%	50V	
C320	1-136-165-00	FILM	0.1uF	5%	50V	
C321	1-126-514-11	ELECT	22uF	20%	16V	
C322	1-126-514-11	ELECT	22uF	20%	16V	
C323	1-130-483-00	MYLAR	0.01uF	5%	50V	
C324	1-106-351-00	MYLAR	2200PF	5%	200V	
C325	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
C326	1-130-478-00	MYLAR	0.0039uF	5%	50V	
C327	1-115-871-11	ELECT	1uF	20%	50V	
C328	1-136-162-00	FILM	0.056uF	5%	50V	
C329	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
C330	1-115-866-11	ELECT	4.7uF	20%	35V	
C331	1-104-665-11	ELECT	100uF	20%	25V	
C332	1-104-665-11	ELECT	100uF	20%	25V	
C333	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
C334	1-104-665-11	ELECT	100uF	20%	25V	
C335	1-126-934-11	ELECT	220uF	20%	10V	
C336	1-126-934-11	ELECT	220uF	20%	10V	
C337	1-104-665-11	ELECT	100uF	20%	25V	
C338	1-163-259-91	CERAMIC CHIP	220PF	5%	50V	
C380	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
C381	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
C383	1-107-713-11	ELECT	4.7uF	20%	50V	
C384	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
C385	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
C402	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C403	1-128-551-11	ELECT	22uF	20%	63V	
C404	1-126-514-11	ELECT	22uF	20%	16V	
C405	1-128-551-11	ELECT	22uF	20%	63V	
C406	1-126-514-11	ELECT	22uF	20%	16V	
C407	1-163-133-00	CERAMIC CHIP	470PF	5%	50V	
C408	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C409	1-126-514-11	ELECT	22uF	20%	16V	
C410	1-126-514-11	ELECT	22uF	20%	16V	
C411	1-126-934-11	ELECT	220uF	20%	10V	
C412	1-163-133-00	CERAMIC CHIP	470PF	5%	50V	
C415	1-126-514-11	ELECT	22uF	20%	16V	
C416	1-104-665-11	ELECT	100uF	20%	25V	
C417	1-104-665-11	ELECT	100uF	20%	25V	
C418	1-126-514-11	ELECT	22uF	20%	16V	

Ref. No.	Part No.	Description	Remarks			
C419	1-136-165-00	FILM	0.1uF	5%	50V	
C420	1-136-165-00	FILM	0.1uF	5%	50V	
C421	1-126-514-11	ELECT	22uF	20%	16V	
C422	1-126-514-11	ELECT	22uF	20%	16V	
C423	1-130-483-00	MYLAR	0.01uF	5%	50V	
C424	1-106-351-00	MYLAR	2200PF	5%	200V	
C425	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
C426	1-130-478-00	MYLAR	0.0039uF	5%	50V	
C427	1-115-871-11	ELECT	1uF	20%	50V	
C428	1-136-162-00	FILM	0.056uF	5%	50V	
C429	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
C430	1-115-866-11	ELECT	4.7uF	20%	35V	
C431	1-104-665-11	ELECT	100uF	20%	25V	
C432	1-104-665-11	ELECT	100uF	20%	25V	
C433	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
C434	1-104-665-11	ELECT	100uF	20%	25V	
C435	1-126-934-11	ELECT	220uF	20%	10V	
C436	1-126-934-11	ELECT	220uF	20%	10V	
C437	1-104-665-11	ELECT	100uF	20%	25V	
C438	1-163-259-91	CERAMIC CHIP	220PF	5%	50V	
C480	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
C481	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
C483	1-107-713-11	ELECT	4.7uF	20%	50V	
C484	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
C485	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
C501	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C502	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C503	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C504	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C505	1-126-514-11	ELECT	22uF	20%	16V	
C506	1-126-514-11	ELECT	22uF	20%	16V	
C507	1-126-514-11	ELECT	22uF	20%	16V	
C508	1-126-514-11	ELECT	22uF	20%	16V	
C513	1-104-665-11	ELECT	100uF	20%	25V	
C514	1-104-665-11	ELECT	100uF	20%	25V	
C515	1-126-514-11	ELECT	22uF	20%	16V	
C516	1-126-514-11	ELECT	22uF	20%	16V	
C517	1-136-165-00	FILM	0.1uF	5%	50V	
C518	1-136-165-00	FILM	0.1uF	5%	50V	
C519	1-136-165-00	FILM	0.1uF	5%	50V	
C520	1-136-165-00	FILM	0.1uF	5%	50V	
C521	1-126-514-11	ELECT	22uF	20%	16V	
C522	1-126-514-11	ELECT	22uF	20%	16V	
C523	1-130-483-00	MYLAR	0.01uF	5%	50V	
C524	1-130-483-00	MYLAR	0.01uF	5%	50V	
C525	1-106-351-00	MYLAR	2200PF	5%	200V	
C526	1-106-351-00	MYLAR	2200PF	5%	200V	
C527	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
C528	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
C529	1-130-478-00	MYLAR	0.0039uF	5%	50V	
C530	1-130-478-00	MYLAR	0.0039uF	5%	50V	
C531	1-115-871-11	ELECT	1uF	20%	50V	
C532	1-115-871-11	ELECT	1uF	20%	50V	
C533	1-136-162-00	FILM	0.056uF	5%	50V	
C534	1-136-162-00	FILM	0.056uF	5%	50V	
C535	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
C536	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
C537	1-115-866-11	ELECT	4.7uF	20%	35V	
C538	1-115-866-11	ELECT	4.7uF	20%	35V	
C541	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	

Ref. No.	Part No.	Description	Remarks			Ref. No.	Part No.	Description	Remarks					
C542	1-126-934-11	ELECT	220uF	20%	10V	C683	1-107-713-11	ELECT	4.7uF	20%	50V			
C543	1-126-934-11	ELECT	220uF	20%	10V	C684	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V			
C544	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	C685	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V			
C545	1-104-665-11	ELECT	100uF	20%	25V	< CONNECTOR >								
C546	1-126-934-11	ELECT	220uF	20%	10V	CN001	1-568-802-11	SOCKET, CONNECTOR 19P						
C547	1-104-665-11	ELECT	100uF	20%	25V	CN002	1-568-802-11	SOCKET, CONNECTOR 19P						
C548	1-126-934-11	ELECT	220uF	20%	10V	* CN003	1-564-521-11	PLUG, CONNECTOR 6P						
C549	1-163-259-91	CERAMIC CHIP	220PF	5%	50V	CN004	1-569-814-11	CONNECTOR, BOARD TO BOARD 21P						
C550	1-163-259-91	CERAMIC CHIP	220PF	5%	50V	* CN005	1-568-845-11	SOCKET, CONNECTOR 31P						
C580	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	< DIODE >								
C581	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	D001	8-719-988-61	DIODE 1SS355TE-17						
C583	1-107-713-11	ELECT	4.7uF	20%	50V	D002	8-719-988-61	DIODE 1SS355TE-17						
C584	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	D003	8-719-988-61	DIODE 1SS355TE-17						
C585	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	D004	8-719-988-61	DIODE 1SS355TE-17						
C601	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	D005	8-719-988-61	DIODE 1SS355TE-17						
C602	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	D006	8-719-988-61	DIODE 1SS355TE-17						
C603	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	D101	8-719-988-61	DIODE 1SS355TE-17						
C604	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	D102	8-719-988-61	DIODE 1SS355TE-17						
C605	1-126-514-11	ELECT	22uF	20%	16V	D103	8-719-313-43	DIODE SEL6210S-TH10 (PEAK : CH1)						
C606	1-126-514-11	ELECT	22uF	20%	16V	D104	8-719-988-61	DIODE 1SS355TE-17						
C607	1-126-514-11	ELECT	22uF	20%	16V	D105	8-719-988-61	DIODE 1SS355TE-17						
C608	1-126-514-11	ELECT	22uF	20%	16V	D180	8-719-422-80	DIODE MA8075-H-TX						
C613	1-104-665-11	ELECT	100uF	20%	25V	D181	8-719-988-61	DIODE 1SS355TE-17						
C614	1-104-665-11	ELECT	100uF	20%	25V	D182	8-719-988-61	DIODE 1SS355TE-17						
C615	1-126-514-11	ELECT	22uF	20%	16V	D183	8-719-988-61	DIODE 1SS355TE-17						
C616	1-126-514-11	ELECT	22uF	20%	16V	D184	8-719-988-61	DIODE 1SS355TE-17						
C617	1-136-165-00	FILM	0.1uF	5%	50V	D201	8-719-988-61	DIODE 1SS355TE-17						
C618	1-136-165-00	FILM	0.1uF	5%	50V	D202	8-719-988-61	DIODE 1SS355TE-17						
C619	1-136-165-00	FILM	0.1uF	5%	50V	D203	8-719-313-43	DIODE SEL6210S-TH10 (PEAK : CH2)						
C620	1-136-165-00	FILM	0.1uF	5%	50V	D204	8-719-988-61	DIODE 1SS355TE-17						
C621	1-126-514-11	ELECT	22uF	20%	16V	D205	8-719-988-61	DIODE 1SS355TE-17						
C622	1-126-514-11	ELECT	22uF	20%	16V	D280	8-719-422-80	DIODE MA8075-H-TX						
C623	1-130-483-00	MYLAR	0.01uF	5%	50V	D281	8-719-988-61	DIODE 1SS355TE-17						
C624	1-130-483-00	MYLAR	0.01uF	5%	50V	D282	8-719-988-61	DIODE 1SS355TE-17						
C625	1-106-351-00	MYLAR	2200PF	5%	200V	D283	8-719-988-61	DIODE 1SS355TE-17						
C626	1-106-351-00	MYLAR	2200PF	5%	200V	D284	8-719-988-61	DIODE 1SS355TE-17						
C627	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	D301	8-719-988-61	DIODE 1SS355TE-17						
C628	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	D302	8-719-988-61	DIODE 1SS355TE-17						
C629	1-130-478-00	MYLAR	0.0039uF	5%	50V	D303	8-719-313-43	DIODE SEL6210S-TH10 (PEAK : CH3)						
C630	1-130-478-00	MYLAR	0.0039uF	5%	50V	D304	8-719-988-61	DIODE 1SS355TE-17						
C631	1-115-871-11	ELECT	1uF	20%	50V	D305	8-719-988-61	DIODE 1SS355TE-17						
C632	1-115-871-11	ELECT	1uF	20%	50V	D380	8-719-422-80	DIODE MA8075-H-TX						
C633	1-136-162-00	FILM	0.056uF	5%	50V	D381	8-719-988-61	DIODE 1SS355TE-17						
C634	1-136-162-00	FILM	0.056uF	5%	50V	D382	8-719-988-61	DIODE 1SS355TE-17						
C635	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	D383	8-719-988-61	DIODE 1SS355TE-17						
C636	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	D384	8-719-988-61	DIODE 1SS355TE-17						
C637	1-115-866-11	ELECT	4.7uF	20%	35V	D401	8-719-988-61	DIODE 1SS355TE-17						
C638	1-115-866-11	ELECT	4.7uF	20%	35V	D402	8-719-988-61	DIODE 1SS355TE-17						
C641	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	D403	8-719-313-43	DIODE SEL6210S-TH10 (PEAK : CH4)						
C642	1-126-934-11	ELECT	220uF	20%	10V	D404	8-719-988-61	DIODE 1SS355TE-17						
C643	1-126-934-11	ELECT	220uF	20%	10V	D405	8-719-988-61	DIODE 1SS355TE-17						
C644	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	D480	8-719-422-80	DIODE MA8075-H-TX						
C645	1-104-665-11	ELECT	100uF	20%	25V	D481	8-719-988-61	DIODE 1SS355TE-17						
C646	1-126-934-11	ELECT	220uF	20%	10V	D482	8-719-988-61	DIODE 1SS355TE-17						
C647	1-104-665-11	ELECT	100uF	20%	25V	D483	8-719-988-61	DIODE 1SS355TE-17						
C648	1-126-934-11	ELECT	220uF	20%	10V									
C649	1-163-259-91	CERAMIC CHIP	220PF	5%	50V									
C650	1-163-259-91	CERAMIC CHIP	220PF	5%	50V									
C680	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V									
C681	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V									

INPUT

Ref. No.	Part No.	Description	Remarks
D484	8-719-988-61	DIODE 1SS355TE-17	
D501	8-719-313-43	DIODE SEL6210S-TH10 (PEAK : ST1)	
D502	8-719-988-61	DIODE 1SS355TE-17	
D503	8-719-988-61	DIODE 1SS355TE-17	
D504	8-719-988-61	DIODE 1SS355TE-17	
D580	8-719-422-80	DIODE MA8075-H-TX	
D581	8-719-988-61	DIODE 1SS355TE-17	
D582	8-719-988-61	DIODE 1SS355TE-17	
D583	8-719-988-61	DIODE 1SS355TE-17	
D584	8-719-988-61	DIODE 1SS355TE-17	
D601	8-719-313-43	DIODE SEL6210S-TH10 (PEAK : ST2)	
D602	8-719-988-61	DIODE 1SS355TE-17	
D603	8-719-988-61	DIODE 1SS355TE-17	
D604	8-719-988-61	DIODE 1SS355TE-17	
D680	8-719-422-80	DIODE MA8075-H-TX	
D681	8-719-988-61	DIODE 1SS355TE-17	
D682	8-719-988-61	DIODE 1SS355TE-17	
D683	8-719-988-61	DIODE 1SS355TE-17	
D684	8-719-988-61	DIODE 1SS355TE-17	
< IC >			
IC001	8-759-240-87	IC TC74HCT157AF(EL)	
IC002	8-759-240-65	IC TC74HCT139AF(EL)	
IC003	8-759-700-80	IC NJM2058M-T1	
IC004	8-759-700-80	IC NJM2058M-T1	
IC005	8-759-240-65	IC TC74HCT139AF(EL)	
IC101	8-759-711-85	IC NJM4580E-D(T1)	
IC102	8-759-711-85	IC NJM4580E-D(T1)	
IC103	8-759-711-85	IC NJM4580E-D(T1)	
IC104	8-759-592-78	IC THAT2180LB	
IC105	8-759-711-85	IC NJM4580E-D(T1)	
IC180	8-759-700-80	IC NJM2058M-T1	
IC181	8-759-230-99	IC TC74HC4053AF-TP1	
IC201	8-759-711-85	IC NJM4580E-D(T1)	
IC202	8-759-711-85	IC NJM4580E-D(T1)	
IC203	8-759-711-85	IC NJM4580E-D(T1)	
IC204	8-759-592-78	IC THAT2180LB	
IC205	8-759-711-85	IC NJM4580E-D(T1)	
IC281	8-759-230-99	IC TC74HC4053AF-TP1	
IC301	8-759-711-85	IC NJM4580E-D(T1)	
IC302	8-759-711-85	IC NJM4580E-D(T1)	
IC303	8-759-711-85	IC NJM4580E-D(T1)	
IC304	8-759-592-78	IC THAT2180LB	
IC305	8-759-711-85	IC NJM4580E-D(T1)	
IC380	8-759-700-80	IC NJM2058M-T1	
IC381	8-759-230-99	IC TC74HC4053AF-TP1	
IC401	8-759-711-85	IC NJM4580E-D(T1)	
IC402	8-759-711-85	IC NJM4580E-D(T1)	
IC403	8-759-711-85	IC NJM4580E-D(T1)	
IC404	8-759-592-78	IC THAT2180LB	
IC405	8-759-711-85	IC NJM4580E-D(T1)	
IC481	8-759-230-99	IC TC74HC4053AF-TP1	
IC501	8-759-711-85	IC NJM4580E-D(T1)	
IC502	8-759-711-85	IC NJM4580E-D(T1)	
IC503	8-759-711-85	IC NJM4580E-D(T1)	
IC504	8-759-711-85	IC NJM4580E-D(T1)	
IC505	8-759-711-85	IC NJM4580E-D(T1)	
IC506	8-759-592-78	IC THAT2180LB	
IC507	8-759-592-78	IC THAT2180LB	
IC509	8-759-711-85	IC NJM4580E-D(T1)	
IC580	8-759-700-80	IC NJM2058M-T1	

Ref. No.	Part No.	Description	Remarks
IC581	8-759-230-99	IC TC74HC4053AF-TP1	
IC601	8-759-711-85	IC NJM4580E-D(T1)	
IC602	8-759-711-85	IC NJM4580E-D(T1)	
IC603	8-759-711-85	IC NJM4580E-D(T1)	
IC604	8-759-711-85	IC NJM4580E-D(T1)	
IC605	8-759-711-85	IC NJM4580E-D(T1)	
IC606	8-759-592-78	IC THAT2180LB	
IC607	8-759-592-78	IC THAT2180LB	
IC609	8-759-711-85	IC NJM4580E-D(T1)	
IC681	8-759-230-99	IC TC74HC4053AF-TP1	
< TRANSISTOR >			
Q101	8-729-354-52	TRANSISTOR 2SC2545-ETZ	
Q102	8-729-354-52	TRANSISTOR 2SC2545-ETZ	
Q103	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
Q104	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
Q201	8-729-354-52	TRANSISTOR 2SC2545-ETZ	
Q202	8-729-354-52	TRANSISTOR 2SC2545-ETZ	
Q203	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
Q204	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
Q301	8-729-354-52	TRANSISTOR 2SC2545-ETZ	
Q302	8-729-354-52	TRANSISTOR 2SC2545-ETZ	
Q303	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
Q304	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
Q401	8-729-354-52	TRANSISTOR 2SC2545-ETZ	
Q402	8-729-354-52	TRANSISTOR 2SC2545-ETZ	
Q403	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
Q404	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
Q501	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
Q502	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
Q601	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
Q602	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
< RESISTOR >			
R001	1-208-534-61	RES,CHIP 100K 2% 1/10W	
R002	1-208-784-11	RES,CHIP 1.2K 2% 1/10W	
R003	1-208-462-61	RES,CHIP 10K 2% 1/10W	
R101	1-216-671-11	METAL CHIP 6.8K 0.5% 1/10W	
R102	1-208-534-61	RES,CHIP 100K 2% 1/10W	
R103	1-216-671-11	METAL CHIP 6.8K 0.5% 1/10W	
R104	1-208-534-61	RES,CHIP 100K 2% 1/10W	
R105	1-208-534-61	RES,CHIP 100K 2% 1/10W	
R106	1-216-603-11	METAL CHIP 10 0.5% 1/10W	
R107	1-208-522-61	RES,CHIP 33K 2% 1/10W	
R108	1-216-603-11	METAL CHIP 10 0.5% 1/10W	
R109	1-208-522-61	RES,CHIP 33K 2% 1/10W	
R110	1-208-800-11	RES,CHIP 5.6K 2% 1/10W	
R111	1-208-449-61	RES,CHIP 3.3K 2% 1/10W	
R112	1-216-659-11	METAL CHIP 2.2K 0.5% 1/10W	
R113	1-216-671-11	METAL CHIP 6.8K 0.5% 1/10W	
R114	1-208-800-11	RES,CHIP 5.6K 2% 1/10W	
R115	1-208-800-11	RES,CHIP 5.6K 2% 1/10W	
R116	1-216-659-11	METAL CHIP 2.2K 0.5% 1/10W	
R117	1-208-774-11	RES,CHIP 470 2% 1/10W	
R118	1-216-613-11	METAL CHIP 27 0.5% 1/10W	
R119	1-216-659-11	METAL CHIP 2.2K 0.5% 1/10W	
R120	1-216-671-11	METAL CHIP 6.8K 0.5% 1/10W	
R121	1-208-784-11	RES,CHIP 1.2K 2% 1/10W	
R122	1-208-784-11	RES,CHIP 1.2K 2% 1/10W	

Ref. No.	Part No.	Description			Remarks	Ref. No.	Part No.	Description			Remarks
R123	1-208-800-11	RES,CHIP	5.6K	2%	1/10W	R206	1-216-603-11	METAL CHIP	10	0.5%	1/10W
R124	1-216-677-11	METAL CHIP	12K	0.5%	1/10W	R207	1-208-522-61	RES,CHIP	33K	2%	1/10W
R125	1-208-812-11	RES,CHIP	18K	2%	1/10W	R208	1-216-603-11	METAL CHIP	10	0.5%	1/10W
R126	1-216-613-11	METAL CHIP	27	0.5%	1/10W	R209	1-208-522-61	RES,CHIP	33K	2%	1/10W
R127	1-208-462-61	RES,CHIP	10K	2%	1/10W	R210	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R128	1-208-462-61	RES,CHIP	10K	2%	1/10W	R211	1-208-449-61	RES,CHIP	3.3K	2%	1/10W
R129	1-216-677-11	METAL CHIP	12K	0.5%	1/10W	R212	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W
R130	1-208-812-11	RES,CHIP	18K	2%	1/10W	R213	1-216-671-11	METAL CHIP	6.8K	0.5%	1/10W
R131	1-208-534-61	RES,CHIP	100K	2%	1/10W	R214	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R132	1-208-534-61	RES,CHIP	100K	2%	1/10W	R215	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R133	1-208-534-61	RES,CHIP	100K	2%	1/10W	R216	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W
R134	1-208-462-61	RES,CHIP	10K	2%	1/10W	R217	1-208-774-11	RES,CHIP	470	2%	1/10W
R135	1-208-518-61	RES,CHIP	22K	2%	1/10W	R218	1-216-613-11	METAL CHIP	27	0.5%	1/10W
R136	1-208-534-61	RES,CHIP	100K	2%	1/10W	R219	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W
R137	1-208-534-61	RES,CHIP	100K	2%	1/10W	R220	1-216-671-11	METAL CHIP	6.8K	0.5%	1/10W
R138	1-208-526-61	RES,CHIP	47K	2%	1/10W	R221	1-208-784-11	RES,CHIP	1.2K	2%	1/10W
R139	1-208-462-61	RES,CHIP	10K	2%	1/10W	R222	1-208-784-11	RES,CHIP	1.2K	2%	1/10W
R140	1-208-810-11	RES,CHIP	15K	2%	1/10W	R223	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R141	1-216-678-11	METAL CHIP	13K	0.5%	1/10W	R224	1-216-677-11	METAL CHIP	12K	0.5%	1/10W
R142	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W	R225	1-208-812-11	RES,CHIP	18K	2%	1/10W
R143	1-208-462-61	RES,CHIP	10K	2%	1/10W	R226	1-216-613-11	METAL CHIP	27	0.5%	1/10W
R144	1-208-534-61	RES,CHIP	100K	2%	1/10W	R227	1-208-462-61	RES,CHIP	10K	2%	1/10W
R145	1-208-462-61	RES,CHIP	10K	2%	1/10W	R228	1-208-462-61	RES,CHIP	10K	2%	1/10W
R146	1-208-810-11	RES,CHIP	15K	2%	1/10W	R229	1-216-677-11	METAL CHIP	12K	0.5%	1/10W
R147	1-208-810-11	RES,CHIP	15K	2%	1/10W	R230	1-208-812-11	RES,CHIP	18K	2%	1/10W
R148	1-216-676-11	METAL CHIP	11K	0.5%	1/10W	R231	1-208-534-61	RES,CHIP	100K	2%	1/10W
R149	1-216-676-11	METAL CHIP	11K	0.5%	1/10W	R232	1-208-534-61	RES,CHIP	100K	2%	1/10W
R150	1-208-462-61	RES,CHIP	10K	2%	1/10W	R233	1-208-534-61	RES,CHIP	100K	2%	1/10W
R151	1-208-518-61	RES,CHIP	22K	2%	1/10W	R234	1-208-462-61	RES,CHIP	10K	2%	1/10W
R152	1-208-453-61	RES,CHIP	4.7K	2%	1/10W	R235	1-208-518-61	RES,CHIP	22K	2%	1/10W
R153	1-208-518-61	RES,CHIP	22K	2%	1/10W	R236	1-208-534-61	RES,CHIP	100K	2%	1/10W
R154	1-208-518-61	RES,CHIP	22K	2%	1/10W	R237	1-208-534-61	RES,CHIP	100K	2%	1/10W
R155	1-208-518-61	RES,CHIP	22K	2%	1/10W	R238	1-208-526-61	RES,CHIP	47K	2%	1/10W
R156	1-208-534-61	RES,CHIP	100K	2%	1/10W	R239	1-208-462-61	RES,CHIP	10K	2%	1/10W
R157	1-208-462-61	RES,CHIP	10K	2%	1/10W	R240	1-208-810-11	RES,CHIP	15K	2%	1/10W
R158	1-208-462-61	RES,CHIP	10K	2%	1/10W	R241	1-216-678-11	METAL CHIP	13K	0.5%	1/10W
R159	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W	R242	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R160	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W	R243	1-208-462-61	RES,CHIP	10K	2%	1/10W
R161	1-216-648-11	METAL CHIP	750	0.5%	1/10W	R244	1-208-534-61	RES,CHIP	100K	2%	1/10W
R162	1-216-648-11	METAL CHIP	750	0.5%	1/10W	R245	1-208-462-61	RES,CHIP	10K	2%	1/10W
R163	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W	R246	1-208-810-11	RES,CHIP	15K	2%	1/10W
R164	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W	R247	1-208-810-11	RES,CHIP	15K	2%	1/10W
R165	1-208-453-61	RES,CHIP	4.7K	2%	1/10W	R248	1-216-676-11	METAL CHIP	11K	0.5%	1/10W
R180	1-208-800-11	RES,CHIP	5.6K	2%	1/10W	R249	1-216-676-11	METAL CHIP	11K	0.5%	1/10W
R181	1-208-518-61	RES,CHIP	22K	2%	1/10W	R250	1-208-462-61	RES,CHIP	10K	2%	1/10W
R182	1-216-689-11	METAL CHIP	39K	0.5%	1/10W	R251	1-208-518-61	RES,CHIP	22K	2%	1/10W
R183	1-216-689-11	METAL CHIP	39K	0.5%	1/10W	R252	1-208-453-61	RES,CHIP	4.7K	2%	1/10W
R184	1-218-760-11	RES,CHIP	220K	2%	1/10W	R253	1-208-518-61	RES,CHIP	22K	2%	1/10W
R185	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W	R254	1-208-518-61	RES,CHIP	22K	2%	1/10W
R186	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W	R255	1-208-518-61	RES,CHIP	22K	2%	1/10W
R187	1-208-810-11	RES,CHIP	15K	2%	1/10W	R256	1-208-534-61	RES,CHIP	100K	2%	1/10W
R188	1-208-518-61	RES,CHIP	22K	2%	1/10W	R257	1-208-462-61	RES,CHIP	10K	2%	1/10W
R189	1-208-526-61	RES,CHIP	47K	2%	1/10W	R258	1-208-462-61	RES,CHIP	10K	2%	1/10W
R193	1-208-812-11	RES,CHIP	18K	2%	1/10W	R259	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R194	1-208-534-61	RES,CHIP	100K	2%	1/10W	R260	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R201	1-216-671-11	METAL CHIP	6.8K	0.5%	1/10W	R261	1-216-648-11	METAL CHIP	750	0.5%	1/10W
R202	1-208-534-61	RES,CHIP	100K	2%	1/10W	R262	1-216-648-11	METAL CHIP	750	0.5%	1/10W
R203	1-216-671-11	METAL CHIP	6.8K	0.5%	1/10W	R263	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R204	1-208-534-61	RES,CHIP	100K	2%	1/10W	R264	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R205	1-208-534-61	RES,CHIP	100K	2%	1/10W	R265	1-208-453-61	RES,CHIP	4.7K	2%	1/10W

INPUT

Ref. No.	Part No.	Description			Remarks
R280	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R281	1-208-518-61	RES,CHIP	22K	2%	1/10W
R282	1-216-689-11	METAL CHIP	39K	0.5%	1/10W
R283	1-216-689-11	METAL CHIP	39K	0.5%	1/10W
R284	1-218-760-11	RES,CHIP	220K	2%	1/10W
R285	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R286	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R287	1-208-810-11	RES,CHIP	15K	2%	1/10W
R288	1-208-518-61	RES,CHIP	22K	2%	1/10W
R289	1-208-526-61	RES,CHIP	47K	2%	1/10W
R293	1-208-812-11	RES,CHIP	18K	2%	1/10W
R294	1-208-534-61	RES,CHIP	100K	2%	1/10W
R301	1-216-671-11	METAL CHIP	6.8K	0.5%	1/10W
R302	1-208-534-61	RES,CHIP	100K	2%	1/10W
R303	1-216-671-11	METAL CHIP	6.8K	0.5%	1/10W
R304	1-208-534-61	RES,CHIP	100K	2%	1/10W
R305	1-208-534-61	RES,CHIP	100K	2%	1/10W
R306	1-216-603-11	METAL CHIP	10	0.5%	1/10W
R307	1-208-522-61	RES,CHIP	33K	2%	1/10W
R308	1-216-603-11	METAL CHIP	10	0.5%	1/10W
R309	1-208-522-61	RES,CHIP	33K	2%	1/10W
R310	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R311	1-208-449-61	RES,CHIP	3.3K	2%	1/10W
R312	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W
R313	1-216-671-11	METAL CHIP	6.8K	0.5%	1/10W
R314	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R315	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R316	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W
R317	1-208-774-11	RES,CHIP	470	2%	1/10W
R318	1-216-613-11	METAL CHIP	27	0.5%	1/10W
R319	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W
R320	1-216-671-11	METAL CHIP	6.8K	0.5%	1/10W
R321	1-208-784-11	RES,CHIP	1.2K	2%	1/10W
R322	1-208-784-11	RES,CHIP	1.2K	2%	1/10W
R323	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R324	1-216-677-11	METAL CHIP	12K	0.5%	1/10W
R325	1-208-812-11	RES,CHIP	18K	2%	1/10W
R326	1-216-613-11	METAL CHIP	27	0.5%	1/10W
R327	1-208-462-61	RES,CHIP	10K	2%	1/10W
R328	1-208-462-61	RES,CHIP	10K	2%	1/10W
R329	1-216-677-11	METAL CHIP	12K	0.5%	1/10W
R330	1-208-812-11	RES,CHIP	18K	2%	1/10W
R331	1-208-534-61	RES,CHIP	100K	2%	1/10W
R332	1-208-534-61	RES,CHIP	100K	2%	1/10W
R333	1-208-534-61	RES,CHIP	100K	2%	1/10W
R334	1-208-462-61	RES,CHIP	10K	2%	1/10W
R335	1-208-518-61	RES,CHIP	22K	2%	1/10W
R336	1-208-534-61	RES,CHIP	100K	2%	1/10W
R337	1-208-534-61	RES,CHIP	100K	2%	1/10W
R338	1-208-526-61	RES,CHIP	47K	2%	1/10W
R339	1-208-462-61	RES,CHIP	10K	2%	1/10W
R340	1-208-810-11	RES,CHIP	15K	2%	1/10W
R341	1-216-678-11	METAL CHIP	13K	0.5%	1/10W
R342	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R343	1-208-462-61	RES,CHIP	10K	2%	1/10W
R344	1-208-534-61	RES,CHIP	100K	2%	1/10W
R345	1-208-462-61	RES,CHIP	10K	2%	1/10W
R346	1-208-810-11	RES,CHIP	15K	2%	1/10W
R347	1-208-810-11	RES,CHIP	15K	2%	1/10W
R348	1-216-676-11	METAL CHIP	11K	0.5%	1/10W

Ref. No.	Part No.	Description			Remarks
R349	1-216-676-11	METAL CHIP	11K	0.5%	1/10W
R350	1-208-462-61	RES,CHIP	10K	2%	1/10W
R351	1-208-518-61	RES,CHIP	22K	2%	1/10W
R352	1-208-453-61	RES,CHIP	4.7K	2%	1/10W
R353	1-208-518-61	RES,CHIP	22K	2%	1/10W
R354	1-208-518-61	RES,CHIP	22K	2%	1/10W
R355	1-208-518-61	RES,CHIP	22K	2%	1/10W
R356	1-208-534-61	RES,CHIP	100K	2%	1/10W
R357	1-208-462-61	RES,CHIP	10K	2%	1/10W
R358	1-208-462-61	RES,CHIP	10K	2%	1/10W
R359	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R360	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R361	1-216-648-11	METAL CHIP	750	0.5%	1/10W
R362	1-216-648-11	METAL CHIP	750	0.5%	1/10W
R363	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R364	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R365	1-208-453-61	RES,CHIP	4.7K	2%	1/10W
R380	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R381	1-208-518-61	RES,CHIP	22K	2%	1/10W
R382	1-216-689-11	METAL CHIP	39K	0.5%	1/10W
R383	1-216-689-11	METAL CHIP	39K	0.5%	1/10W
R384	1-218-760-11	RES,CHIP	220K	2%	1/10W
R385	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R386	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R387	1-208-810-11	RES,CHIP	15K	2%	1/10W
R388	1-208-518-61	RES,CHIP	22K	2%	1/10W
R389	1-208-526-61	RES,CHIP	47K	2%	1/10W
R393	1-208-812-11	RES,CHIP	18K	2%	1/10W
R394	1-208-534-61	RES,CHIP	100K	2%	1/10W
R401	1-216-671-11	METAL CHIP	6.8K	0.5%	1/10W
R402	1-208-534-61	RES,CHIP	100K	2%	1/10W
R403	1-216-671-11	METAL CHIP	6.8K	0.5%	1/10W
R404	1-208-534-61	RES,CHIP	100K	2%	1/10W
R405	1-208-534-61	RES,CHIP	100K	2%	1/10W
R406	1-216-603-11	METAL CHIP	10	0.5%	1/10W
R407	1-208-522-61	RES,CHIP	33K	2%	1/10W
R408	1-216-603-11	METAL CHIP	10	0.5%	1/10W
R409	1-208-522-61	RES,CHIP	33K	2%	1/10W
R410	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R411	1-208-449-61	RES,CHIP	3.3K	2%	1/10W
R412	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W
R413	1-216-671-11	METAL CHIP	6.8K	0.5%	1/10W
R414	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R415	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R416	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W
R417	1-208-774-11	RES,CHIP	470	2%	1/10W
R418	1-216-613-11	METAL CHIP	27	0.5%	1/10W
R419	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W
R420	1-216-671-11	METAL CHIP	6.8K	0.5%	1/10W
R421	1-208-784-11	RES,CHIP	1.2K	2%	1/10W
R422	1-208-784-11	RES,CHIP	1.2K	2%	1/10W
R423	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R424	1-216-677-11	METAL CHIP	12K	0.5%	1/10W
R425	1-208-812-11	RES,CHIP	18K	2%	1/10W
R426	1-216-613-11	METAL CHIP	27	0.5%	1/10W
R427	1-208-462-61	RES,CHIP	10K	2%	1/10W
R428	1-208-462-61	RES,CHIP	10K	2%	1/10W
R429	1-216-677-11	METAL CHIP	12K	0.5%	1/10W
R430	1-208-812-11	RES,CHIP	18K	2%	1/10W
R431	1-208-534-61	RES,CHIP	100K	2%	1/10W

Ref. No.	Part No.	Description			Remarks	Ref. No.	Part No.	Description			Remarks
R432	1-208-534-61	RES,CHIP	100K	2%	1/10W	R515	1-216-613-11	METAL CHIP	27	0.5%	1/10W
R433	1-208-534-61	RES,CHIP	100K	2%	1/10W	R516	1-208-534-61	RES,CHIP	100K	2%	1/10W
R434	1-208-462-61	RES,CHIP	10K	2%	1/10W	R517	1-208-784-11	RES,CHIP	1.2K	2%	1/10W
R435	1-208-518-61	RES,CHIP	22K	2%	1/10W	R518	1-208-784-11	RES,CHIP	1.2K	2%	1/10W
R436	1-208-534-61	RES,CHIP	100K	2%	1/10W	R519	1-208-784-11	RES,CHIP	1.2K	2%	1/10W
R437	1-208-534-61	RES,CHIP	100K	2%	1/10W	R520	1-208-784-11	RES,CHIP	1.2K	2%	1/10W
R438	1-208-526-61	RES,CHIP	47K	2%	1/10W	R521	1-216-677-11	METAL CHIP	12K	0.5%	1/10W
R439	1-208-462-61	RES,CHIP	10K	2%	1/10W	R522	1-216-677-11	METAL CHIP	12K	0.5%	1/10W
R440	1-208-810-11	RES,CHIP	15K	2%	1/10W	R523	1-208-534-61	RES,CHIP	100K	2%	1/10W
R441	1-216-678-11	METAL CHIP	13K	0.5%	1/10W	R524	1-216-677-11	METAL CHIP	12K	0.5%	1/10W
R442	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W	R525	1-216-677-11	METAL CHIP	12K	0.5%	1/10W
R443	1-208-462-61	RES,CHIP	10K	2%	1/10W	R526	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W
R444	1-208-534-61	RES,CHIP	100K	2%	1/10W	R527	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W
R445	1-208-462-61	RES,CHIP	10K	2%	1/10W	R528	1-208-449-61	RES,CHIP	3.3K	2%	1/10W
R446	1-208-810-11	RES,CHIP	15K	2%	1/10W	R529	1-208-449-61	RES,CHIP	3.3K	2%	1/10W
R447	1-208-810-11	RES,CHIP	15K	2%	1/10W	R530	1-208-449-61	RES,CHIP	3.3K	2%	1/10W
R448	1-216-676-11	METAL CHIP	11K	0.5%	1/10W	R531	1-208-449-61	RES,CHIP	3.3K	2%	1/10W
R449	1-216-676-11	METAL CHIP	11K	0.5%	1/10W	R532	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R450	1-208-462-61	RES,CHIP	10K	2%	1/10W	R533	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R451	1-208-518-61	RES,CHIP	22K	2%	1/10W	R534	1-208-462-61	RES,CHIP	10K	2%	1/10W
R452	1-208-453-61	RES,CHIP	4.7K	2%	1/10W	R535	1-208-462-61	RES,CHIP	10K	2%	1/10W
R453	1-208-518-61	RES,CHIP	22K	2%	1/10W	R536	1-208-518-61	RES,CHIP	22K	2%	1/10W
R454	1-208-518-61	RES,CHIP	22K	2%	1/10W	R537	1-208-518-61	RES,CHIP	22K	2%	1/10W
R455	1-208-518-61	RES,CHIP	22K	2%	1/10W	R538	1-208-462-61	RES,CHIP	10K	2%	1/10W
R456	1-208-534-61	RES,CHIP	100K	2%	1/10W	R539	1-208-810-11	RES,CHIP	15K	2%	1/10W
R457	1-208-462-61	RES,CHIP	10K	2%	1/10W	R540	1-208-462-61	RES,CHIP	10K	2%	1/10W
R458	1-208-462-61	RES,CHIP	10K	2%	1/10W	R541	1-208-810-11	RES,CHIP	15K	2%	1/10W
R459	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W	R542	1-216-678-11	METAL CHIP	13K	0.5%	1/10W
R460	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W	R543	1-216-678-11	METAL CHIP	13K	0.5%	1/10W
R461	1-216-648-11	METAL CHIP	750	0.5%	1/10W	R544	1-208-462-61	RES,CHIP	10K	2%	1/10W
R462	1-216-648-11	METAL CHIP	750	0.5%	1/10W	R545	1-208-462-61	RES,CHIP	10K	2%	1/10W
R463	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W	R546	1-208-462-61	RES,CHIP	10K	2%	1/10W
R464	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W	R547	1-208-462-61	RES,CHIP	10K	2%	1/10W
R465	1-208-453-61	RES,CHIP	4.7K	2%	1/10W	R548	1-208-810-11	RES,CHIP	15K	2%	1/10W
R480	1-208-800-11	RES,CHIP	5.6K	2%	1/10W	R549	1-208-810-11	RES,CHIP	15K	2%	1/10W
R481	1-208-518-61	RES,CHIP	22K	2%	1/10W	R550	1-208-810-11	RES,CHIP	15K	2%	1/10W
R482	1-216-689-11	METAL CHIP	39K	0.5%	1/10W	R551	1-208-810-11	RES,CHIP	15K	2%	1/10W
R483	1-216-689-11	METAL CHIP	39K	0.5%	1/10W	R552	1-216-676-11	METAL CHIP	11K	0.5%	1/10W
R484	1-218-760-11	RES,CHIP	220K	2%	1/10W	R553	1-216-676-11	METAL CHIP	11K	0.5%	1/10W
R485	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W	R554	1-216-676-11	METAL CHIP	11K	0.5%	1/10W
R486	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W	R555	1-216-676-11	METAL CHIP	11K	0.5%	1/10W
R487	1-208-810-11	RES,CHIP	15K	2%	1/10W	R556	1-208-462-61	RES,CHIP	10K	2%	1/10W
R488	1-208-518-61	RES,CHIP	22K	2%	1/10W	R557	1-208-462-61	RES,CHIP	10K	2%	1/10W
R489	1-208-526-61	RES,CHIP	47K	2%	1/10W	R558	1-208-518-61	RES,CHIP	22K	2%	1/10W
R493	1-208-812-11	RES,CHIP	18K	2%	1/10W	R559	1-208-518-61	RES,CHIP	22K	2%	1/10W
R494	1-208-534-61	RES,CHIP	100K	2%	1/10W	R562	1-208-453-61	RES,CHIP	4.7K	2%	1/10W
R501	1-216-647-11	METAL CHIP	680	0.5%	1/10W	R563	1-208-453-61	RES,CHIP	4.7K	2%	1/10W
R502	1-216-647-11	METAL CHIP	680	0.5%	1/10W	R566	1-208-518-61	RES,CHIP	22K	2%	1/10W
R503	1-208-526-61	RES,CHIP	47K	2%	1/10W	R567	1-208-518-61	RES,CHIP	22K	2%	1/10W
R504	1-208-462-61	RES,CHIP	10K	2%	1/10W	R568	1-208-462-61	RES,CHIP	10K	2%	1/10W
R505	1-208-462-61	RES,CHIP	10K	2%	1/10W	R569	1-208-462-61	RES,CHIP	10K	2%	1/10W
R506	1-208-800-11	RES,CHIP	5.6K	2%	1/10W	R570	1-208-462-61	RES,CHIP	10K	2%	1/10W
R507	1-208-800-11	RES,CHIP	5.6K	2%	1/10W	R571	1-208-462-61	RES,CHIP	10K	2%	1/10W
R508	1-208-800-11	RES,CHIP	5.6K	2%	1/10W	R572	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R509	1-208-800-11	RES,CHIP	5.6K	2%	1/10W	R573	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R510	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W	R574	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R511	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W	R575	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W
R512	1-208-774-11	RES,CHIP	470	2%	1/10W	R576	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W
R513	1-208-774-11	RES,CHIP	470	2%	1/10W	R577	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R514	1-216-613-11	METAL CHIP	27	0.5%	1/10W	R578	1-208-453-61	RES,CHIP	4.7K	2%	1/10W

INPUT

Ref. No.	Part No.	Description			Remarks
R579	1-208-453-61	RES,CHIP	4.7K	2%	1/10W
R580	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R581	1-208-518-61	RES,CHIP	22K	2%	1/10W
R582	1-216-689-11	METAL CHIP	39K	0.5%	1/10W
R583	1-216-689-11	METAL CHIP	39K	0.5%	1/10W
R584	1-218-760-11	RES,CHIP	220K	2%	1/10W
R585	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R586	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R587	1-208-810-11	RES,CHIP	15K	2%	1/10W
R588	1-208-518-61	RES,CHIP	22K	2%	1/10W
R589	1-208-526-61	RES,CHIP	47K	2%	1/10W
R593	1-208-812-11	RES,CHIP	18K	2%	1/10W
R601	1-216-647-11	METAL CHIP	680	0.5%	1/10W
R602	1-216-647-11	METAL CHIP	680	0.5%	1/10W
R603	1-208-526-61	RES,CHIP	47K	2%	1/10W
R604	1-208-462-61	RES,CHIP	10K	2%	1/10W
R605	1-208-462-61	RES,CHIP	10K	2%	1/10W
R606	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R607	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R608	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R609	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R610	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R611	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R612	1-208-774-11	RES,CHIP	470	2%	1/10W
R613	1-208-774-11	RES,CHIP	470	2%	1/10W
R614	1-216-613-11	METAL CHIP	27	0.5%	1/10W
R615	1-216-613-11	METAL CHIP	27	0.5%	1/10W
R616	1-208-534-61	RES,CHIP	100K	2%	1/10W
R617	1-208-784-11	RES,CHIP	1.2K	2%	1/10W
R618	1-208-784-11	RES,CHIP	1.2K	2%	1/10W
R619	1-208-784-11	RES,CHIP	1.2K	2%	1/10W
R620	1-208-784-11	RES,CHIP	1.2K	2%	1/10W
R621	1-216-677-11	METAL CHIP	12K	0.5%	1/10W
R622	1-216-677-11	METAL CHIP	12K	0.5%	1/10W
R623	1-208-534-61	RES,CHIP	100K	2%	1/10W
R624	1-216-677-11	METAL CHIP	12K	0.5%	1/10W
R625	1-216-677-11	METAL CHIP	12K	0.5%	1/10W
R626	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W
R627	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W
R628	1-208-449-61	RES,CHIP	3.3K	2%	1/10W
R629	1-208-449-61	RES,CHIP	3.3K	2%	1/10W
R630	1-208-449-61	RES,CHIP	3.3K	2%	1/10W
R631	1-208-449-61	RES,CHIP	3.3K	2%	1/10W
R632	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R633	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R634	1-208-462-61	RES,CHIP	10K	2%	1/10W
R635	1-208-462-61	RES,CHIP	10K	2%	1/10W
R636	1-208-518-61	RES,CHIP	22K	2%	1/10W
R637	1-208-518-61	RES,CHIP	22K	2%	1/10W
R638	1-208-462-61	RES,CHIP	10K	2%	1/10W
R639	1-208-810-11	RES,CHIP	15K	2%	1/10W
R640	1-208-462-61	RES,CHIP	10K	2%	1/10W
R641	1-208-810-11	RES,CHIP	15K	2%	1/10W
R642	1-216-678-11	METAL CHIP	13K	0.5%	1/10W
R643	1-216-678-11	METAL CHIP	13K	0.5%	1/10W
R644	1-208-462-61	RES,CHIP	10K	2%	1/10W
R645	1-208-462-61	RES,CHIP	10K	2%	1/10W
R646	1-208-462-61	RES,CHIP	10K	2%	1/10W
R647	1-208-462-61	RES,CHIP	10K	2%	1/10W
R648	1-208-810-11	RES,CHIP	15K	2%	1/10W

Ref. No.	Part No.	Description			Remarks
R649	1-208-810-11	RES,CHIP	15K	2%	1/10W
R650	1-208-810-11	RES,CHIP	15K	2%	1/10W
R651	1-208-810-11	RES,CHIP	15K	2%	1/10W
R652	1-216-676-11	METAL CHIP	11K	0.5%	1/10W
R653	1-216-676-11	METAL CHIP	11K	0.5%	1/10W
R654	1-216-676-11	METAL CHIP	11K	0.5%	1/10W
R655	1-216-676-11	METAL CHIP	11K	0.5%	1/10W
R656	1-208-462-61	RES,CHIP	10K	2%	1/10W
R657	1-208-462-61	RES,CHIP	10K	2%	1/10W
R658	1-208-518-61	RES,CHIP	22K	2%	1/10W
R659	1-208-518-61	RES,CHIP	22K	2%	1/10W
R662	1-208-453-61	RES,CHIP	4.7K	2%	1/10W
R663	1-208-453-61	RES,CHIP	4.7K	2%	1/10W
R666	1-208-518-61	RES,CHIP	22K	2%	1/10W
R667	1-208-518-61	RES,CHIP	22K	2%	1/10W
R668	1-208-462-61	RES,CHIP	10K	2%	1/10W
R669	1-208-462-61	RES,CHIP	10K	2%	1/10W
R670	1-208-462-61	RES,CHIP	10K	2%	1/10W
R671	1-208-462-61	RES,CHIP	10K	2%	1/10W
R672	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R673	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R674	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R675	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W
R676	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W
R677	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R678	1-208-453-61	RES,CHIP	4.7K	2%	1/10W
R679	1-208-453-61	RES,CHIP	4.7K	2%	1/10W
R680	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R681	1-208-518-61	RES,CHIP	22K	2%	1/10W
R682	1-216-689-11	METAL CHIP	39K	0.5%	1/10W
R683	1-216-689-11	METAL CHIP	39K	0.5%	1/10W
R684	1-218-760-11	RES,CHIP	220K	2%	1/10W
R685	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R686	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R687	1-208-810-11	RES,CHIP	15K	2%	1/10W
R688	1-208-518-61	RES,CHIP	22K	2%	1/10W
R689	1-208-526-61	RES,CHIP	47K	2%	1/10W
R693	1-208-812-11	RES,CHIP	18K	2%	1/10W
< VARIABLE RESISTOR >					
RV101	1-225-556-11	RES, VAR 10K (LEVEL : CH1)			
RV102	1-225-557-11	RES, VAR 10K (MID : CH1)			
RV103	1-225-557-11	RES, VAR 10K (LOW : CH1)			
RV104	1-225-557-11	RES, VAR 10K (HIGH : CH1)			
RV105	1-225-553-11	RES, VAR 5K (PAN : CH1)			
RV106	1-225-558-11	RES, VAR 50K (AUX 1/3 : CH1)			
RV107	1-225-558-11	RES, VAR 50K (AUX 2/4 : CH1)			
RV180	1-225-850-11	RES, VAR, SLIDE 50K (CH FADER : CH1)			
RV181	1-238-600-11	RES, ADJ, CARBON 10K			
RV201	1-225-556-11	RES, VAR 10K (LEVEL : CH2)			
RV202	1-225-557-11	RES, VAR 10K (MID : CH2)			
RV203	1-225-557-11	RES, VAR 10K (LOW : CH2)			
RV204	1-225-557-11	RES, VAR 10K (HIGH : CH2)			
RV205	1-225-553-11	RES, VAR 5K (PAN : CH2)			
RV206	1-225-558-11	RES, VAR 50K (AUX 1/3 : CH2)			
RV207	1-225-558-11	RES, VAR 50K (AUX 2/4 : CH2)			
RV280	1-225-850-11	RES, VAR, SLIDE 50K (CH FADER : CH2)			
RV281	1-238-600-11	RES, ADJ, CARBON 10K			
RV301	1-225-556-11	RES, VAR 10K (LEVEL : CH3)			
RV302	1-225-557-11	RES, VAR 10K (MID : CH3)			

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
RV303	1-225-557-11	RES, VAR 10K (LOW : CH3)		S302	1-554-118-00	SWITCH, PUSH (1 KEY) (B : CH3)	
RV304	1-225-557-11	RES, VAR 10K (HIGH : CH3)		S303	1-554-118-00	SWITCH, PUSH (1 KEY) (LCF : CH3)	
RV305	1-225-553-11	RES, VAR 5K (PAN : CH3)		S304	1-762-198-11	SWITCH, PUSH (1 KEY) (PFL : CH3)	
RV306	1-225-558-11	RES, VAR 50K (AUX 1/3 : CH3)		S305	1-554-118-00	SWITCH, PUSH (1 KEY) (1 : CH3)	
RV307	1-225-558-11	RES, VAR 50K (AUX 2/4 : CH3)		S306	1-554-118-00	SWITCH, PUSH (1 KEY) (2 : CH3)	
RV380	1-225-850-11	RES, VAR, SLIDE 50K (CH FADER : CH3)		S307	1-554-118-00	SWITCH, PUSH (1 KEY) (PRE : CH3)	
RV381	1-238-600-11	RES, ADJ, CARBON 10K		S308	1-554-118-00	SWITCH, PUSH (1 KEY) (3 : CH3)	
RV401	1-225-556-11	RES, VAR 10K (LEVEL : CH4)		S309	1-554-118-00	SWITCH, PUSH (1 KEY) (1-2/3-4 : CH3)	
RV402	1-225-554-11	RES, VAR 10K (MID : CH4)		S310	1-554-118-00	SWITCH, PUSH (1 KEY) (4 : CH3)	
RV403	1-225-557-11	RES, VAR 10K (LOW : CH4)		S380	1-554-118-00	SWITCH, PUSH (1 KEY) (LOCAL : CH3)	
RV404	1-225-557-11	RES, VAR 10K (HIGH : CH4)		S381	1-554-118-00	SWITCH, PUSH (1 KEY) (MUTING : CH3)	
RV405	1-225-553-11	RES, VAR 5K (PAN : CH4)		S401	1-572-042-11	SWITCH, SLIDE (INPUT-A LEVEL : CH4)	
RV406	1-225-558-11	RES, VAR 50K (AUX 1/3 : CH4)		S402	1-554-118-00	SWITCH, PUSH (1 KEY) (B : CH4)	
RV407	1-225-558-11	RES, ADJ, CARBON 10K		S403	1-554-118-00	SWITCH, PUSH (1 KEY) (LCF : CH4)	
RV480	1-225-850-11	RES, VAR, SLIDE 50K (CH FADER : CH4)		S404	1-762-198-11	SWITCH, PUSH (1 KEY) (PFL : CH4)	
RV481	1-238-600-11	RES, ADJ, CARBON 10K		S405	1-554-118-00	SWITCH, PUSH (1 KEY) (1 : CH4)	
RV501	1-225-554-11	RES, VAR 10K (MID : ST1)		S406	1-554-118-00	SWITCH, PUSH (1 KEY) (2 : CH4)	
RV502	1-225-554-11	RES, VAR 10K (LOW : ST1)		S407	1-554-118-00	SWITCH, PUSH (1 KEY) (PRE : CH4)	
RV503	1-225-554-11	RES, VAR 10K (HIGH : ST1)		S408	1-554-118-00	SWITCH, PUSH (1 KEY) (3 : CH4)	
RV504	1-225-553-11	RES, VAR 5K (BAL : ST1)		S409	1-554-118-00	SWITCH, PUSH (1 KEY) (1-2/3-4 : CH4)	
RV505	1-225-555-11	RES, VAR 50K (AUX LVL : ST1)		S410	1-554-118-00	SWITCH, PUSH (1 KEY) (4 : CH4)	
RV506	1-225-553-11	RES, VAR 5K (AUX BAL : ST1)		S480	1-554-118-00	SWITCH, PUSH (1 KEY) (LOCAL : CH4)	
RV580	1-225-850-11	RES, VAR, SLIDE 50K (CH FADER : ST1)		S481	1-554-118-00	SWITCH, PUSH (1 KEY) (MUTING : CH4)	
RV581	1-238-600-11	RES, ADJ, CARBON 10K		S501	1-572-042-11	SWITCH, SLIDE (INPUT LEVEL : ST1)	
RV601	1-225-554-11	RES, VAR 10K (MID : ST2)		S502	1-554-118-00	SWITCH, PUSH (1 KEY) (L : ST1)	
RV602	1-225-554-11	RES, VAR 10K (LOW : ST2)		S503	1-554-118-00	SWITCH, PUSH (1 KEY) (R : ST1)	
RV603	1-225-554-11	RES, VAR 10K (HIGH : ST2)		S504	1-554-118-00	SWITCH, PUSH (1 KEY) (LCF : ST1)	
RV604	1-225-553-11	RES, VAR 5K (BAL : ST2)		S505	1-762-198-11	SWITCH, PUSH (1 KEY) (PFL : ST1)	
RV605	1-225-555-11	RES, VAR 50K (AUX LVL : ST2)		S506	1-554-118-00	SWITCH, PUSH (1 KEY) (1-2 : ST1)	
RV606	1-225-553-11	RES, VAR 5K (AUX BAL : ST2)		S507	1-554-118-00	SWITCH, PUSH (1 KEY) (PRE : ST1)	
RV680	1-225-850-11	RES, VAR, SLIDE 50K (CH FADER : ST2)		S508	1-554-118-00	SWITCH, PUSH (1 KEY) (3-4 : ST1)	
RV681	1-238-600-11	RES, ADJ, CARBON 10K		S509	1-554-118-00	SWITCH, PUSH (1 KEY) (1-2/3-4 : ST1)	
		< SWITCH >		S580	1-554-118-00	SWITCH, PUSH (1 KEY) (LOCAL : ST1)	
S101	1-572-042-11	SWITCH, SLIDE (INPUT-A LEVEL : CH1)		S581	1-554-118-00	SWITCH, PUSH (1 KEY) (MUTING : ST1)	
S102	1-554-118-00	SWITCH, PUSH (1 KEY) (B : CH1)		S601	1-572-042-11	SWITCH, SLIDE (INPUT LEVEL : ST2)	
S103	1-554-118-00	SWITCH, PUSH (1 KEY) (LCF : CH1)		S602	1-554-118-00	SWITCH, PUSH (1 KEY) (L : ST2)	
S104	1-762-198-11	SWITCH, PUSH (1 KEY) (PFL : CH1)		S603	1-554-118-00	SWITCH, PUSH (1 KEY) (R : ST2)	
S105	1-554-118-00	SWITCH, PUSH (1 KEY) (1 : CH1)		S604	1-554-118-00	SWITCH, PUSH (1 KEY) (LCF : ST2)	
S106	1-554-118-00	SWITCH, PUSH (1 KEY) (2 : CH1)		S605	1-762-198-11	SWITCH, PUSH (1 KEY) (PFL : ST2)	
S107	1-554-118-00	SWITCH, PUSH (1 KEY) (PRE : CH1)		S606	1-554-118-00	SWITCH, PUSH (1 KEY) (1-2 : ST2)	
S108	1-554-118-00	SWITCH, PUSH (1 KEY) (3 : CH1)		S607	1-554-118-00	SWITCH, PUSH (1 KEY) (PRE : ST2)	
S109	1-554-118-00	SWITCH, PUSH (1 KEY) (1-2/3-4 : CH1)		S608	1-554-118-00	SWITCH, PUSH (1 KEY) (3-4 : ST2)	
S110	1-554-118-00	SWITCH, PUSH (1 KEY) (4 : CH1)		S609	1-554-118-00	SWITCH, PUSH (1 KEY) (1-2/3-4 : ST2)	
S180	1-554-118-00	SWITCH, PUSH (1 KEY) (LOCAL : CH1)		S680	1-554-118-00	SWITCH, PUSH (1 KEY) (LOCAL : ST2)	
S181	1-554-118-00	SWITCH, PUSH (1 KEY) (MUTING : CH1)		S681	1-554-118-00	SWITCH, PUSH (1 KEY) (MUTING : ST2)	
S201	1-572-042-11	SWITCH, SLIDE (INPUT-A LEVEL : CH2)		*****			
S202	1-554-118-00	SWITCH, PUSH (1 KEY) (B : CH2)		* A-4591-207-A	MASTER BOARD, COMPLETE		
S203	1-554-118-00	SWITCH, PUSH (1 KEY) (LCF : CH2)		*****			
S204	1-762-198-11	SWITCH, PUSH (1 KEY) (PFL : CH2)		3-350-679-11	WASHER, FIBER		
S205	1-554-118-00	SWITCH, PUSH (1 KEY) (1 : CH2)		< BUS BAR >			
S206	1-554-118-00	SWITCH, PUSH (1 KEY) (2 : CH2)		* BB001	1-560-242-31	BUS BAR 5P	
S207	1-554-118-00	SWITCH, PUSH (1 KEY) (PRE : CH2)		* BB002	1-560-242-21	BUS BAR 4P	
S208	1-554-118-00	SWITCH, PUSH (1 KEY) (3 : CH2)		* BB003	1-560-242-81	BUS BAR 8P	
S209	1-554-118-00	SWITCH, PUSH (1 KEY) (1-2/3-4 : CH2)		* BB004	1-560-242-31	BUS BAR 5P	
S210	1-554-118-00	SWITCH, PUSH (1 KEY) (4 : CH2)					
S280	1-554-118-00	SWITCH, PUSH (1 KEY) (LOCAL : CH2)					
S281	1-554-118-00	SWITCH, PUSH (1 KEY) (MUTING : CH2)					
S301	1-572-042-11	SWITCH, SLIDE (INPUT-A LEVEL : CH3)					

MASTER

Ref. No.	Part No.	Description				Remarks
< CAPACITOR >						
C001	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
C002	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
C003	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
C004	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
C005	1-126-934-11	ELECT	220uF	20%	10V	
C006	1-126-514-11	ELECT	22uF	20%	16V	
C007	1-126-514-11	ELECT	22uF	20%	16V	
C008	1-126-514-11	ELECT	22uF	20%	16V	
C009	1-126-514-11	ELECT	22uF	20%	16V	
C101	1-104-665-11	ELECT	100uF	20%	25V	
C102	1-104-665-11	ELECT	100uF	20%	25V	
C103	1-126-514-11	ELECT	22uF	20%	16V	
C105	1-126-514-11	ELECT	22uF	20%	16V	
C107	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
C108	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
C109	1-126-934-11	ELECT	220uF	20%	10V	
C110	1-126-934-11	ELECT	220uF	20%	10V	
C111	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C112	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C113	1-126-514-11	ELECT	22uF	20%	16V	
C114	1-126-514-11	ELECT	22uF	20%	16V	
C117	1-126-514-11	ELECT	22uF	20%	16V	
C118	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C119	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C120	1-126-514-11	ELECT	22uF	20%	16V	
C121	1-126-514-11	ELECT	22uF	20%	16V	
C124	1-126-514-11	ELECT	22uF	20%	16V	
C125	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C126	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C127	1-126-514-11	ELECT	22uF	20%	16V	
C128	1-126-514-11	ELECT	22uF	20%	16V	
C131	1-126-514-11	ELECT	22uF	20%	16V	
C132	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C133	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C134	1-126-514-11	ELECT	22uF	20%	16V	
C135	1-126-514-11	ELECT	22uF	20%	16V	
C138	1-126-514-11	ELECT	22uF	20%	16V	
C150	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C151	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C152	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
C153	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
C203	1-163-227-11	CERAMIC CHIP	10PF	0.5PF	50V	
C204	1-126-514-11	ELECT	22uF	20%	16V	
C205	1-126-514-11	ELECT	22uF	20%	16V	
C206	1-163-227-11	CERAMIC CHIP	10PF	0.5PF	50V	
C207	1-126-514-11	ELECT	22uF	20%	16V	
C208	1-126-514-11	ELECT	22uF	20%	16V	
C209	1-163-227-11	CERAMIC CHIP	10PF	0.5PF	50V	
C210	1-126-514-11	ELECT	22uF	20%	16V	
C211	1-126-514-11	ELECT	22uF	20%	16V	
C212	1-163-227-11	CERAMIC CHIP	10PF	0.5PF	50V	
C213	1-126-514-11	ELECT	22uF	20%	16V	
C214	1-126-514-11	ELECT	22uF	20%	16V	
C215	1-104-665-11	ELECT	100uF	20%	25V	
C216	1-104-665-11	ELECT	100uF	20%	25V	

Ref. No.	Part No.	Description	Remarks		
C217	1-163-235-11	CERAMIC CHIP	22PF	5%	50V
C218	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C219	1-126-934-11	ELECT	220uF	20%	10V
C220	1-126-934-11	ELECT	220uF	20%	10V
C221	1-163-235-11	CERAMIC CHIP	22PF	5%	50V
C222	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C223	1-126-934-11	ELECT	220uF	20%	10V
C224	1-126-934-11	ELECT	220uF	20%	10V
C225	1-163-235-11	CERAMIC CHIP	22PF	5%	50V
C226	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C227	1-126-934-11	ELECT	220uF	20%	10V
C228	1-126-934-11	ELECT	220uF	20%	10V
C229	1-163-235-11	CERAMIC CHIP	22PF	5%	50V
C230	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C231	1-126-934-11	ELECT	220uF	20%	10V
C232	1-126-934-11	ELECT	220uF	20%	10V
C233	1-104-665-11	ELECT	100uF	20%	25V
C234	1-104-665-11	ELECT	100uF	20%	25V
C235	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C236	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C237	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C238	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C239	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C240	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C241	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C242	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C243	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C244	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C245	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C246	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C303	1-163-235-11	CERAMIC CHIP	22PF	5%	50V
C306	1-126-514-11	ELECT	22uF	20%	16V
C307	1-163-235-11	CERAMIC CHIP	22PF	5%	50V
C310	1-126-514-11	ELECT	22uF	20%	16V
C311	1-163-235-11	CERAMIC CHIP	22PF	5%	50V
C314	1-126-514-11	ELECT	22uF	20%	16V
C315	1-163-235-11	CERAMIC CHIP	22PF	5%	50V
C318	1-104-665-11	ELECT	100uF	20%	25V
C319	1-126-514-11	ELECT	22uF	20%	16V
C320	1-104-665-11	ELECT	100uF	20%	25V
C321	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C322	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C323	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C324	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C403	1-163-235-11	CERAMIC CHIP	22PF	5%	50V
C404	1-126-514-11	ELECT	22uF	20%	16V
C405	1-163-235-11	CERAMIC CHIP	22PF	5%	50V
C406	1-126-514-11	ELECT	22uF	20%	16V
C407	1-163-235-11	CERAMIC CHIP	22PF	5%	50V
C408	1-126-514-11	ELECT	22uF	20%	16V
C409	1-163-235-11	CERAMIC CHIP	22PF	5%	50V
C410	1-126-514-11	ELECT	22uF	20%	16V
C411	1-163-235-11	CERAMIC CHIP	22PF	5%	50V
C412	1-126-514-11	ELECT	22uF	20%	16V
C413	1-163-235-11	CERAMIC CHIP	22PF	5%	50V
C415	1-163-235-11	CERAMIC CHIP	22PF	5%	50V
C417	1-163-235-11	CERAMIC CHIP	22PF	5%	50V
C419	1-163-235-11	CERAMIC CHIP	22PF	5%	50V
C421	1-163-243-11	CERAMIC CHIP	47PF	5%	50V
C501	1-126-514-11	ELECT	22uF	20%	16V

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
C502	1-126-514-11	ELECT	22uF 20% 16V	C622	1-163-243-11	CERAMIC CHIP	47PF 5% 50V
C503	1-126-514-11	ELECT	22uF 20% 16V	C623	1-163-243-11	CERAMIC CHIP	47PF 5% 50V
C504	1-126-514-11	ELECT	22uF 20% 16V	C651	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V
C505	1-104-665-11	ELECT	100uF 20% 25V	C701	1-163-251-11	CERAMIC CHIP	100PF 5% 50V
C510	1-104-665-11	ELECT	100uF 20% 25V	C702	1-163-251-11	CERAMIC CHIP	100PF 5% 50V
C511	1-126-514-11	ELECT	22uF 20% 16V	C703	1-163-251-11	CERAMIC CHIP	100PF 5% 50V
C512	1-126-514-11	ELECT	22uF 20% 16V	C704	1-163-251-11	CERAMIC CHIP	100PF 5% 50V
C513	1-126-514-11	ELECT	22uF 20% 16V	C705	1-126-514-11	ELECT	22uF 20% 16V
C514	1-126-514-11	ELECT	22uF 20% 16V	C706	1-126-514-11	ELECT	22uF 20% 16V
C515	1-163-243-11	CERAMIC CHIP	47PF 5% 50V	C707	1-126-514-11	ELECT	22uF 20% 16V
C516	1-163-243-11	CERAMIC CHIP	47PF 5% 50V	C708	1-126-514-11	ELECT	22uF 20% 16V
C517	1-163-243-11	CERAMIC CHIP	47PF 5% 50V	C715	1-126-514-11	ELECT	22uF 20% 16V
C518	1-163-243-11	CERAMIC CHIP	47PF 5% 50V	C716	1-126-514-11	ELECT	22uF 20% 16V
C520	1-163-235-11	CERAMIC CHIP	22PF 5% 50V	C717	1-136-165-00	FILM	0.1uF 5% 50V
C521	1-163-235-11	CERAMIC CHIP	22PF 5% 50V	C718	1-136-165-00	FILM	0.1uF 5% 50V
C522	1-163-235-11	CERAMIC CHIP	22PF 5% 50V	C719	1-136-165-00	FILM	0.1uF 5% 50V
C523	1-163-235-11	CERAMIC CHIP	22PF 5% 50V	C720	1-136-165-00	FILM	0.1uF 5% 50V
C550	1-126-934-11	ELECT	220uF 20% 10V	C721	1-126-514-11	ELECT	22uF 20% 16V
C551	1-216-295-91	SHORT	0	C722	1-126-514-11	ELECT	22uF 20% 16V
C552	1-126-934-11	ELECT	220uF 20% 10V	C723	1-130-483-00	MYLAR	0.01uF 5% 50V
C553	1-163-133-00	CERAMIC CHIP	470PF 5% 50V	C724	1-130-483-00	MYLAR	0.01uF 5% 50V
C554	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V	C725	1-106-351-00	MYLAR	2200PF 5% 200V
C555	1-126-963-11	ELECT	4.7uF 20% 50V	C726	1-106-351-00	MYLAR	2200PF 5% 200V
C556	1-126-514-11	ELECT	22uF 20% 16V	C727	1-163-235-11	CERAMIC CHIP	22PF 5% 50V
C557	1-126-963-11	ELECT	4.7uF 20% 50V	C728	1-163-235-11	CERAMIC CHIP	22PF 5% 50V
C558	1-163-275-11	CERAMIC CHIP	0.001uF 5% 50V	C729	1-130-478-00	MYLAR	0.0039uF 5% 50V
C559	1-163-275-11	CERAMIC CHIP	0.001uF 5% 50V	C730	1-130-478-00	MYLAR	0.0039uF 5% 50V
C560	1-126-963-11	ELECT	4.7uF 20% 50V	C731	1-115-871-11	ELECT	1uF 20% 50V
C561	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V	C732	1-115-871-11	ELECT	1uF 20% 50V
C562	1-163-275-11	CERAMIC CHIP	0.001uF 5% 50V	C733	1-136-162-00	FILM	0.056uF 5% 50V
C563	1-126-963-11	ELECT	4.7uF 20% 50V	C734	1-136-162-00	FILM	0.056uF 5% 50V
C564	1-104-665-11	ELECT	100uF 20% 25V	C735	1-163-235-11	CERAMIC CHIP	22PF 5% 50V
C565	1-104-665-11	ELECT	100uF 20% 25V	C736	1-163-235-11	CERAMIC CHIP	22PF 5% 50V
C566	1-163-243-11	CERAMIC CHIP	47PF 5% 50V	C737	1-115-866-11	ELECT	4.7uF 20% 35V
C567	1-163-243-11	CERAMIC CHIP	47PF 5% 50V	C738	1-115-866-11	ELECT	4.7uF 20% 35V
C568	1-163-243-11	CERAMIC CHIP	47PF 5% 50V	C741	1-163-235-11	CERAMIC CHIP	22PF 5% 50V
C569	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V	C742	1-126-934-11	ELECT	220uF 20% 10V
C570	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V	C743	1-126-934-11	ELECT	220uF 20% 10V
C571	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V	C744	1-163-235-11	CERAMIC CHIP	22PF 5% 50V
C572	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V	C746	1-126-934-11	ELECT	220uF 20% 10V
C601	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V	C747	1-163-133-00	CERAMIC CHIP	470PF 5% 50V
C602	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V	C748	1-126-934-11	ELECT	220uF 20% 10V
C603	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V	C749	1-163-259-91	CERAMIC CHIP	220PF 5% 50V
C604	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V	C750	1-163-259-91	CERAMIC CHIP	220PF 5% 50V
C605	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V	C780	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V
C606	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V	C781	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V
C607	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V	C783	1-107-713-11	ELECT	4.7uF 20% 50V
C609	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V	C784	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V
C610	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V	C785	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V
C611	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V	C786	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V
C612	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V	C801	1-163-251-11	CERAMIC CHIP	100PF 5% 50V
C613	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V	C802	1-163-251-11	CERAMIC CHIP	100PF 5% 50V
C614	1-126-514-11	ELECT	22uF 20% 16V	C803	1-163-251-11	CERAMIC CHIP	100PF 5% 50V
C615	1-126-514-11	ELECT	22uF 20% 16V	C804	1-163-251-11	CERAMIC CHIP	100PF 5% 50V
C616	1-126-514-11	ELECT	22uF 20% 16V	C805	1-126-514-11	ELECT	22uF 20% 16V
C617	1-126-514-11	ELECT	22uF 20% 16V	C806	1-126-514-11	ELECT	22uF 20% 16V
C618	1-164-004-11	CERAMIC CHIP	0.1uF 10% 25V	C807	1-126-514-11	ELECT	22uF 20% 16V
C619	1-163-133-00	CERAMIC CHIP	470PF 5% 50V	C808	1-126-514-11	ELECT	22uF 20% 16V
C620	1-163-243-11	CERAMIC CHIP	47PF 5% 50V	C813	1-104-665-11	ELECT	100uF 20% 25V
C621	1-163-243-11	CERAMIC CHIP	47PF 5% 50V	C814	1-104-665-11	ELECT	100uF 20% 25V

MASTER

Ref. No.	Part No.	Description	Remarks			
C815	1-126-514-11	ELECT	22uF	20%	16V	
C816	1-126-514-11	ELECT	22uF	20%	16V	
C817	1-136-165-00	FILM	0.1uF	5%	50V	
C818	1-136-165-00	FILM	0.1uF	5%	50V	
C819	1-136-165-00	FILM	0.1uF	5%	50V	
C820	1-136-165-00	FILM	0.1uF	5%	50V	
C821	1-126-514-11	ELECT	22uF	20%	16V	
C822	1-126-514-11	ELECT	22uF	20%	16V	
C823	1-130-483-00	MYLAR	0.01uF	5%	50V	
C824	1-130-483-00	MYLAR	0.01uF	5%	50V	
C825	1-106-351-00	MYLAR	2200PF	5%	200V	
C826	1-106-351-00	MYLAR	2200PF	5%	200V	
C827	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
C828	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
C829	1-130-478-00	MYLAR	0.0039uF	5%	50V	
C830	1-130-478-00	MYLAR	0.0039uF	5%	50V	
C831	1-115-871-11	ELECT	1uF	20%	50V	
C832	1-115-871-11	ELECT	1uF	20%	50V	
C833	1-136-162-00	FILM	0.056uF	5%	50V	
C834	1-136-162-00	FILM	0.056uF	5%	50V	
C835	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
C836	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
C837	1-115-866-11	ELECT	4.7uF	20%	35V	
C838	1-115-866-11	ELECT	4.7uF	20%	35V	
C841	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
C842	1-126-934-11	ELECT	220uF	20%	10V	
C843	1-126-934-11	ELECT	220uF	20%	10V	
C844	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
C845	1-104-665-11	ELECT	100uF	20%	25V	
C846	1-126-934-11	ELECT	220uF	20%	10V	
C847	1-104-665-11	ELECT	100uF	20%	25V	
C848	1-126-934-11	ELECT	220uF	20%	10V	
C849	1-163-259-91	CERAMIC CHIP	220PF	5%	50V	
C850	1-163-259-91	CERAMIC CHIP	220PF	5%	50V	
C880	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
C881	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
C883	1-107-713-11	ELECT	4.7uF	20%	50V	
C884	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
C885	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
C886	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
C887	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
C888	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
C901	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C902	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C903	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C904	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C905	1-126-514-11	ELECT	22uF	20%	16V	
C906	1-126-514-11	ELECT	22uF	20%	16V	
C907	1-126-514-11	ELECT	22uF	20%	16V	
C908	1-126-514-11	ELECT	22uF	20%	16V	
C913	1-104-665-11	ELECT	100uF	20%	25V	
C914	1-104-665-11	ELECT	100uF	20%	25V	
C915	1-126-514-11	ELECT	22uF	20%	16V	
C916	1-126-514-11	ELECT	22uF	20%	16V	
C917	1-136-165-00	FILM	0.1uF	5%	50V	
C918	1-136-165-00	FILM	0.1uF	5%	50V	
C919	1-136-165-00	FILM	0.1uF	5%	50V	
C920	1-136-165-00	FILM	0.1uF	5%	50V	
C921	1-126-514-11	ELECT	22uF	20%	16V	
C922	1-126-514-11	ELECT	22uF	20%	16V	

Ref. No.	Part No.	Description	Remarks			
C923	1-130-483-00	MYLAR	0.01uF	5%	50V	
C924	1-130-483-00	MYLAR	0.01uF	5%	50V	
C925	1-106-351-00	MYLAR	2200PF	5%	200V	
C926	1-106-351-00	MYLAR	2200PF	5%	200V	
C927	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
C928	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
C929	1-130-478-00	MYLAR	0.0039uF	5%	50V	
C930	1-130-478-00	MYLAR	0.0039uF	5%	50V	
C931	1-115-871-11	ELECT	1uF	20%	50V	
C932	1-115-871-11	ELECT	1uF	20%	50V	
C933	1-136-162-00	FILM	0.056uF	5%	50V	
C934	1-136-162-00	FILM	0.056uF	5%	50V	
C935	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
C936	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
C937	1-115-866-11	ELECT	4.7uF	20%	35V	
C938	1-115-866-11	ELECT	4.7uF	20%	35V	
C941	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
C942	1-126-934-11	ELECT	220uF	20%	10V	
C943	1-126-934-11	ELECT	220uF	20%	10V	
C944	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
C945	1-104-665-11	ELECT	100uF	20%	25V	
C946	1-126-934-11	ELECT	220uF	20%	10V	
C947	1-104-665-11	ELECT	100uF	20%	25V	
C948	1-126-934-11	ELECT	220uF	20%	10V	
C949	1-163-259-91	CERAMIC CHIP	220PF	5%	50V	
C950	1-163-259-91	CERAMIC CHIP	220PF	5%	50V	
C980	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
C981	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
C983	1-107-713-11	ELECT	4.7uF	20%	50V	
C984	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
C985	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
C986	1-164-004-11	CERAMIC CHIP	0.1uF	10%	25V	
C1001	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C1002	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C1003	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C1004	1-163-251-11	CERAMIC CHIP	100PF	5%	50V	
C1005	1-126-514-11	ELECT	22uF	20%	16V	
C1006	1-126-514-11	ELECT	22uF	20%	16V	
C1007	1-126-514-11	ELECT	22uF	20%	16V	
C1008	1-126-514-11	ELECT	22uF	20%	16V	
C1013	1-104-665-11	ELECT	100uF	20%	25V	
C1014	1-104-665-11	ELECT	100uF	20%	25V	
C1015	1-126-514-11	ELECT	22uF	20%	16V	
C1016	1-126-514-11	ELECT	22uF	20%	16V	
C1017	1-136-165-00	FILM	0.1uF	5%	50V	
C1018	1-136-165-00	FILM	0.1uF	5%	50V	
C1019	1-136-165-00	FILM	0.1uF	5%	50V	
C1020	1-136-165-00	FILM	0.1uF	5%	50V	
C1021	1-126-514-11	ELECT	22uF	20%	16V	
C1022	1-126-514-11	ELECT	22uF	20%	16V	
C1023	1-130-483-00	MYLAR	0.01uF	5%	50V	
C1024	1-130-483-00	MYLAR	0.01uF	5%	50V	
C1025	1-106-351-00	MYLAR	2200PF	5%	200V	
C1026	1-106-351-00	MYLAR	2200PF	5%	200V	
C1027	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
C1028	1-163-235-11	CERAMIC CHIP	22PF	5%	50V	
C1029	1-130-478-00	MYLAR	0.0039uF	5%	50V	
C1030	1-130-478-00	MYLAR	0.0039uF	5%	50V	
C1031	1-115-871-11	ELECT	1uF	20%	50V	
C1032	1-115-871-11	ELECT	1uF	20%	50V	

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
C1033	1-136-162-00	FILM 0.056uF 5%	50V	D654	8-719-988-61	DIODE 1SS355TE-17	
C1034	1-136-162-00	FILM 0.056uF 5%	50V	D655	8-719-988-61	DIODE 1SS355TE-17	
C1035	1-163-235-11	CERAMIC CHIP 22PF 5%	50V	D656	8-719-988-61	DIODE 1SS355TE-17	
C1036	1-163-235-11	CERAMIC CHIP 22PF 5%	50V	D657	8-719-988-61	DIODE 1SS355TE-17	
C1037	1-115-866-11	ELECT 4.7uF 20%	35V	D658	8-719-988-61	DIODE 1SS355TE-17	
C1038	1-115-866-11	ELECT 4.7uF 20%	35V	D659	8-719-988-61	DIODE 1SS355TE-17	
C1041	1-163-235-11	CERAMIC CHIP 22PF 5%	50V	D660	8-719-988-61	DIODE 1SS355TE-17	
C1042	1-126-934-11	ELECT 220uF 20%	10V	D661	8-719-988-61	DIODE 1SS355TE-17	
C1043	1-126-934-11	ELECT 220uF 20%	10V	D662	8-719-988-61	DIODE 1SS355TE-17	
C1044	1-163-235-11	CERAMIC CHIP 22PF 5%	50V	D663	8-719-988-61	DIODE 1SS355TE-17	
C1045	1-104-665-11	ELECT 100uF 20%	25V	D664	8-719-988-61	DIODE 1SS355TE-17	
C1046	1-126-934-11	ELECT 220uF 20%	10V	D665	8-719-988-61	DIODE 1SS355TE-17	
C1047	1-104-665-11	ELECT 100uF 20%	25V	D666	8-719-988-61	DIODE 1SS355TE-17	
C1048	1-126-934-11	ELECT 220uF 20%	10V	D667	8-719-988-61	DIODE 1SS355TE-17	
C1049	1-163-259-91	CERAMIC CHIP 220PF 5%	50V	D668	8-719-988-61	DIODE 1SS355TE-17	
C1050	1-163-259-91	CERAMIC CHIP 220PF 5%	50V	D669	8-719-988-61	DIODE 1SS355TE-17	
C1080	1-164-004-11	CERAMIC CHIP 0.1uF 10%	25V	D670	8-719-988-61	DIODE 1SS355TE-17	
C1081	1-164-004-11	CERAMIC CHIP 0.1uF 10%	25V	D671	8-719-988-61	DIODE 1SS355TE-17	
C1083	1-107-713-11	ELECT 4.7uF 20%	50V	D672	8-719-988-61	DIODE 1SS355TE-17	
C1084	1-164-004-11	CERAMIC CHIP 0.1uF 10%	25V	D673	8-719-988-61	DIODE 1SS355TE-17	
C1085	1-164-004-11	CERAMIC CHIP 0.1uF 10%	25V	D674	8-719-988-61	DIODE 1SS355TE-17	
C1086	1-164-004-11	CERAMIC CHIP 0.1uF 10%	25V	D675	8-719-988-61	DIODE 1SS355TE-17	
C1087	1-164-004-11	CERAMIC CHIP 0.1uF 10%	25V	D676	8-719-988-61	DIODE 1SS355TE-17	
C1088	1-164-004-11	CERAMIC CHIP 0.1uF 10%	25V	D677	8-719-988-61	DIODE 1SS355TE-17	
< CONNECTOR >				D678	8-719-988-61	DIODE 1SS355TE-17	
* CN001	1-564-521-11	PLUG, CONNECTOR 6P		D679	8-719-988-61	DIODE 1SS355TE-17	
* CN002	1-568-841-11	SOCKET, CONNECTOR 25P		D680	8-719-988-61	DIODE 1SS355TE-17	
CN003	1-691-650-11	SOCKET, CONNECTOR 19P		D681	8-719-988-61	DIODE 1SS355TE-17	
* CN005	1-568-862-11	SOCKET, CONNECTOR 19P		D682	8-719-988-61	DIODE 1SS355TE-17	
CN006	1-569-815-11	CONNECTOR, BOARD TO BOARD 21P		D701	8-719-313-43	DIODE SEL6210S-TH10 (PEAK : ST3)	
* CN007	1-568-845-11	SOCKET, CONNECTOR 31P		D702	8-719-988-61	DIODE 1SS355TE-17	
CN008	1-793-242-11	PIN, CONNECTOR (PC BOARD) 11P		D703	8-719-988-61	DIODE 1SS355TE-17	
* CN009	1-568-450-11	HOUSING, CONNECTOR(PC BOARD)4P		D704	8-719-988-61	DIODE 1SS355TE-17	
< DIODE >				D780	8-719-422-80	DIODE MA8075-H-TX	
D001	8-719-988-61	DIODE 1SS355TE-17		D781	8-719-988-61	DIODE 1SS355TE-17	
D002	8-719-988-61	DIODE 1SS355TE-17		D782	8-719-988-61	DIODE 1SS355TE-17	
D003	8-719-988-61	DIODE 1SS355TE-17		D783	8-719-988-61	DIODE 1SS355TE-17	
D004	8-719-988-61	DIODE 1SS355TE-17		D784	8-719-988-61	DIODE 1SS355TE-17	
D101	8-719-988-61	DIODE 1SS355TE-17		D801	8-719-313-43	DIODE SEL6210S-TH10 (PEAK : ST4)	
D102	8-719-988-61	DIODE 1SS355TE-17		D802	8-719-988-61	DIODE 1SS355TE-17	
D103	8-719-988-61	DIODE 1SS355TE-17		D803	8-719-988-61	DIODE 1SS355TE-17	
D550	8-719-422-80	DIODE MA8075-H-TX		D804	8-719-988-61	DIODE 1SS355TE-17	
D551	8-719-988-61	DIODE 1SS355TE-17		D880	8-719-422-80	DIODE MA8075-H-TX	
D552	8-719-422-80	DIODE MA8075-H-TX		D881	8-719-988-61	DIODE 1SS355TE-17	
D553	8-719-988-61	DIODE 1SS355TE-17		D882	8-719-988-61	DIODE 1SS355TE-17	
D554	8-719-422-80	DIODE MA8075-H-TX		D883	8-719-988-61	DIODE 1SS355TE-17	
D555	8-719-988-61	DIODE 1SS355TE-17		D884	8-719-988-61	DIODE 1SS355TE-17	
D556	8-719-988-61	DIODE 1SS355TE-17		D901	8-719-313-43	DIODE SEL6210S-TH10 (PEAK : ST5)	
D557	8-719-422-80	DIODE MA8075-H-TX		D903	8-719-988-61	DIODE 1SS355TE-17	
D558	8-719-988-61	DIODE 1SS355TE-17		D904	8-719-988-61	DIODE 1SS355TE-17	
D559	8-719-988-61	DIODE 1SS355TE-17		D980	8-719-422-80	DIODE MA8075-H-TX	
D560	8-719-988-61	DIODE 1SS355TE-17		D981	8-719-988-61	DIODE 1SS355TE-17	
D561	8-719-988-61	DIODE 1SS355TE-17		D982	8-719-988-61	DIODE 1SS355TE-17	
D562	8-719-988-61	DIODE 1SS355TE-17		D983	8-719-988-61	DIODE 1SS355TE-17	
D563	8-719-988-61	DIODE 1SS355TE-17		D984	8-719-988-61	DIODE 1SS355TE-17	
D650	8-719-050-89	DIODE SEL6910A-TH10 (EDITOR : EDITOR)		D1001	8-719-313-43	DIODE SEL6210S-TH10 (PEAK : ST6)	
D651	8-719-988-61	DIODE 1SS355TE-17		D1003	8-719-988-61	DIODE 1SS355TE-17	
D652	8-719-988-61	DIODE 1SS355TE-17		D1004	8-719-988-61	DIODE 1SS355TE-17	
D653	8-719-988-61	DIODE 1SS355TE-17		D1080	8-719-422-80	DIODE MA8075-H-TX	
				D1081	8-719-988-61	DIODE 1SS355TE-17	

MASTER

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
D1082	8-719-988-61	DIODE 1SS355TE-17		IC705	8-759-711-85	IC NJM4580E-D(T1)	
D1083	8-719-988-61	DIODE 1SS355TE-17		IC706	8-759-592-78	IC THAT2180LB	
D1084	8-719-988-61	DIODE 1SS355TE-17		IC707	8-759-592-78	IC THAT2180LB	
		< IC >		IC709	8-759-711-85	IC NJM4580E-D(T1)	
				IC780	8-759-700-80	IC NJM2058M-T1	
IC001	8-759-238-17	IC TC74HCT138AF-TP1		IC781	8-759-230-99	IC TC74HC4053AF-TP1	
IC002	8-759-700-80	IC NJM2058M-T1		IC782	8-759-240-87	IC TC74HCT157AF(EL)	
IC003	8-759-238-17	IC TC74HCT138AF-TP1		IC801	8-759-711-85	IC NJM4580E-D(T1)	
IC004	8-759-238-17	IC TC74HCT138AF-TP1		IC802	8-759-711-85	IC NJM4580E-D(T1)	
IC005	8-759-238-17	IC TC74HCT138AF-TP1		IC803	8-759-711-85	IC NJM4580E-D(T1)	
IC006	8-759-710-88	IC NJM431U-TE1		IC804	8-759-711-85	IC NJM4580E-D(T1)	
IC007	8-759-710-88	IC NJM431U-TE1		IC805	8-759-711-85	IC NJM4580E-D(T1)	
IC008	8-759-710-88	IC NJM431U-TE1		IC806	8-759-592-78	IC THAT2180LB	
IC009	8-759-710-88	IC NJM431U-TE1		IC807	8-759-592-78	IC THAT2180LB	
IC101	8-759-711-85	IC NJM4580E-D(T1)		IC809	8-759-711-85	IC NJM4580E-D(T1)	
IC102	8-759-711-85	IC NJM4580E-D(T1)		IC881	8-759-230-99	IC TC74HC4053AF-TP1	
IC103	8-759-711-85	IC NJM4580E-D(T1)		IC882	8-759-230-99	IC TC74HC4053AF-TP1	
IC104	8-759-711-85	IC NJM4580E-D(T1)		IC883	8-759-240-87	IC TC74HCT157AF(EL)	
IC201	8-759-711-85	IC NJM4580E-D(T1)		IC901	8-759-711-85	IC NJM4580E-D(T1)	
IC202	8-759-711-85	IC NJM4580E-D(T1)		IC902	8-759-711-85	IC NJM4580E-D(T1)	
IC203	8-759-711-85	IC NJM4580E-D(T1)		IC903	8-759-711-85	IC NJM4580E-D(T1)	
IC204	8-759-711-85	IC NJM4580E-D(T1)		IC904	8-759-711-85	IC NJM4580E-D(T1)	
IC205	8-759-711-85	IC NJM4580E-D(T1)		IC905	8-759-711-85	IC NJM4580E-D(T1)	
IC206	8-759-711-85	IC NJM4580E-D(T1)		IC906	8-759-592-78	IC THAT2180LB	
IC207	8-759-711-85	IC NJM4580E-D(T1)		IC907	8-759-592-78	IC THAT2180LB	
IC208	8-759-711-85	IC NJM4580E-D(T1)		IC909	8-759-711-85	IC NJM4580E-D(T1)	
IC301	8-759-711-85	IC NJM4580E-D(T1)		IC980	8-759-700-80	IC NJM2058M-T1	
IC302	8-759-711-85	IC NJM4580E-D(T1)		IC981	8-759-230-99	IC TC74HC4053AF-TP1	
IC303	8-759-711-85	IC NJM4580E-D(T1)		IC982	8-759-240-87	IC TC74HCT157AF(EL)	
IC304	8-759-711-85	IC NJM4580E-D(T1)		IC1001	8-759-711-85	IC NJM4580E-D(T1)	
IC401	8-759-711-85	IC NJM4580E-D(T1)		IC1002	8-759-711-85	IC NJM4580E-D(T1)	
IC402	8-759-711-85	IC NJM4580E-D(T1)		IC1003	8-759-711-85	IC NJM4580E-D(T1)	
IC403	8-759-711-85	IC NJM4580E-D(T1)		IC1004	8-759-711-85	IC NJM4580E-D(T1)	
IC404	8-759-711-85	IC NJM4580E-D(T1)		IC1005	8-759-711-85	IC NJM4580E-D(T1)	
IC405	8-759-711-85	IC NJM4580E-D(T1)		IC1006	8-759-592-78	IC THAT2180LB	
IC501	8-759-711-85	IC NJM4580E-D(T1)		IC1007	8-759-592-78	IC THAT2180LB	
IC502	8-759-711-85	IC NJM4580E-D(T1)		IC1009	8-759-711-85	IC NJM4580E-D(T1)	
IC503	8-759-711-85	IC NJM4580E-D(T1)		IC1081	8-759-230-99	IC TC74HC4053AF-TP1	
IC504	8-759-711-85	IC NJM4580E-D(T1)		IC1082	8-759-230-99	IC TC74HC4053AF-TP1	
IC551	8-759-711-85	IC NJM4580E-D(T1)		IC1083	8-759-240-87	IC TC74HCT157AF(EL)	
IC552	8-759-711-85	IC NJM4580E-D(T1)				< MICROPHONE >	
IC553	8-759-711-85	IC NJM4580E-D(T1)		MIC550	1-542-347-11	MICROPHONE (MIC : TALK BACK)	
IC554	8-759-700-80	IC NJM2058M-T1				< TRANSISTOR >	
IC555	8-759-700-80	IC NJM2058M-T1		Q001	8-729-201-53	TRANSISTOR 2SA1015TP-YGR	
IC601	8-759-230-99	IC TC74HC4053AF-TP1		Q550	8-729-201-53	TRANSISTOR 2SA1015TP-YGR	
IC602	8-759-230-99	IC TC74HC4053AF-TP1		Q551	8-729-201-53	TRANSISTOR 2SA1015TP-YGR	
IC603	8-759-230-99	IC TC74HC4053AF-TP1		Q552	8-729-201-53	TRANSISTOR 2SA1015TP-YGR	
IC604	8-759-230-99	IC TC74HC4053AF-TP1		Q553	8-729-201-53	TRANSISTOR 2SA1015TP-YGR	
IC605	8-759-230-99	IC TC74HC4053AF-TP1		Q554	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
IC606	8-759-230-99	IC TC74HC4053AF-TP1		Q555	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
IC607	8-759-230-99	IC TC74HC4053AF-TP1		Q701	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
IC608	8-759-711-85	IC NJM4580E-D(T1)		Q702	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
IC609	8-759-711-85	IC NJM4580E-D(T1)		Q801	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
IC650	8-759-239-88	IC TC74HCT02AF(EL)		Q802	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
IC651	8-759-239-88	IC TC74HCT02AF(EL)		Q901	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
IC652	8-759-240-87	IC TC74HCT157AF(EL)		Q902	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
IC701	8-759-711-85	IC NJM4580E-D(T1)		Q1001	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
IC702	8-759-711-85	IC NJM4580E-D(T1)		Q1002	8-729-230-49	TRANSISTOR 2SC2712-YG-TE85L	
IC703	8-759-711-85	IC NJM4580E-D(T1)					
IC704	8-759-711-85	IC NJM4580E-D(T1)					

Ref. No.	Part No.	Description	Remarks			Ref. No.	Part No.	Description	Remarks		
< RESISTOR >						R133	1-208-784-11	RES,CHIP	1.2K	2%	1/10W
R001	1-208-784-11	RES,CHIP	1.2K	2%	1/10W	R134	1-208-784-11	RES,CHIP	1.2K	2%	1/10W
R002	1-208-462-61	RES,CHIP	10K	2%	1/10W	R135	1-216-677-11	METAL CHIP	12K	0.5%	1/10W
R003	1-208-462-61	RES,CHIP	10K	2%	1/10W	R136	1-216-677-11	METAL CHIP	12K	0.5%	1/10W
R004	1-208-462-61	RES,CHIP	10K	2%	1/10W	R137	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R005	1-208-462-61	RES,CHIP	10K	2%	1/10W	R138	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R006	1-208-462-61	RES,CHIP	10K	2%	1/10W	R139	1-216-613-11	METAL CHIP	27	0.5%	1/10W
R007	1-208-365-61	RES,CHIP	100	2%	1/10W	R140	1-208-774-11	RES,CHIP	470	2%	1/10W
R008	1-208-365-61	RES,CHIP	100	2%	1/10W	R141	1-208-784-11	RES,CHIP	1.2K	2%	1/10W
R009	1-208-365-61	RES,CHIP	100	2%	1/10W	R142	1-208-784-11	RES,CHIP	1.2K	2%	1/10W
R010	1-208-365-61	RES,CHIP	100	2%	1/10W	R143	1-216-677-11	METAL CHIP	12K	0.5%	1/10W
R011	1-208-810-11	RES,CHIP	15K	2%	1/10W	R144	1-216-677-11	METAL CHIP	12K	0.5%	1/10W
R012	1-208-526-61	RES,CHIP	47K	2%	1/10W	R150	1-208-534-61	RES,CHIP	100K	2%	1/10W
R013	1-208-425-61	RES,CHIP	330	2%	1/10W	R151	1-208-534-61	RES,CHIP	100K	2%	1/10W
R014	1-208-425-61	RES,CHIP	330	2%	1/10W	R152	1-208-457-11	RES,CHIP	6.2K	2%	1/10W
R015	1-208-425-61	RES,CHIP	330	2%	1/10W	R153	1-208-774-11	RES,CHIP	470	2%	1/10W
R016	1-208-462-61	RES,CHIP	10K	2%	1/10W	R154	1-208-774-11	RES,CHIP	470	2%	1/10W
R017	1-208-462-61	RES,CHIP	10K	2%	1/10W	R155	1-208-457-11	RES,CHIP	6.2K	2%	1/10W
R018	1-208-425-61	RES,CHIP	330	2%	1/10W	R156	1-208-453-61	RES,CHIP	4.7K	2%	1/10W
R019	1-208-425-61	RES,CHIP	330	2%	1/10W	R157	1-208-453-61	RES,CHIP	4.7K	2%	1/10W
R020	1-208-462-61	RES,CHIP	10K	2%	1/10W	R201	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R021	1-208-462-61	RES,CHIP	10K	2%	1/10W	R202	1-208-812-11	RES,CHIP	18K	2%	1/10W
R022	1-208-365-61	RES,CHIP	100	2%	1/10W	R203	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R023	1-208-365-61	RES,CHIP	100	2%	1/10W	R204	1-208-812-11	RES,CHIP	18K	2%	1/10W
R024	1-208-365-61	RES,CHIP	100	2%	1/10W	R205	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R025	1-208-365-61	RES,CHIP	100	2%	1/10W	R206	1-208-812-11	RES,CHIP	18K	2%	1/10W
R026	1-208-365-61	RES,CHIP	100	2%	1/10W	R207	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R027	1-208-365-61	RES,CHIP	100	2%	1/10W	R208	1-208-812-11	RES,CHIP	18K	2%	1/10W
R103	1-208-462-61	RES,CHIP	10K	2%	1/10W	R209	1-208-462-61	RES,CHIP	10K	2%	1/10W
R106	1-208-462-61	RES,CHIP	10K	2%	1/10W	R210	1-208-462-61	RES,CHIP	10K	2%	1/10W
R107	1-208-462-61	RES,CHIP	10K	2%	1/10W	R211	1-216-671-11	METAL CHIP	6.8K	0.5%	1/10W
R108	1-208-462-61	RES,CHIP	10K	2%	1/10W	R212	1-208-457-11	RES,CHIP	6.2K	2%	1/10W
R109	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W	R213	1-208-457-11	RES,CHIP	6.2K	2%	1/10W
R110	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W	R214	1-216-671-11	METAL CHIP	6.8K	0.5%	1/10W
R111	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W	R215	1-208-550-61	RES,CHIP	470K	2%	1/10W
R112	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W	R216	1-208-518-61	RES,CHIP	22K	2%	1/10W
R113	1-208-800-11	RES,CHIP	5.6K	2%	1/10W	R217	1-208-518-61	RES,CHIP	22K	2%	1/10W
R114	1-208-800-11	RES,CHIP	5.6K	2%	1/10W	R218	1-208-518-61	RES,CHIP	22K	2%	1/10W
R115	1-216-613-11	METAL CHIP	27	0.5%	1/10W	R219	1-208-518-61	RES,CHIP	22K	2%	1/10W
R116	1-208-774-11	RES,CHIP	470	2%	1/10W	R220	1-208-365-61	RES,CHIP	100	2%	1/10W
R117	1-208-784-11	RES,CHIP	1.2K	2%	1/10W	R221	1-208-365-61	RES,CHIP	100	2%	1/10W
R118	1-208-784-11	RES,CHIP	1.2K	2%	1/10W	R222	1-216-671-11	METAL CHIP	6.8K	0.5%	1/10W
R119	1-216-677-11	METAL CHIP	12K	0.5%	1/10W	R223	1-208-457-11	RES,CHIP	6.2K	2%	1/10W
R120	1-216-677-11	METAL CHIP	12K	0.5%	1/10W	R224	1-208-457-11	RES,CHIP	6.2K	2%	1/10W
R121	1-208-800-11	RES,CHIP	5.6K	2%	1/10W	R225	1-216-671-11	METAL CHIP	6.8K	0.5%	1/10W
R122	1-208-800-11	RES,CHIP	5.6K	2%	1/10W	R226	1-208-550-61	RES,CHIP	470K	2%	1/10W
R123	1-216-613-11	METAL CHIP	27	0.5%	1/10W	R227	1-208-518-61	RES,CHIP	22K	2%	1/10W
R124	1-208-774-11	RES,CHIP	470	2%	1/10W	R228	1-208-518-61	RES,CHIP	22K	2%	1/10W
R125	1-208-784-11	RES,CHIP	1.2K	2%	1/10W	R229	1-208-518-61	RES,CHIP	22K	2%	1/10W
R126	1-208-784-11	RES,CHIP	1.2K	2%	1/10W	R230	1-208-518-61	RES,CHIP	22K	2%	1/10W
R127	1-216-677-11	METAL CHIP	12K	0.5%	1/10W	R231	1-208-365-61	RES,CHIP	100	2%	1/10W
R128	1-216-677-11	METAL CHIP	12K	0.5%	1/10W	R232	1-208-365-61	RES,CHIP	100	2%	1/10W
R129	1-208-800-11	RES,CHIP	5.6K	2%	1/10W	R233	1-216-671-11	METAL CHIP	6.8K	0.5%	1/10W
R130	1-208-800-11	RES,CHIP	5.6K	2%	1/10W	R234	1-208-457-11	RES,CHIP	6.2K	2%	1/10W
R131	1-216-613-11	METAL CHIP	27	0.5%	1/10W	R235	1-208-457-11	RES,CHIP	6.2K	2%	1/10W
R132	1-208-774-11	RES,CHIP	470	2%	1/10W	R236	1-216-671-11	METAL CHIP	6.8K	0.5%	1/10W
						R237	1-208-550-61	RES,CHIP	470K	2%	1/10W
						R238	1-208-518-61	RES,CHIP	22K	2%	1/10W
						R239	1-208-518-61	RES,CHIP	22K	2%	1/10W
						R240	1-208-518-61	RES,CHIP	22K	2%	1/10W

MASTER

Ref. No.	Part No.	Description			Remarks
R241	1-208-518-61	RES,CHIP	22K	2%	1/10W
R242	1-208-365-61	RES,CHIP	100	2%	1/10W
R243	1-208-365-61	RES,CHIP	100	2%	1/10W
R244	1-216-671-11	METAL CHIP	6.8K	0.5%	1/10W
R245	1-208-457-11	RES,CHIP	6.2K	2%	1/10W
R246	1-208-457-11	RES,CHIP	6.2K	2%	1/10W
R247	1-216-671-11	METAL CHIP	6.8K	0.5%	1/10W
R248	1-208-550-61	RES,CHIP	470K	2%	1/10W
R249	1-208-518-61	RES,CHIP	22K	2%	1/10W
R250	1-208-518-61	RES,CHIP	22K	2%	1/10W
R251	1-208-518-61	RES,CHIP	22K	2%	1/10W
R252	1-208-518-61	RES,CHIP	22K	2%	1/10W
R253	1-208-365-61	RES,CHIP	100	2%	1/10W
R254	1-208-365-61	RES,CHIP	100	2%	1/10W
R255	1-216-635-11	METAL CHIP	220	0.5%	1/10W
R256	1-216-635-11	METAL CHIP	220	0.5%	1/10W
R257	1-216-635-11	METAL CHIP	220	0.5%	1/10W
R258	1-216-635-11	METAL CHIP	220	0.5%	1/10W
R301	1-216-648-11	METAL CHIP	750	0.5%	1/10W
R302	1-216-671-11	METAL CHIP	6.8K	0.5%	1/10W
R303	1-208-453-61	RES,CHIP	4.7K	2%	1/10W
R304	1-208-462-61	RES,CHIP	10K	2%	1/10W
R305	1-216-648-11	METAL CHIP	750	0.5%	1/10W
R306	1-216-671-11	METAL CHIP	6.8K	0.5%	1/10W
R307	1-208-453-61	RES,CHIP	4.7K	2%	1/10W
R308	1-208-462-61	RES,CHIP	10K	2%	1/10W
R309	1-216-648-11	METAL CHIP	750	0.5%	1/10W
R310	1-216-671-11	METAL CHIP	6.8K	0.5%	1/10W
R311	1-208-453-61	RES,CHIP	4.7K	2%	1/10W
R312	1-208-462-61	RES,CHIP	10K	2%	1/10W
R313	1-216-648-11	METAL CHIP	750	0.5%	1/10W
R314	1-216-671-11	METAL CHIP	6.8K	0.5%	1/10W
R315	1-208-453-61	RES,CHIP	4.7K	2%	1/10W
R316	1-208-462-61	RES,CHIP	10K	2%	1/10W
R317	1-208-462-61	RES,CHIP	10K	2%	1/10W
R318	1-208-462-61	RES,CHIP	10K	2%	1/10W
R319	1-208-462-61	RES,CHIP	10K	2%	1/10W
R320	1-208-462-61	RES,CHIP	10K	2%	1/10W
R321	1-216-635-11	METAL CHIP	220	0.5%	1/10W
R322	1-216-635-11	METAL CHIP	220	0.5%	1/10W
R323	1-216-635-11	METAL CHIP	220	0.5%	1/10W
R324	1-216-635-11	METAL CHIP	220	0.5%	1/10W
R401	1-208-462-61	RES,CHIP	10K	2%	1/10W
R402	1-208-462-61	RES,CHIP	10K	2%	1/10W
R403	1-208-462-61	RES,CHIP	10K	2%	1/10W
R404	1-208-462-61	RES,CHIP	10K	2%	1/10W
R405	1-208-462-61	RES,CHIP	10K	2%	1/10W
R406	1-208-462-61	RES,CHIP	10K	2%	1/10W
R407	1-208-462-61	RES,CHIP	10K	2%	1/10W
R408	1-208-462-61	RES,CHIP	10K	2%	1/10W
R409	1-208-462-61	RES,CHIP	10K	2%	1/10W
R410	1-208-462-61	RES,CHIP	10K	2%	1/10W
R411	1-208-462-61	RES,CHIP	10K	2%	1/10W
R412	1-208-462-61	RES,CHIP	10K	2%	1/10W
R413	1-208-462-61	RES,CHIP	10K	2%	1/10W
R414	1-208-462-61	RES,CHIP	10K	2%	1/10W
R415	1-208-462-61	RES,CHIP	10K	2%	1/10W
R422	1-208-534-61	RES,CHIP	100K	2%	1/10W
R423	1-208-437-61	RES,CHIP	1K	2%	1/10W
R424	1-216-635-11	METAL CHIP	220	0.5%	1/10W

Ref. No.	Part No.	Description			Remarks
R501	1-208-462-61	RES,CHIP	10K	2%	1/10W
R502	1-208-462-61	RES,CHIP	10K	2%	1/10W
R503	1-208-462-61	RES,CHIP	10K	2%	1/10W
R504	1-208-462-61	RES,CHIP	10K	2%	1/10W
R505	1-208-462-61	RES,CHIP	10K	2%	1/10W
R506	1-208-462-61	RES,CHIP	10K	2%	1/10W
R507	1-208-462-61	RES,CHIP	10K	2%	1/10W
R508	1-208-462-61	RES,CHIP	10K	2%	1/10W
R509	1-208-462-61	RES,CHIP	10K	2%	1/10W
R510	1-208-462-61	RES,CHIP	10K	2%	1/10W
R511	1-208-462-61	RES,CHIP	10K	2%	1/10W
R512	1-208-462-61	RES,CHIP	10K	2%	1/10W
R513	1-208-462-61	RES,CHIP	10K	2%	1/10W
R514	1-208-462-61	RES,CHIP	10K	2%	1/10W
R515	1-208-462-61	RES,CHIP	10K	2%	1/10W
R516	1-208-462-61	RES,CHIP	10K	2%	1/10W
R517	1-208-462-61	RES,CHIP	10K	2%	1/10W
R518	1-208-462-61	RES,CHIP	10K	2%	1/10W
R519	1-208-462-61	RES,CHIP	10K	2%	1/10W
R520	1-208-462-61	RES,CHIP	10K	2%	1/10W
R521	1-208-462-61	RES,CHIP	10K	2%	1/10W
R522	1-208-462-61	RES,CHIP	10K	2%	1/10W
R523	1-208-462-61	RES,CHIP	10K	2%	1/10W
R524	1-208-462-61	RES,CHIP	10K	2%	1/10W
R525	1-216-635-11	METAL CHIP	220	0.5%	1/10W
R526	1-216-635-11	METAL CHIP	220	0.5%	1/10W
R527	1-216-635-11	METAL CHIP	220	0.5%	1/10W
R528	1-216-635-11	METAL CHIP	220	0.5%	1/10W
R547	1-208-453-61	RES,CHIP	4.7K	2%	1/10W
R548	1-208-453-61	RES,CHIP	4.7K	2%	1/10W
R549	1-216-635-11	METAL CHIP	220	0.5%	1/10W
R550	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W
R551	1-208-462-61	RES,CHIP	10K	2%	1/10W
R552	1-208-462-61	RES,CHIP	10K	2%	1/10W
R553	1-216-685-11	METAL CHIP	27K	0.5%	1/10W
R554	1-208-534-61	RES,CHIP	100K	2%	1/10W
R555	1-216-613-11	METAL CHIP	27	0.5%	1/10W
R556	1-216-689-11	METAL CHIP	39K	0.5%	1/10W
R557	1-208-534-61	RES,CHIP	100K	2%	1/10W
R558	1-208-518-61	RES,CHIP	22K	2%	1/10W
R559	1-208-518-61	RES,CHIP	22K	2%	1/10W
R560	1-216-685-11	METAL CHIP	27K	0.5%	1/10W
R561	1-208-534-61	RES,CHIP	100K	2%	1/10W
R562	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R563	1-208-534-61	RES,CHIP	100K	2%	1/10W
R564	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R565	1-208-518-61	RES,CHIP	22K	2%	1/10W
R566	1-208-518-61	RES,CHIP	22K	2%	1/10W
R567	1-216-685-11	METAL CHIP	27K	0.5%	1/10W
R568	1-218-756-11	RES,CHIP	150K	2%	1/10W
R569	1-208-534-61	RES,CHIP	100K	2%	1/10W
R570	1-208-518-61	RES,CHIP	22K	2%	1/10W
R571	1-218-756-11	RES,CHIP	150K	2%	1/10W
R572	1-208-518-61	RES,CHIP	22K	2%	1/10W
R573	1-218-756-11	RES,CHIP	150K	2%	1/10W
R574	1-208-810-11	RES,CHIP	15K	2%	1/10W
R575	1-216-685-11	METAL CHIP	27K	0.5%	1/10W
R576	1-208-534-61	RES,CHIP	100K	2%	1/10W
R577	1-208-526-61	RES,CHIP	47K	2%	1/10W
R578	1-208-526-61	RES,CHIP	47K	2%	1/10W

Ref. No.	Part No.	Description			Remarks	Ref. No.	Part No.	Description			Remarks
R579	1-208-534-61	RES,CHIP	100K	2%	1/10W	R670	1-216-635-11	METAL CHIP	220	0.5%	1/10W
R580	1-208-534-61	RES,CHIP	100K	2%	1/10W	R671	1-208-365-61	RES,CHIP	100	2%	1/10W
R581	1-208-534-61	RES,CHIP	100K	2%	1/10W	R672	1-208-365-61	RES,CHIP	100	2%	1/10W
R582	1-208-518-61	RES,CHIP	22K	2%	1/10W	R701	1-216-647-11	METAL CHIP	680	0.5%	1/10W
R583	1-208-518-61	RES,CHIP	22K	2%	1/10W	R702	1-216-647-11	METAL CHIP	680	0.5%	1/10W
R584	1-208-526-61	RES,CHIP	47K	2%	1/10W	R703	1-208-462-61	RES,CHIP	10K	2%	1/10W
R585	1-208-526-61	RES,CHIP	47K	2%	1/10W	R704	1-208-462-61	RES,CHIP	10K	2%	1/10W
R586	1-208-526-61	RES,CHIP	47K	2%	1/10W	R705	1-208-526-61	RES,CHIP	47K	2%	1/10W
R587	1-208-526-61	RES,CHIP	47K	2%	1/10W	R706	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R588	1-208-449-61	RES,CHIP	3.3K	2%	1/10W	R707	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R589	1-208-526-61	RES,CHIP	47K	2%	1/10W	R708	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R590	1-208-425-61	RES,CHIP	330	2%	1/10W	R709	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R591	1-208-425-61	RES,CHIP	330	2%	1/10W	R710	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R592	1-208-425-61	RES,CHIP	330	2%	1/10W	R711	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R593	1-208-437-61	RES,CHIP	1K	2%	1/10W	R712	1-208-774-11	RES,CHIP	470	2%	1/10W
R594	1-208-462-61	RES,CHIP	10K	2%	1/10W	R713	1-208-774-11	RES,CHIP	470	2%	1/10W
R595	1-208-437-61	RES,CHIP	1K	2%	1/10W	R714	1-216-613-11	METAL CHIP	27	0.5%	1/10W
R596	1-208-425-61	RES,CHIP	330	2%	1/10W	R715	1-216-613-11	METAL CHIP	27	0.5%	1/10W
R597	1-208-462-61	RES,CHIP	10K	2%	1/10W	R716	1-208-534-61	RES,CHIP	100K	2%	1/10W
R598	1-208-365-61	RES,CHIP	100	2%	1/10W	R717	1-208-784-11	RES,CHIP	1.2K	2%	1/10W
R599	1-208-365-61	RES,CHIP	100	2%	1/10W	R718	1-208-784-11	RES,CHIP	1.2K	2%	1/10W
R602	1-208-462-61	RES,CHIP	10K	2%	1/10W	R719	1-208-784-11	RES,CHIP	1.2K	2%	1/10W
R603	1-208-462-61	RES,CHIP	10K	2%	1/10W	R720	1-208-784-11	RES,CHIP	1.2K	2%	1/10W
R607	1-208-462-61	RES,CHIP	10K	2%	1/10W	R721	1-216-677-11	METAL CHIP	12K	0.5%	1/10W
R609	1-208-462-61	RES,CHIP	10K	2%	1/10W	R722	1-216-677-11	METAL CHIP	12K	0.5%	1/10W
R610	1-208-462-61	RES,CHIP	10K	2%	1/10W	R723	1-208-534-61	RES,CHIP	100K	2%	1/10W
R611	1-208-462-61	RES,CHIP	10K	2%	1/10W	R724	1-216-677-11	METAL CHIP	12K	0.5%	1/10W
R613	1-208-462-61	RES,CHIP	10K	2%	1/10W	R725	1-216-677-11	METAL CHIP	12K	0.5%	1/10W
R614	1-208-462-61	RES,CHIP	10K	2%	1/10W	R726	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W
R615	1-208-462-61	RES,CHIP	10K	2%	1/10W	R727	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W
R617	1-208-462-61	RES,CHIP	10K	2%	1/10W	R728	1-208-449-61	RES,CHIP	3.3K	2%	1/10W
R618	1-208-462-61	RES,CHIP	10K	2%	1/10W	R729	1-208-449-61	RES,CHIP	3.3K	2%	1/10W
R620	1-208-462-61	RES,CHIP	10K	2%	1/10W	R730	1-208-449-61	RES,CHIP	3.3K	2%	1/10W
R622	1-208-534-61	RES,CHIP	100K	2%	1/10W	R731	1-208-449-61	RES,CHIP	3.3K	2%	1/10W
R623	1-208-462-61	RES,CHIP	10K	2%	1/10W	R732	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R624	1-208-462-61	RES,CHIP	10K	2%	1/10W	R733	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R625	1-208-462-61	RES,CHIP	10K	2%	1/10W	R734	1-208-462-61	RES,CHIP	10K	2%	1/10W
R626	1-208-462-61	RES,CHIP	10K	2%	1/10W	R735	1-208-462-61	RES,CHIP	10K	2%	1/10W
R640	1-208-453-61	RES,CHIP	4.7K	2%	1/10W	R736	1-208-518-61	RES,CHIP	22K	2%	1/10W
R641	1-208-453-61	RES,CHIP	4.7K	2%	1/10W	R737	1-208-518-61	RES,CHIP	22K	2%	1/10W
R650	1-216-635-11	METAL CHIP	220	0.5%	1/10W	R738	1-208-462-61	RES,CHIP	10K	2%	1/10W
R651	1-208-526-61	RES,CHIP	47K	2%	1/10W	R739	1-208-810-11	RES,CHIP	15K	2%	1/10W
R652	1-208-526-61	RES,CHIP	47K	2%	1/10W	R740	1-208-462-61	RES,CHIP	10K	2%	1/10W
R653	1-208-534-61	RES,CHIP	100K	2%	1/10W	R741	1-208-810-11	RES,CHIP	15K	2%	1/10W
R654	1-208-534-61	RES,CHIP	100K	2%	1/10W	R742	1-216-678-11	METAL CHIP	13K	0.5%	1/10W
R655	1-208-534-61	RES,CHIP	100K	2%	1/10W	R743	1-216-678-11	METAL CHIP	13K	0.5%	1/10W
R656	1-208-534-61	RES,CHIP	100K	2%	1/10W	R744	1-208-462-61	RES,CHIP	10K	2%	1/10W
R657	1-208-534-61	RES,CHIP	100K	2%	1/10W	R745	1-208-462-61	RES,CHIP	10K	2%	1/10W
R658	1-208-534-61	RES,CHIP	100K	2%	1/10W	R746	1-208-462-61	RES,CHIP	10K	2%	1/10W
R659	1-208-534-61	RES,CHIP	100K	2%	1/10W	R747	1-208-462-61	RES,CHIP	10K	2%	1/10W
R660	1-208-534-61	RES,CHIP	100K	2%	1/10W	R748	1-208-810-11	RES,CHIP	15K	2%	1/10W
R661	1-208-534-61	RES,CHIP	100K	2%	1/10W	R749	1-208-810-11	RES,CHIP	15K	2%	1/10W
R662	1-208-534-61	RES,CHIP	100K	2%	1/10W	R750	1-208-810-11	RES,CHIP	15K	2%	1/10W
R663	1-208-534-61	RES,CHIP	100K	2%	1/10W	R751	1-208-810-11	RES,CHIP	15K	2%	1/10W
R664	1-208-534-61	RES,CHIP	100K	2%	1/10W	R752	1-216-676-11	METAL CHIP	11K	0.5%	1/10W
R665	1-208-534-61	RES,CHIP	100K	2%	1/10W	R753	1-216-676-11	METAL CHIP	11K	0.5%	1/10W
R666	1-208-534-61	RES,CHIP	100K	2%	1/10W	R754	1-216-676-11	METAL CHIP	11K	0.5%	1/10W
R667	1-208-534-61	RES,CHIP	100K	2%	1/10W	R755	1-216-676-11	METAL CHIP	11K	0.5%	1/10W
R668	1-208-462-61	RES,CHIP	10K	2%	1/10W	R756	1-208-462-61	RES,CHIP	10K	2%	1/10W
R669	1-216-635-11	METAL CHIP	220	0.5%	1/10W	R757	1-208-462-61	RES,CHIP	10K	2%	1/10W

MASTER

Ref. No.	Part No.	Description	Remarks			Ref. No.	Part No.	Description	Remarks		
R758	1-208-518-61	RES,CHIP	22K	2%	1/10W	R830	1-208-449-61	RES,CHIP	3.3K	2%	1/10W
R759	1-208-518-61	RES,CHIP	22K	2%	1/10W	R831	1-208-449-61	RES,CHIP	3.3K	2%	1/10W
R762	1-208-453-61	RES,CHIP	4.7K	2%	1/10W	R832	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R763	1-208-453-61	RES,CHIP	4.7K	2%	1/10W	R833	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R766	1-208-518-61	RES,CHIP	22K	2%	1/10W	R834	1-208-462-61	RES,CHIP	10K	2%	1/10W
R767	1-208-518-61	RES,CHIP	22K	2%	1/10W	R835	1-208-462-61	RES,CHIP	10K	2%	1/10W
R768	1-208-462-61	RES,CHIP	10K	2%	1/10W	R836	1-208-518-61	RES,CHIP	22K	2%	1/10W
R769	1-208-462-61	RES,CHIP	10K	2%	1/10W	R837	1-208-518-61	RES,CHIP	22K	2%	1/10W
R770	1-208-462-61	RES,CHIP	10K	2%	1/10W	R838	1-208-462-61	RES,CHIP	10K	2%	1/10W
R771	1-208-462-61	RES,CHIP	10K	2%	1/10W	R839	1-208-810-11	RES,CHIP	15K	2%	1/10W
R772	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W	R840	1-208-462-61	RES,CHIP	10K	2%	1/10W
R773	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W	R841	1-208-810-11	RES,CHIP	15K	2%	1/10W
R774	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W	R842	1-216-678-11	METAL CHIP	13K	0.5%	1/10W
R775	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W	R843	1-216-678-11	METAL CHIP	13K	0.5%	1/10W
R776	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W	R844	1-208-462-61	RES,CHIP	10K	2%	1/10W
R777	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W	R845	1-208-462-61	RES,CHIP	10K	2%	1/10W
R778	1-208-453-61	RES,CHIP	4.7K	2%	1/10W	R846	1-208-462-61	RES,CHIP	10K	2%	1/10W
R779	1-208-453-61	RES,CHIP	4.7K	2%	1/10W	R847	1-208-462-61	RES,CHIP	10K	2%	1/10W
R780	1-208-800-11	RES,CHIP	5.6K	2%	1/10W	R848	1-208-810-11	RES,CHIP	15K	2%	1/10W
R781	1-208-518-61	RES,CHIP	22K	2%	1/10W	R849	1-208-810-11	RES,CHIP	15K	2%	1/10W
R782	1-216-689-11	METAL CHIP	39K	0.5%	1/10W	R850	1-208-810-11	RES,CHIP	15K	2%	1/10W
R783	1-216-689-11	METAL CHIP	39K	0.5%	1/10W	R851	1-208-810-11	RES,CHIP	15K	2%	1/10W
R784	1-218-760-11	RES,CHIP	220K	2%	1/10W	R852	1-216-676-11	METAL CHIP	11K	0.5%	1/10W
R785	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W	R853	1-216-676-11	METAL CHIP	11K	0.5%	1/10W
R786	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W	R854	1-216-676-11	METAL CHIP	11K	0.5%	1/10W
R787	1-208-810-11	RES,CHIP	15K	2%	1/10W	R855	1-216-676-11	METAL CHIP	11K	0.5%	1/10W
R788	1-208-518-61	RES,CHIP	22K	2%	1/10W	R856	1-208-462-61	RES,CHIP	10K	2%	1/10W
R789	1-208-526-61	RES,CHIP	47K	2%	1/10W	R857	1-208-462-61	RES,CHIP	10K	2%	1/10W
R790	1-216-689-11	METAL CHIP	39K	0.5%	1/10W	R858	1-208-518-61	RES,CHIP	22K	2%	1/10W
R793	1-208-812-11	RES,CHIP	18K	2%	1/10W	R859	1-208-518-61	RES,CHIP	22K	2%	1/10W
R794	1-208-812-11	RES,CHIP	18K	2%	1/10W	R862	1-208-453-61	RES,CHIP	4.7K	2%	1/10W
R801	1-216-647-11	METAL CHIP	680	0.5%	1/10W	R863	1-208-453-61	RES,CHIP	4.7K	2%	1/10W
R802	1-216-647-11	METAL CHIP	680	0.5%	1/10W	R866	1-208-518-61	RES,CHIP	22K	2%	1/10W
R803	1-208-526-61	RES,CHIP	47K	2%	1/10W	R867	1-208-518-61	RES,CHIP	22K	2%	1/10W
R804	1-208-462-61	RES,CHIP	10K	2%	1/10W	R868	1-208-462-61	RES,CHIP	10K	2%	1/10W
R805	1-208-462-61	RES,CHIP	10K	2%	1/10W	R869	1-208-462-61	RES,CHIP	10K	2%	1/10W
R806	1-208-800-11	RES,CHIP	5.6K	2%	1/10W	R870	1-208-462-61	RES,CHIP	10K	2%	1/10W
R807	1-208-800-11	RES,CHIP	5.6K	2%	1/10W	R871	1-208-462-61	RES,CHIP	10K	2%	1/10W
R808	1-208-800-11	RES,CHIP	5.6K	2%	1/10W	R872	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R809	1-208-800-11	RES,CHIP	5.6K	2%	1/10W	R873	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R810	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W	R874	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R811	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W	R875	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W
R812	1-208-774-11	RES,CHIP	470	2%	1/10W	R876	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W
R813	1-208-774-11	RES,CHIP	470	2%	1/10W	R877	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R814	1-216-613-11	METAL CHIP	27	0.5%	1/10W	R878	1-208-462-61	RES,CHIP	10K	2%	1/10W
R815	1-216-613-11	METAL CHIP	27	0.5%	1/10W	R879	1-208-462-61	RES,CHIP	10K	2%	1/10W
R816	1-208-534-61	RES,CHIP	100K	2%	1/10W	R880	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R817	1-208-784-11	RES,CHIP	1.2K	2%	1/10W	R881	1-208-518-61	RES,CHIP	22K	2%	1/10W
R818	1-208-784-11	RES,CHIP	1.2K	2%	1/10W	R882	1-216-689-11	METAL CHIP	39K	0.5%	1/10W
R819	1-208-784-11	RES,CHIP	1.2K	2%	1/10W	R883	1-216-689-11	METAL CHIP	39K	0.5%	1/10W
R820	1-208-784-11	RES,CHIP	1.2K	2%	1/10W	R884	1-218-760-11	RES,CHIP	220K	2%	1/10W
R821	1-216-677-11	METAL CHIP	12K	0.5%	1/10W	R885	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R822	1-216-677-11	METAL CHIP	12K	0.5%	1/10W	R886	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R823	1-208-534-61	RES,CHIP	100K	2%	1/10W	R887	1-208-810-11	RES,CHIP	15K	2%	1/10W
R824	1-216-677-11	METAL CHIP	12K	0.5%	1/10W	R888	1-208-518-61	RES,CHIP	22K	2%	1/10W
R825	1-216-677-11	METAL CHIP	12K	0.5%	1/10W	R889	1-208-526-61	RES,CHIP	47K	2%	1/10W
R826	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W	R890	1-208-453-61	RES,CHIP	4.7K	2%	1/10W
R827	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W	R891	1-208-453-61	RES,CHIP	4.7K	2%	1/10W
R828	1-208-449-61	RES,CHIP	3.3K	2%	1/10W	R894	1-208-812-11	RES,CHIP	18K	2%	1/10W
R829	1-208-449-61	RES,CHIP	3.3K	2%	1/10W	R895	1-208-812-11	RES,CHIP	18K	2%	1/10W

Ref. No.	Part No.	Description			Remarks	Ref. No.	Part No.	Description			Remarks
R901	1-216-647-11	METAL CHIP	680	0.5%	1/10W	R963	1-208-453-61	RES,CHIP	4.7K	2%	1/10W
R902	1-216-647-11	METAL CHIP	680	0.5%	1/10W	R966	1-208-518-61	RES,CHIP	22K	2%	1/10W
R903	1-208-526-61	RES,CHIP	47K	2%	1/10W	R967	1-208-518-61	RES,CHIP	22K	2%	1/10W
R904	1-208-462-61	RES,CHIP	10K	2%	1/10W	R968	1-208-462-61	RES,CHIP	10K	2%	1/10W
R905	1-208-462-61	RES,CHIP	10K	2%	1/10W	R969	1-208-462-61	RES,CHIP	10K	2%	1/10W
R906	1-208-800-11	RES,CHIP	5.6K	2%	1/10W	R970	1-208-462-61	RES,CHIP	10K	2%	1/10W
R907	1-208-800-11	RES,CHIP	5.6K	2%	1/10W	R971	1-208-462-61	RES,CHIP	10K	2%	1/10W
R908	1-208-800-11	RES,CHIP	5.6K	2%	1/10W	R972	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R909	1-208-800-11	RES,CHIP	5.6K	2%	1/10W	R973	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R910	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W	R974	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R911	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W	R975	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W
R912	1-208-774-11	RES,CHIP	470	2%	1/10W	R976	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W
R913	1-208-774-11	RES,CHIP	470	2%	1/10W	R977	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R914	1-216-613-11	METAL CHIP	27	0.5%	1/10W	R978	1-208-453-61	RES,CHIP	4.7K	2%	1/10W
R915	1-216-613-11	METAL CHIP	27	0.5%	1/10W	R979	1-208-453-61	RES,CHIP	4.7K	2%	1/10W
R916	1-208-534-61	RES,CHIP	100K	2%	1/10W	R980	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R917	1-208-784-11	RES,CHIP	1.2K	2%	1/10W	R981	1-208-518-61	RES,CHIP	22K	2%	1/10W
R918	1-208-784-11	RES,CHIP	1.2K	2%	1/10W	R982	1-216-689-11	METAL CHIP	39K	0.5%	1/10W
R919	1-208-784-11	RES,CHIP	1.2K	2%	1/10W	R983	1-216-689-11	METAL CHIP	39K	0.5%	1/10W
R920	1-208-784-11	RES,CHIP	1.2K	2%	1/10W	R984	1-218-760-11	RES,CHIP	220K	2%	1/10W
R921	1-216-677-11	METAL CHIP	12K	0.5%	1/10W	R985	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R922	1-216-677-11	METAL CHIP	12K	0.5%	1/10W	R986	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R923	1-208-534-61	RES,CHIP	100K	2%	1/10W	R987	1-208-810-11	RES,CHIP	15K	2%	1/10W
R924	1-216-677-11	METAL CHIP	12K	0.5%	1/10W	R988	1-208-518-61	RES,CHIP	22K	2%	1/10W
R925	1-216-677-11	METAL CHIP	12K	0.5%	1/10W	R989	1-208-526-61	RES,CHIP	47K	2%	1/10W
R926	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W	R990	1-216-689-11	METAL CHIP	39K	0.5%	1/10W
R927	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W	R993	1-208-812-11	RES,CHIP	18K	2%	1/10W
R928	1-208-449-61	RES,CHIP	3.3K	2%	1/10W	R994	1-208-812-11	RES,CHIP	18K	2%	1/10W
R929	1-208-449-61	RES,CHIP	3.3K	2%	1/10W	R1001	1-216-647-11	METAL CHIP	680	0.5%	1/10W
R930	1-208-449-61	RES,CHIP	3.3K	2%	1/10W	R1002	1-216-647-11	METAL CHIP	680	0.5%	1/10W
R931	1-208-449-61	RES,CHIP	3.3K	2%	1/10W	R1003	1-208-526-61	RES,CHIP	47K	2%	1/10W
R932	1-208-800-11	RES,CHIP	5.6K	2%	1/10W	R1004	1-208-462-61	RES,CHIP	10K	2%	1/10W
R933	1-208-800-11	RES,CHIP	5.6K	2%	1/10W	R1005	1-208-462-61	RES,CHIP	10K	2%	1/10W
R934	1-208-462-61	RES,CHIP	10K	2%	1/10W	R1006	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R935	1-208-462-61	RES,CHIP	10K	2%	1/10W	R1007	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R936	1-208-518-61	RES,CHIP	22K	2%	1/10W	R1008	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R937	1-208-518-61	RES,CHIP	22K	2%	1/10W	R1009	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R938	1-208-462-61	RES,CHIP	10K	2%	1/10W	R1010	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R939	1-208-810-11	RES,CHIP	15K	2%	1/10W	R1011	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R940	1-208-462-61	RES,CHIP	10K	2%	1/10W	R1012	1-208-774-11	RES,CHIP	470	2%	1/10W
R941	1-208-810-11	RES,CHIP	15K	2%	1/10W	R1013	1-208-774-11	RES,CHIP	470	2%	1/10W
R942	1-216-678-11	METAL CHIP	13K	0.5%	1/10W	R1014	1-216-613-11	METAL CHIP	27	0.5%	1/10W
R943	1-216-678-11	METAL CHIP	13K	0.5%	1/10W	R1015	1-216-613-11	METAL CHIP	27	0.5%	1/10W
R944	1-208-462-61	RES,CHIP	10K	2%	1/10W	R1016	1-208-534-61	RES,CHIP	100K	2%	1/10W
R945	1-208-462-61	RES,CHIP	10K	2%	1/10W	R1017	1-208-810-11	RES,CHIP	15K	2%	1/10W
R946	1-208-462-61	RES,CHIP	10K	2%	1/10W	R1018	1-208-810-11	RES,CHIP	15K	2%	1/10W
R947	1-208-462-61	RES,CHIP	10K	2%	1/10W	R1019	1-208-810-11	RES,CHIP	15K	2%	1/10W
R948	1-208-810-11	RES,CHIP	15K	2%	1/10W	R1020	1-208-810-11	RES,CHIP	15K	2%	1/10W
R949	1-208-810-11	RES,CHIP	15K	2%	1/10W	R1021	1-216-677-11	METAL CHIP	12K	0.5%	1/10W
R950	1-208-810-11	RES,CHIP	15K	2%	1/10W	R1022	1-216-677-11	METAL CHIP	12K	0.5%	1/10W
R951	1-208-810-11	RES,CHIP	15K	2%	1/10W	R1023	1-208-534-61	RES,CHIP	100K	2%	1/10W
R952	1-216-676-11	METAL CHIP	11K	0.5%	1/10W	R1024	1-216-677-11	METAL CHIP	12K	0.5%	1/10W
R953	1-216-676-11	METAL CHIP	11K	0.5%	1/10W	R1025	1-216-677-11	METAL CHIP	12K	0.5%	1/10W
R954	1-216-676-11	METAL CHIP	11K	0.5%	1/10W	R1026	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W
R955	1-216-676-11	METAL CHIP	11K	0.5%	1/10W	R1027	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W
R956	1-208-462-61	RES,CHIP	10K	2%	1/10W	R1028	1-208-449-61	RES,CHIP	3.3K	2%	1/10W
R957	1-208-462-61	RES,CHIP	10K	2%	1/10W	R1029	1-208-449-61	RES,CHIP	3.3K	2%	1/10W
R958	1-208-518-61	RES,CHIP	22K	2%	1/10W	R1030	1-208-449-61	RES,CHIP	3.3K	2%	1/10W
R959	1-208-518-61	RES,CHIP	22K	2%	1/10W	R1031	1-208-449-61	RES,CHIP	3.3K	2%	1/10W
R962	1-208-453-61	RES,CHIP	4.7K	2%	1/10W	R1032	1-208-800-11	RES,CHIP	5.6K	2%	1/10W

MASTER

Ref. No.	Part No.	Description			Remarks
R1033	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R1034	1-208-462-61	RES,CHIP	10K	2%	1/10W
R1035	1-208-462-61	RES,CHIP	10K	2%	1/10W
R1036	1-208-518-61	RES,CHIP	22K	2%	1/10W
R1037	1-208-518-61	RES,CHIP	22K	2%	1/10W
R1038	1-208-462-61	RES,CHIP	10K	2%	1/10W
R1039	1-208-810-11	RES,CHIP	15K	2%	1/10W
R1040	1-208-462-61	RES,CHIP	10K	2%	1/10W
R1041	1-208-810-11	RES,CHIP	15K	2%	1/10W
R1042	1-216-678-11	METAL CHIP	13K	0.5%	1/10W
R1043	1-216-678-11	METAL CHIP	13K	0.5%	1/10W
R1044	1-208-462-61	RES,CHIP	10K	2%	1/10W
R1045	1-208-462-61	RES,CHIP	10K	2%	1/10W
R1046	1-208-462-61	RES,CHIP	10K	2%	1/10W
R1047	1-208-462-61	RES,CHIP	10K	2%	1/10W
R1048	1-208-810-11	RES,CHIP	15K	2%	1/10W
R1049	1-208-810-11	RES,CHIP	15K	2%	1/10W
R1050	1-208-810-11	RES,CHIP	15K	2%	1/10W
R1051	1-208-810-11	RES,CHIP	15K	2%	1/10W
R1052	1-216-676-11	METAL CHIP	11K	0.5%	1/10W
R1053	1-216-676-11	METAL CHIP	11K	0.5%	1/10W
R1054	1-216-676-11	METAL CHIP	11K	0.5%	1/10W
R1055	1-216-676-11	METAL CHIP	11K	0.5%	1/10W
R1056	1-208-462-61	RES,CHIP	10K	2%	1/10W
R1057	1-208-462-61	RES,CHIP	10K	2%	1/10W
R1058	1-208-518-61	RES,CHIP	22K	2%	1/10W
R1059	1-208-518-61	RES,CHIP	22K	2%	1/10W
R1062	1-208-453-61	RES,CHIP	4.7K	2%	1/10W
R1063	1-208-453-61	RES,CHIP	4.7K	2%	1/10W
R1066	1-208-518-61	RES,CHIP	22K	2%	1/10W
R1067	1-208-518-61	RES,CHIP	22K	2%	1/10W
R1068	1-208-462-61	RES,CHIP	10K	2%	1/10W
R1069	1-208-462-61	RES,CHIP	10K	2%	1/10W
R1070	1-208-462-61	RES,CHIP	10K	2%	1/10W
R1071	1-208-462-61	RES,CHIP	10K	2%	1/10W
R1072	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R1073	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R1074	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R1075	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W
R1076	1-216-659-11	METAL CHIP	2.2K	0.5%	1/10W
R1077	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R1078	1-208-462-61	RES,CHIP	10K	2%	1/10W
R1079	1-208-462-61	RES,CHIP	10K	2%	1/10W
R1080	1-208-800-11	RES,CHIP	5.6K	2%	1/10W
R1081	1-208-518-61	RES,CHIP	22K	2%	1/10W
R1082	1-216-689-11	METAL CHIP	39K	0.5%	1/10W
R1083	1-216-689-11	METAL CHIP	39K	0.5%	1/10W
R1084	1-218-760-11	RES,CHIP	220K	2%	1/10W
R1085	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R1086	1-216-665-11	METAL CHIP	3.9K	0.5%	1/10W
R1087	1-208-810-11	RES,CHIP	15K	2%	1/10W
R1088	1-208-518-61	RES,CHIP	22K	2%	1/10W
R1089	1-208-526-61	RES,CHIP	47K	2%	1/10W
R1090	1-208-453-61	RES,CHIP	4.7K	2%	1/10W
R1091	1-208-453-61	RES,CHIP	4.7K	2%	1/10W
R1094	1-208-812-11	RES,CHIP	18K	2%	1/10W

Ref. No.	Part No.	Description	Remarks
		< VARIABLE RESISTOR >	
RV101	1-225-555-11	RES, VAR 50K (LEVEL : RETURN)	
RV102	1-225-553-11	RES, VAR 5K (BAL : RETURN)	
RV201	1-225-552-11	RES, VAR, SLIDE 50K (MASTER1 FADER)	
RV202	1-225-552-11	RES, VAR, SLIDE 50K (MASTER2 FADER)	
RV203	1-225-552-11	RES, VAR, SLIDE 50K (MASTER3 FADER)	
RV204	1-225-552-11	RES, VAR, SLIDE 50K (MASTER4 FADER)	
RV301	1-225-558-11	RES, VAR 50K (AUX MASTER1)	
RV302	1-225-558-11	RES, VAR 50K (AUX MASTER2)	
RV303	1-225-558-11	RES, VAR 50K (AUX MASTER3)	
RV304	1-225-558-11	RES, VAR 50K (AUX MASTER4)	
RV501	1-225-555-11	RES, VAR 50K (OUTPUT1-2 : EDITOR)	
RV502	1-225-555-11	RES, VAR 50K (OUTPUT3-4 : EDITOR)	
RV550	1-225-558-11	RES, VAR 50K (LEVEL : TALK BACK)	
RV551	1-238-600-11	RES, ADJ, CARBON 10K	
RV552	1-225-555-11	RES, VAR 50K (LEVEL : PHONES)	
RV701	1-225-554-11	RES, VAR 10K (MID : ST3)	
RV702	1-225-554-11	RES, VAR 10K (LOW : ST3)	
RV703	1-225-554-11	RES, VAR 10K (HIGH : ST3)	
RV704	1-225-553-11	RES, VAR 5K (BAL : ST3)	
RV705	1-225-555-11	RES, VAR 50K (AUX LVL : ST3)	
RV706	1-225-553-11	RES, VAR 5K (AUX BAL : ST3)	
RV780	1-225-850-11	RES, VAR, SLIDE 50K (CH FADER : ST3)	
RV781	1-238-600-11	RES, ADJ, CARBON 10K	
RV801	1-225-554-11	RES, VAR 10K (MID : ST4)	
RV802	1-225-554-11	RES, VAR 10K (LOW : ST4)	
RV803	1-225-554-11	RES, VAR 10K (HIGH : ST4)	
RV804	1-225-553-11	RES, VAR 5K (BAL : ST4)	
RV805	1-225-555-11	RES, VAR 50K (AUX LVL : ST4)	
RV806	1-225-553-11	RES, VAR 5K (AUX BAL : ST4)	
RV880	1-225-850-11	RES, VAR, SLIDE 50K (CH FADER : ST4)	
RV881	1-238-600-11	RES, ADJ, CARBON 10K	
RV901	1-225-554-11	RES, VAR 10K (MID : ST5)	
RV902	1-225-554-11	RES, VAR 10K (LOW : ST5)	
RV903	1-225-554-11	RES, VAR 10K (HIGH : ST5)	
RV904	1-225-553-11	RES, VAR 5K (BAL : ST5)	
RV905	1-225-555-11	RES, VAR 50K (AUX LVL : ST5)	
RV906	1-225-553-11	RES, VAR 5K (AUX BAL : ST5)	
RV980	1-225-850-11	RES, VAR, SLIDE 50K (CH FADER : ST5)	
RV981	1-238-600-11	RES, ADJ, CARBON 10K	
RV1001	1-225-554-11	RES, VAR 10K (MID : ST6)	
RV1002	1-225-554-11	RES, VAR 10K (LOW : ST6)	
RV1003	1-225-554-11	RES, VAR 10K (HIGH : ST6)	
RV1004	1-225-553-11	RES, VAR 5K (BAL : ST6)	
RV1005	1-225-555-11	RES, VAR 50K (AUX LVL : ST6)	
RV1006	1-225-553-11	RES, VAR 5K (AUX BAL : ST6)	
RV1080	1-225-850-11	RES, VAR, SLIDE 50K (CH FADER : ST6)	
RV1081	1-238-600-11	RES, ADJ, CARBON 10K	
		< RELAY >	
RY101	1-755-061-11	RELAY	
RY102	1-755-061-11	RELAY	

Ref. No.	Part No.	Description	Remarks	Ref. No.	Part No.	Description	Remarks
		< SWITCH >					
S101	1-554-118-00	SWITCH, PUSH (1 KEY) (1-2 : RETURN)		S808	1-554-118-00	SWITCH, PUSH (1 KEY) (3-4 : ST4)	
S102	1-554-118-00	SWITCH, PUSH (1 KEY) (3-4 : RETURN)		S809	1-554-118-00	SWITCH, PUSH (1 KEY) (1-2/3-4 : ST4)	
S201	1-554-118-00	SWITCH, PUSH (1 KEY) (RETURN : SOURCE)		S880	1-554-118-00	SWITCH, PUSH (1 KEY) (LOCAL : ST4)	
S301	1-554-118-00	SWITCH, PUSH (1 KEY) (AUX 1 : SOURCE)		S881	1-554-118-00	SWITCH, PUSH (1 KEY) (MUTING : ST4)	
S302	1-554-118-00	SWITCH, PUSH (1 KEY) (AUX 2 : SOURCE)		S901	1-572-042-11	SWITCH, SLIDE (INPUT LEVEL : ST5)	
S303	1-554-118-00	SWITCH, PUSH (1 KEY) (AUX 3 : SOURCE)		S902	1-554-118-00	SWITCH, PUSH (1 KEY) (L : ST5)	
S304	1-554-118-00	SWITCH, PUSH (1 KEY) (AUX 4 : SOURCE)		S903	1-554-118-00	SWITCH, PUSH (1 KEY) (R : ST5)	
S501	1-554-118-00	SWITCH, PUSH (1 KEY) (1-1 : MONITOR)		S904	1-554-118-00	SWITCH, PUSH (1 KEY) (LCF : ST5)	
S502	1-554-118-00	SWITCH, PUSH (1 KEY) (1-2 : MONITOR)		S905	1-762-198-11	SWITCH, PUSH (1 KEY) (PFL : ST5)	
S503	1-554-118-00	SWITCH, PUSH (1 KEY) (1-3 : MONITOR)		S906	1-554-118-00	SWITCH, PUSH (1 KEY) (1-2 : ST5)	
S504	1-554-118-00	SWITCH, PUSH (1 KEY) (1-4 : MONITOR)		S907	1-554-118-00	SWITCH, PUSH (1 KEY) (PRE : ST5)	
S505	1-554-118-00	SWITCH, PUSH (1 KEY) (2-1 : MONITOR)		S908	1-554-118-00	SWITCH, PUSH (1 KEY) (3-4 : ST5)	
S506	1-554-118-00	SWITCH, PUSH (1 KEY) (2-2 : MONITOR)		S909	1-554-118-00	SWITCH, PUSH (1 KEY) (1-2/3-4 : ST5)	
S507	1-554-118-00	SWITCH, PUSH (1 KEY) (2-3 : MONITOR)		S980	1-554-118-00	SWITCH, PUSH (1 KEY) (LOCAL : ST5)	
S508	1-554-118-00	SWITCH, PUSH (1 KEY) (2-4 : MONITOR)		S981	1-554-118-00	SWITCH, PUSH (1 KEY) (MUTING : ST5)	
S509	1-554-118-00	SWITCH, PUSH (1 KEY) (3-1 : MONITOR)		S1001	1-572-042-11	SWITCH, SLIDE (INPUT LEVEL : ST6)	
S510	1-554-118-00	SWITCH, PUSH (1 KEY) (3-2 : MONITOR)		S1002	1-554-118-00	SWITCH, PUSH (1 KEY) (L : ST6)	
S511	1-554-118-00	SWITCH, PUSH (1 KEY) (3-3 : MONITOR)		S1003	1-554-118-00	SWITCH, PUSH (1 KEY) (R : ST6)	
S512	1-554-118-00	SWITCH, PUSH (1 KEY) (3-4 : MONITOR)		S1004	1-554-118-00	SWITCH, PUSH (1 KEY) (PFL : ST6)	
S513	1-554-118-00	SWITCH, PUSH (1 KEY) (4-1 : MONITOR)		S1005	1-762-198-11	SWITCH, PUSH (1 KEY) (PFL : ST6)	
S514	1-554-118-00	SWITCH, PUSH (1 KEY) (4-2 : MONITOR)		S1006	1-554-118-00	SWITCH, PUSH (1 KEY) (1-2 : ST6)	
S515	1-554-118-00	SWITCH, PUSH (1 KEY) (4-3 : MONITOR)		S1007	1-554-118-00	SWITCH, PUSH (1 KEY) (PRE : ST6)	
S516	1-554-118-00	SWITCH, PUSH (1 KEY) (4-4 : MONITOR)		S1008	1-554-118-00	SWITCH, PUSH (1 KEY) (3-4 : ST6)	
S517	1-762-823-11	SWITCH, SLIDE (METER)		S1009	1-554-118-00	SWITCH, PUSH (1 KEY) (1-2/3-4 : ST6)	
S550	1-762-198-11	SWITCH, PUSH (1 KEY) (1-2 : TALK BACK)		S1080	1-554-118-00	SWITCH, PUSH (1 KEY) (LOCAL : ST6)	
S551	1-762-198-11	SWITCH, PUSH (1 KEY) (TB OUT : TALK BACK)		S1081	1-554-118-00	SWITCH, PUSH (1 KEY) (MUTING : ST6)	
S552	1-554-118-00	SWITCH, PUSH (1 KEY) (MUTING : EDITOR)				< THERMISTOR >	
S553	1-554-118-00	SWITCH, PUSH (1 KEY) (OSC ON)		TH701	1-808-964-11	THERMISTOR (POSITIVE)	
S601	1-554-118-00	SWITCH, PUSH (1 KEY) (2CH : SOURCE)		TH801	1-808-964-11	THERMISTOR (POSITIVE)	
S602	1-554-118-00	SWITCH, PUSH (1 KEY) (PFL : SOURCE)		TH901	1-808-964-11	THERMISTOR (POSITIVE)	
S603	1-554-118-00	SWITCH, PUSH (1 KEY) (MONITOR : PHONES)		TH1001	1-808-964-11	THERMISTOR (POSITIVE)	
S650	1-692-504-11	SWITCH, SLIDE (REC MODE)		*****			
S651	1-554-118-00	SWITCH, PUSH (1 KEY) (MONI1-2 : SOURCE)		*	A-4591-203-A	METER BOARD, COMPLETE	
S652	1-554-118-00	SWITCH, PUSH (1 KEY) (MONI3-4 : SOURCE)				*****	
S653	1-554-118-00	SWITCH, PUSH (1 KEY) (1-2 : SOURCE)				< CONNECTOR >	
S654	1-554-118-00	SWITCH, PUSH (1 KEY) (3-4 : SOURCE)		* CN401	1-565-364-11	HOUSING,CONNECTOR(PC BOARD)11P	
S655	1-554-118-00	SWITCH, PUSH (1 KEY) (EDIT : SOURCE)				< DIODE >	
S701	1-572-042-11	SWITCH, SLIDE (INPUT LEVEL : ST3)		D401	8-719-984-42	DIODE HDSP-4830-S02 (1)	
S702	1-554-118-00	SWITCH, PUSH (1 KEY) (L : ST3)		D402	8-719-939-91	DIODE HDSP-4850 (1)	
S703	1-554-118-00	SWITCH, PUSH (1 KEY) (R : ST3)		D403	8-719-984-42	DIODE HDSP-4830-S02 (2)	
S704	1-554-118-00	SWITCH, PUSH (1 KEY) (LCF : ST3)		D404	8-719-939-91	DIODE HDSP-4850 (2)	
S705	1-762-198-11	SWITCH, PUSH (1 KEY) (PFL : ST3)		D405	8-719-984-42	DIODE HDSP-4830-S02 (3)	
S706	1-554-118-00	SWITCH, PUSH (1 KEY) (1-2 : ST3)		D406	8-719-939-91	DIODE HDSP-4850 (3)	
S707	1-554-118-00	SWITCH, PUSH (1 KEY) (PRE : ST3)		D407	8-719-984-42	DIODE HDSP-4830-S02 (4)	
S708	1-554-118-00	SWITCH, PUSH (1 KEY) (3-4 : ST3)		D408	8-719-939-91	DIODE HDSP-4850 (4)	
S709	1-554-118-00	SWITCH, PUSH (1 KEY) (1-2/3-4 : ST3)				< IC >	
S780	1-554-118-00	SWITCH, PUSH (1 KEY) (LOCAL : ST3)		IC401	8-759-710-88	IC NJM431U-TE1	
S781	1-554-118-00	SWITCH, PUSH (1 KEY) (MUTING : ST3)		IC402	8-759-273-87	IC NJM2901V(Te2)	
S801	1-572-042-11	SWITCH, SLIDE (INPUT LEVEL : ST4)		IC403	8-759-273-87	IC NJM2901V(Te2)	
S802	1-554-118-00	SWITCH, PUSH (1 KEY) (L : ST4)		IC404	8-759-273-87	IC NJM2901V(Te2)	
S803	1-554-118-00	SWITCH, PUSH (1 KEY) (R : ST4)		IC405	8-759-273-87	IC NJM2901V(Te2)	
S804	1-554-118-00	SWITCH, PUSH (1 KEY) (LCF : ST4)					
S805	1-762-198-11	SWITCH, PUSH (1 KEY) (PFL : ST4)					
S806	1-554-118-00	SWITCH, PUSH (1 KEY) (1-2 : ST4)					
S807	1-554-118-00	SWITCH, PUSH (1 KEY) (PRE : ST4)					

Ref. No.	Part No.	Description	Remarks		
IC406	8-759-273-87	IC NJM2901V(TE2)			
IC407	8-759-273-87	IC NJM2901V(TE2)			
IC408	8-759-273-87	IC NJM2901V(TE2)			
IC409	8-759-273-87	IC NJM2901V(TE2)			
IC410	8-759-273-87	IC NJM2901V(TE2)			
IC411	8-759-273-87	IC NJM2901V(TE2)			
IC412	8-759-273-87	IC NJM2901V(TE2)			
IC413	8-759-273-87	IC NJM2901V(TE2)			
IC414	8-759-273-87	IC NJM2901V(TE2)			
IC415	8-759-273-87	IC NJM2901V(TE2)			
IC416	8-759-273-87	IC NJM2901V(TE2)			
IC417	8-759-273-87	IC NJM2901V(TE2)			
< RESISTOR >					
R401	1-208-453-61	RES,CHIP	4.7K	2%	1/10W
R402	1-211-960-11	RES,CHIP	22	2%	1/10W
R403	1-211-960-11	RES,CHIP	22	2%	1/10W
R404	1-211-960-11	RES,CHIP	22	2%	1/10W
R405	1-211-960-11	RES,CHIP	22	2%	1/10W
R406	1-216-613-11	METAL CHIP	27	0.5%	1/10W
R407	1-216-613-11	METAL CHIP	27	0.5%	1/10W
R408	1-216-613-11	METAL CHIP	27	0.5%	1/10W
R409	1-211-960-11	RES,CHIP	22	2%	1/10W
R410	1-211-960-11	RES,CHIP	22	2%	1/10W
R411	1-211-960-11	RES,CHIP	22	2%	1/10W
R412	1-211-960-11	RES,CHIP	22	2%	1/10W
R413	1-211-960-11	RES,CHIP	22	2%	1/10W
R414	1-211-960-11	RES,CHIP	22	2%	1/10W
R415	1-211-960-11	RES,CHIP	22	2%	1/10W
R416	1-211-960-11	RES,CHIP	22	2%	1/10W
R417	1-208-437-61	RES,CHIP	1K	2%	1/10W

*	A-4591-202-A	PS BOARD, COMPLETE	*****		
*	4-921-402-01	HEAT SINK			
	7-682-549-09	SCREW +B 3X10			
< CAPACITOR >					
C601	1-126-967-11	ELECT	47uF	20%	50V
C602	1-104-665-11	ELECT	100uF	20%	25V
C603	1-104-665-11	ELECT	100uF	20%	25V
C604	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V
C605	1-128-576-11	ELECT	100uF	20%	63V
C606	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V
C607	1-126-953-11	ELECT	2200uF	20%	35V
C608	1-126-953-11	ELECT	2200uF	20%	35V
C609	1-128-556-11	ELECT	1000uF	20%	63V
C610	1-128-350-11	ELECT(BLOCK)	22000uF	20%	35V
C611	1-128-350-11	ELECT(BLOCK)	22000uF	20%	35V
C612	1-128-567-51	ELECT	1000uF	20%	100V
C613	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V
C614	1-163-021-91	CERAMIC CHIP	0.01uF	10%	50V
< CONNECTOR >					
* CN601	1-564-243-11	PIN, CONNECTOR 6P			
* CN602	1-564-242-00	PIN, CONNECTOR 5P			

Ref. No.	Part No.	Description	Remarks		
< DIODE >					
D601	8-719-988-61	DIODE 1SS355TE-17			
D602	8-719-022-90	DIODE MA8160-M-TX			
D603	8-719-022-90	DIODE MA8160-M-TX			
D604	8-719-022-90	DIODE MA8160-M-TX			
D605	8-719-988-61	DIODE 1SS355TE-17			
D606	8-719-022-90	DIODE MA8160-M-TX			
D607	8-719-018-12	DIODE MA8330-L-TX			
D608	8-719-987-67	DIODE 11EFS2-TB5			
D609	8-719-987-67	DIODE 11EFS2-TB5			
D610	8-719-312-47	DIODE RBA-406B			
D611	8-719-987-67	DIODE 11EFS2-TB5			
< TRANSISTOR >					
Q601	8-749-010-25	IC MN2488-OPY-M			
Q602	8-749-010-26	IC MP1620-OPY-M			
Q603	8-729-029-94	TRANSISTOR DTC143TSA-TP			
Q604	8-729-017-06	TRANSISTOR 2SC4793			
Q605	8-729-207-46	TRANSISTOR 2SC3112B-TPE2			
< RESISTOR >					
R601	1-208-526-61	RES,CHIP 47K	2%	1/10W	
R602	1-216-619-11	METAL CHIP 47	0.5%	1/10W	
R603	1-208-462-61	RES,CHIP 10K	2%	1/10W	
R604	1-216-619-11	METAL CHIP 47	0.5%	1/10W	
R605	1-208-437-61	RES,CHIP 1K	2%	1/10W	
R606	1-208-437-61	RES,CHIP 1K	2%	1/10W	
R607	1-216-619-11	METAL CHIP 47	0.5%	1/10W	
R608	1-208-365-61	RES,CHIP 100	2%	1/10W	
R609	1-208-462-61	RES,CHIP 10K	2%	1/10W	
R610	1-208-462-61	RES,CHIP 10K	2%	1/10W	
< THERMISTOR(POSITIVE) >					
△ THP601	1-810-942-11	THERMISTOR, POSITIVE			
△ THP602	1-810-942-11	THERMISTOR, POSITIVE			
△ THP603	1-202-852-00	THERMISTOR, POSITIVE			

MISCELLANEOUS					

△ 5	1-776-095-11	CORD, POWER (V200)			
△ 5	1-790-345-11	CORD, POWER (V200R)			
△ 7	1-431-820-11	TRANSFORMER, POWER (V200R)			
△ 7	1-433-926-11	TRANSFORMER, POWER (V200)			
54	1-773-117-11	WIRE (FLAT TYPE) (19 CORE)			
56	1-769-281-11	WIRE (FLAT TYPE) (31 CORE)			
57	1-773-232-11	WIRE (FLAT TYPE) (25 CORE)			
△ 68	1-570-743-21	SWITCH, AC POWER (POWER)			
70	1-773-133-11	WIRE (FLAT TYPE) (19 CORE)			

The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified.

△印の部品、または △印付きの点線で囲まれた部品は、安全性を維持するために重要な部品です。従って交換時は、必ず指定の部品を使用して下さい。

Ref. No.	Part No.	Description	Remarks
ACCESSORIES & PACKING MATERIALS			

△	1-569-008-21	ADAPTOR, CONVERSION 2P (V200)	
	2-346-938-01	MANUAL, INSTRUCTION (JAPANESE) (V200R)	
	2-346-938-11	MANUAL INSTRUCTION (ENGLISH) (V200)	

HARDWARE LIST			

#1	7-685-870-09	SCREW +BVTT 3X5 (S)	
#2	7-685-647-79	SCREW +BVTP 3X10 TYPE2 TT (B)	
#3	7-685-853-09	SCREW +BVTT 2X6 (S)	
#4	7-682-559-09	SCREW +B 4X5	
#5	7-688-003-01	W 3, SMALL	
#7	7-682-547-09	SCREW (M3X6), S TITE, + BTT	
#8	7-682-549-09	SCREW +B 3X10	

The components identified by mark △ or dotted line with mark △ are critical for safety.
Replace only with part number specified.

△印の部品, または △印付きの点線で囲まれた部品は,
安全性を維持するために重要な部品です。
従って交換時は, 必ず指定の部品を使用して下さい。