


*
 US Model
 Canadian Model
 AEP Model
 UK Model
 E Model

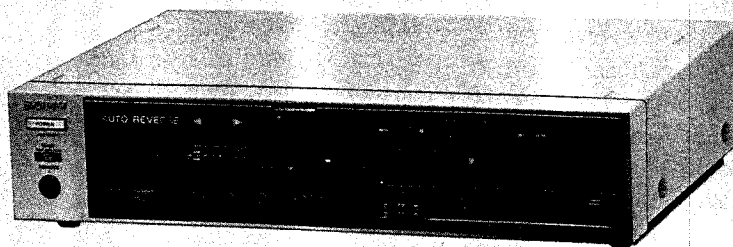

'Dolby' and the double-D symbol are the trade marks of Dolby Laboratories Licensing Corporation. Noise reduction system manufactured under license from Dolby Laboratories Licensing Corporation.

STEREO CASSETTE DECK

SPECIFICATIONS

Recording system 4-track 2-channel stereo
 Fast-forward and rewind time Approx. 100 sec. (with C-60 cassette)
 Bias frequency 105 kHz
 Signal-to-noise ratio (NAB, at peak level)

0 dB = 0.775 V

Tape Transport
 Mechanism Type

TCM-130RH1

— Continued on Page 2 —

Cassette	Dolby NR switch	OFF	B-TYPE ON	C-TYPE ON
TYPE IV (Sony METALLIC)		58 dB	65 dB	71 dB
TYPE III (Sony FeCr)		59 dB	66 dB	72 dB
TYPE II (Sony UCX)		57 dB	64 dB	70 dB
TYPE I (Sony BHF)		54 dB	61 dB	67 dB

Total harmonic distortion

1.0% (with Sony METALLIC and FeCr cassettes)

Frequency response DOLBY NR OFF

- With TYPE IV cassette (Sony METALLIC)
 - 20 - 17,000 Hz
 - 30 - 15,000 Hz (± 3 dB)
 - 30 - 13,000 Hz (± 3 dB, 0 VU recording)
 - 30 - 15,000 Hz (DIN)
- With TYPE III cassette (Sony FeCr)
 - 20 - 16,000 Hz
 - 30 - 15,000 Hz (± 3 dB)
 - 30 - 15,000 Hz (DIN)
- With TYPE II cassette (Sony UCX)
 - 20 - 16,000 Hz
 - 30 - 15,000 Hz (± 3 dB)
 - 30 - 15,000 Hz (DIN)
- With TYPE I cassette (Sony BHF)
 - 20 - 15,000 Hz
 - 30 - 14,000 Hz (DIN)



SERVICE MANUAL

Wow and flutter	0.065% WRMS (NAB) ±0.2% (DIN)
Inputs	Line inputs (phono jacks) Sensitivity 77.5 mV (-20 dB) Input impedance 50 k ohms
Outputs	Line outputs (phono jacks) Output level 0.435 V (-5 dB) at load impedance 50 k ohms Load impedance over 10 k ohms

General

Power requirements	AEP model: 220 V ac, 50/60 Hz (240 V ac adjustable by authorized Sony personnel) UK model: 240 V ac, 50/60 Hz (220 V ac adjustable by authorized Sony personnel) US, Canadian model: 120V ac, 60 Hz E model: 110, 120, 220 or 240 V ac adjustable, 50/60 Hz
AC outlet	US, Canadian, AEP model: 1 unswitched, 100 watts max. UK model: 1 switched, 100 watts max.
Power consumption	AEP, UK model: 22 watts US, Canadian model: 20 watts E model: 21 watts
Dimensions	Approx. 355 × 80 × 280 mm (w/h/d) (14 × 3 1/4 × 11 1/8 inches) including projecting parts and controls
Weight	Approx. 5 kg (11 lbs 1 oz)

SAFETY CHECK-OUT (US Model)

After correcting the original service problem, perform the following safety check before releasing the set to the customer:

Check the antenna terminals, metal trim, "metallized" knobs, screws, and all other exposed metal parts for AC leakage. Check leakage as described below.

LEAKAGE TEST

The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 0.5 mA (500 microampers). Leakage current can be measured by any one of three methods.

1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufacturers' instructions to use these instruments.
2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.
3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The "limit" indication is 0.75 V, so analog meters must have an accurate low-voltage scale. The Simpson 250 and Sanwa SH-63Trd are examples of a passive VOM that is suitable. Nearly all battery operated digital multimeters that have a 2 V AC range are suitable. (See Fig. A)


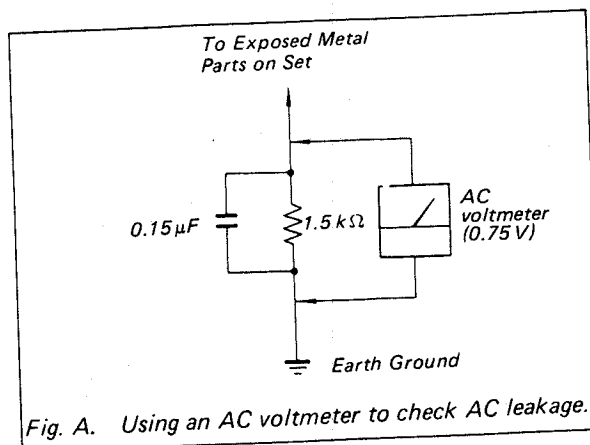


Fig. A. Using an AC voltmeter to check AC leakage.


NOTES ON REPAIR

When the mechanism section is operated with the set in an upside-down position, misoperation may result. For repair while operating the mechanism section, perform with the set in its normal position or standing on its side.

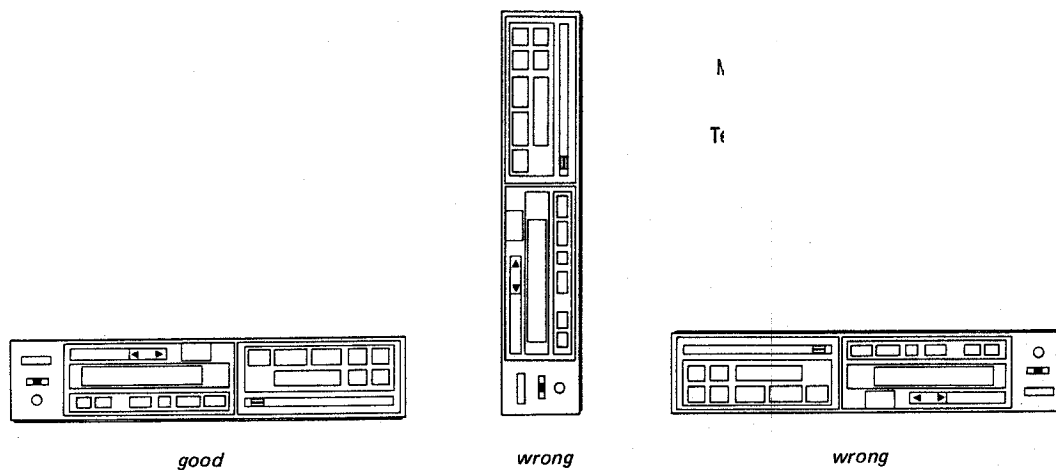

MODEL IDENTIFICATION

—Specification label on jack plate—

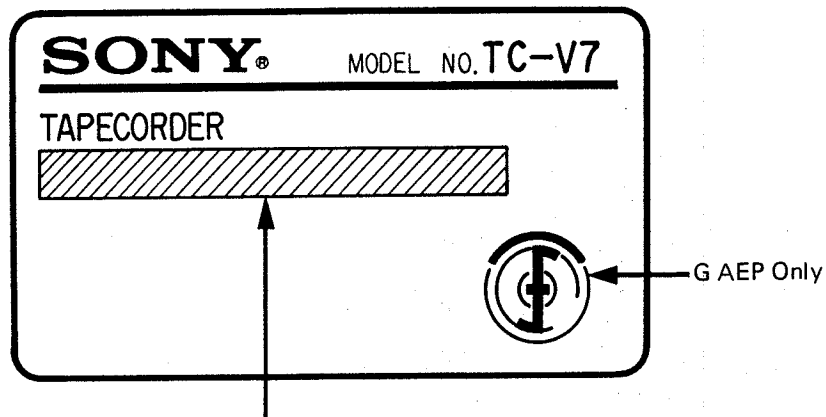

US, Canadian : AC: 120V 60Hz 20W
 AEP, G AEP : AC: 220V ~ 50/60Hz 22W
 UK : AC: 240V ~ 50/60Hz 22W
 E : AC: 110, 120, 220, 240V ~ 50/60Hz 21W

SECTION 1

OUTLINE

1-1. FEATURE

Auto-reverse playback with roto-bilateral record/playback head

Continuous playback of both sides of the cassette is possible without turning the cassette over. When the tape reaches its end, the roto-bilateral record/playback head reverses position and the other side will be played back automatically. The side being played back can be changed instantly during playback by simply pressing the forward or reverse play button. The ► or ◄ indicator shows the playback direction. The roto-bilateral head assures the same performance characteristics in either tape transport direction.

Newly-developed Laser Amorphous head

The record-playback head is made of a special amorphous magnetic alloy developed by Sony, and its cores are solidly welded by laser. This new highly durable head provides a wider dynamic range and a more extended frequency response, especially in the high-frequency range. The head is designed to take full advantage of the potential of metal tapes.

Ultra slim cabinet

Touch a button and the cassette module slides smoothly out. The use of this cassette module with a linearskating power loading mechanism makes it possible to reduce the height of the cabinet to 70mm.

Blank skip function

Blank spaces of at least 10 seconds long can be skipped in either fast-forward or fast-reverse mode so that only the recorded portions of the tape are played back.

AMS (Automatic Music Sensor)

The AMS locates a selection as far ahead as 9 selections or as far back as 8 selections and plays the selection back automatically.



Cycle Play

Using the  cycle key, both sides of the cassette can be played back five times in succession.


Other useful functions

- The newly-developed C-type Dolby NR system which reduces tape noise twice as effectively as the conventional B-type system is incorporated.
- The digital linear counter indicates the elapsed recording or playback time in minutes and seconds, and indicates the recording time remaining with a minus sign.
- The peak level meters, digital linear counter, and other indicators in use are all displayed in the bright FL-display window.
- The automatic tape select system adjusts are cassette deck to the optimum recording and playback characteristics for each tape type.
- A timer switch is provided to turn the deck on and off at times preset on an optional timer.
- Various remote control operations are possible using the optional RM-70 remote control unit, the RM-65 synchro remote control unit (for synchronized operation with the turntable) or the ST-V7 system control tuner (for remote control of the audio system).


1-2. FUNCTION OF CONTROL

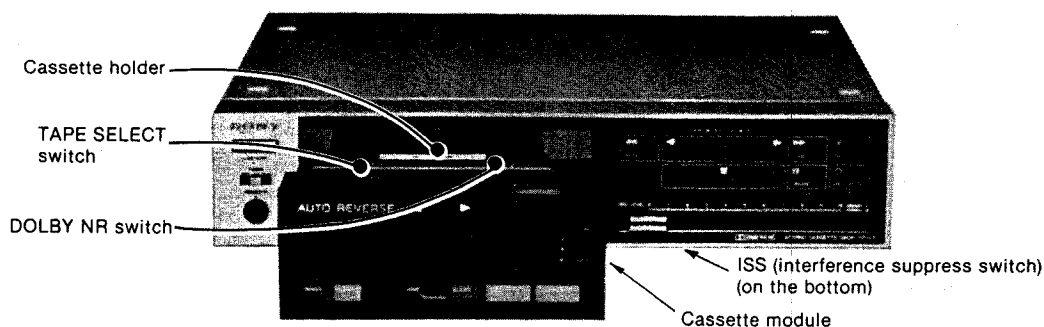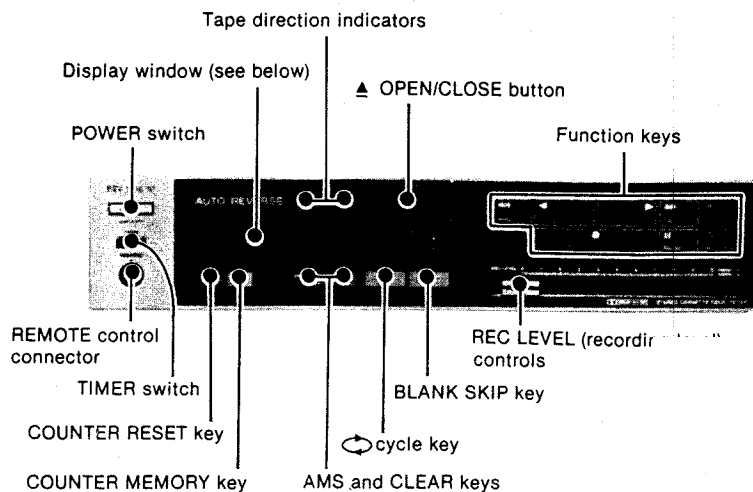



Display window

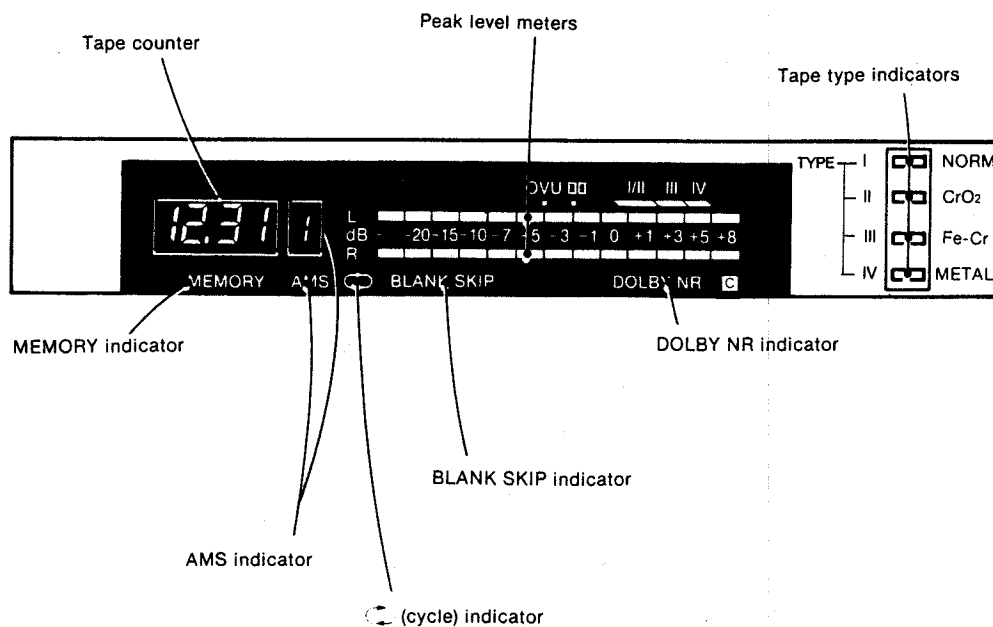


1-3. BLOCK DIAGRAMS

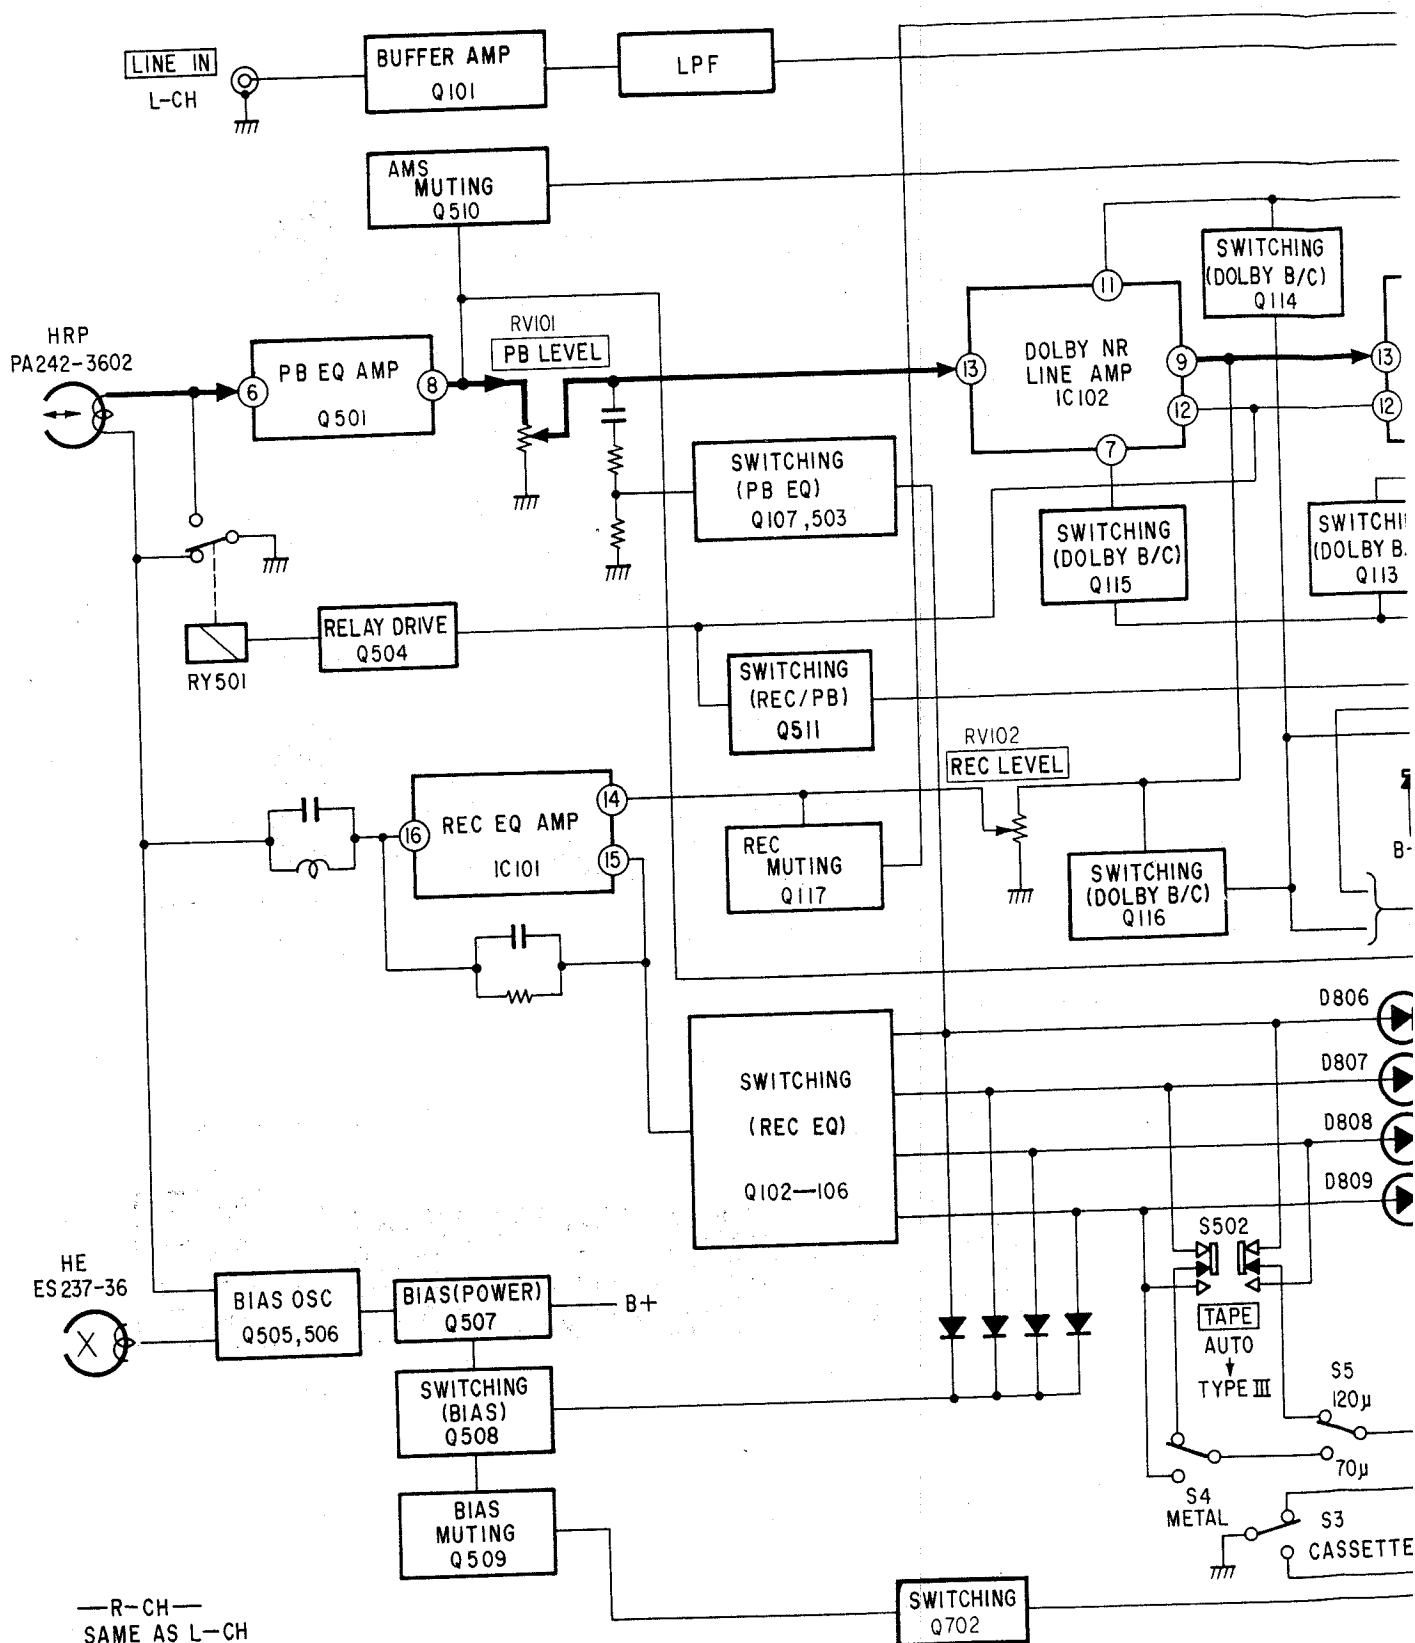

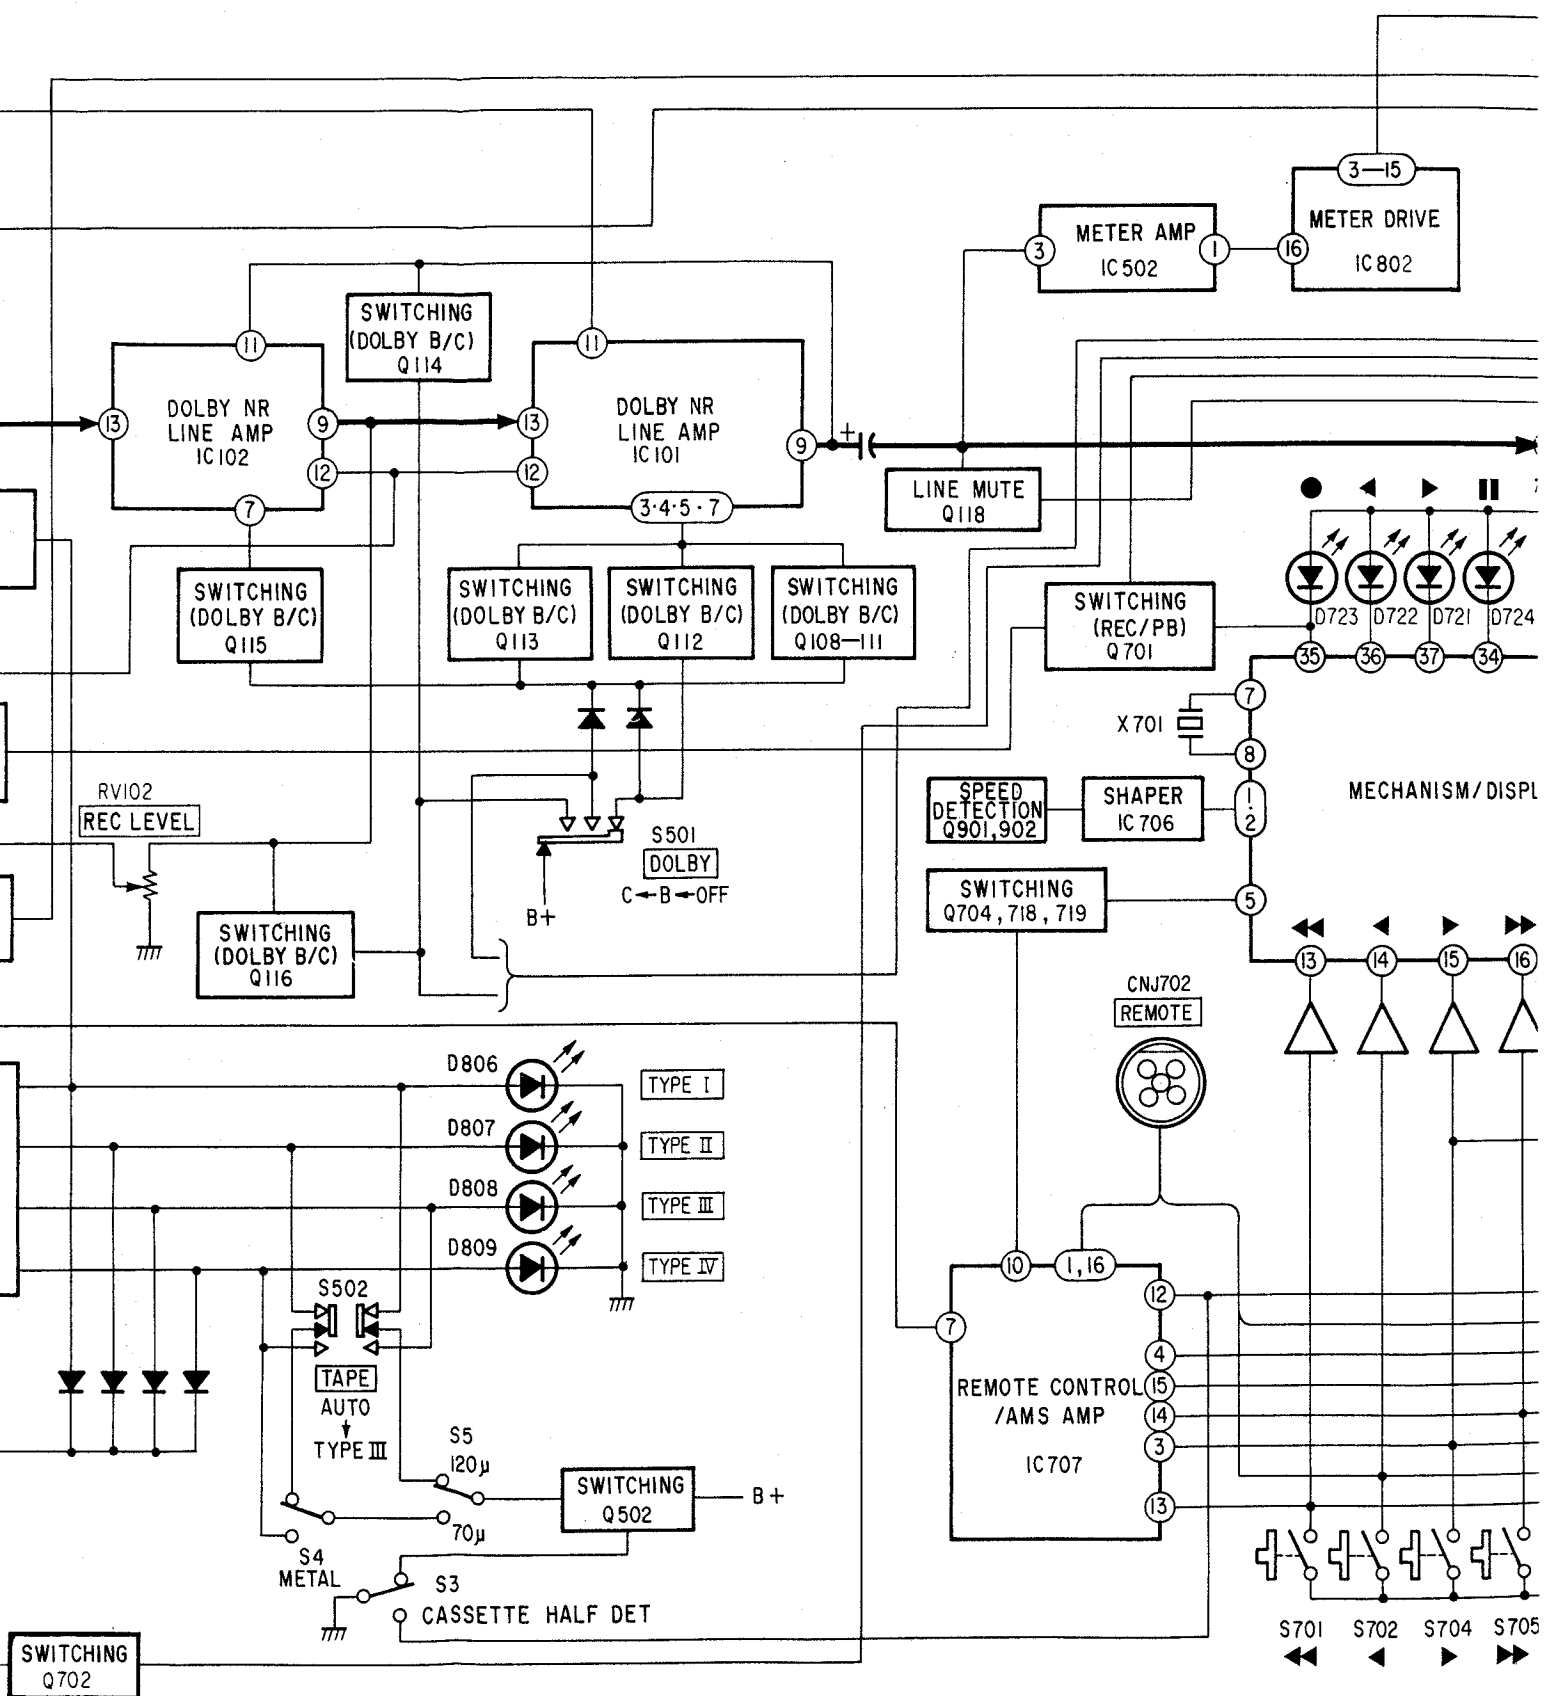

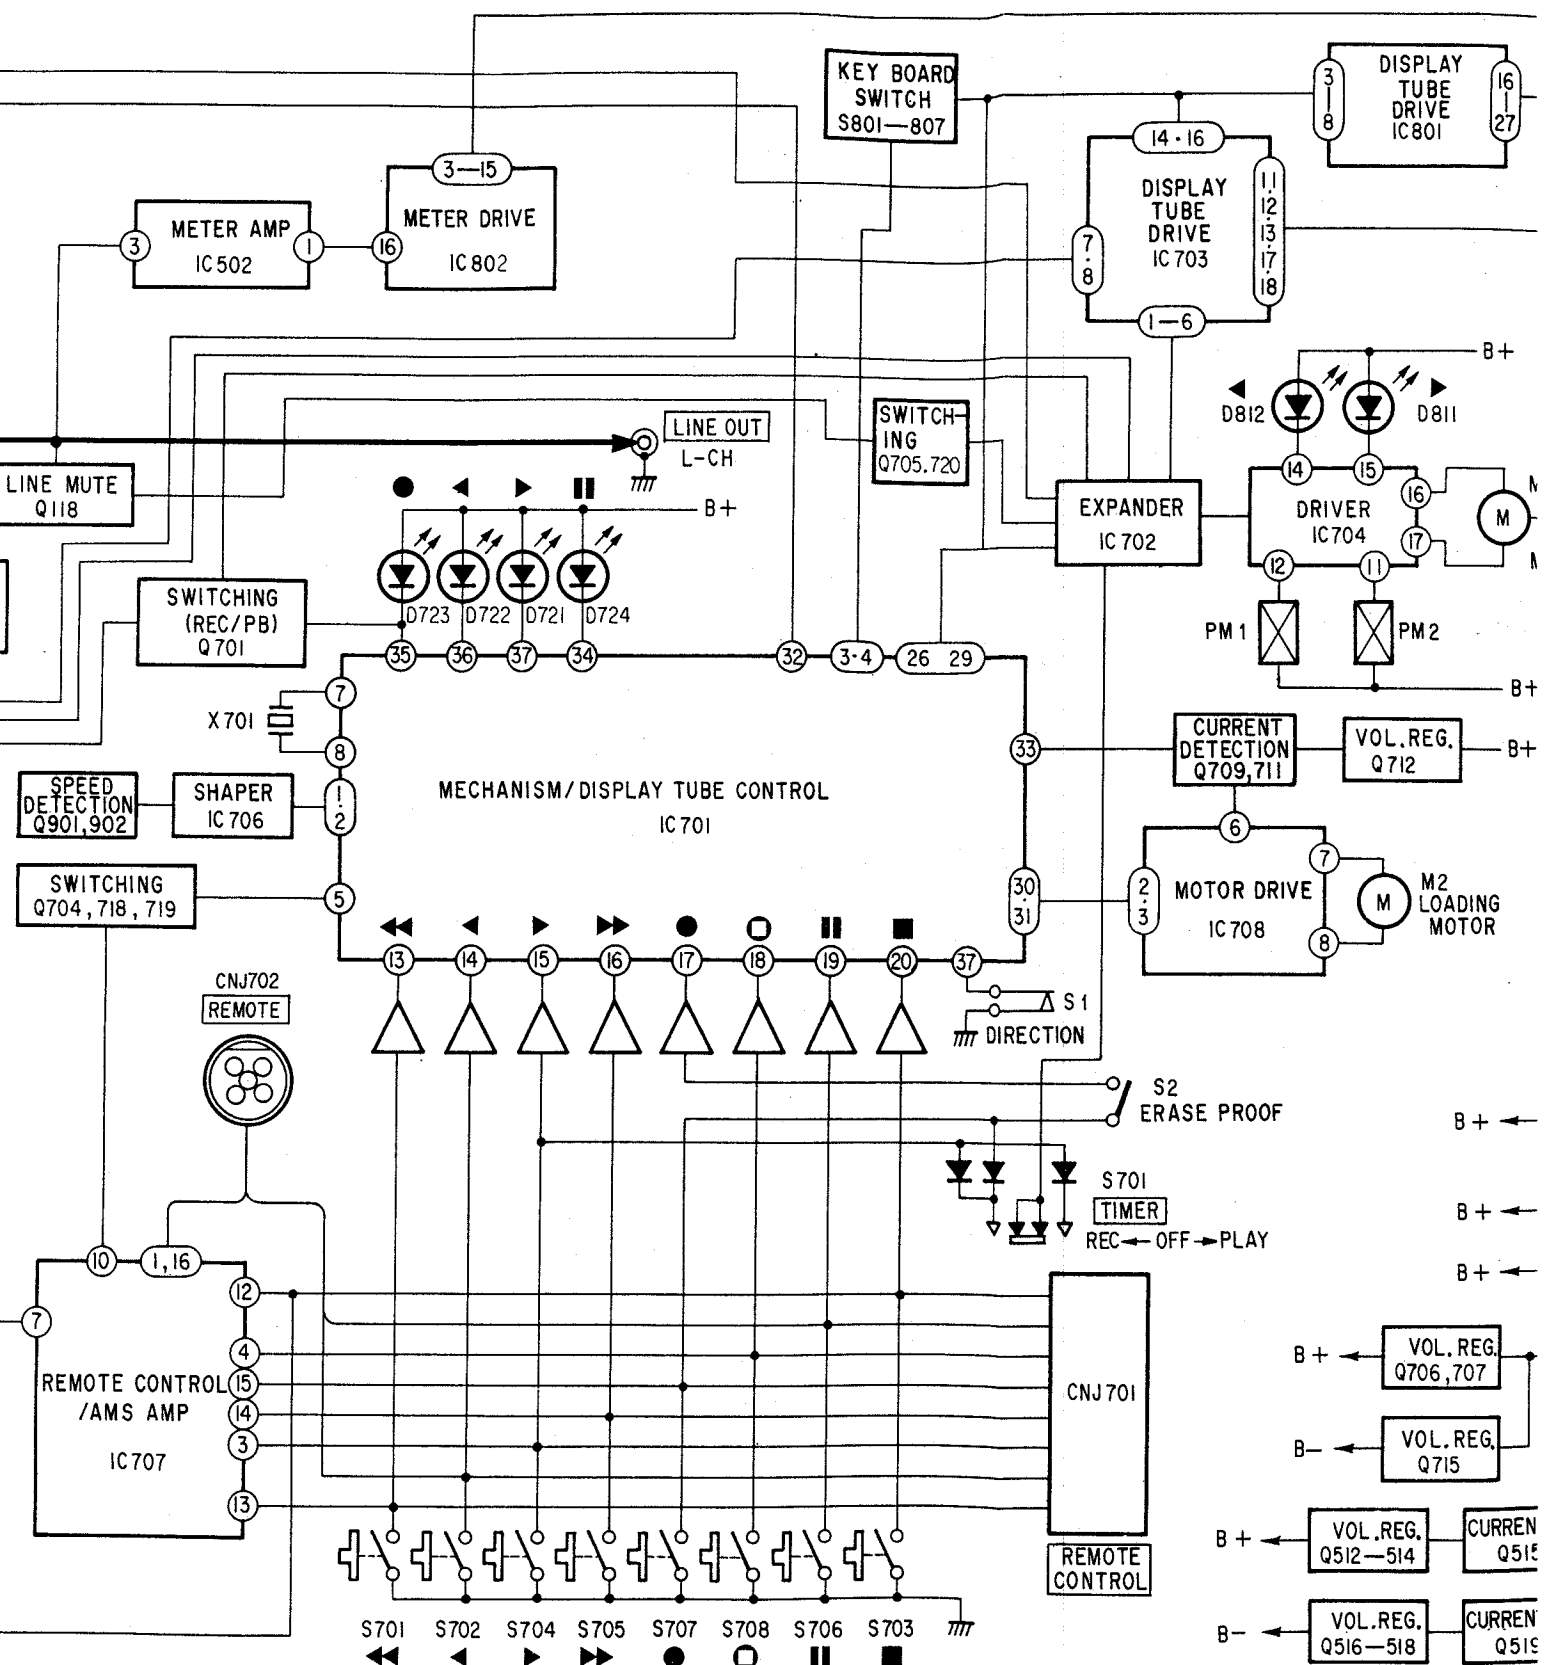

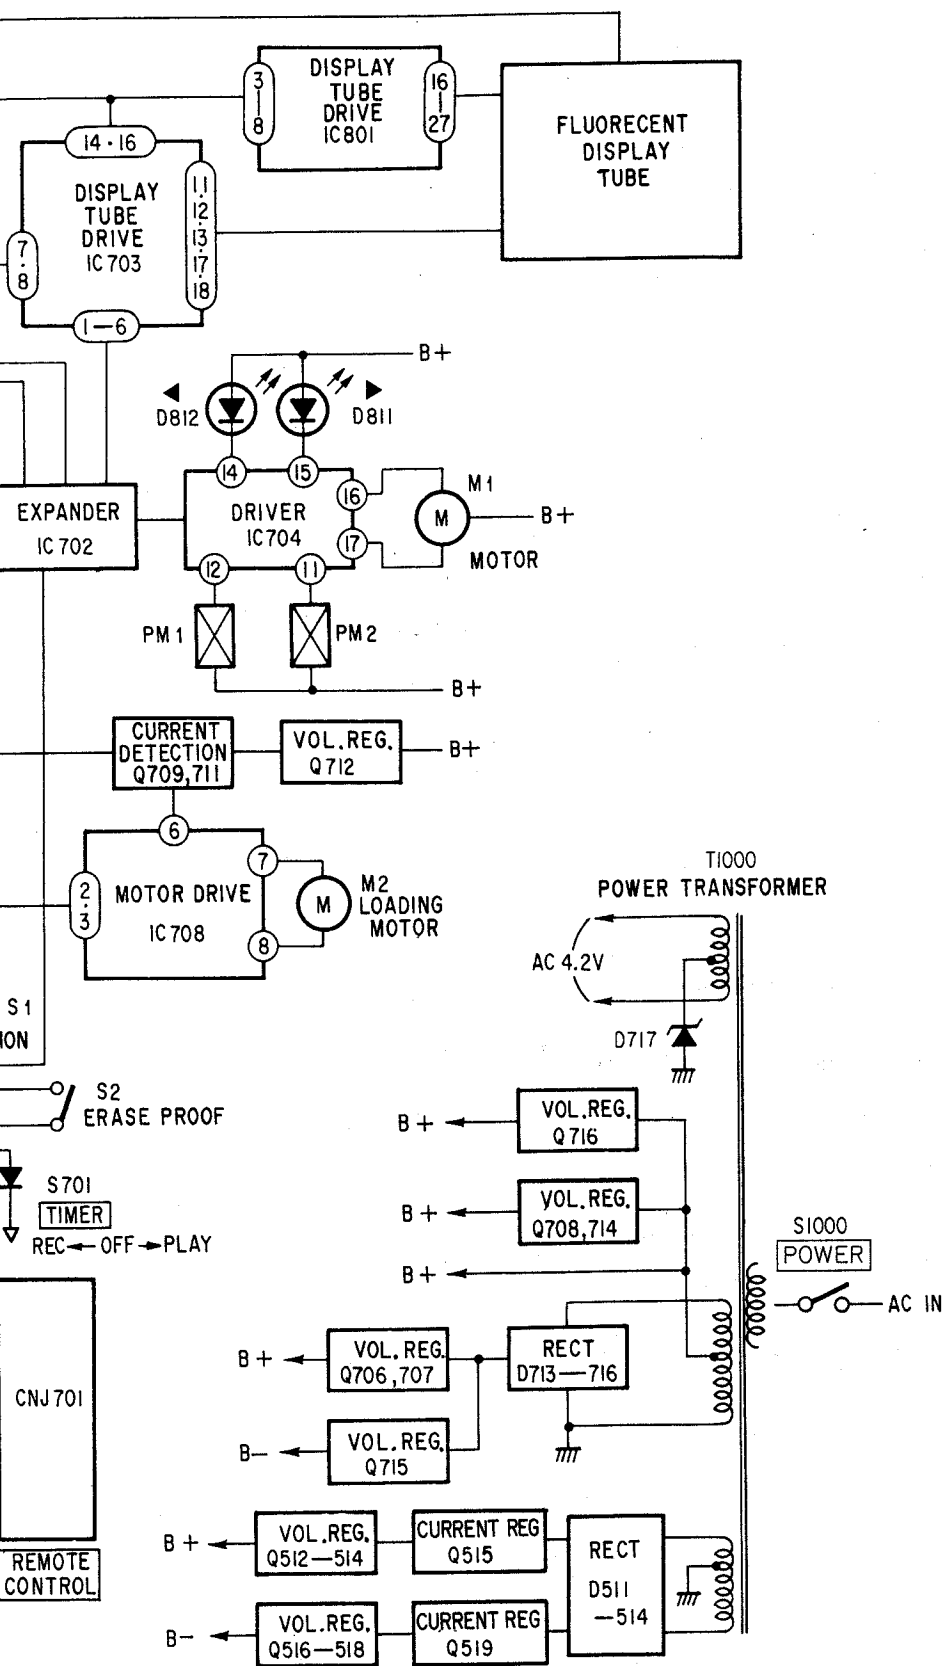

SECTION 2

OPERATION DESCRIPTION

2-1. MECHANICAL SECTION OPEN/CLOSE OPERATION

The mechanical section on this set can be opened and closed simply by pushing the OPEN/CLOSE button, due to the linear skating structure.

IC708 is for driving the loading motor (M2) which moves the mechanism. Pins ② and ③ are input pins and ⑦ and ⑧ are output pins. Pin ⑥ is the power supply pin and ⑤ is the ground.

The forward and reverse rotation of the motor is performed by the 1 and 0 combination of input pins ② and ③. Microcomputer IC701 inputs to pins ② and ③. The truth table for IC708 is as follows:

IC708 pin no.	Input		Output	
	②	③	⑦	⑧
during OPEN	H	L	H	L
during CLOSE	L	H	L	H
Stop	H	H	L	L



(1) CLOSE → OPEN

When the OPEN/CLOSE button is pressed while the mechanism is closed, IC701 pin ③① goes from high to low, IC708 pin ⑦ goes high, pin ⑧ goes low, the motor rotates and the mechanism opens. Even when the mechanism opens completely and stops, IC708 pin ⑦ and ⑧ remain high and low, and voltage continues to be applied to the motor, so the current flowing to IC708 pin ⑥ increases suddenly. When the current increases, Q709 base potential drops and Q709 turns on. When Q709 goes on, Q711 turns on. This causes IC701 pin ③③ to drop to 0V, and "Mechanism open" is input to IC701. When IC701 pin ③③ becomes 0V, IC701 pin ③① goes from low to high and IC708 pins ⑦ and ⑧ go low. Voltage ceases to be applied to the motor and opening is completed.

(2) OPEN → CLOSE

When the OPEN/CLOSE button is pressed while the mechanism is open, IC701 pin ③① goes from high to low, IC708 pin ⑦ goes low and pin ⑧ goes high, the motor rotates in reverse and the mechanism closes. Even when the mechanism closes completely and stops, IC708 pins ⑦ and ⑧ remain low and high, and voltage continues to be applied to the motor, so the current flowing to IC708 pin ⑥ increases suddenly. When the current increases, Q709 base potential drops and Q709 turns on. When Q709 turns on, Q711 base potential drops and it goes on. This causes IC701 pin ③③ to drop to 0V, and "mechanism closed" is input to IC701. When IC701 pin ③③ becomes 0V, IC701 pin ③① goes from low to high and IC708 pins ⑦ and ⑧ go low. Voltage ceases to be applied to the motor and closing is completed. (When power is turned on and IC701 is reset, IC701 regards the mechanism as closed.)


2-2. OPEN/CLOSED OPERATION TIMING CHART

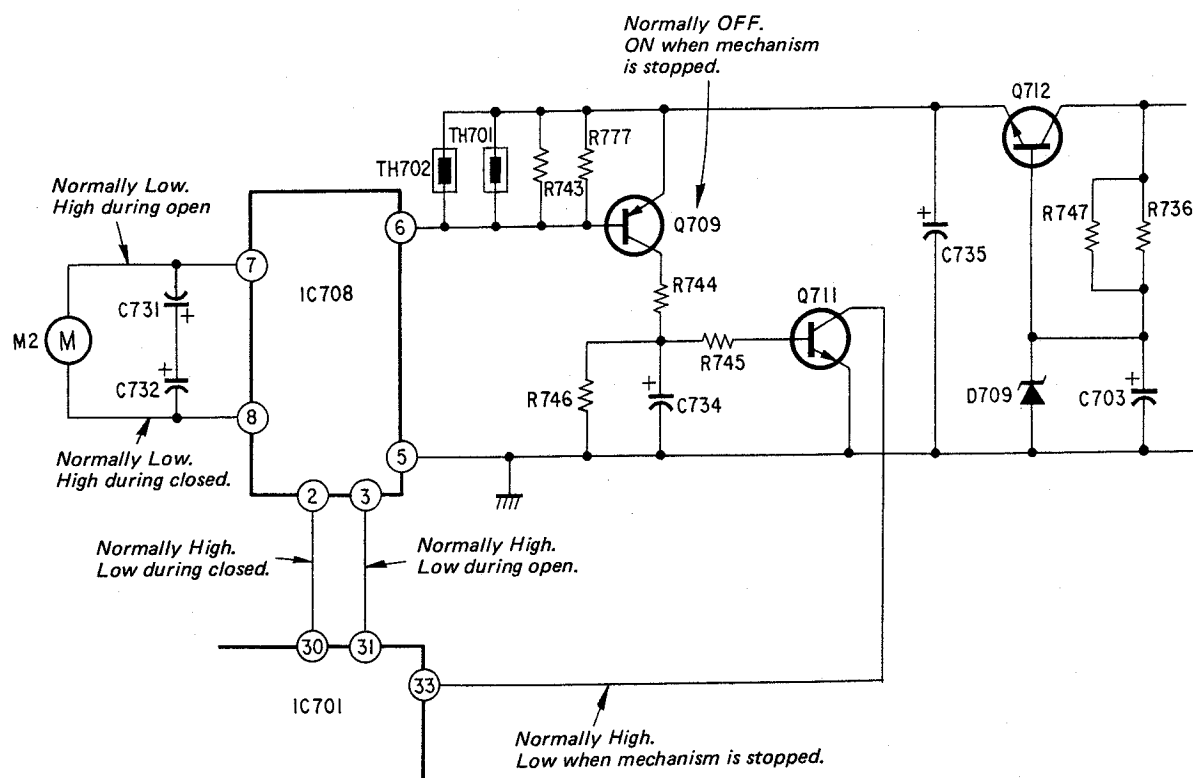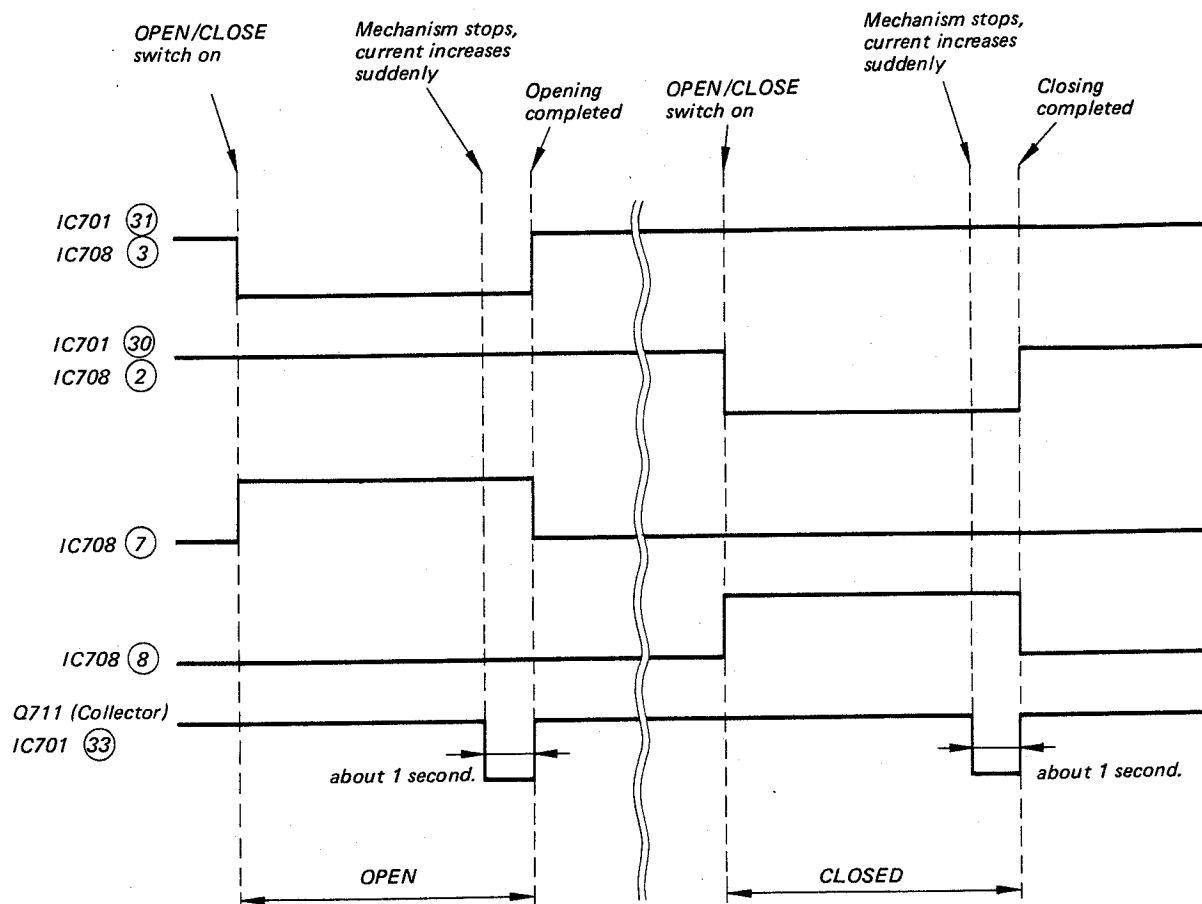


2-3. SYSTEM CONTROL MICROCOMPUTER (IC701)

Conditions for IC701 beginning to operate:

- (1) 5V supplied to power supply pin (42).
- (2) Reset pin (6) goes to 5V from 0V.
- (3) Clock pins (7) and (8) are oscillating at 4MHz or 3.99MHz.

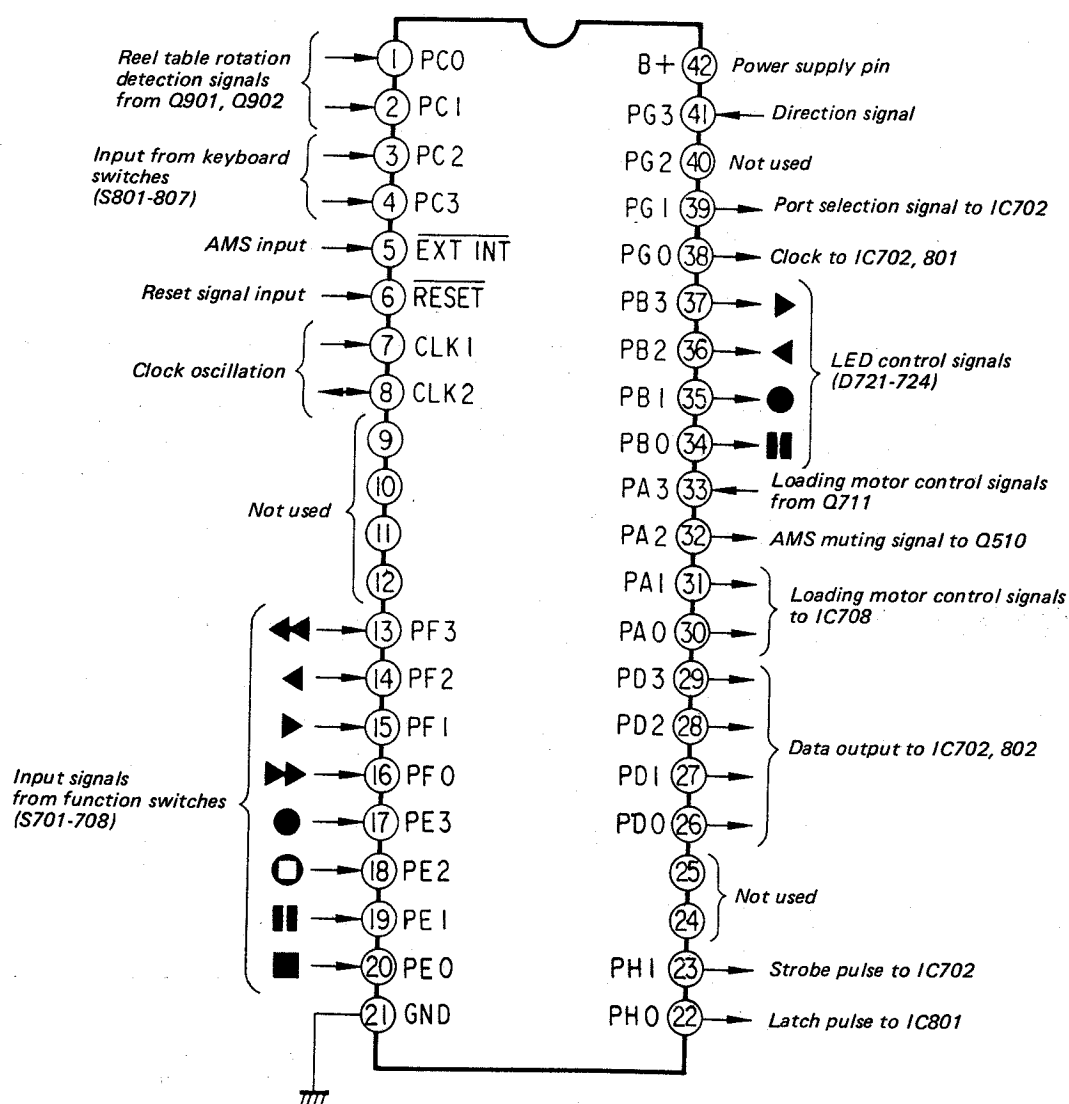



2-4. PORT MAP

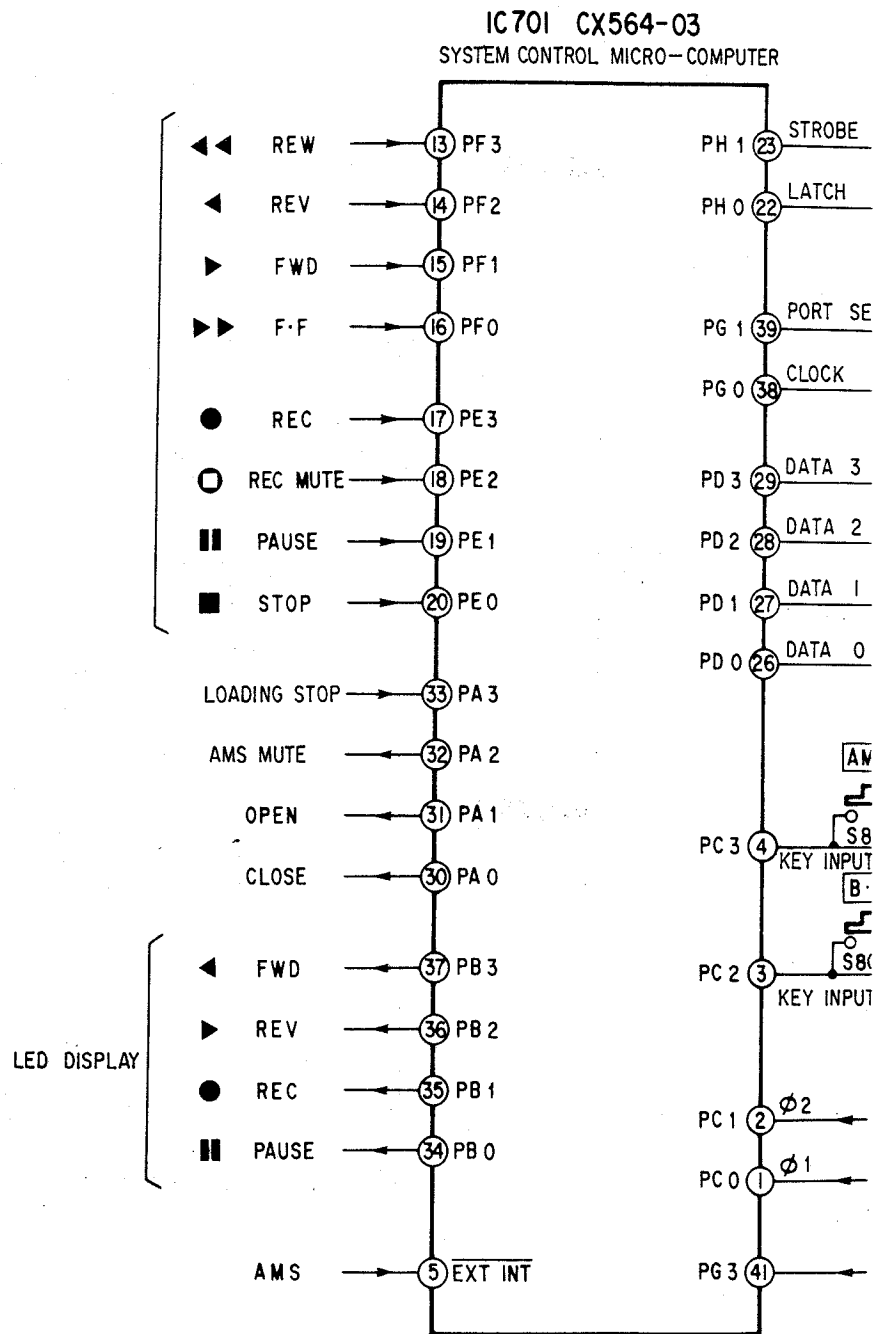

IC701 CX564-03
SYSTEM CONTROL MICRO-COMPUTER

IC70

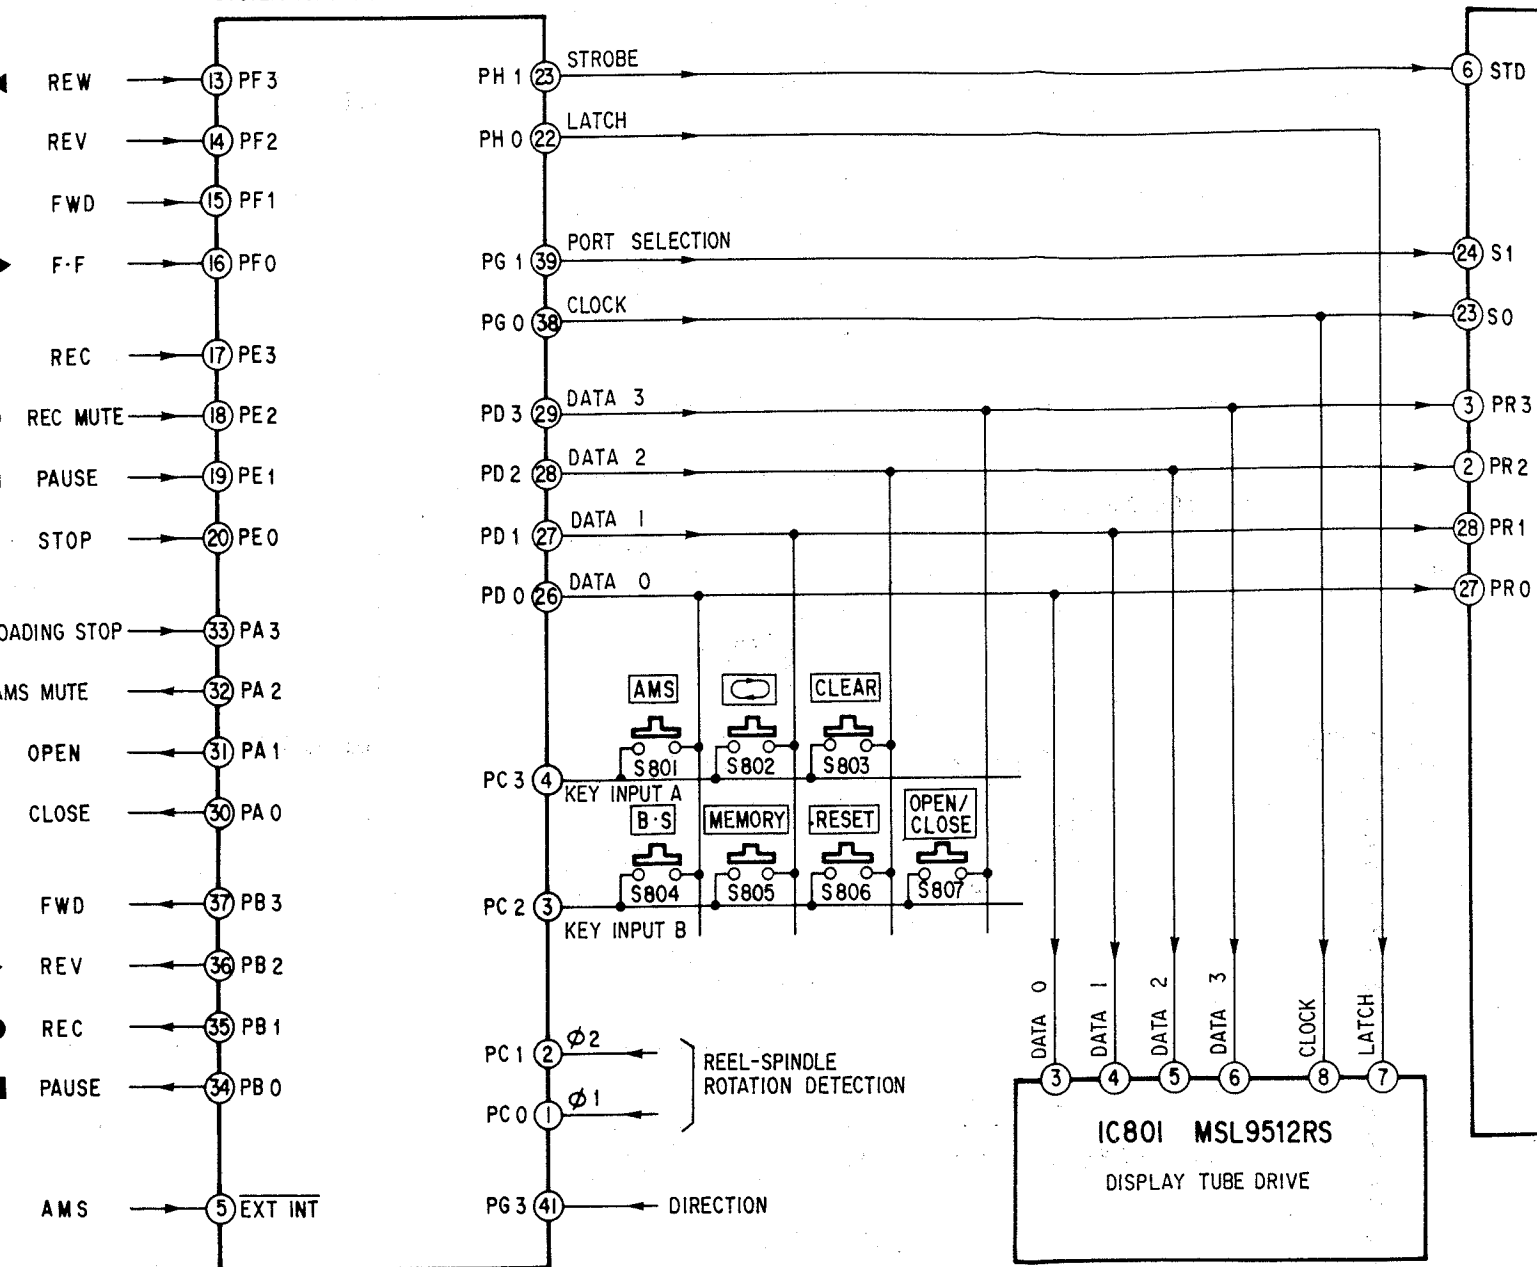


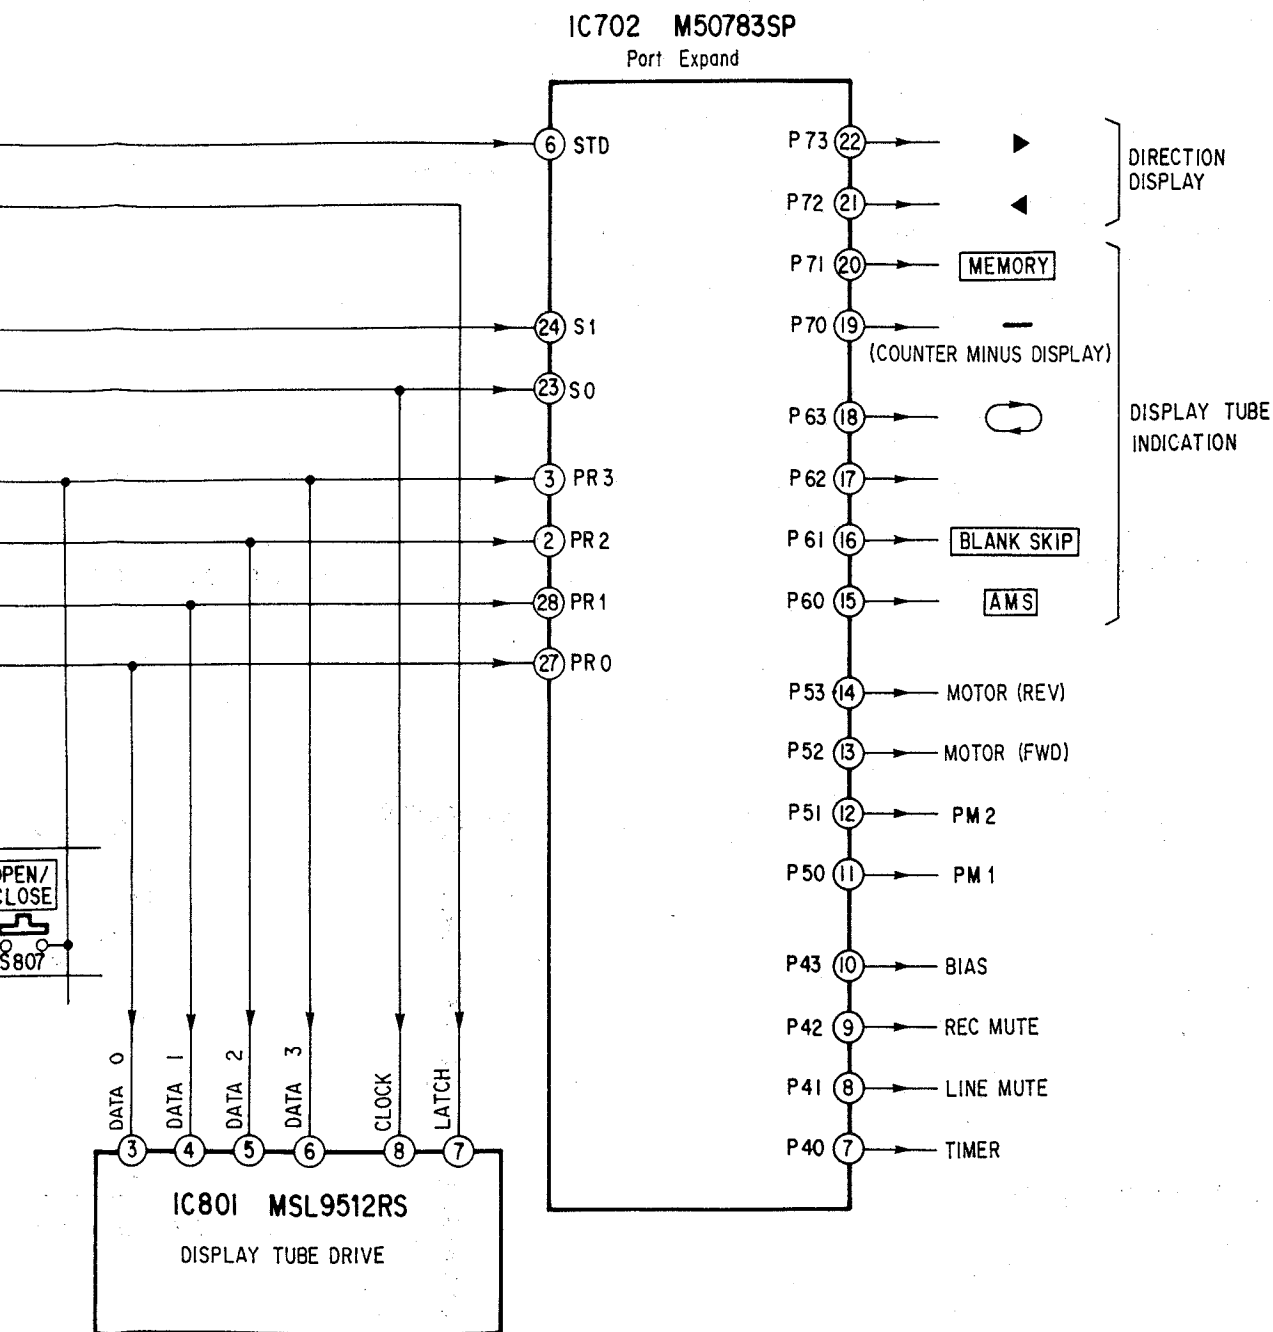

SECTION 3 DISASSEMBLY


Note: Follow the disassembly procedure in the numerical order given.

CASE REMOVAL

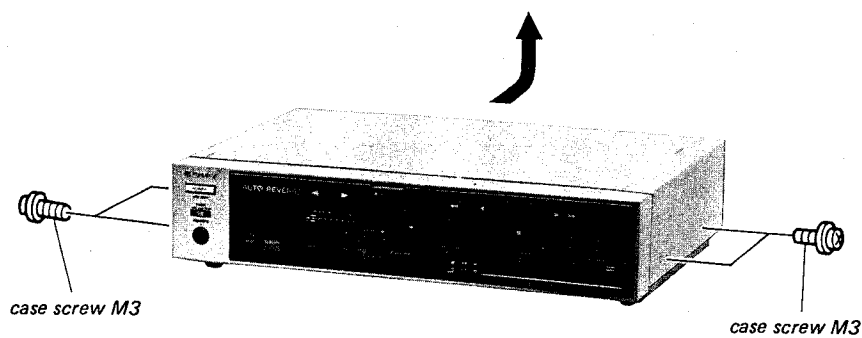


PLAYBACK BOARD REMOVAL

- ① +PTPWH3X5 (2 pieces)




BOTTOM PLATE REMOVAL

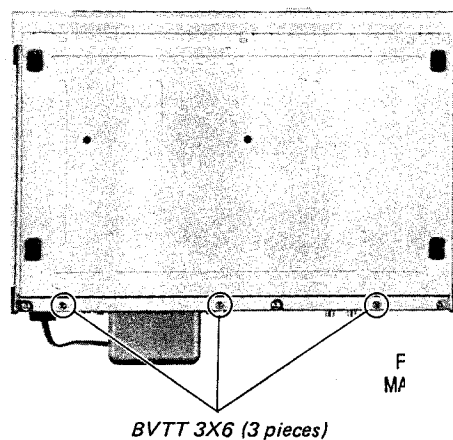


MECHANISM SECTION

- ② Remove the Joint (B)




SYSTEM CONTROL BOARD REMOVAL

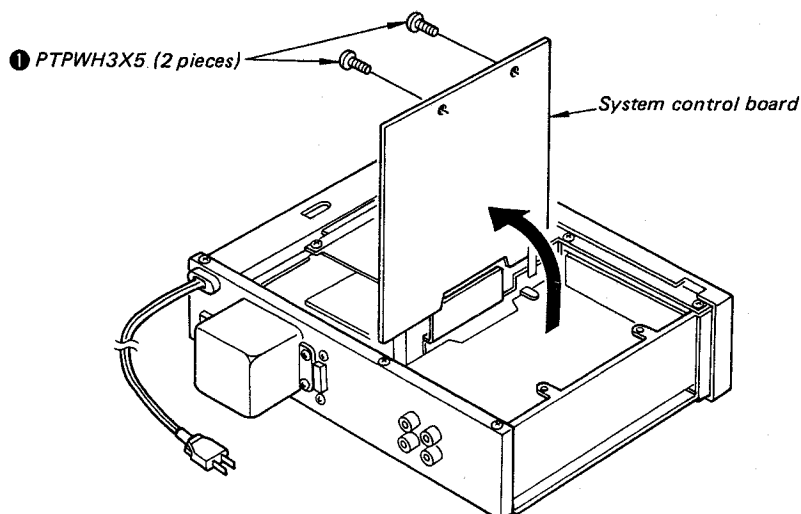

FRONT PANEL REMOVAL


- ② Draw out the front Panel.




PLAYBACK BOARD REMOVAL

① +PTPWH3X5
(2 pieces)

Playback Board

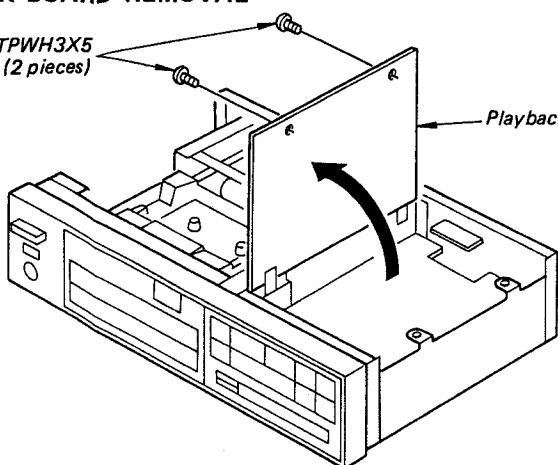


RECORD BOARD REMOVAL

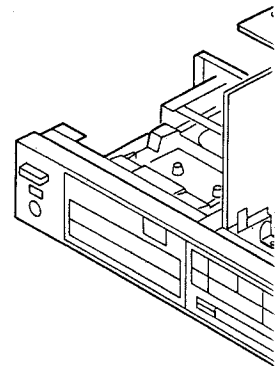


MECHANISM SECTION

② Remove the
Joint (B)

① BVTT2.6X4

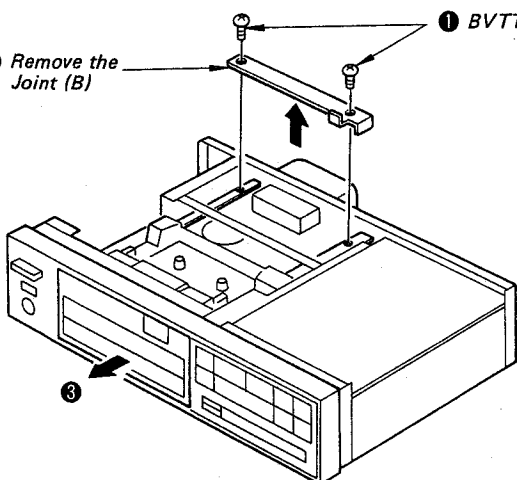


MD Cover/Drawer Bottom Plate Removal

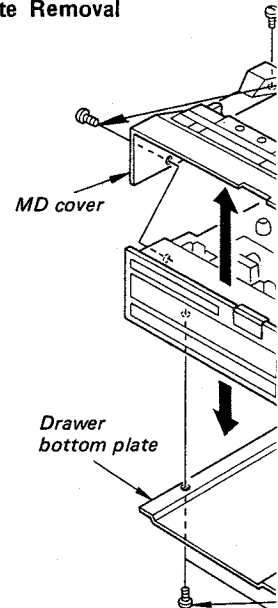

FRONT PANEL REMOVAL


① Lift the front panel while inserting
the driver to these portions.

② Draw out the
front Panel.

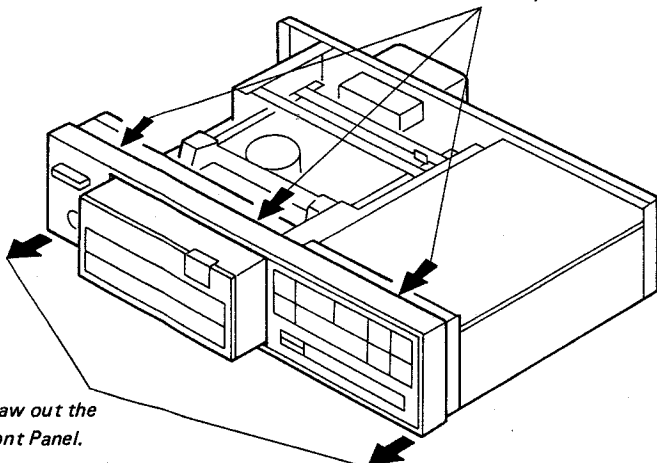


CONTROL SW BOARD REMOVAL


+P3X6 (9 piece)

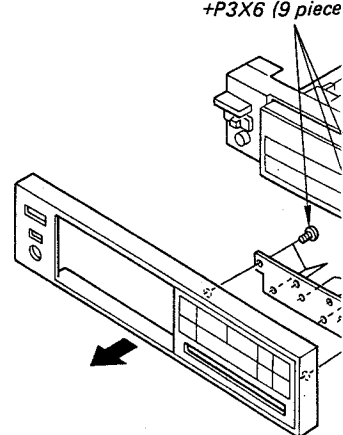


RECORD BOARD REMOVAL

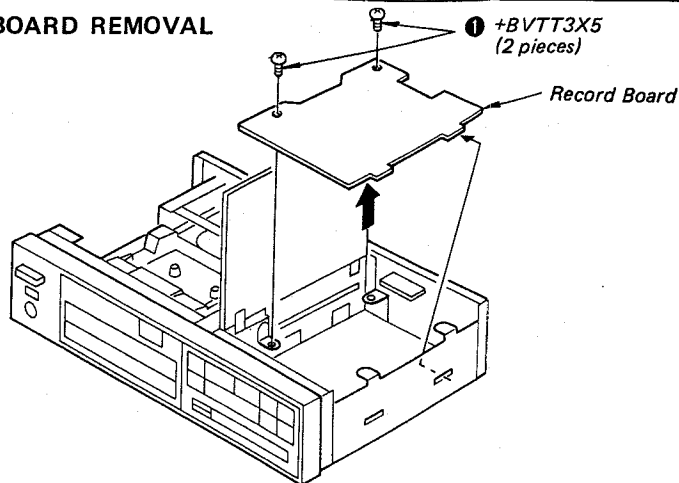

MD Cover/Drawer Bottom Plate Removal

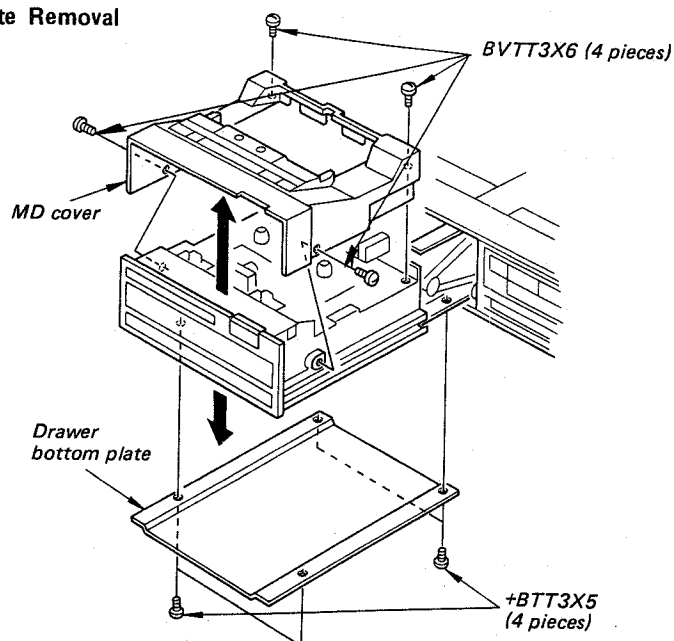


CONTROL SW BOARD REMOVAL

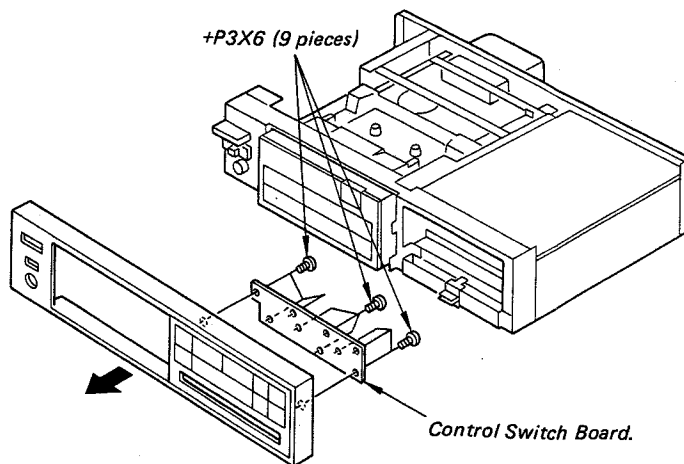

PINCH ROLLER

tension spr
thrust retainer (B) -
Pinch roller (R) assy
tension spring

DRAWER PANEL



REC VOL BOARD

3 +B (3)
2 Remove the co
ornamental pla

+BVTT3X5
(2 pieces)


Record Board

+BVTT3X6 (4 pieces)


+BTT3X5
(4 pieces)

ch Board.


PINCH ROLLER/HEAD REMOVAL

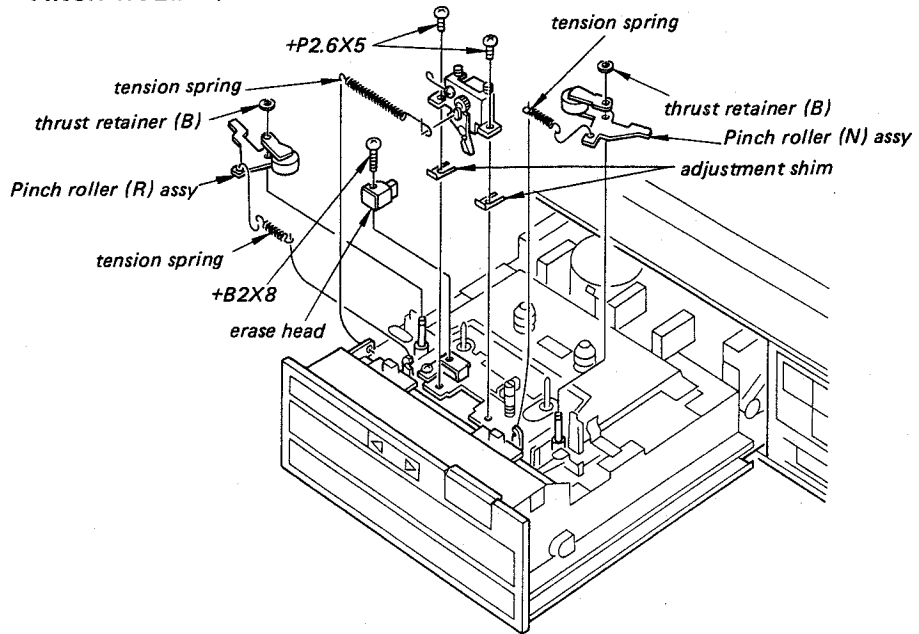

DRAWER PANEL/FL BOARD REMOVAL

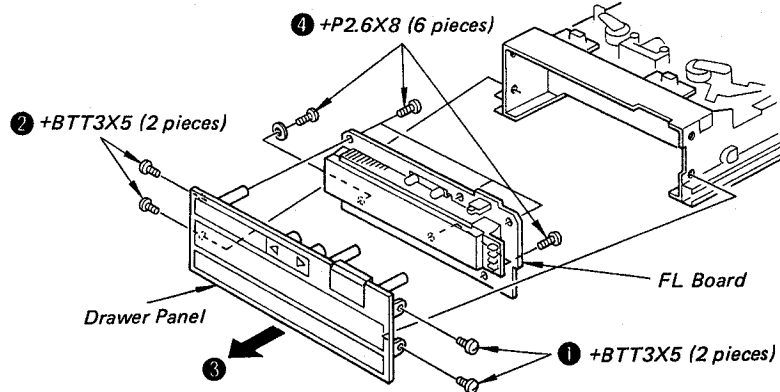

REC VOL BOARD REMOVAL

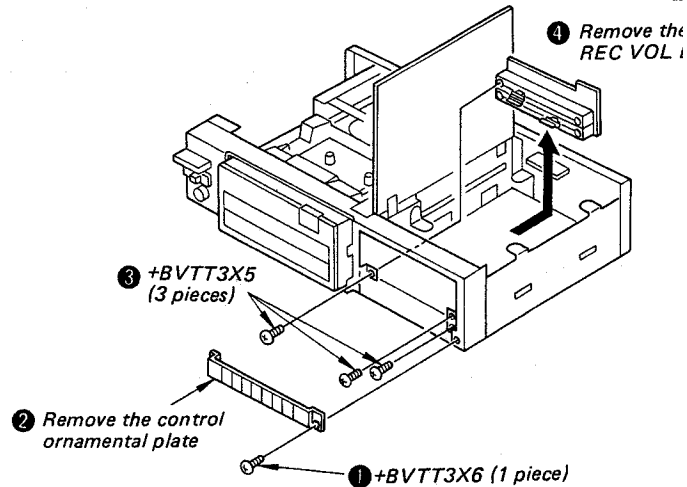

SECTION 4 ADJUSTMENTS

4-1. MECHANICAL ADJUSTMENTS


PRECAUTION

1. Clean the following parts with a denatured-alcohol-moistened swab:

record/playback head	pinch roller
erase head	rubber belts
capstan	idlers
2. Demagnetize the record/playback head with a head demagnetizer.
3. Do not use a magnetized screwdriver for the adjustments.
4. After the adjustments, apply suitable locking compound to the parts adjusted.
5. The adjustments should be performed with the rated power supply voltage unless otherwise noted.

Torque Measurement

Mode	Torque Meter	Torque
Forward	CQ-102C	28-60 g·cm 0.39-0.82 oz·inch
FWD back tension	CQ-102C	2-7 g·cm 0.03-0.1 oz·inch
Reverse	CQ-102RB	28-60 g·cm 0.39-0.82 oz·inch
REV back tension	CQ-102RB	2-7 g·cm 0.03-0.1 oz·inch

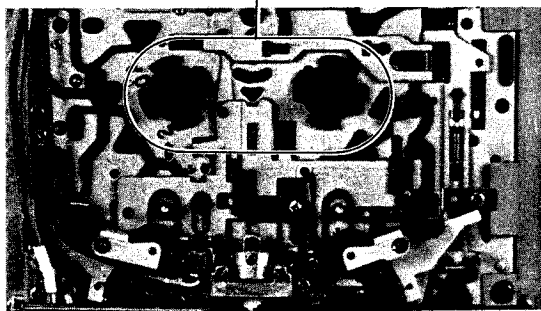


The height adjustment shim of the head holder assembly.

Thick (mm)	Parts No.
0.05	3-307-477-41
0.1	3-307-477-01
0.2	3-307-477-11
0.3	3-307-477-21
0.4	3-307-477-31

TAPE PATH ADJUSTMENT

When assembling the erase head and head holder, and when replacing the tape guide (L), be sure to perform the following adjustments.

1. Using a mirror tape cassette, adjust each of the adjustment screws until there is no tape curling.
2. Perform adjustments by changing the height adjustment shim of the head holder assembly and the height adjustment shim of the record/playback head, so that the core of the record/playback head is positioned correctly for both FWD and REV.

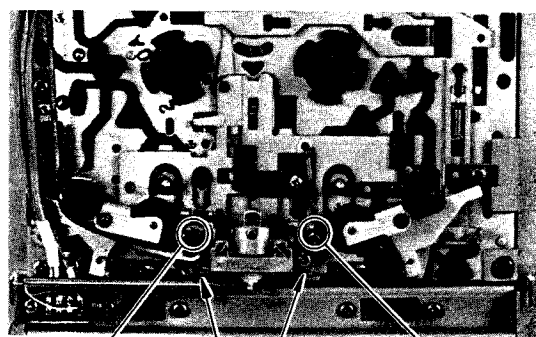


Erase head tape pass adjustment screw

Tape guide tape pass adjustment screw.

Head holder height adjustment shim

Height adjustment shim of REC/PB head.



Enlarged view-of head holder assembly.

3. After the adjustment, lock the screws with locking compound.



The height adjustment shim of the REC/PB head.

Thick (mm)	Parts No.
0.05	3-307-480-02
0.1	3-307-479-01
0.2	3-307-479-11
0.3	3-307-479-21
0.4	3-307-479-31

RECORD/PLAYBACK HEAD HEIGHT ADJUSTMENT

The following adjustments should be made when the record/playback head is replaced.


1. The head should be made after removing the head pad of the mirror tape cassette.
2. Using the leader section of the mirror cassette tape, adjustments are made by changing the adjusting shim so that the core and the edge of the tape become as shown in the illustration below when the tape is moved across the head.

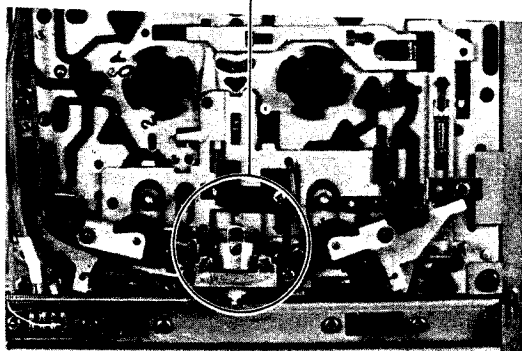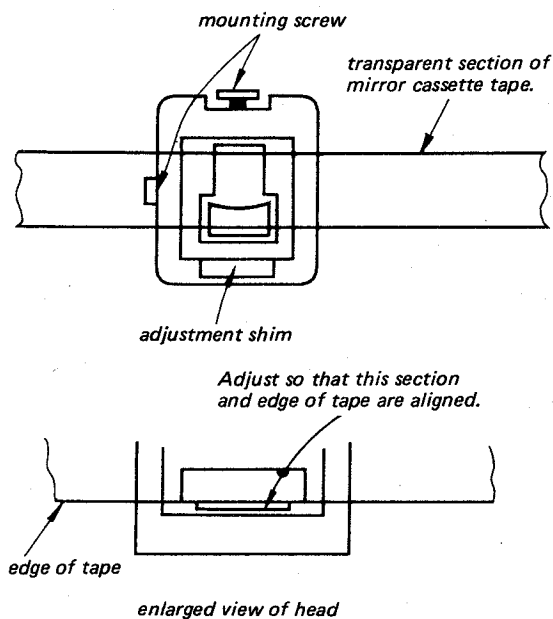


The height adjustment shim of the REC/PB head

Thick (mm)	Parts No.
0.05	3-307-480-02
0.1	3-307-479-01
0.2	3-307-479-11
0.3	3-307-479-21
0.4	3-307-479-31

PAUSE ARM POSITION ADJUSTMENT

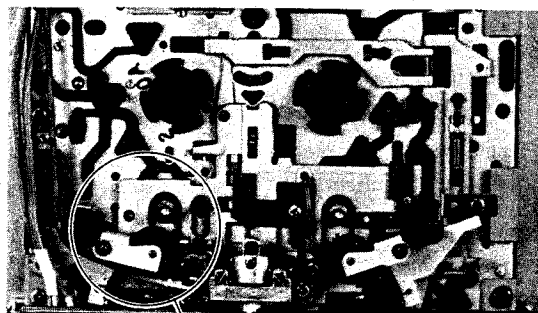

Loosen the hexagonal-head securing bolt B and adjust the position of the pause arm B so that the distance of A becomes 0.5 mm ~ 1.0 mm.

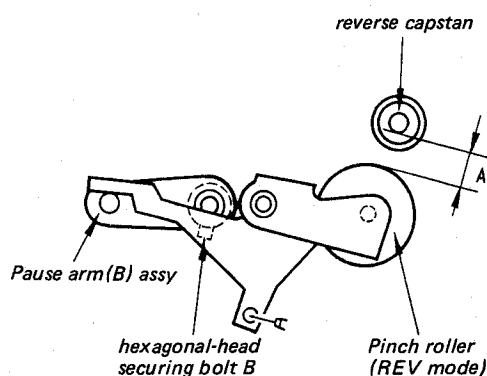

4-2. ELECTRICAL ADJUSTMENTS

Note: The adjustment should be performed in the order given in this service manual. The adjustments should be performed for both L-CH and R-CH.

- Set the TAPE switches according to the tape as follows.

Tape	TAPE switch
CS-10	TYPE I
CS-20	TYPE II
CS-30	TYPE III
CS-40	TYPE IV


- Switches and controls should be set as follows unless otherwise specified.

DOLBY NR switch:	OFF
TAPE switch:	TYPE I
TIMER switch:	OFF

- Standard Record :

Deliver the standard input signal level to the input jack and set the REC LEVEL control to obtain the standard output signal level.

—Record Mode—

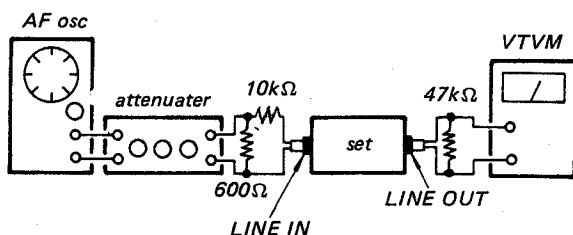

Standard Input Level

	LINE IN
source impedance	10 k Ω
input level	0.25 V (-10 dB)

Standard Output Level

	LINE OUT
load impedance	47 k Ω
output level	0.44 V (-5 dB)


Tape Speed Adjustment

Setting:

Tape Selector Switch AUTO
Dorby NR switch OFF

Procedure:

Mode: PLAYBACK

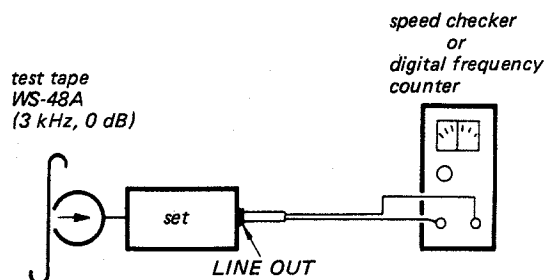


Using test tape WS-48A adjust the variable resistor that built in motor so that the specification is met. Adjust for both forward (▶) direction and reverse (◀) direction.

Specification:

Speed checker	Digital frequency counter
$\pm 1\%$	2,970–3,030 Hz

Frequency difference between the beginning and the end of the tape should be within 1% (30 Hz).

Adjustment Location:

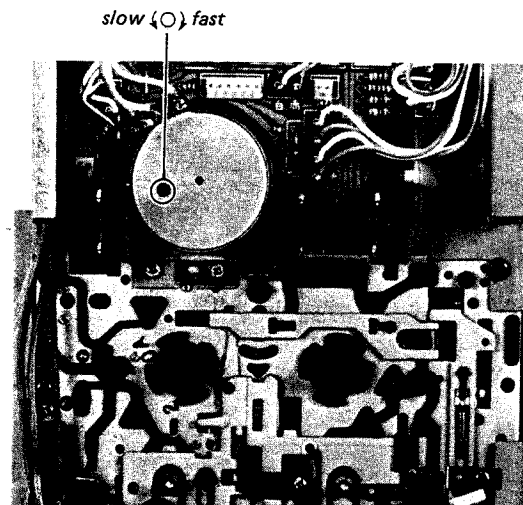

Tape Speed Adjustment


Setting:

Tape Selector Switch AUTO
Dorby NR switch OFF

Procedure:

Mode: PLAYBACK

test tape
WS-48A
(3 kHz, 0 dB)

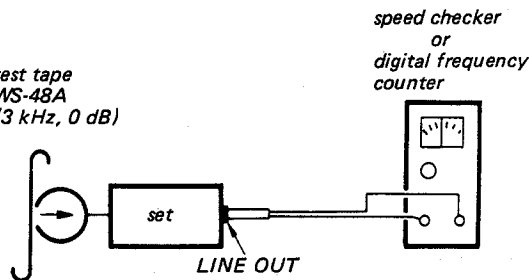


Using test tape WS-48A adjust the variable resistor that built in motor so that the specification is met. Adjust for both forward (▶) direction and reverse (◀) direction.

Specification:

Speed checker	Digital frequency counter
±1%	2,970–3,030 Hz

Frequency difference between the beginning and the end of the tape should be within 1% (30 Hz).

Adjustment Location:

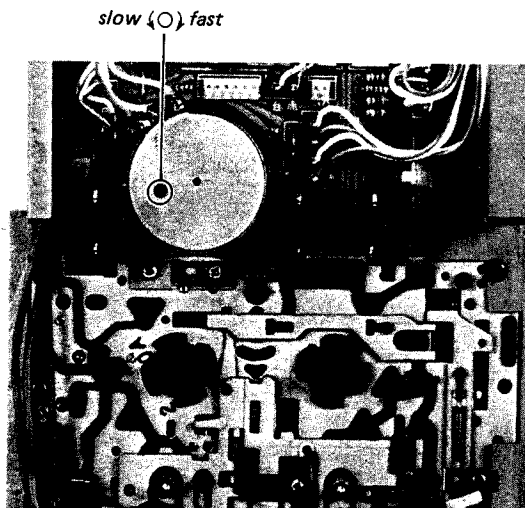


Record/playback Head Azimuth Adjustment

Procedure:


1. Mode: playback (FOW/REV)

test tape
P-4-A81
(6.3 kHz, -10 dB)

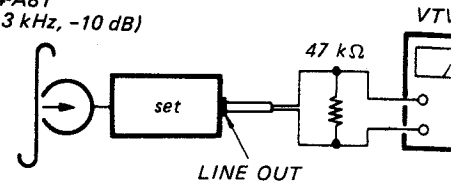


Adjust for forward (▶) direction and (◀) direction.

2. Turn the adjustment screw for the main output levels. If these levels do not match the adjustment screw where both of levels match together within 0.5 dB.

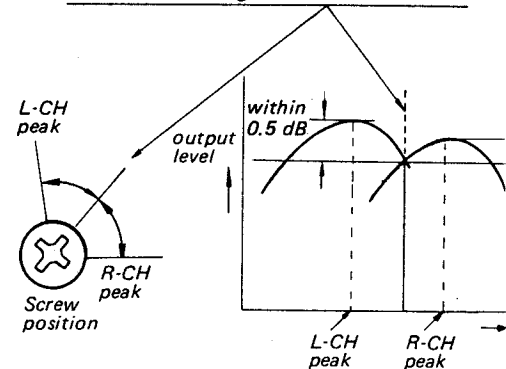

3. Phase Check
Confirm that phase difference between L and R-channel is within 90°.

test tape
P-4-A81
(6.3 kHz, -10 dB)

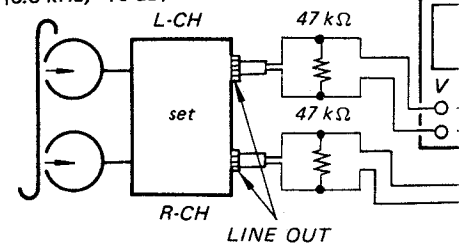


Screen pattern				
good			wrong	

Record/playback Head Azimuth Adjustment

Procedure:


1. Mode: playback (FOW/REV)

test tape
P-4-A81
(6.3 kHz, -10 dB)

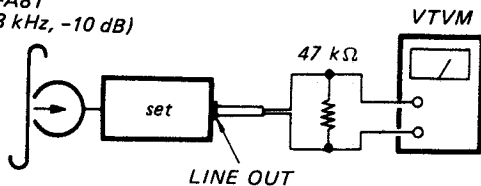

Adjust for forward (▶) direction and reverse (◀) direction.



2. Turn the adjustment screw for the maximum output levels. If these levels do not match, turn the adjustment screw where both of output levels match together within 0.5 dB.

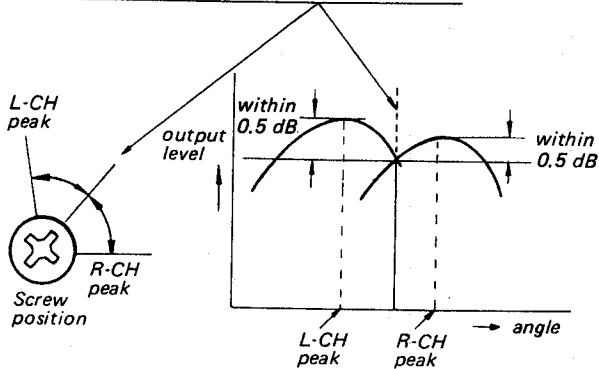

3. Phase Check

Confirm that phase difference between L-channel and R-channel is within 90°.

test tape
P-4-A81
(6.3 kHz, -10 dB)

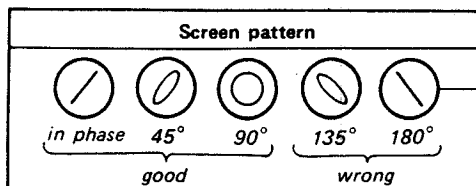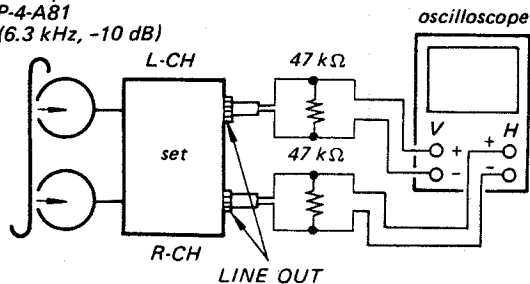

4. After the adjustment, lock the screws with locking compound.

Adjustment Location:




Adjustment screw
REVERSE direction
(◀)

Adjustment screws
FORWARD direction
(▶)

After the adjustment, lock the screws with locking compound.

Adjustment Location:

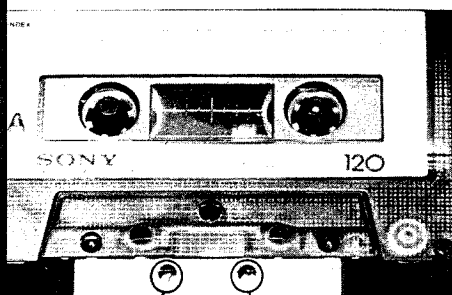


Adjustment screw
REVERSE direction
(◀)

Adjustment screws
FORWARD direction
(▶)

Playback Level Adjustment

Procedure:

Mode: playback

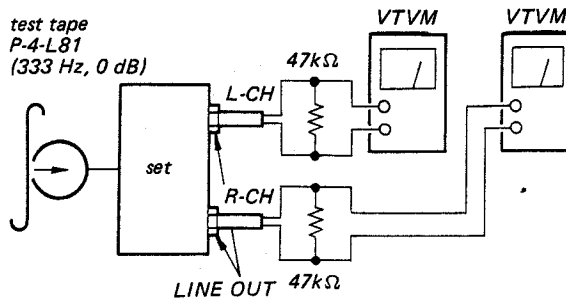

Adjust the RV101 (L-CH) and RV201 (R-CH) so that the specification is met.

Specification:


LINE OUT level: 0.52 ~ 0.59 V
(-3.5 ~ -2.5 dB)

Level difference between channels:
less than 0.5 dB

Check that the LINE OUT level does not change in playback mode while changing the mode from playback to stop several times.

Adjustment Location:

—PLAYBACK BOARD—

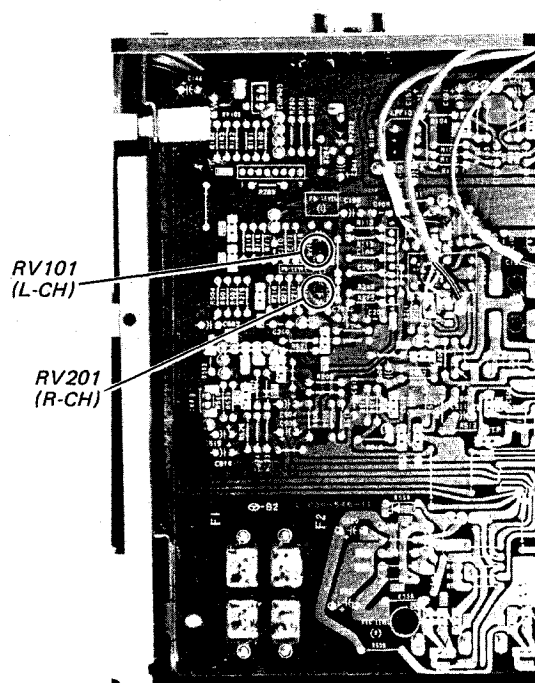


Record Bias Adjustment

Setting:

TAPE SELECT
DOLBY NOISE
TEST TAPES
REC LEVEL

Procedure:


1. Mode: record



Record

2. Mode: playback


recorded
portion




Playback level
Adjust C1
playback level
to that of

Adjustment location

—PLAYBACK BOARD—

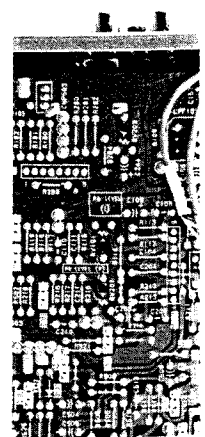


ment

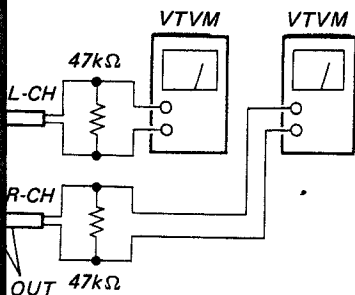

01 (L-CH) and RV201 (R-CH)
Specification is met.

0.52 ~ 0.59 V
(-3.5 ~ -2.5 dB)
between channels:
less than 0.5 dB

LINE OUT level does not
back mode while changing the
back to stop several times.

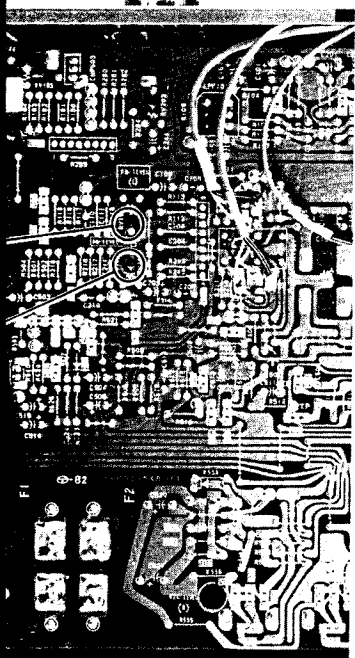


Record Bias Adjustment

Setting:

TAPE SELECTOR : AUTO
DOLBY NR : OFF
TEST TAPE : CS-10 (Blank tape)
REC LEVEL : STANDARD RECORD
(See page 19)


Procedure:

1. Mode: record

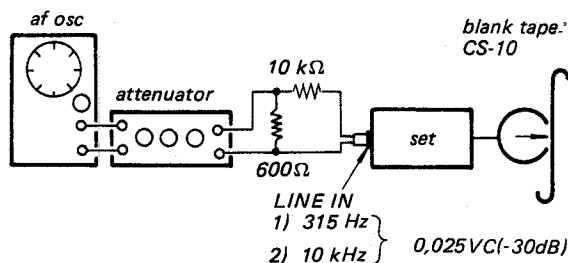

Record 315 Hz and 10 kHz Signals.


2. Mode: playback

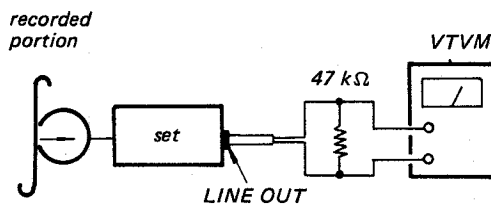

Playback the two signals recorded in Step 1.
Adjust C154 (L-CH) and C254 (R-CH) so that
playback output of 10kHz signal is 0dB relative
to that of 315 Hz.

Adjustment location:

—PLAYBACK BOARD—

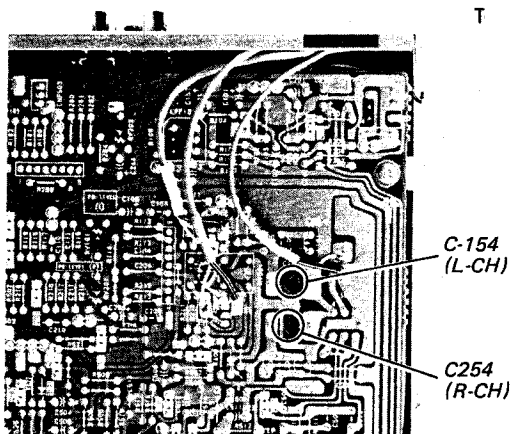


Record Level Adjustment

Setting:

TAPE SELECTOR : A
DOLBY NR : O
TEST TAPE : C
REC LEVEL : S
(S)


Procedure:

1. Mode: record



Record a 333 Hz signal o

2. Mode: playback




Playback the signal recorded in
Adjust RV102 (L-CH) and R
the specification below.

Specification:

LINE OUT level: 0.41
(-5.5)

Adjustment Location:

—RECORD BOARD—

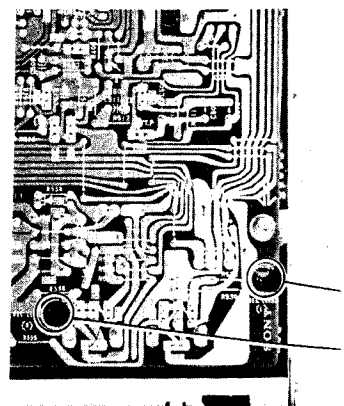


Record Level Adjustment

Setting:

TAPE SELECTOR : AUTO
DOLBY NR : OFF
TEST TAPE : CS-10 (Blank tape)
REC LEVEL : STANDARD RECORD
(See page 19)


Procedure:

1. Mode: record

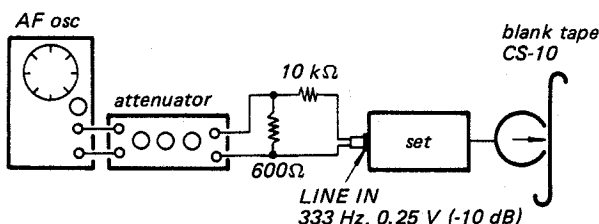

Record a 333 Hz signal of 0.25 V (-10 dB).

2. Mode: playback

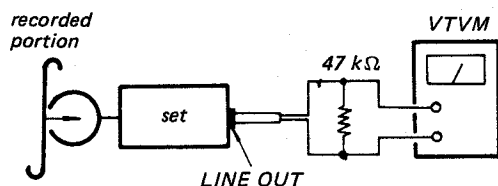


Playback the signal recorded in Step 1.
Adjust RV102 (L-CH) and RV202 (R-CH) for the specification below.

Specification:

LINE OUT level: 0.41 to 0.46 V
(-5.5 to -4.5 dB)

Adjustment Location:


—RECORD BOARD—

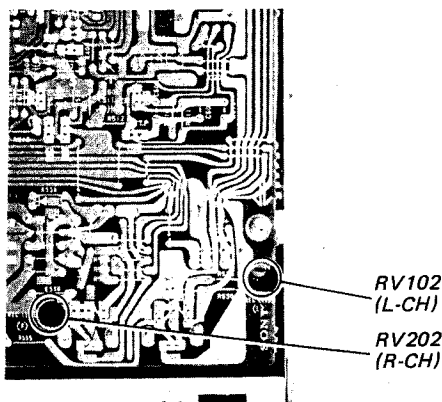

Level Meter Calibration

Procedure:


1. Mode: record

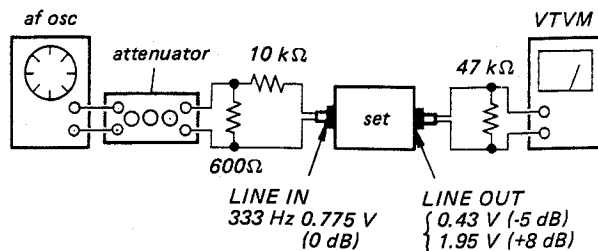

2. Set the REC LEVEL control so that the LINE OUT level is 0.43 V (-5 dB) when a 333 Hz signal of 0.775 V (0 dB) is applied to LINE IN.
3. Adjust RV103 (L-CH), RV203 (R-CH) so that the -5 dB indicating LED in the LED meter goes on.
4. Set the REC LEVEL control so that the LINE OUT level is 1.9 V (+8 dB) Make sure that the +8 dB indicating LED on.

Adjustment Location:

—PLAYBACK BOARD—

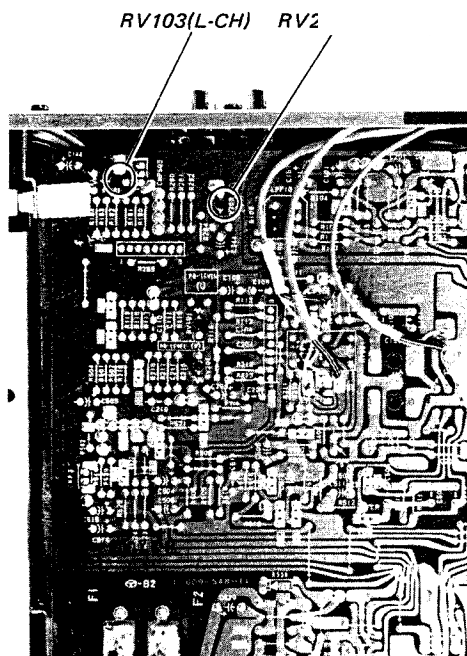

5-1. MOUNTING DIAGRAM
— Audio Section —

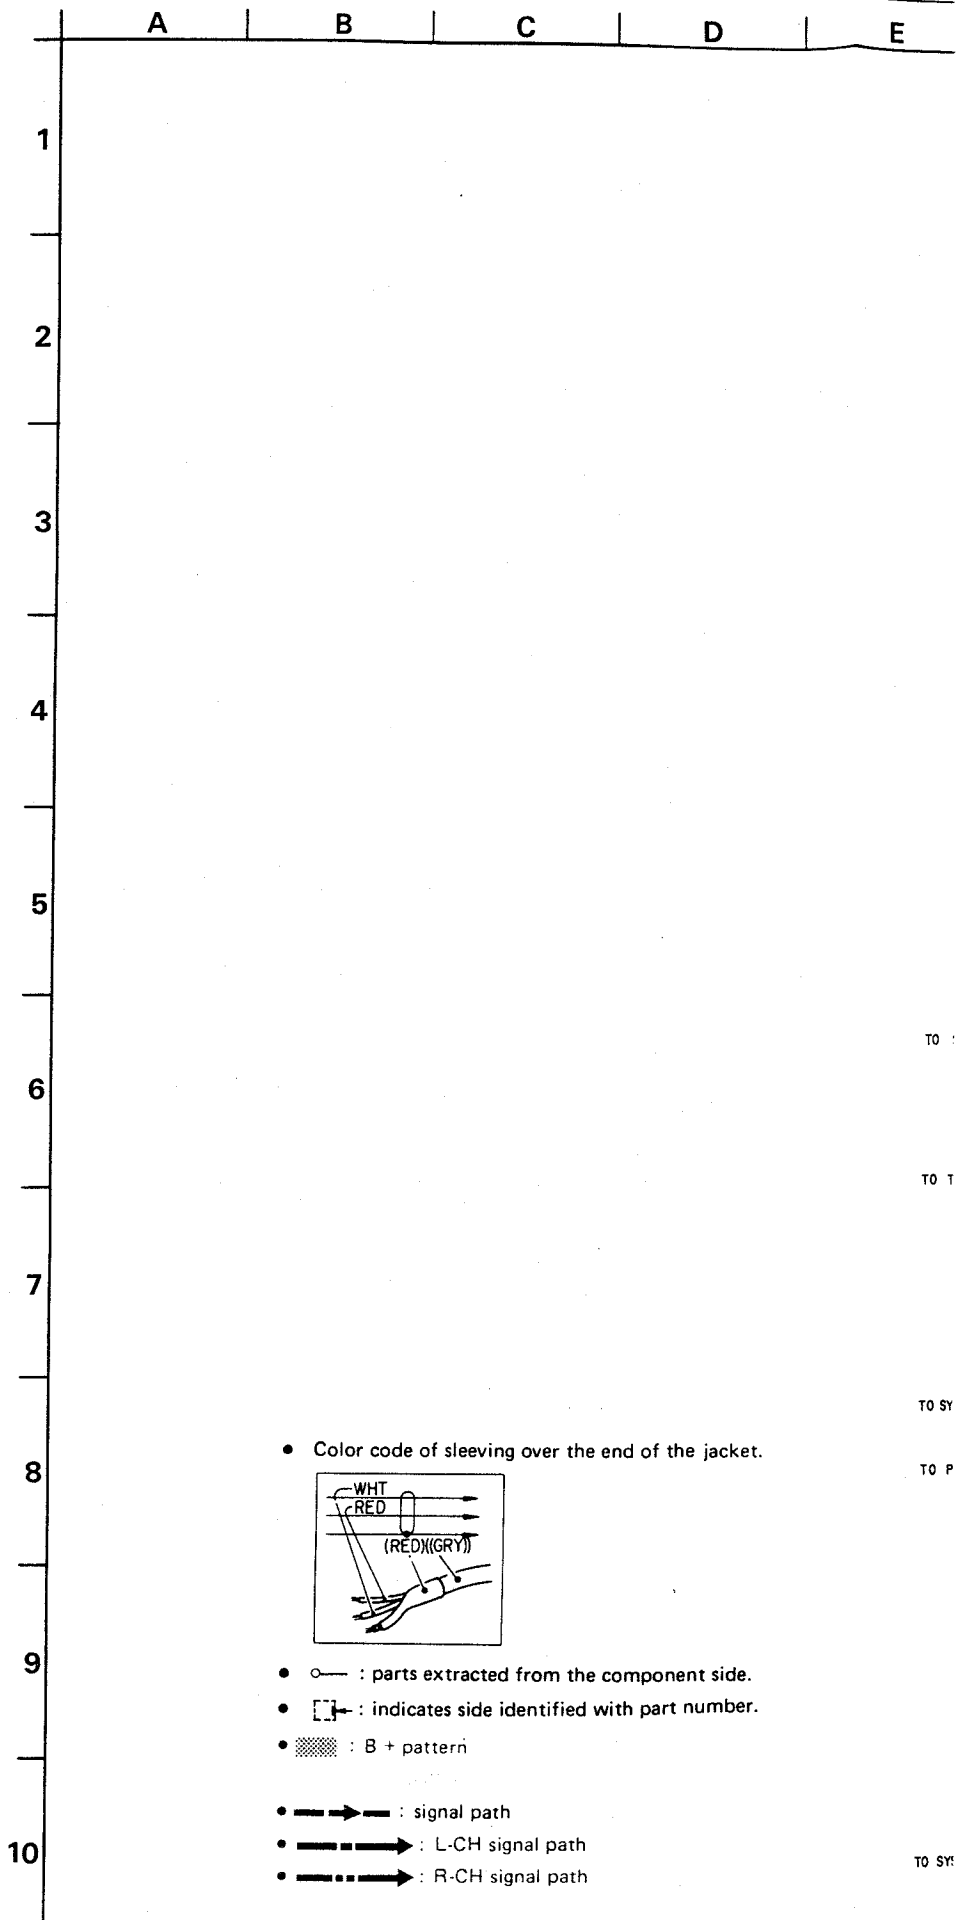


DIAGRAM
tion —

A

B

C

D

E

F

G

1

2

3

4

5

6

7

8

9

10

Q


IC

D


PLAYBA



IC502



IC501



TO SYSTEM CONTROL BOARD (D)

WITH NO CASSETTE: 0V
WITH CASSETTE: 7.7V


TO TRANSLATION BOARD (H)

TO SYSTEM CONTROL BOARD (C)

TO POWER TRANSFORMER (I)

TO SYSTEM CONTROL BOARD (B)

- Color code of sleeving over the end of the jacket.



- ○ — : parts extracted from the component side.
- [] — : indicates side identified with part number.
- [] : B + pattern
- — : signal path
- — : L-CH signal path
- — : R-CH signal path

J

K

L

M

N

O


P


Q

IC501 504 101 201
 509 508 507 506 505
 519 517 516 515 513 514
 518 512


516 501 509
 511 512 510
 514 515
 513

ARD

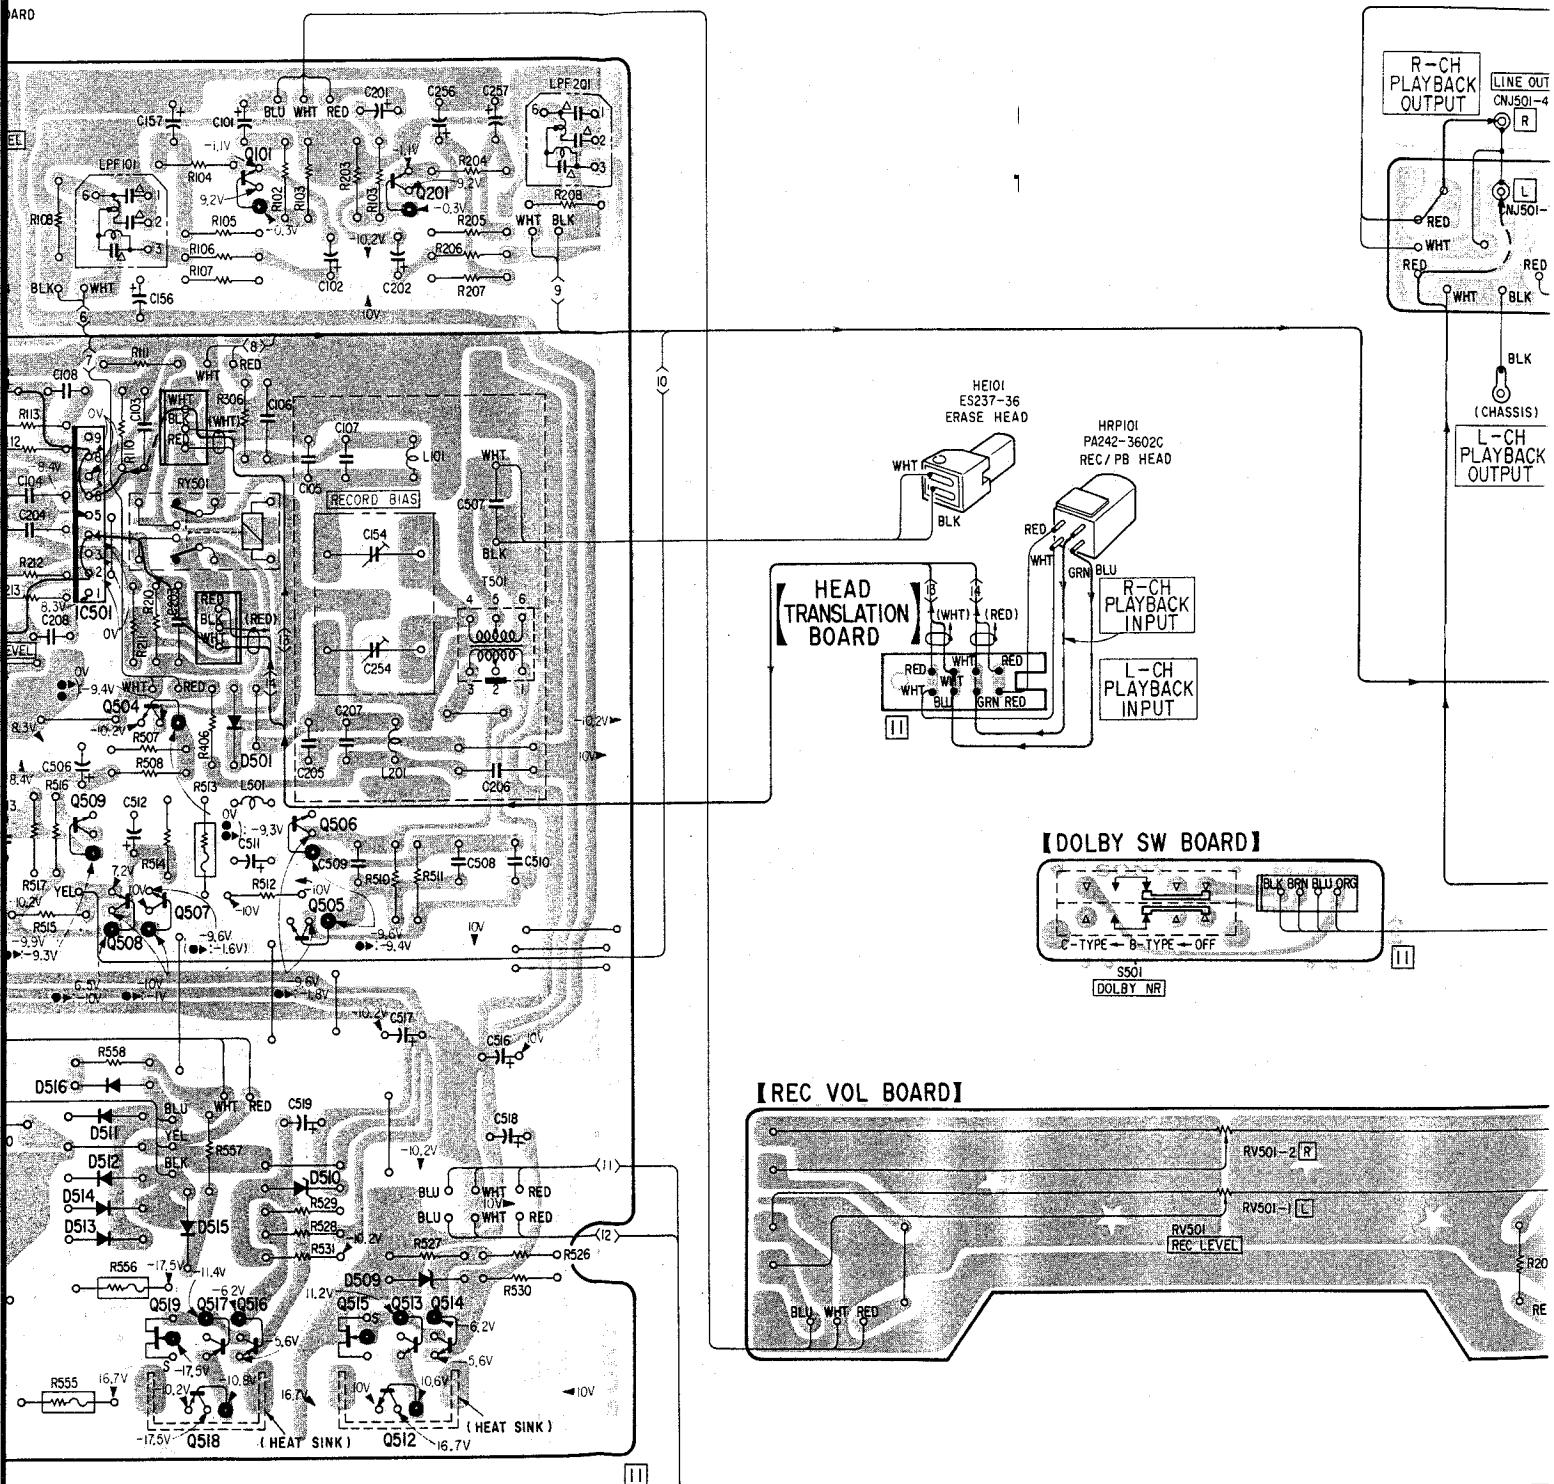


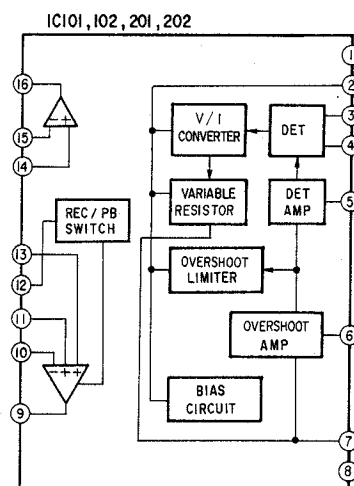A vertical ruler with markings from 1 to 10. The numbers 1 through 10 are printed in a bold, sans-serif font, aligned to the right of the ruler's edge. The ruler itself is a thin vertical line with short horizontal tick marks extending to the left at each integer value.

— Audio Section —





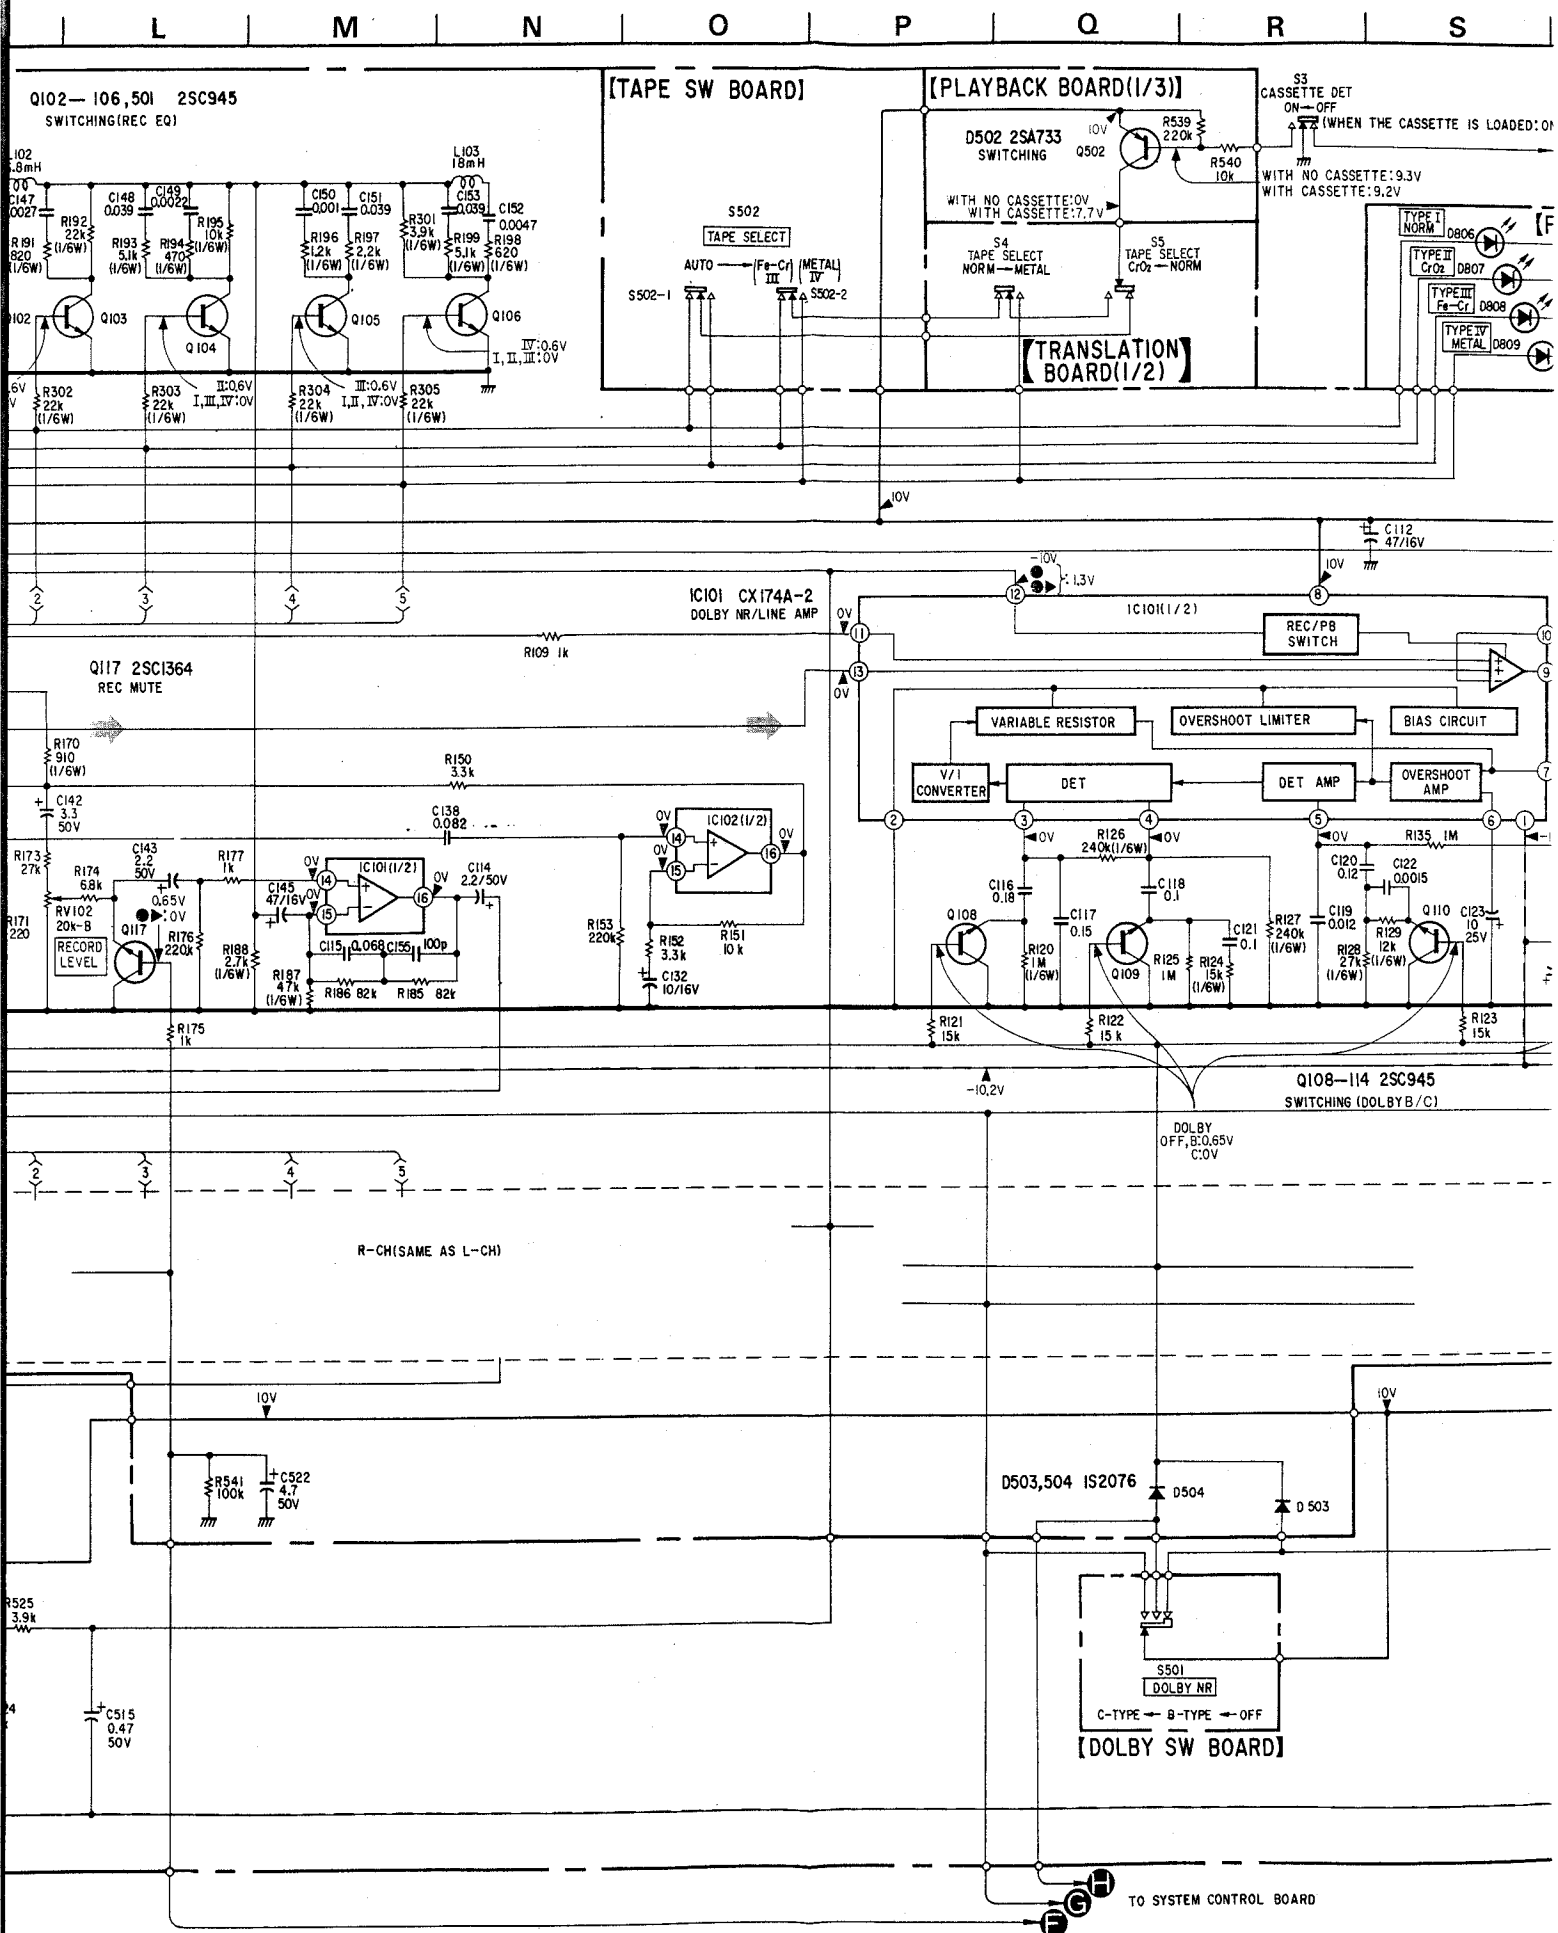

P Q R S T U V W X

[PLAYBACK BOARD(1/3)]

D502 2SA733
SWITCHING

Q502

R539
220k

R540
10k

S3 CASSETTE DET

ON-OFF

(WHEN THE CASSETTE IS LOADED:ON)

TO SYSTEM CONTROL BOARD

WITH NO CASSETTE:0V
WITH CASSETTE:7.7V

S4 TAPE SELECT

NORM-METAL

S5 TAPE SELECT

CrO₂-NORM

[TRANSLATION BOARD(1/2)]

[FL BOARD(1/2)]

TYPE I NORM

TYPE II CrO₂

TYPE III Fe-Cr

TYPE IV METAL

D806

D807

D808


D809

D806-809

PY5724K

R807

560 (1/6W)

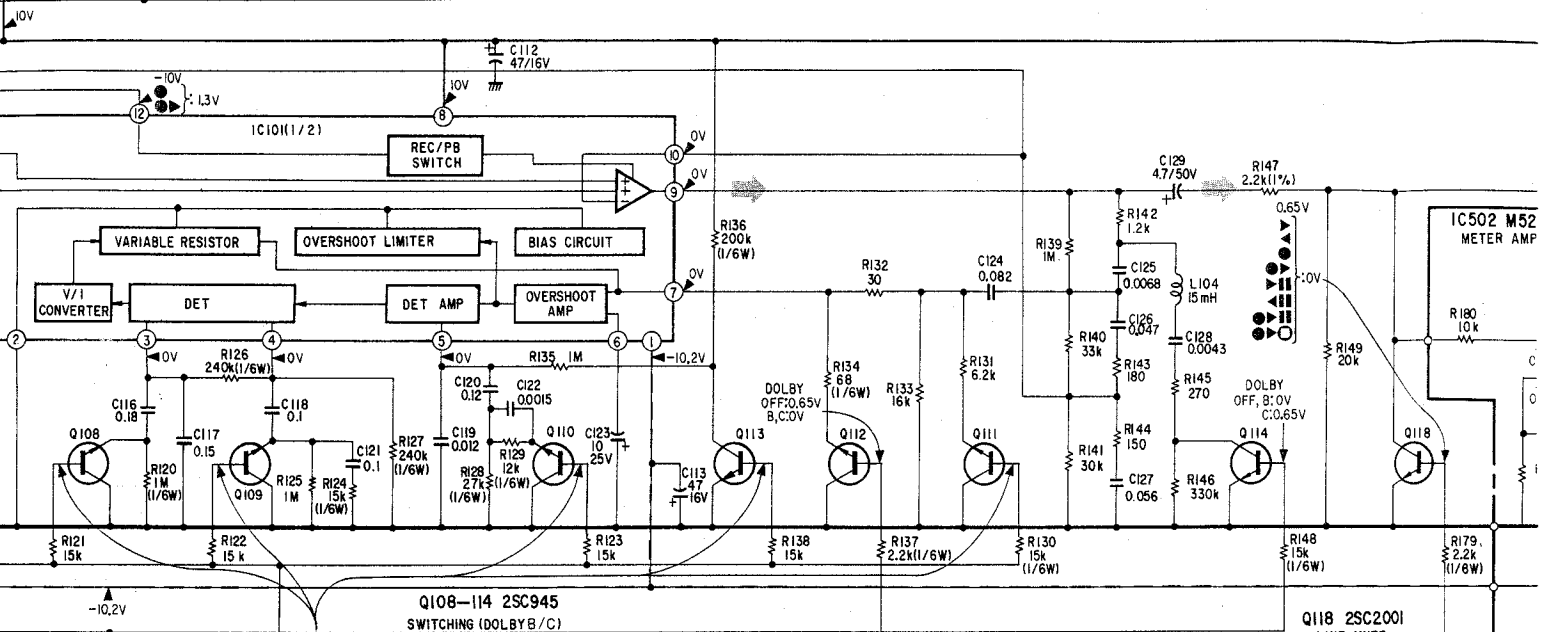

D503,504 IS2076

D504

D503

S501

DOLBY NR

C-TYPE B-TYPE OFF

[DOLBY SW BOARD]

Q512 2SD414

Q513 2SD1152

Q514 2SD1152

VOL. REG.

Q515 2SK30A-0

CURRENT REG.

Q519 2SK30A-0

CURRENT REG.

Q516 2SB864

Q517 2SB864

Q518 2SB548

VOL. REG.

C516

220 16V

R526

680 (1%)

R530

10k

Q512

10.6V

Q513

6.2V

C518

100/16V

R527

1k (1%)

C519

100 16V

R528

1.1k (1%)

C517

220 16V

R529

680 (1%)

R531


10k

Q518


-10.8V

TO SYSTEM CONTROL BOARD

TO SYSTEM CONTROL BOARD

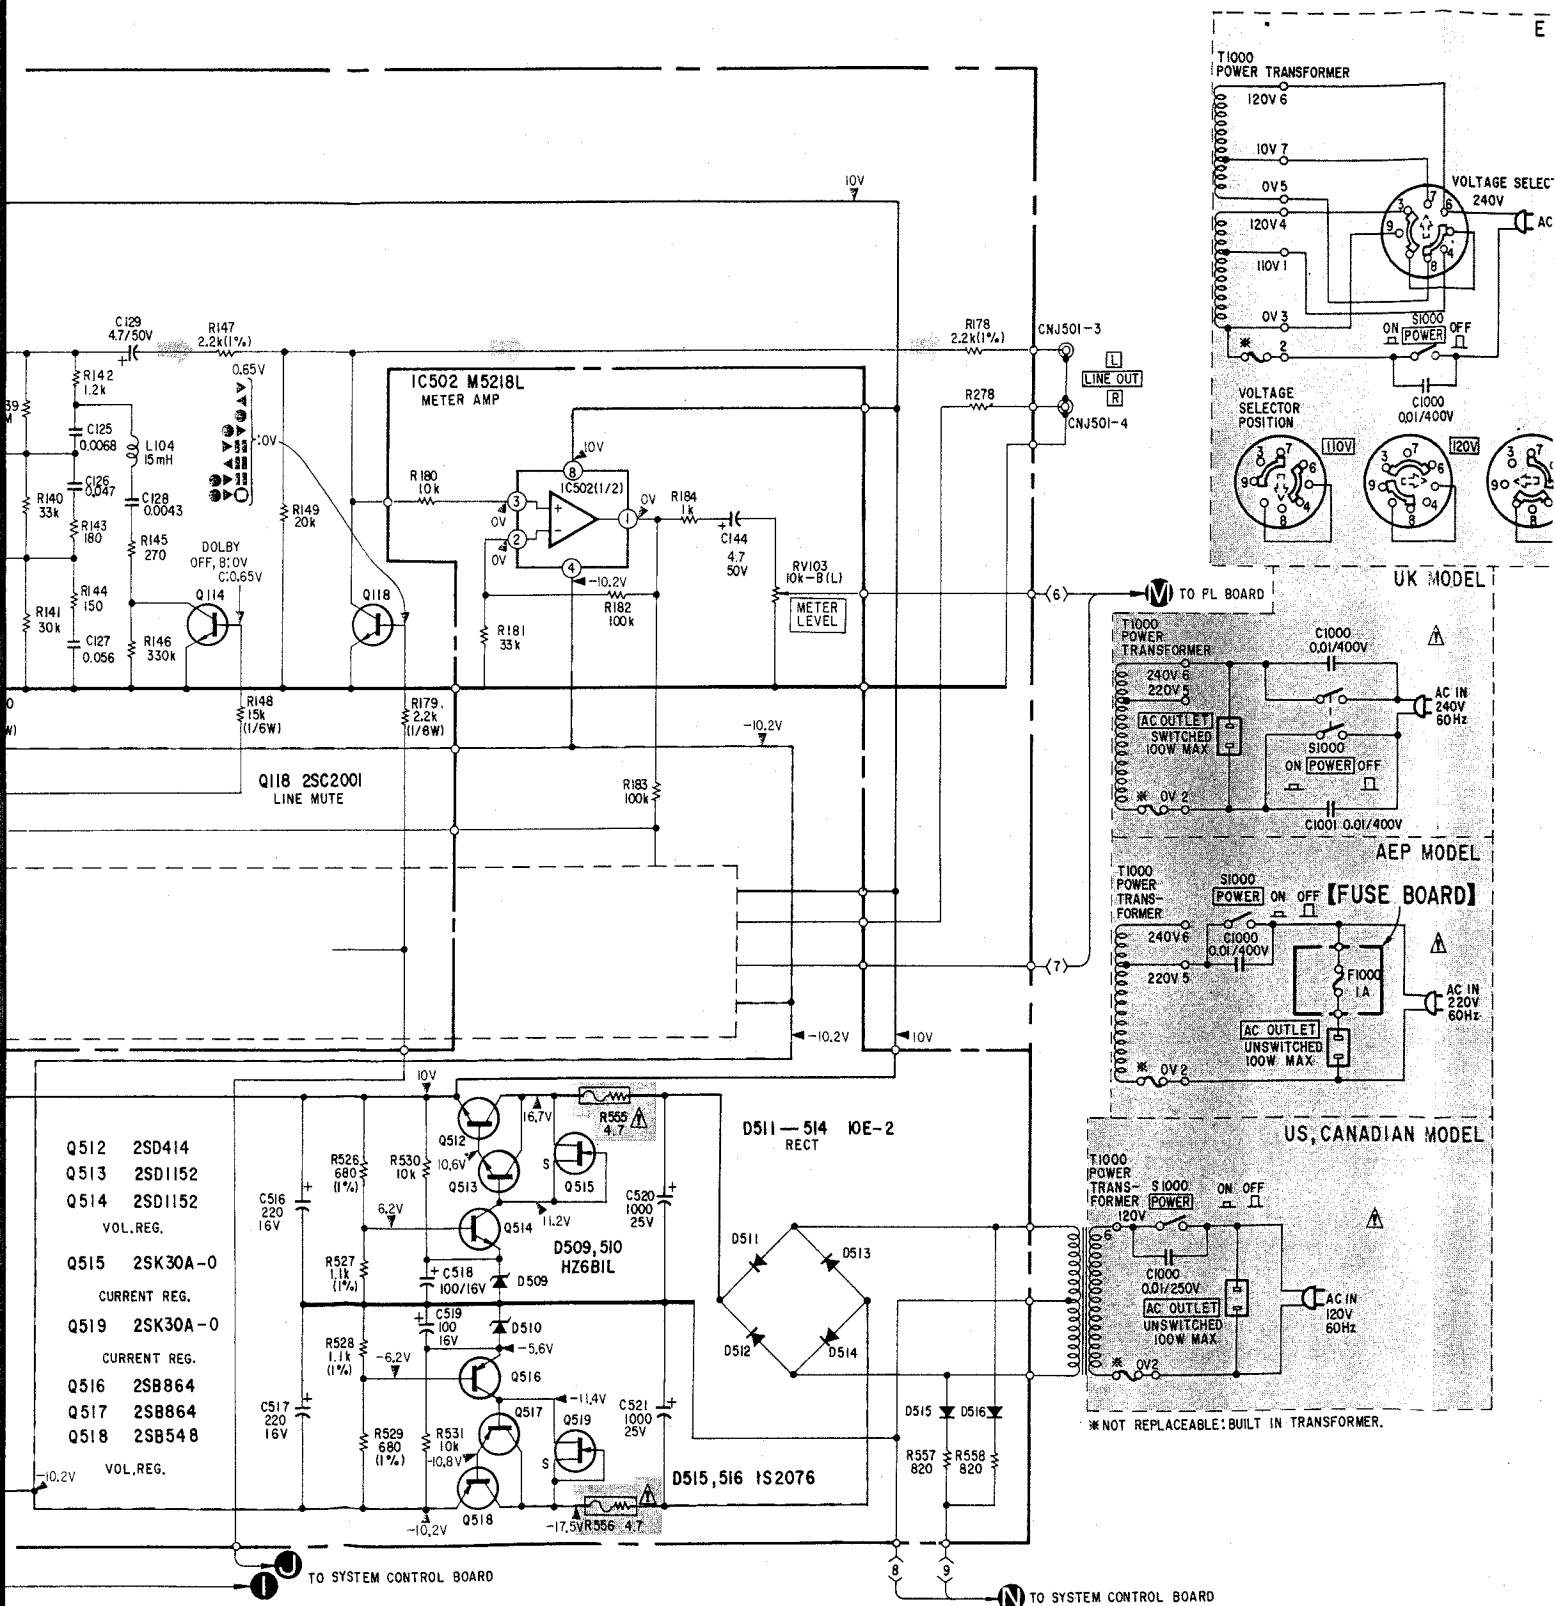

A1 B1 C1 D1 E1 F1 G1 H1

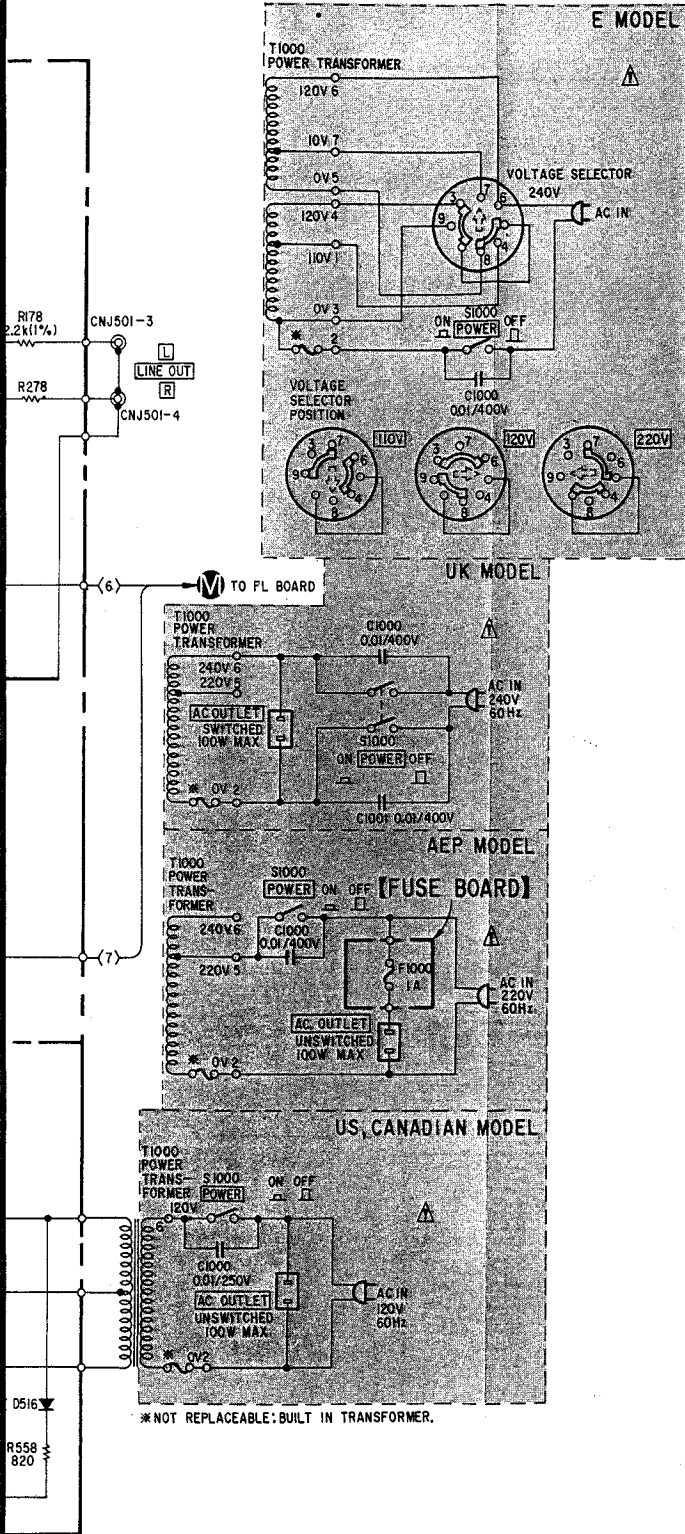

Note: The components identified by shading and mark Δ are critical for safety. Replace only with part number specified.


Note: Les composants identifiés par une trame et une marque Δ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.





Note: Voltages are measured with a VOM (50k Ω /V).

- Components for right channel have same values as for left channel. Reference numbers are coded from
- All capacitors are in μ F unless otherwise noted. pF; μ F; 50 WV or less are not indicated except for electrolytics.
- All resistors are in ohms, $\frac{1}{4}$ W unless otherwise noted. k Ω : 1000 Ω , M Ω : 1000 k Ω
- : fusible resistor.
- Δ : internal component.
- : panel designation.
- : adjustment for repair.
- : B+ bus.
- : B- bus.
- Readings are taken under no-signal conditions with a VOM (50 k Ω /V).
- Voltages are dc with respect to ground unless otherwise noted.
- Switch

Ref. No.	Switch	Position
S3	CASSETTE DET	OFF
S4	TAPE SELECT	NORM
S5	TAPE SELECT	NORM
S501	DOLBY NR	OFF
S502	TAPE SELECT	AUTO
S1000	POWER	OFF

: Signal path


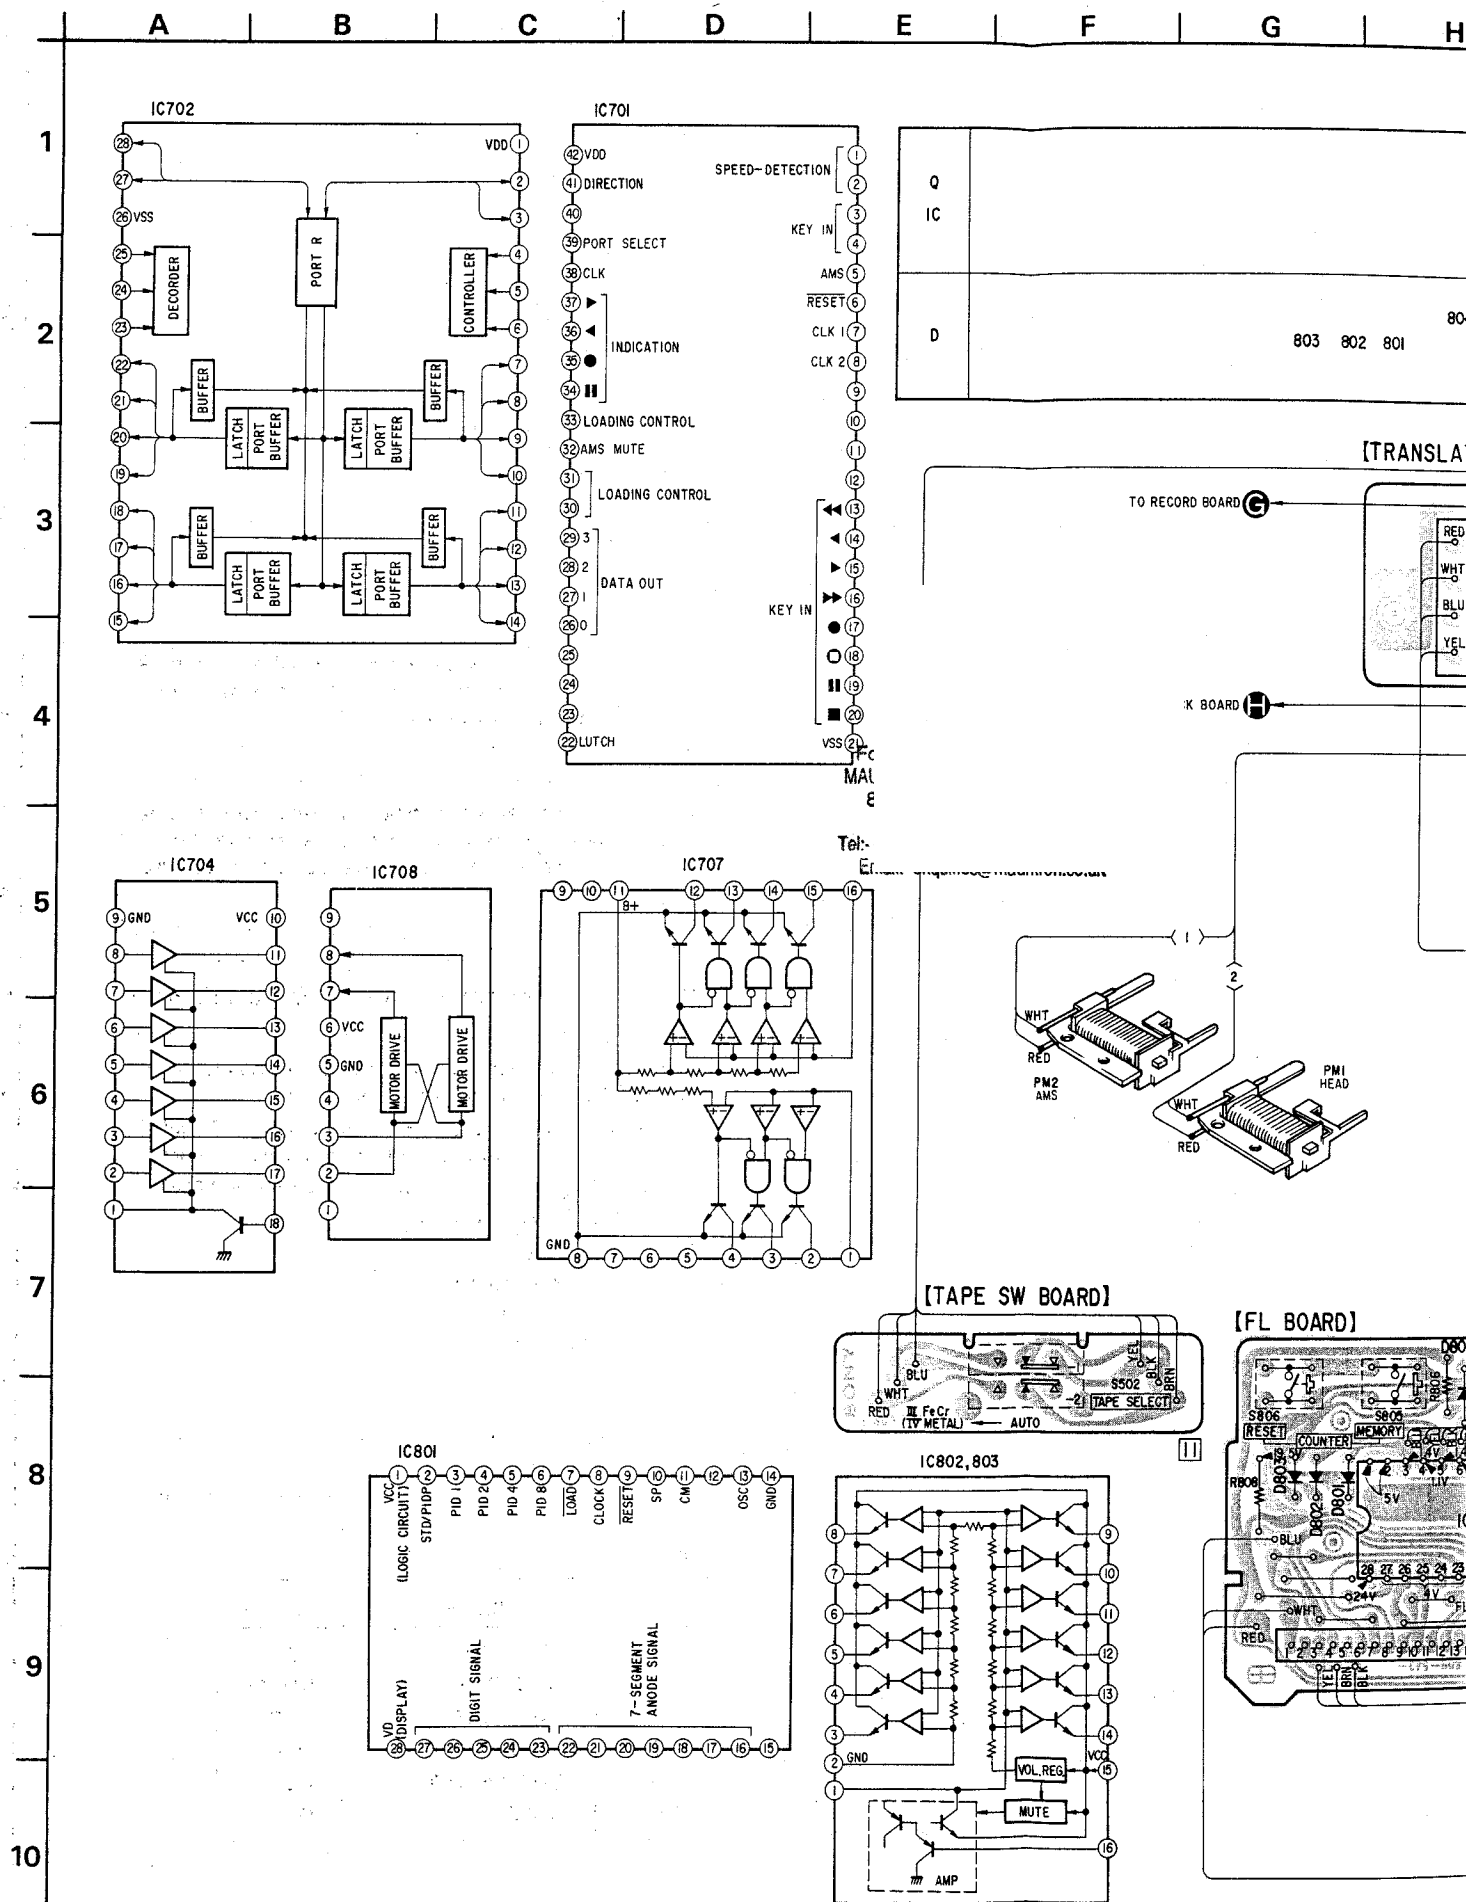


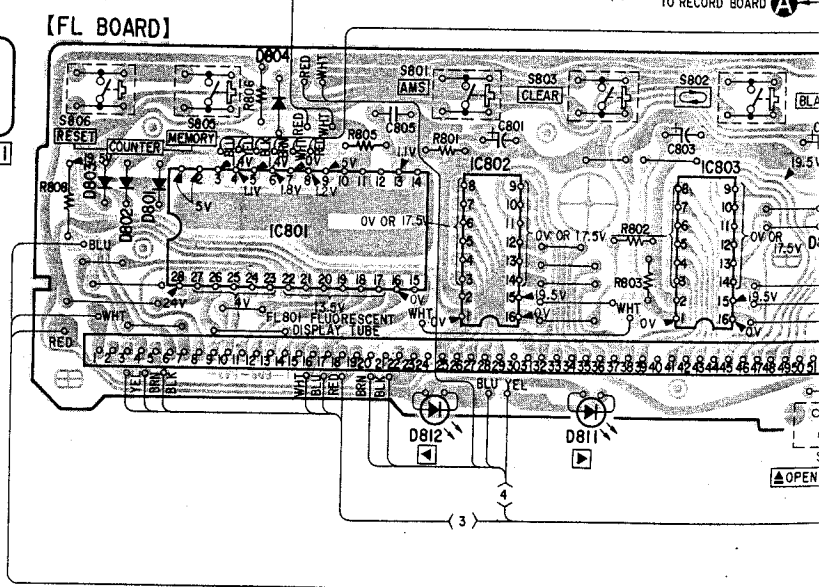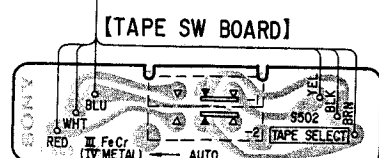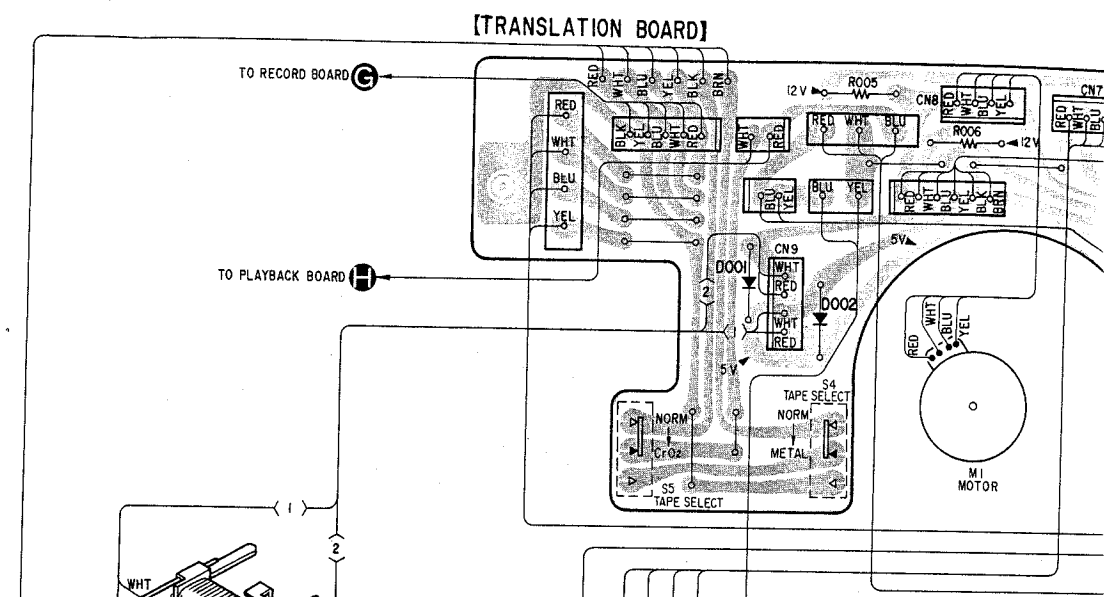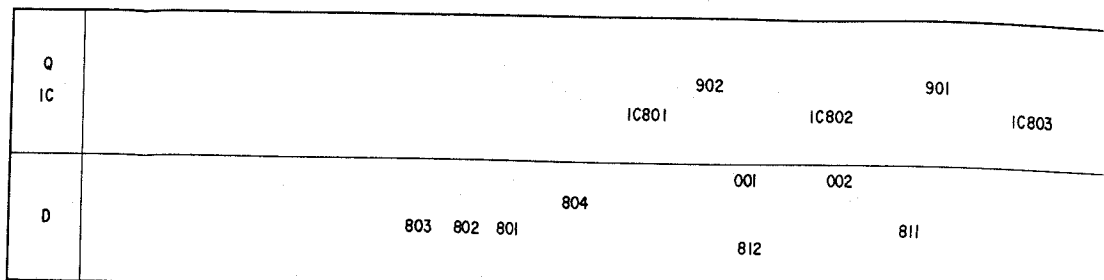


H I J K L M N O

902 901 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000


TRANSLATION BOARD

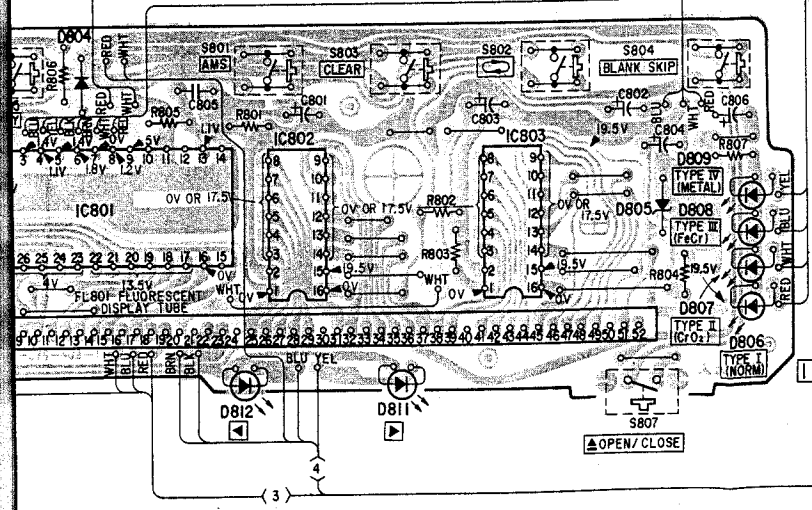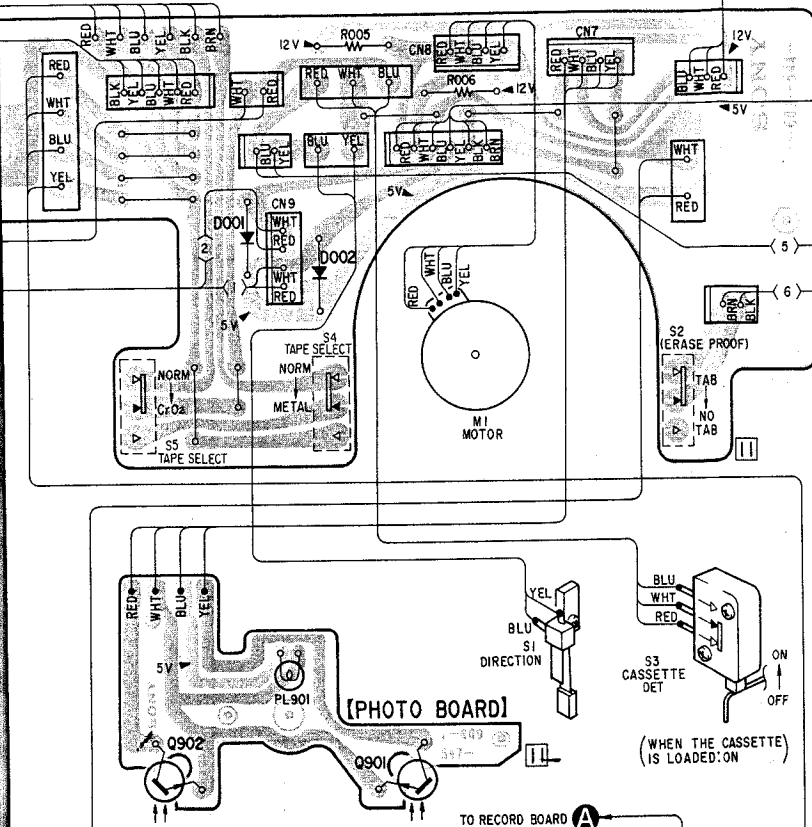

TRANSISTOR (A) BOARD

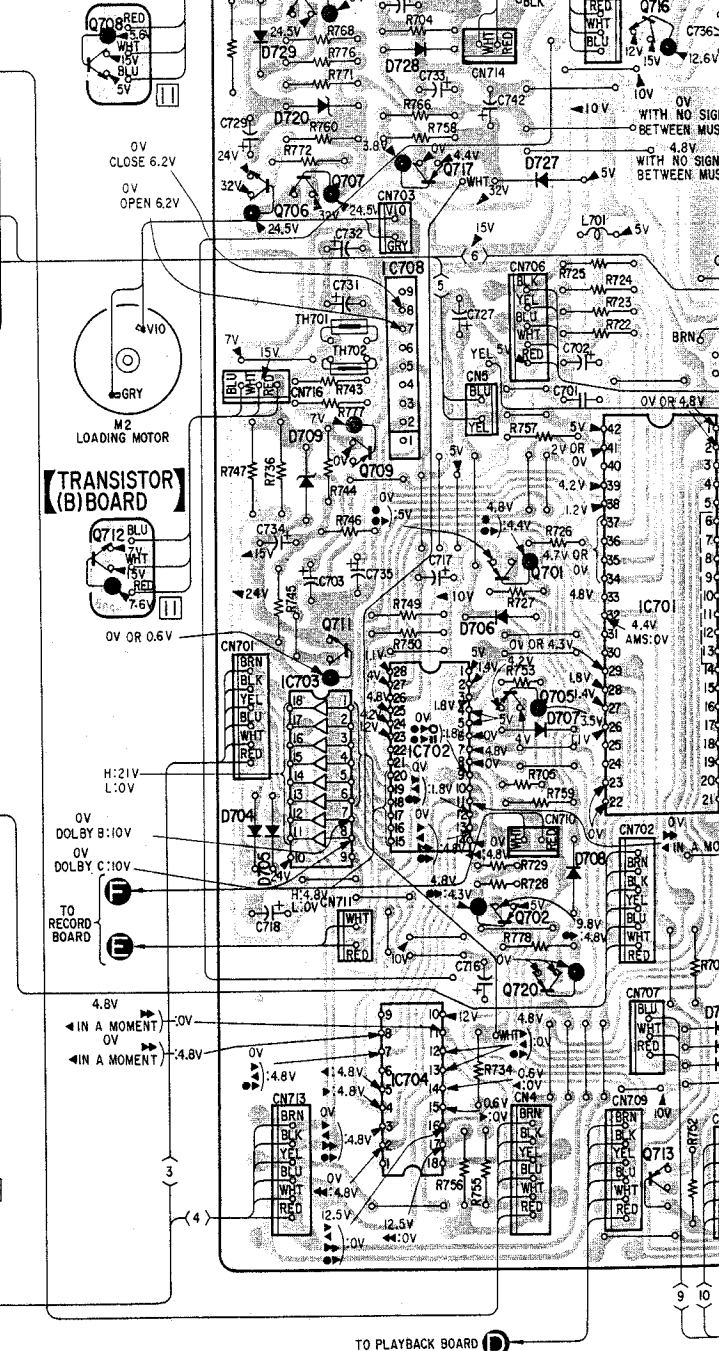


TRANSISTOR (B) BOARD

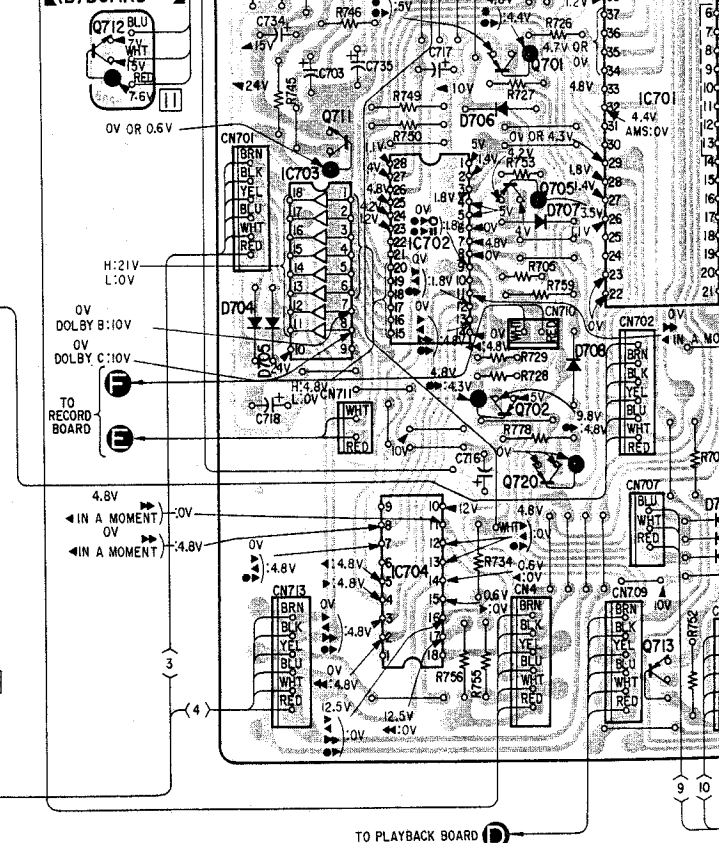

M N O P Q R S T

703 717 716 715 719 704
706 707 IC708 701 IC701
708 711 IC702 705 IC706 718
712 IC703 IC704 702 720 713 IC705 IC707

729 720 728 727 718 726 717 715 713 716 714
709 706 707 708 701 702 703 712

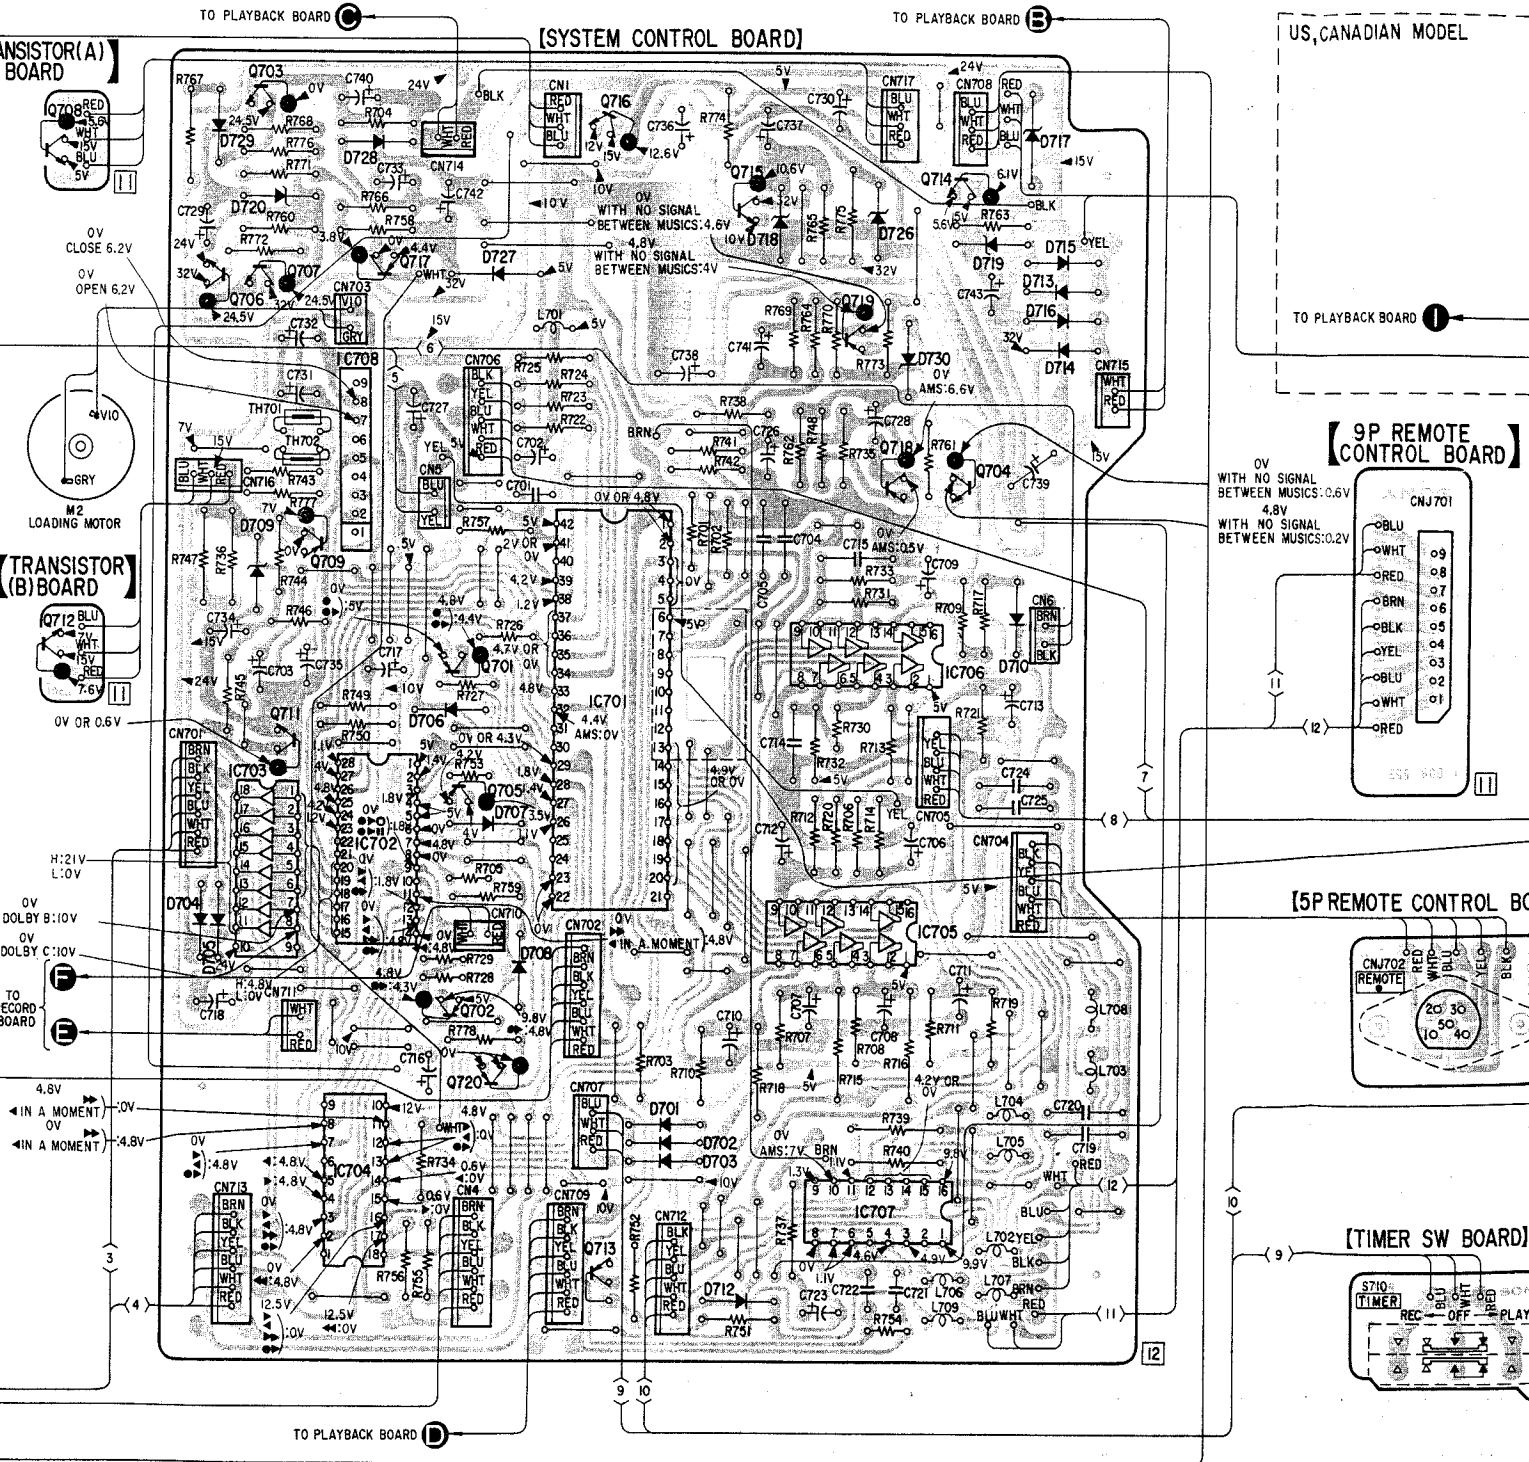


704

707

717
719 715
710 713
716
714


723

724 721

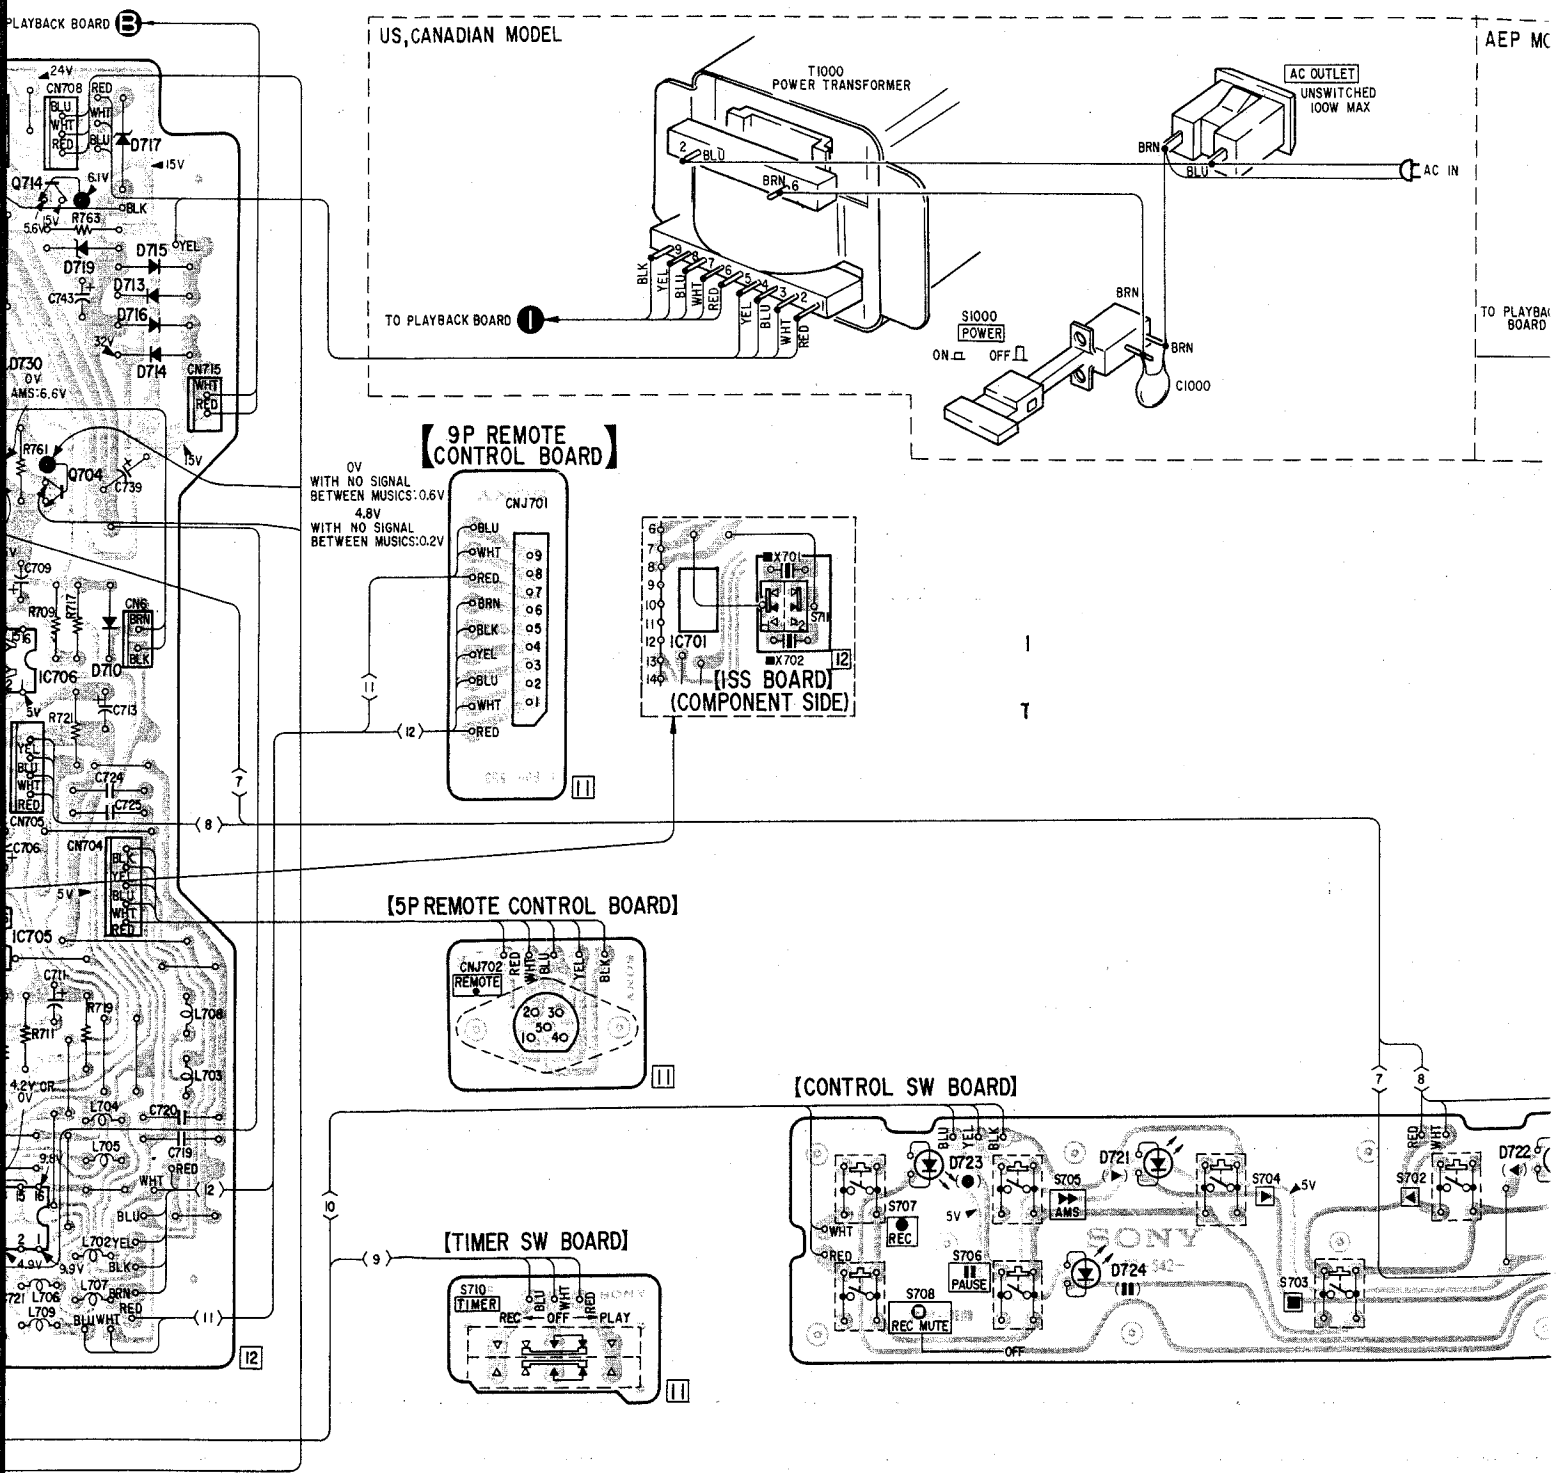


V W X Y Z A1 B1 C1 D1


				Q
				IC
723	724	721	722	D

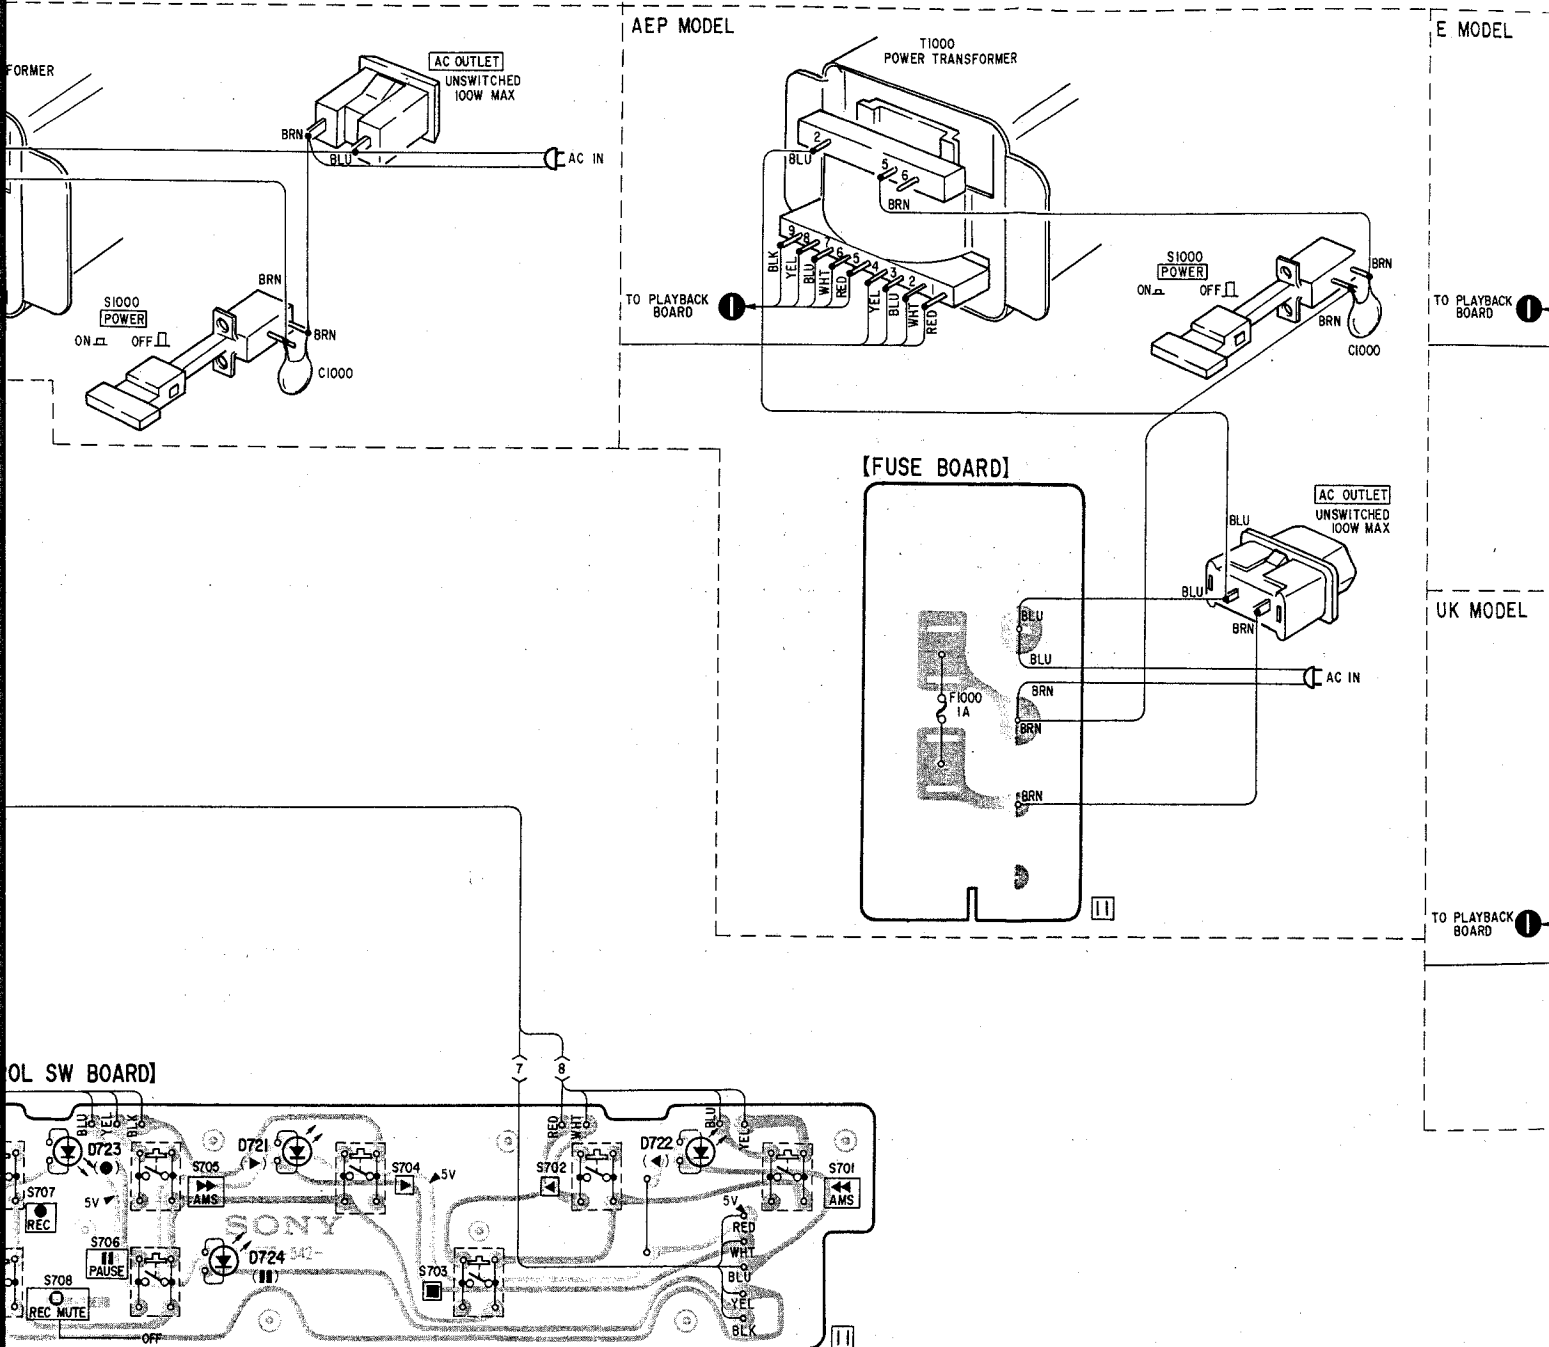


A1 B1 C1 D1 E1 F1 G1 H1

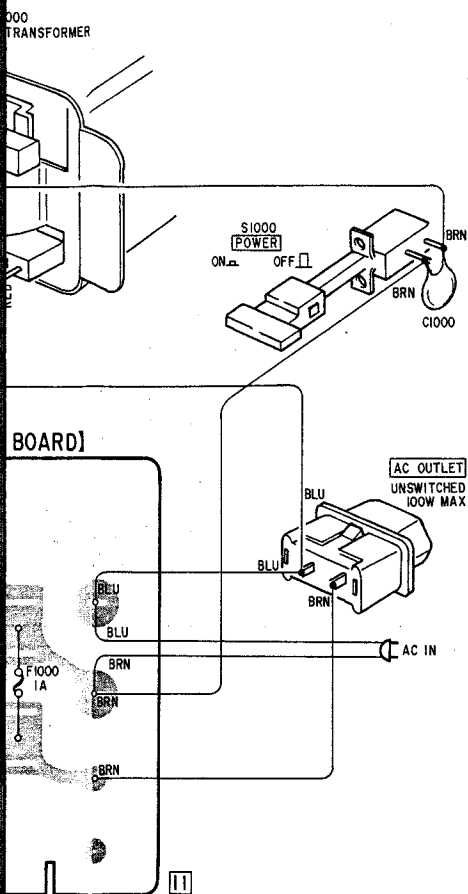

E MODEL

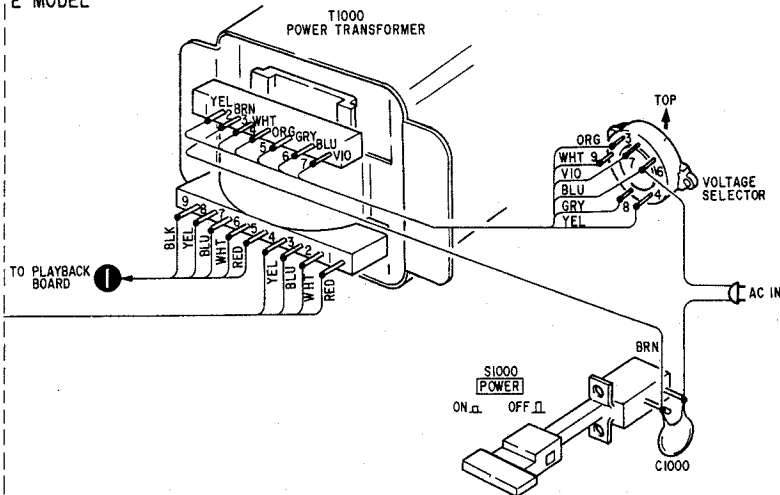


UK MODEL

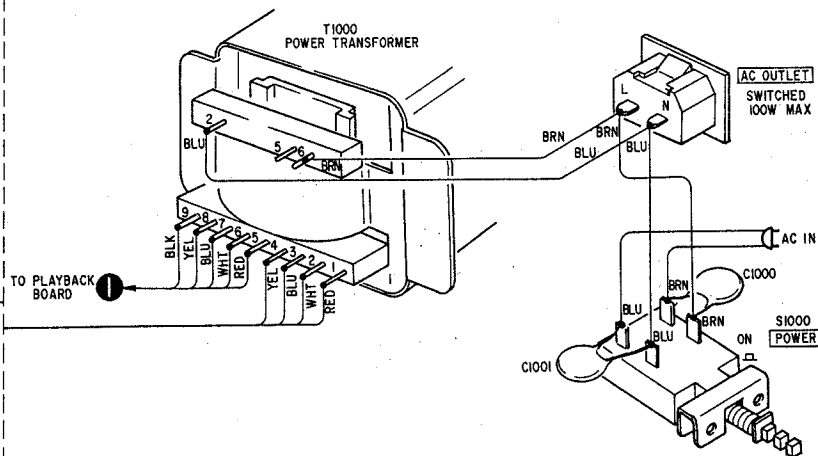


- — : parts extracted from the component side.
- : part mounted on the conductor side.
- : B+ pattern

5-4. SCHEMATIC DIAGRAM
- System Control Section -


TC-V7

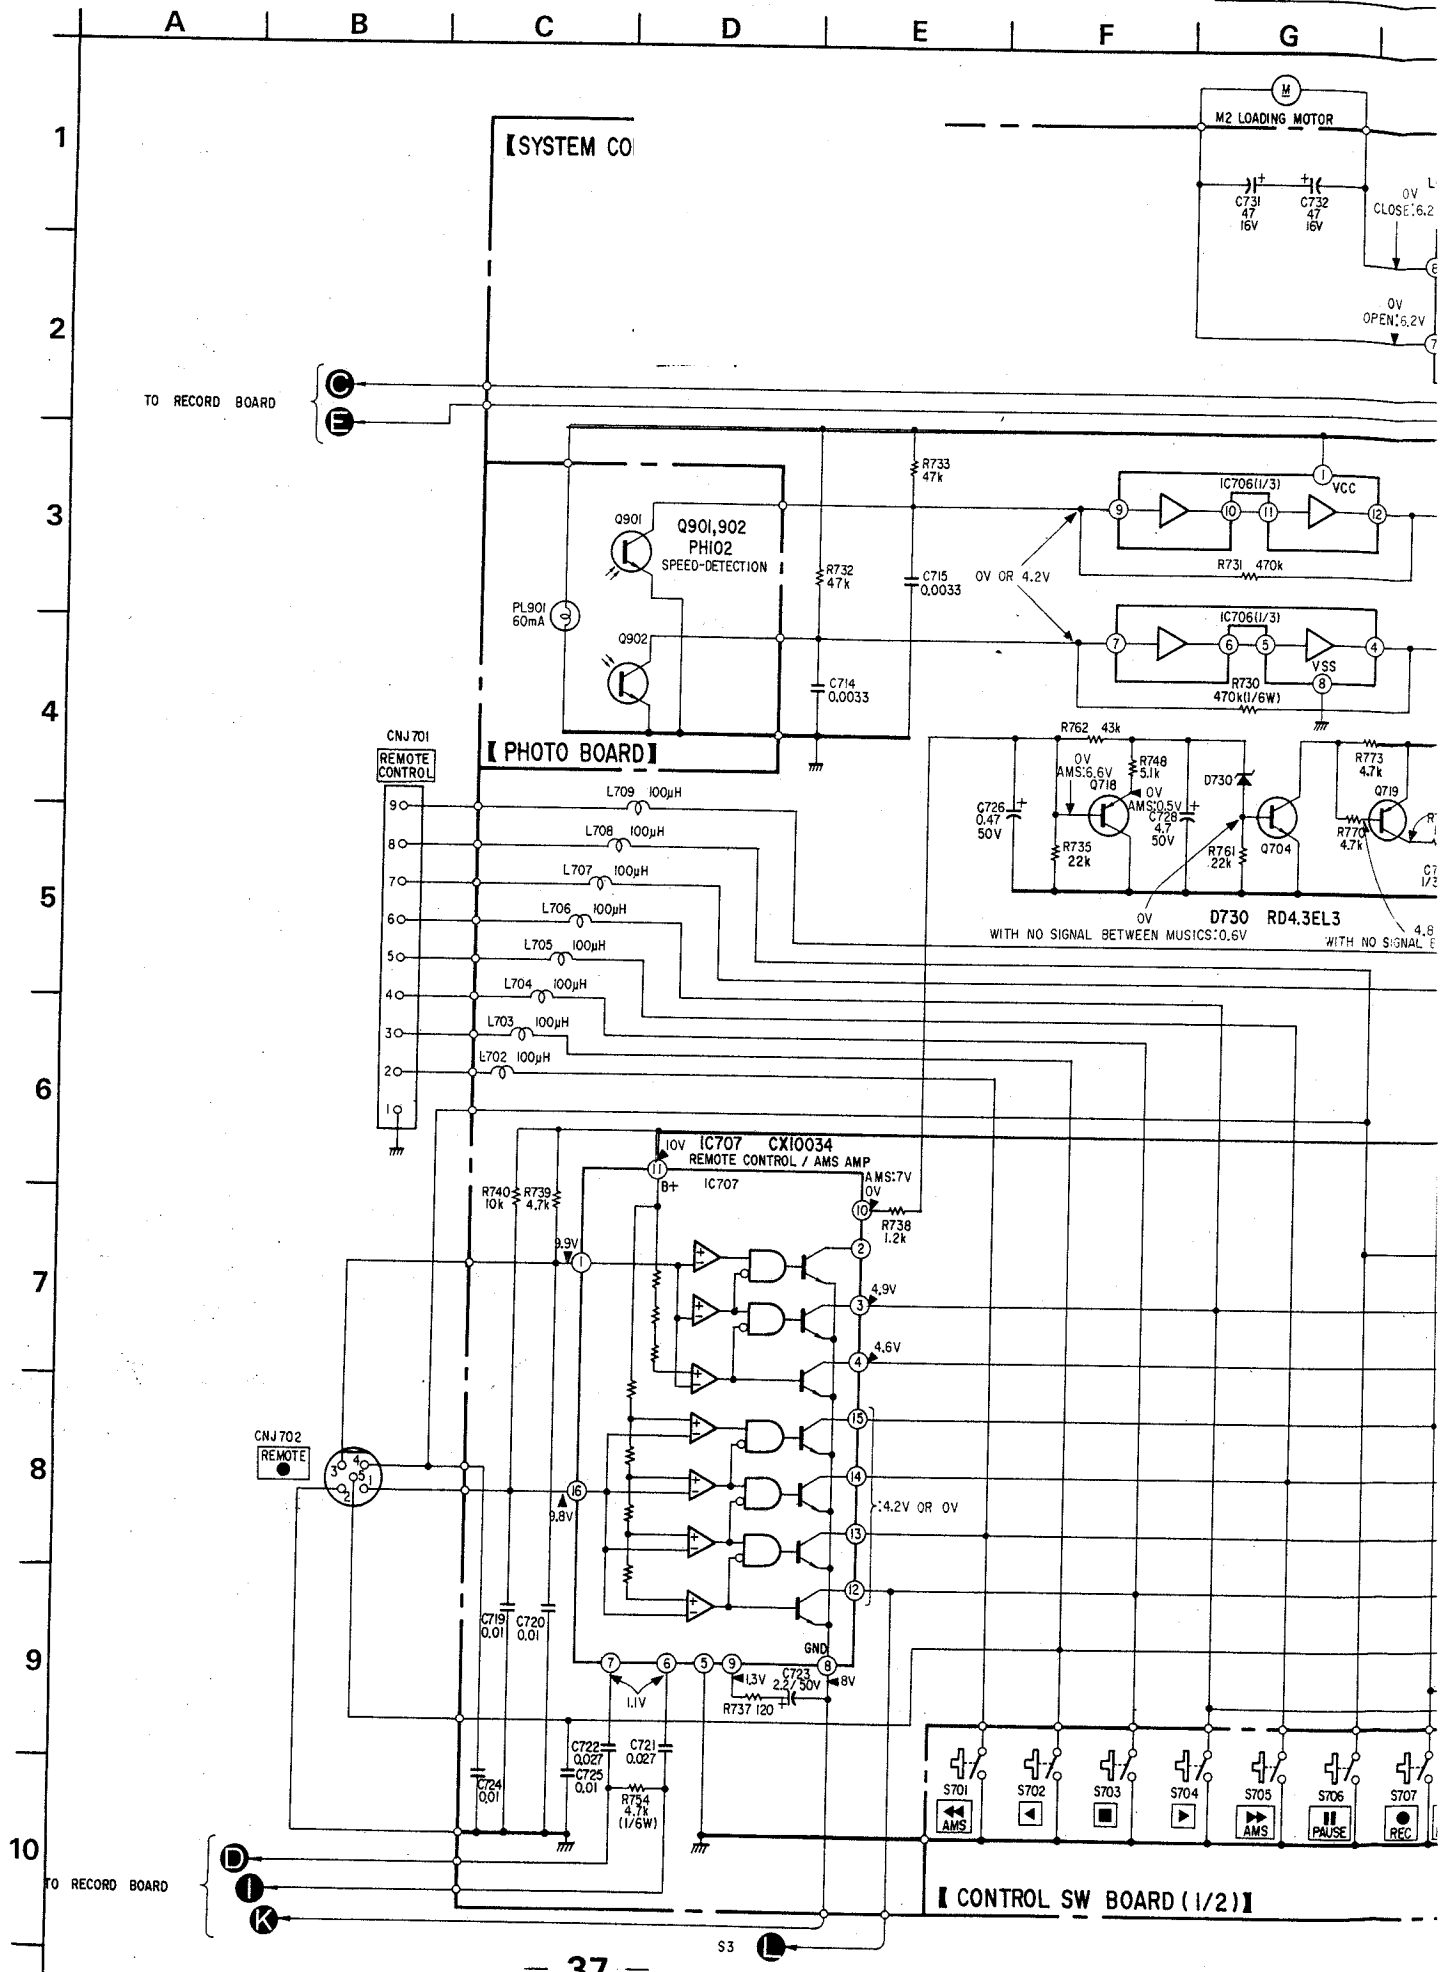

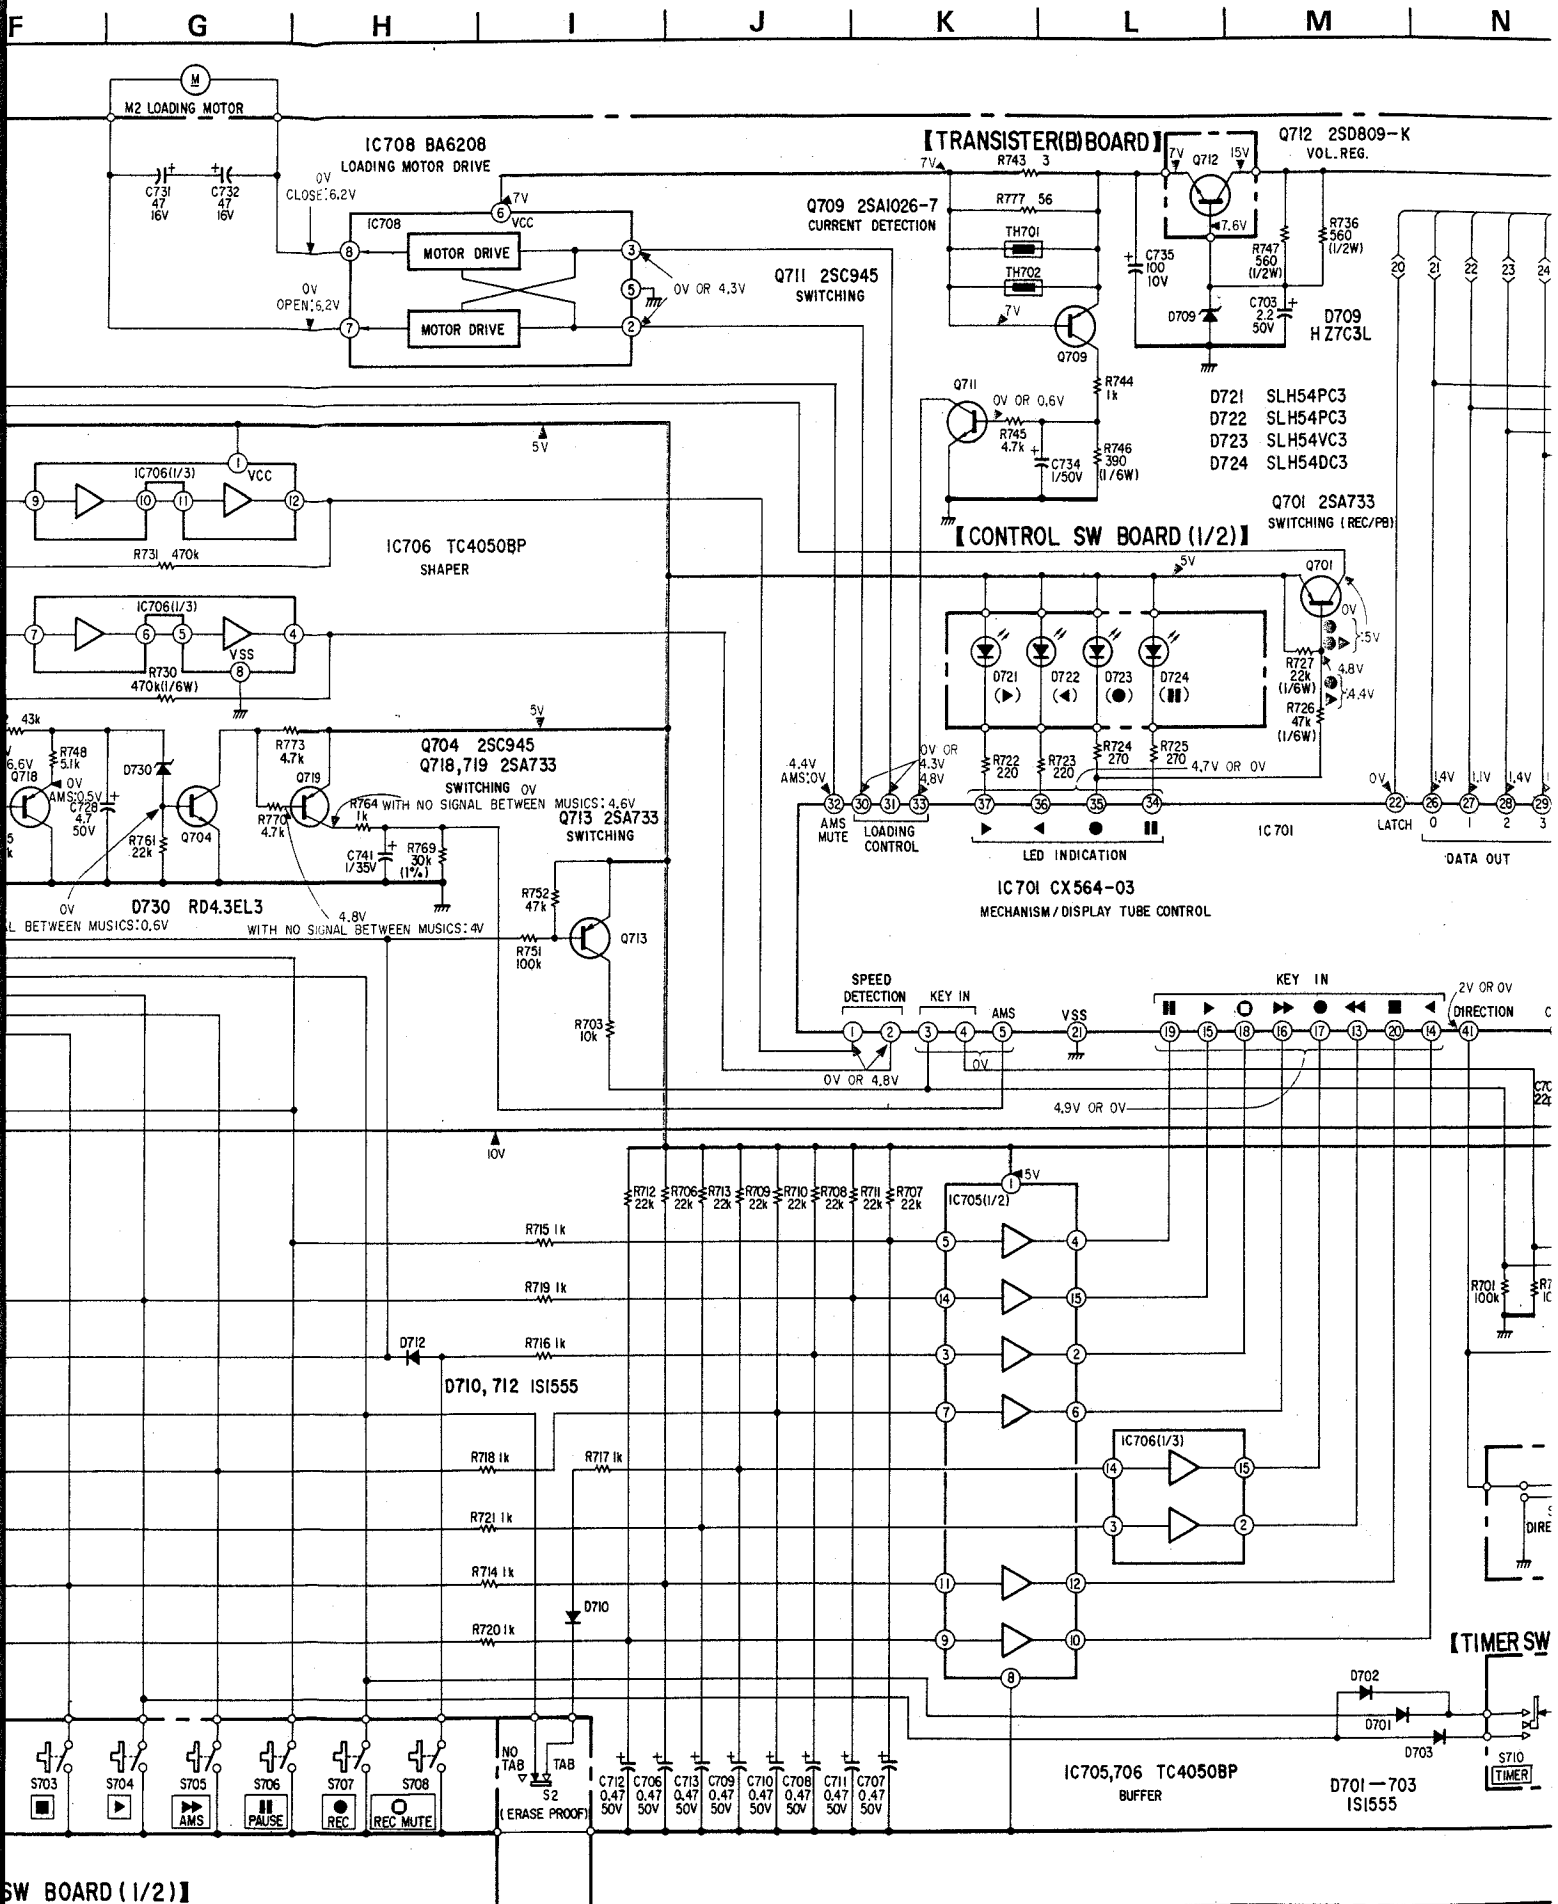


SW BOARD (1/2)



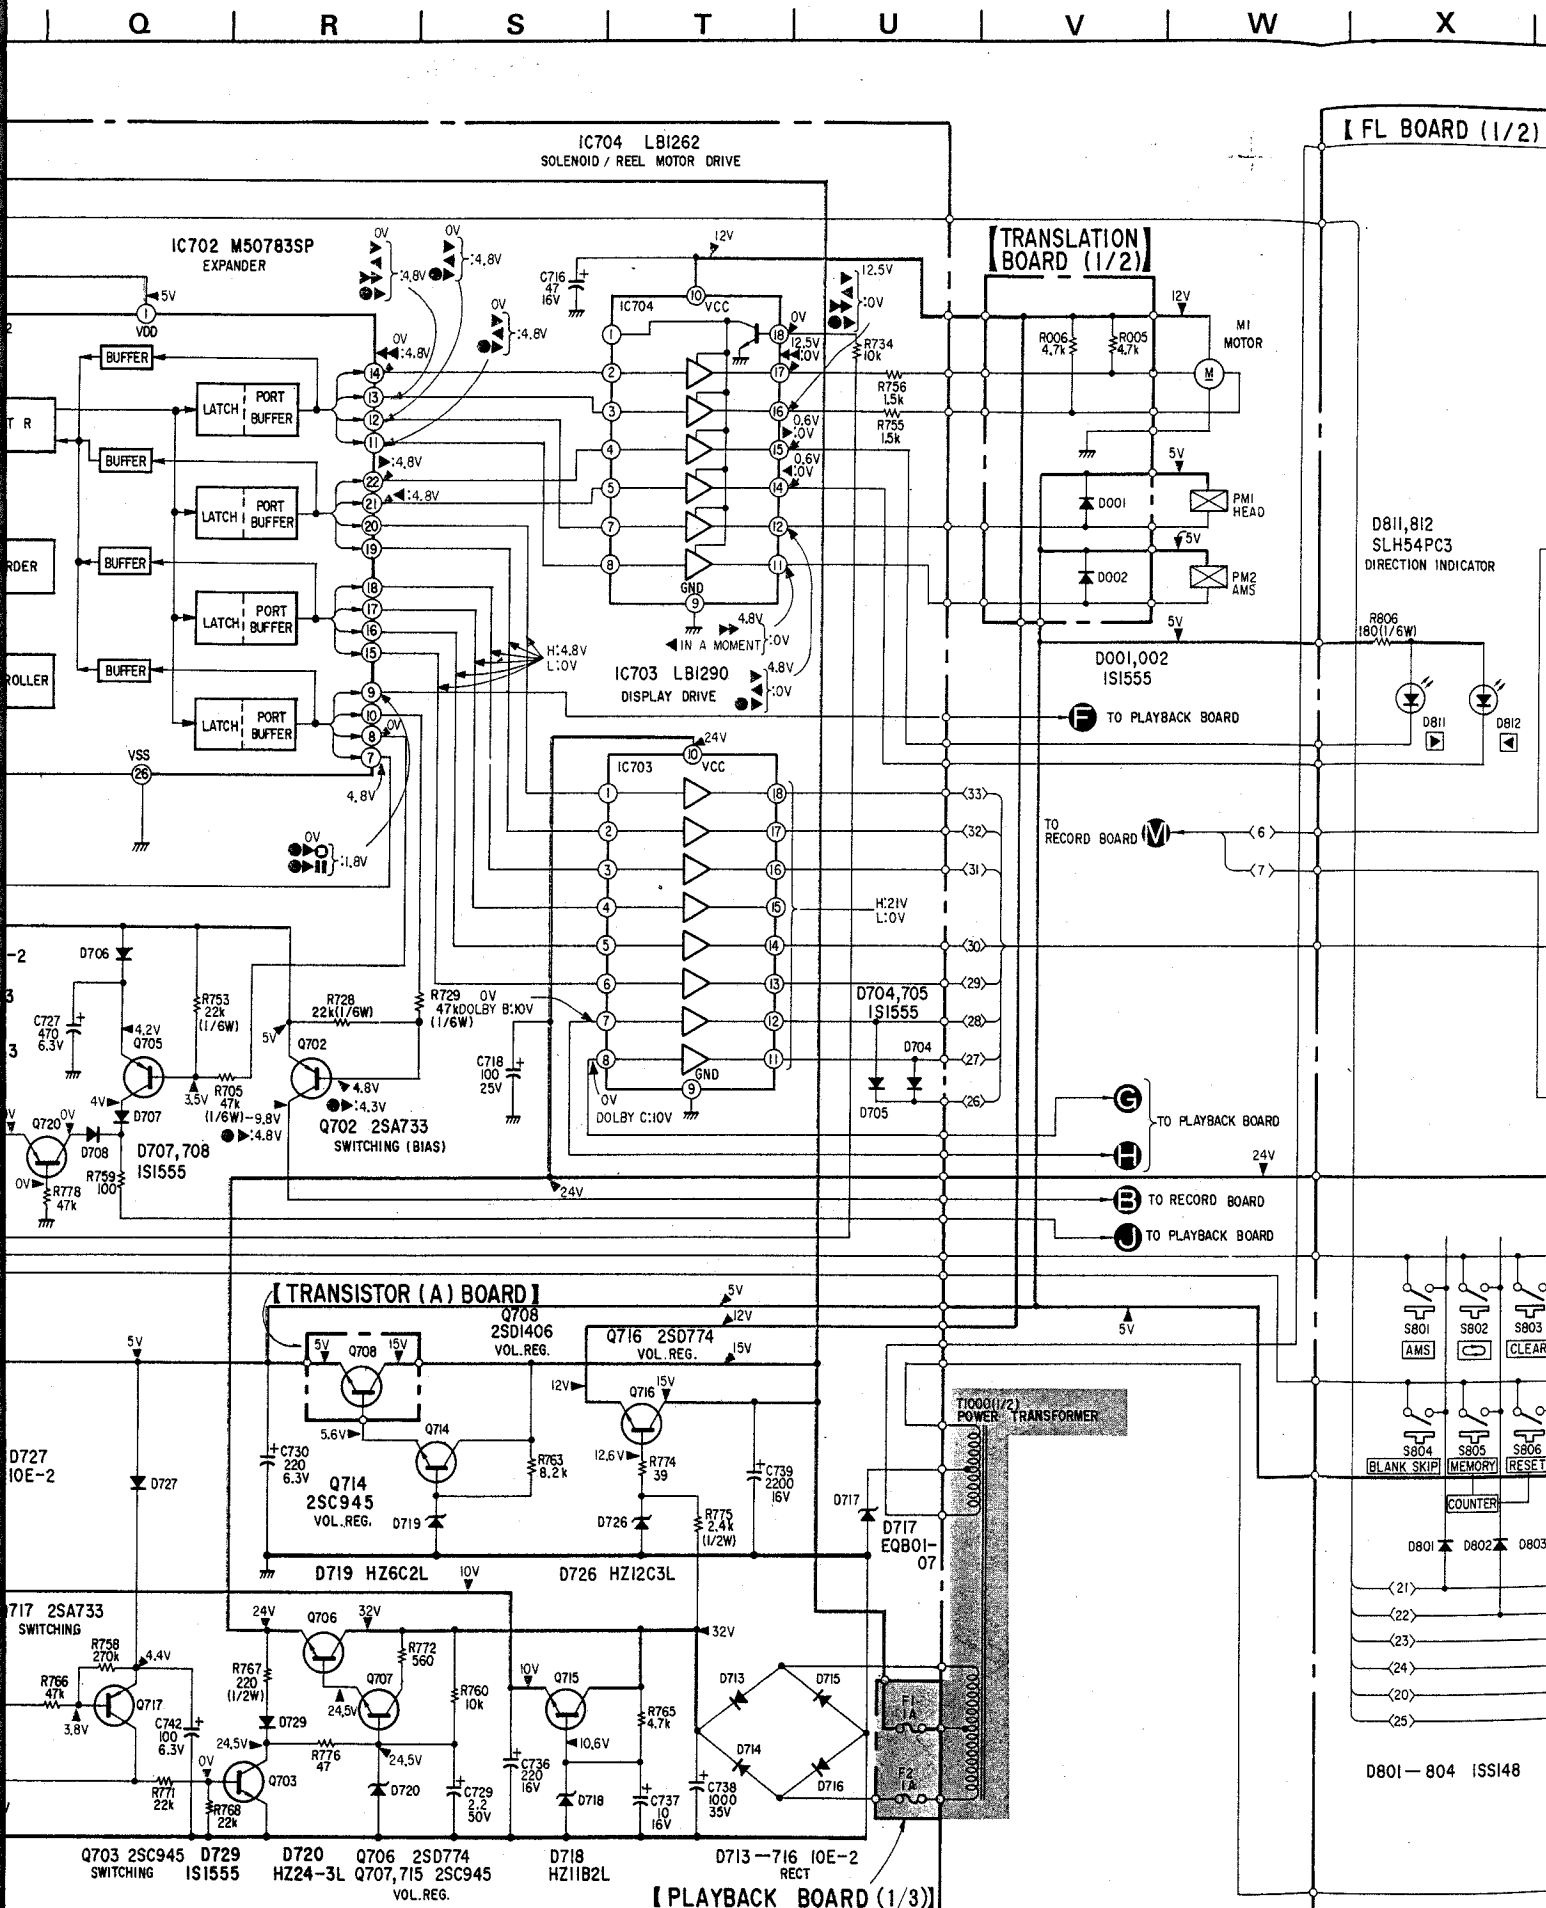

【 FL BOARD (1/2) 】

TRANSLATION BOARD (1/2)

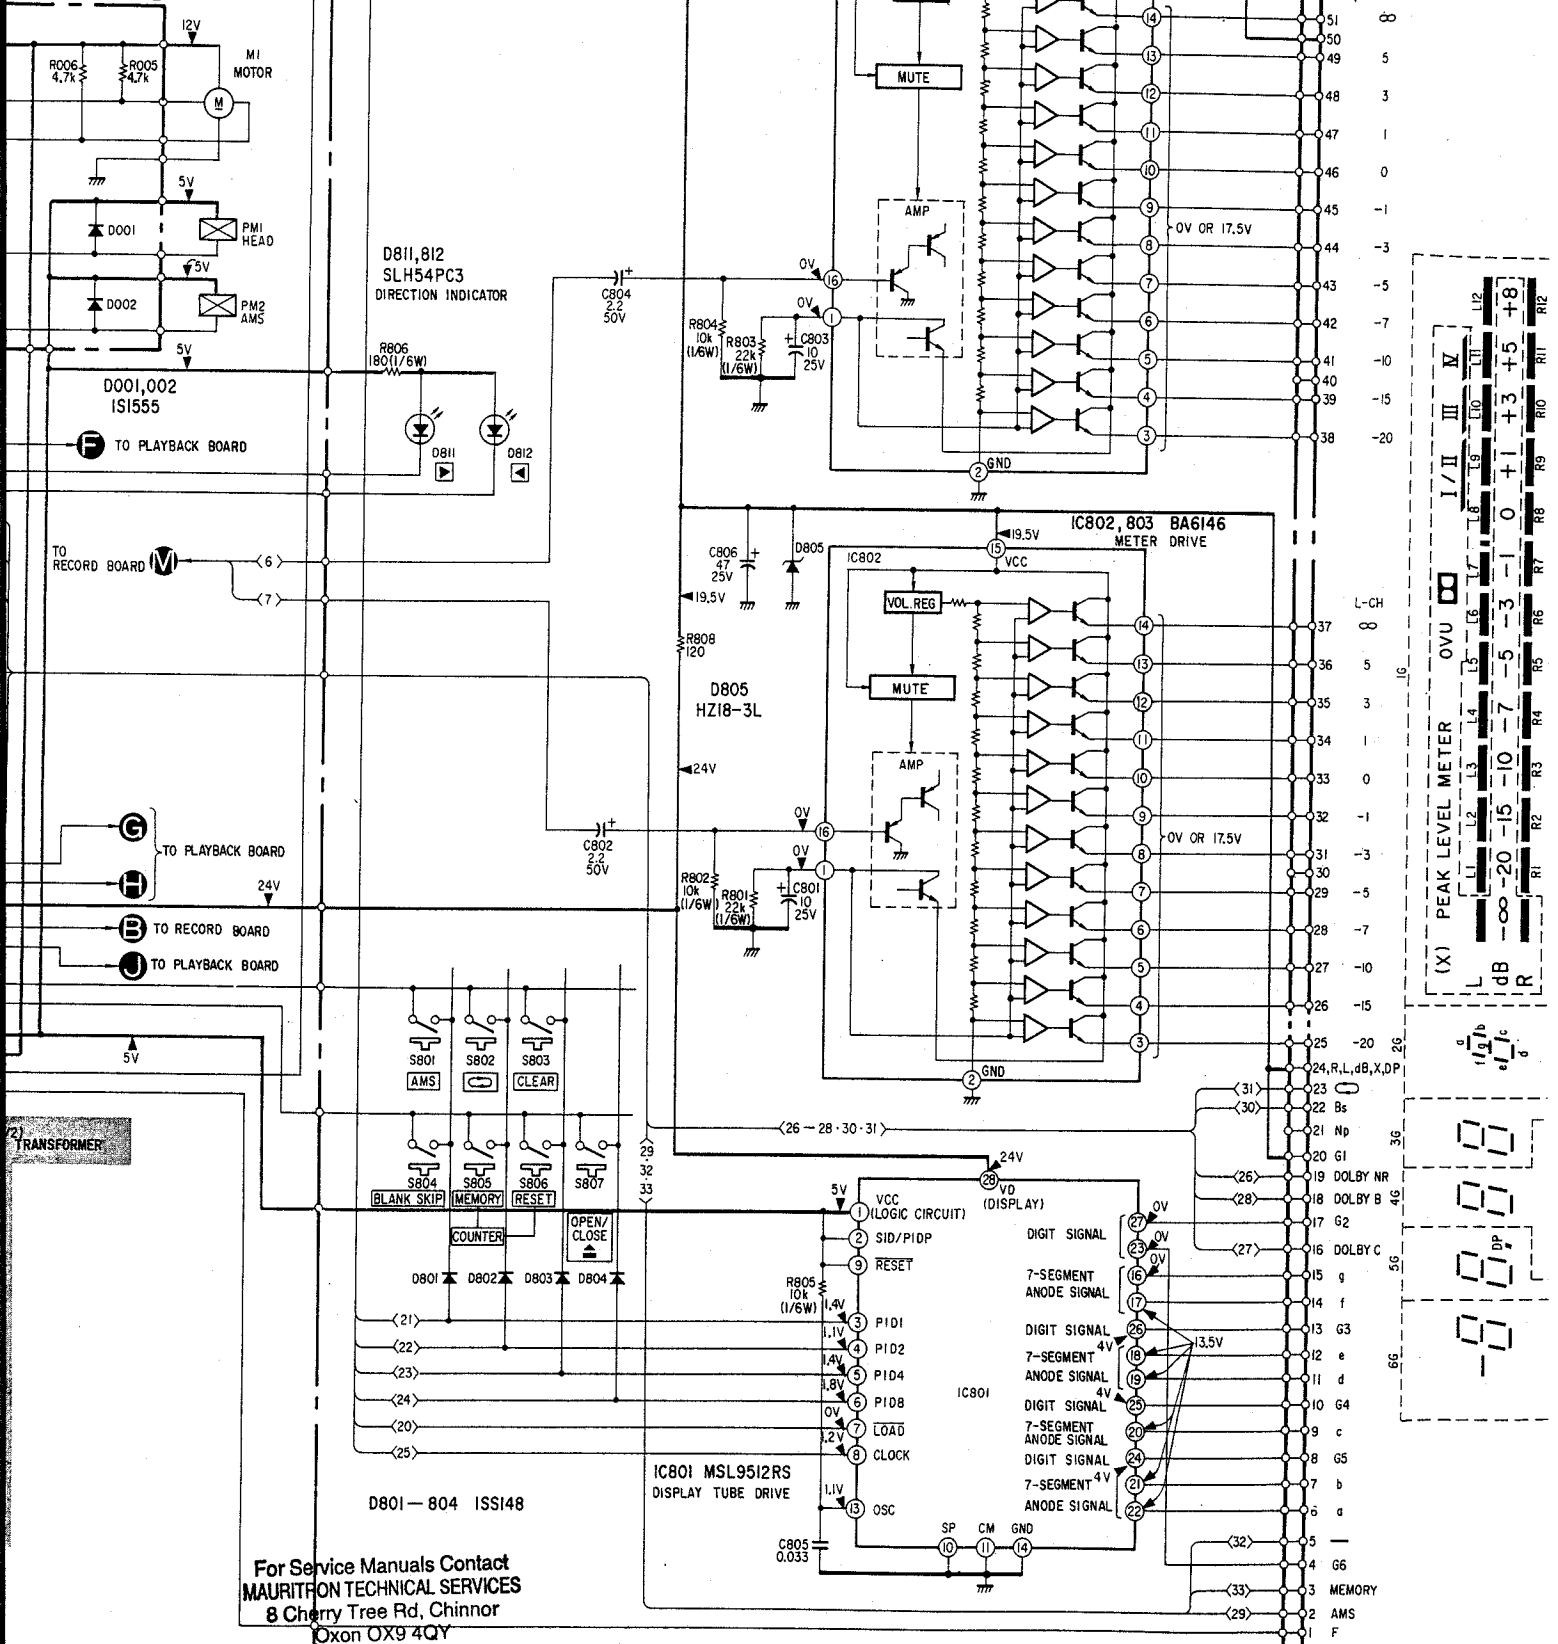

For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
8 Cherry Tree Rd, Chinnor
Oxon OX9 4QY

Tel: 01844-351694 Fax: 01844-352554
Email: enquiries@mauritron.co.uk

A1

B1

C1

D1














E1

F1


G1

H1


Semiconductor Lead Layouts

BA6146 CX564-03 CX174A-2 CX10034 LB1262 LB1290 M507835SP MSL9512RS TC4050BP  (Top view)	2SA1026-7 	PH102 
BA6208 	2SB548 2SD414 2SD809K 	PY5724K 
M5218L 	2SD1406 	SLH54DC3 SLH54PC3 SLH54VC3 
NJM4562S-D 	2SK30A-0 	
2SA844 2SB864 2SC945 2SC2001-K2 2SC1345 2SC1364 2SC1364-8 2SD1152 	10E2 1S1555 1SS119 1SS148 EQB01-07 HZ11B2L HZ12C3L HZ18-3L HZ24-3L HZ6B1L HZ6C2L HZ9A2L RD4.3E-L3 	


2SA1026-7	PH102
2SB548 2SD414 2SD809K	PY5724K
letter side	
2SD1406	SLH54DC3 SLH54PC3 SLH54VC3
SK30A-0	
0E2 S1555 SS119 SS148 QB01-07 Z11B2L Z12C3L Z18-3L Z24-3L Z6B1L Z6C2L Z9A2L D4.3E-L3	
cathode	
anode	

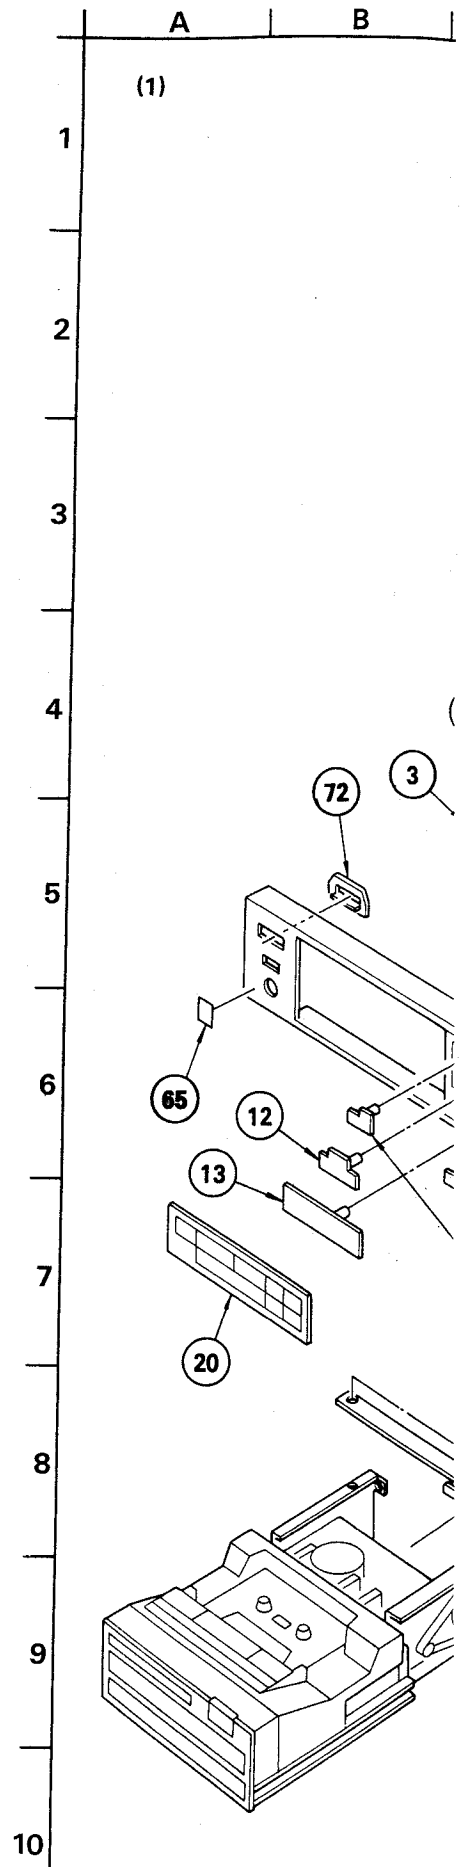


SECTION 6 EXPLODED VIEWS AND PARTS LIST

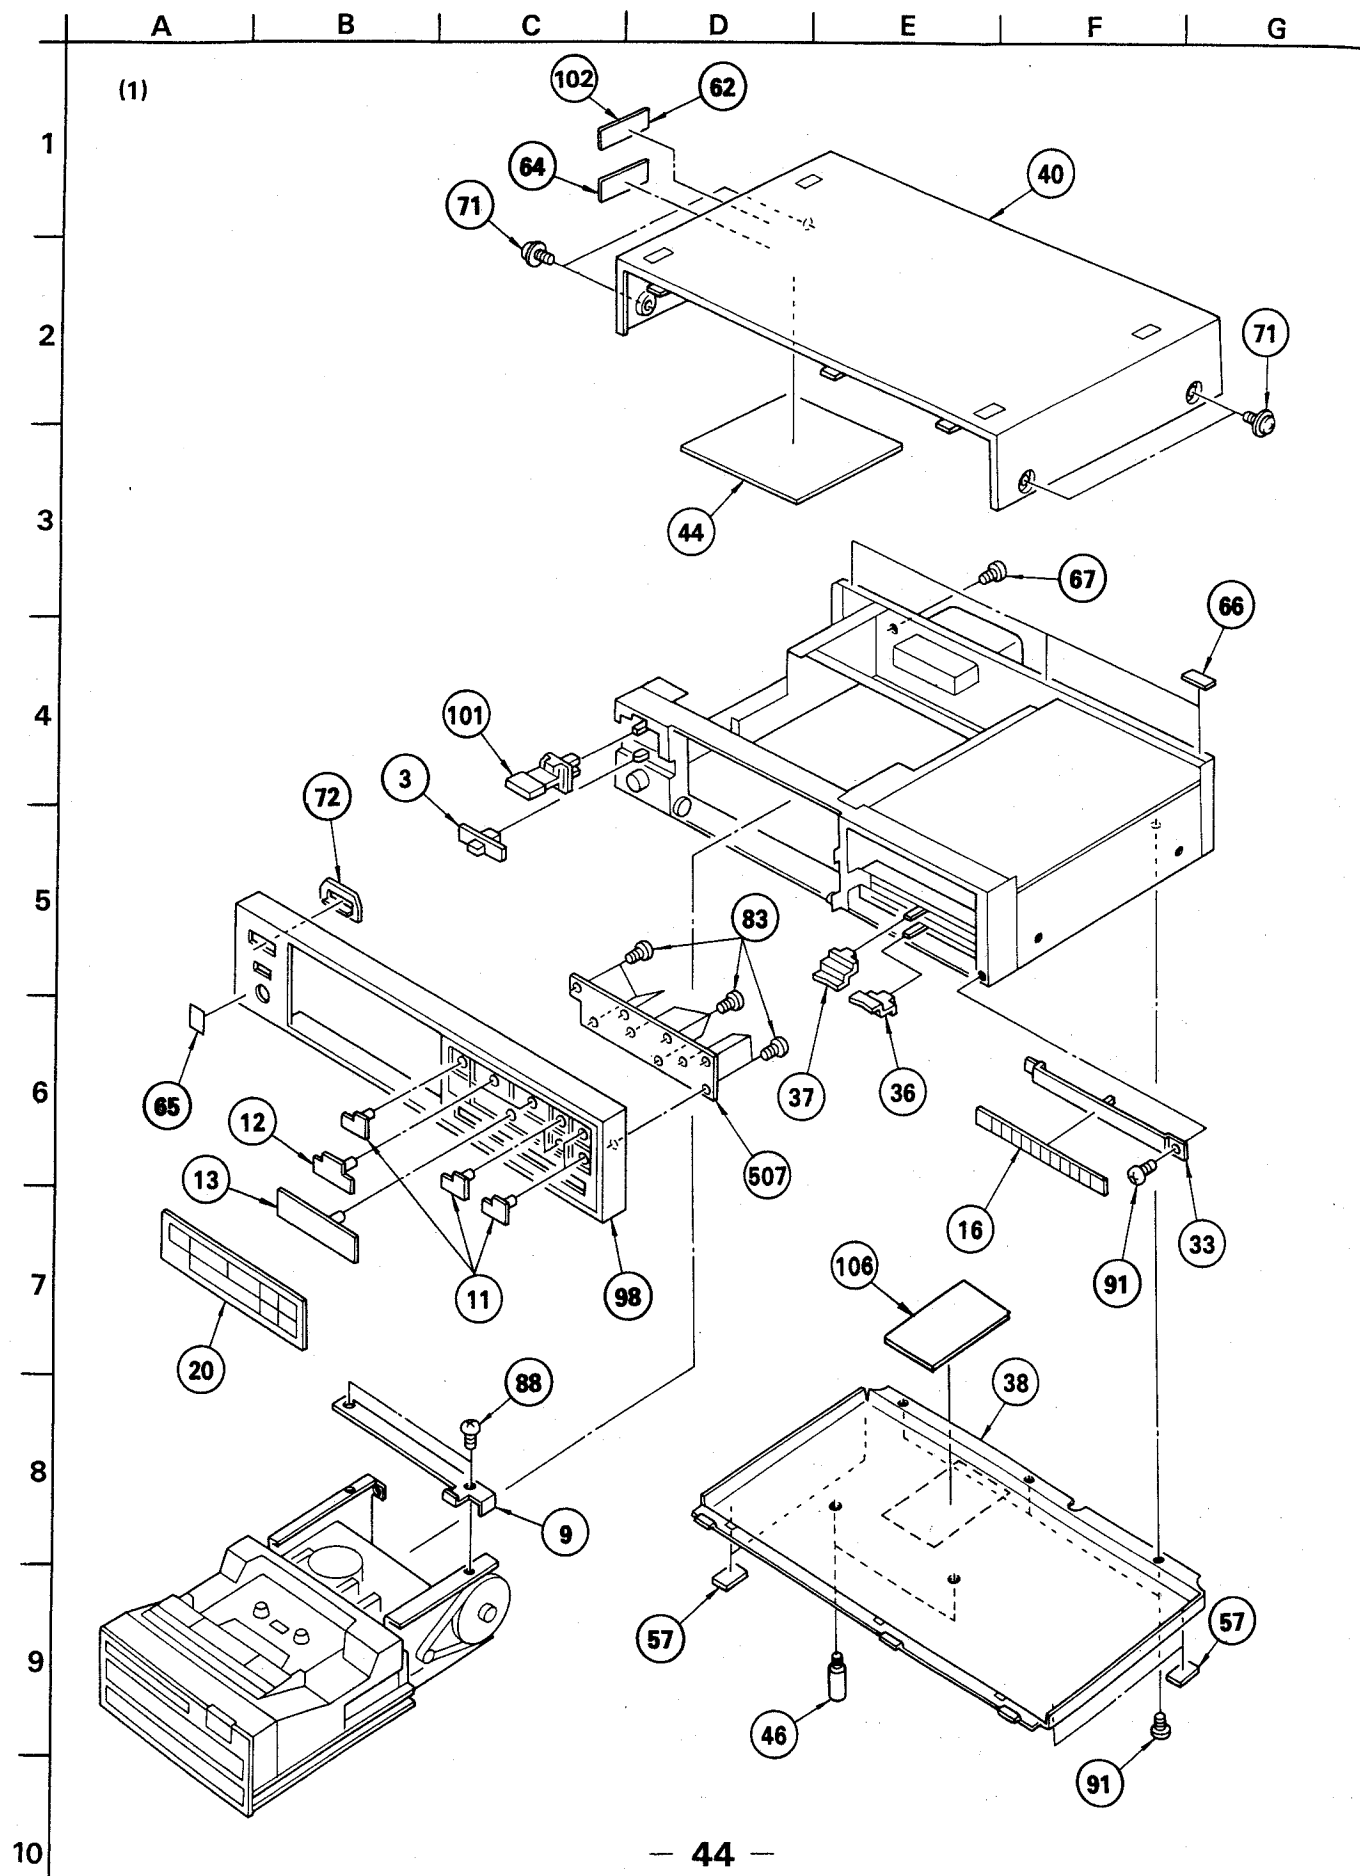



(2)

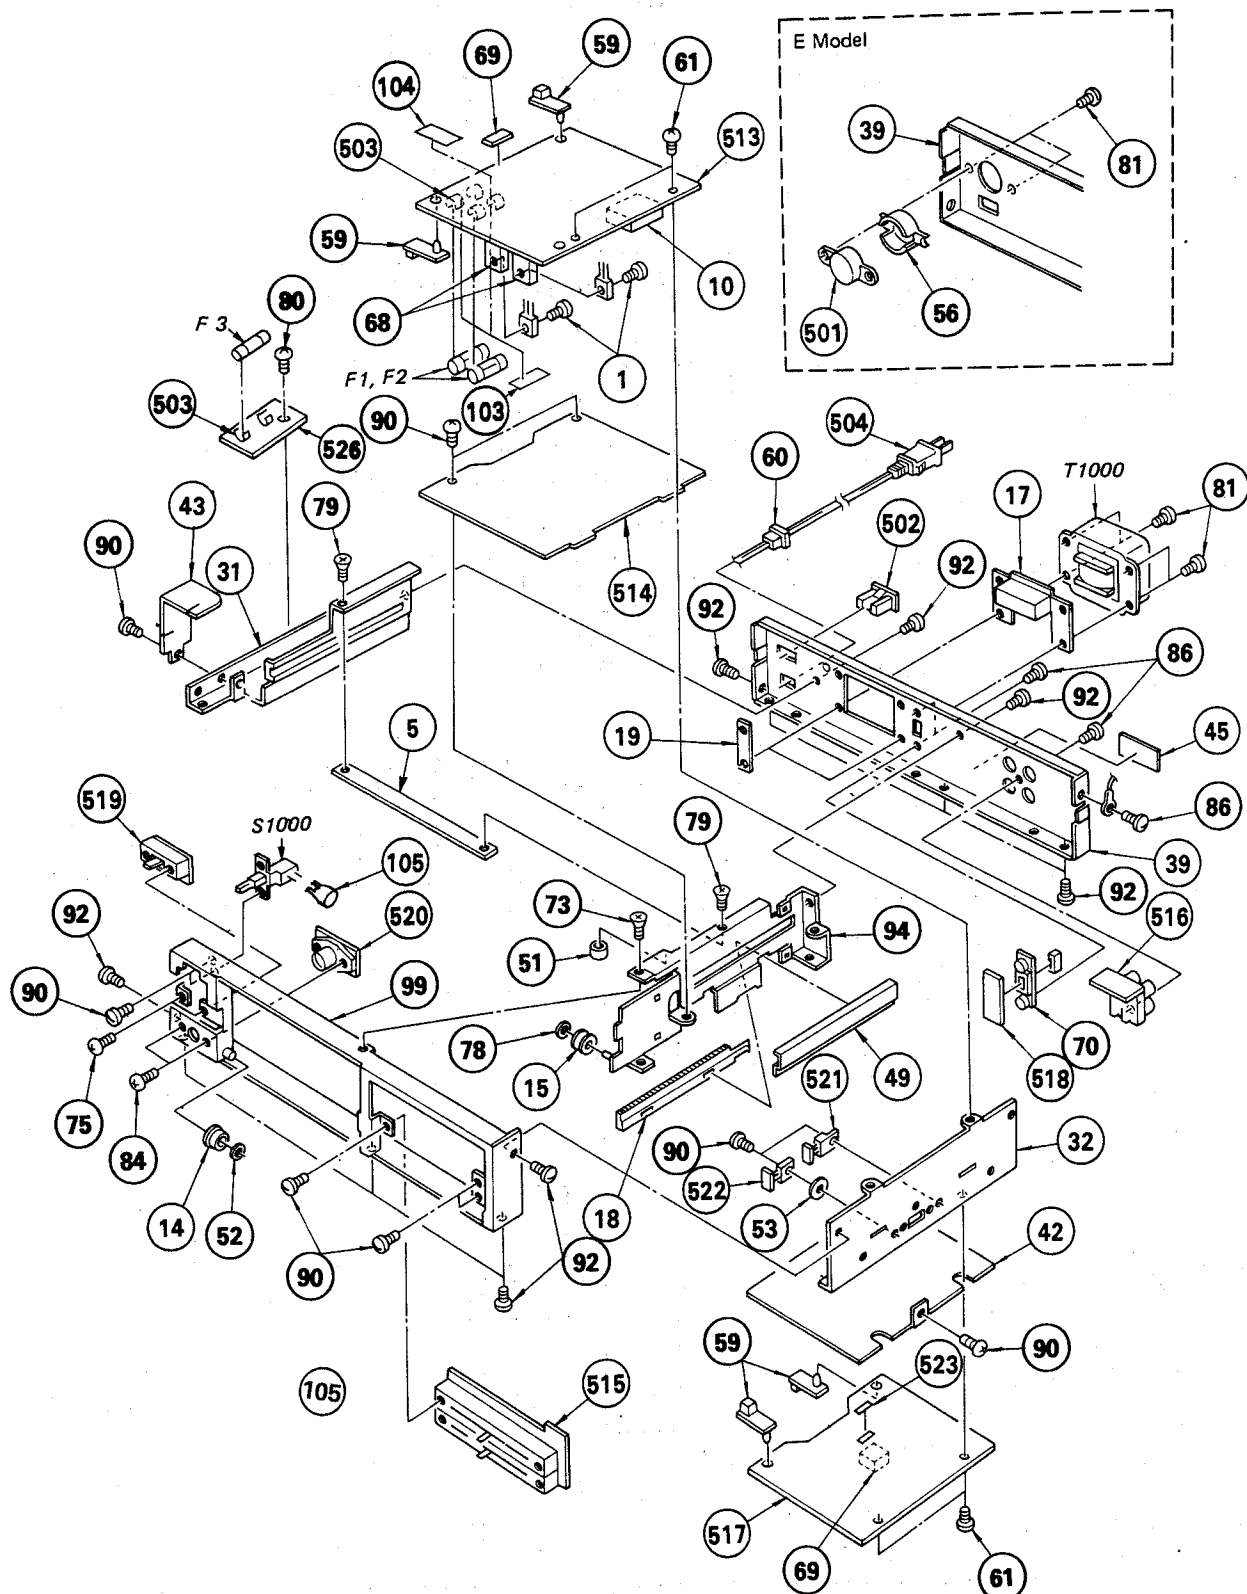


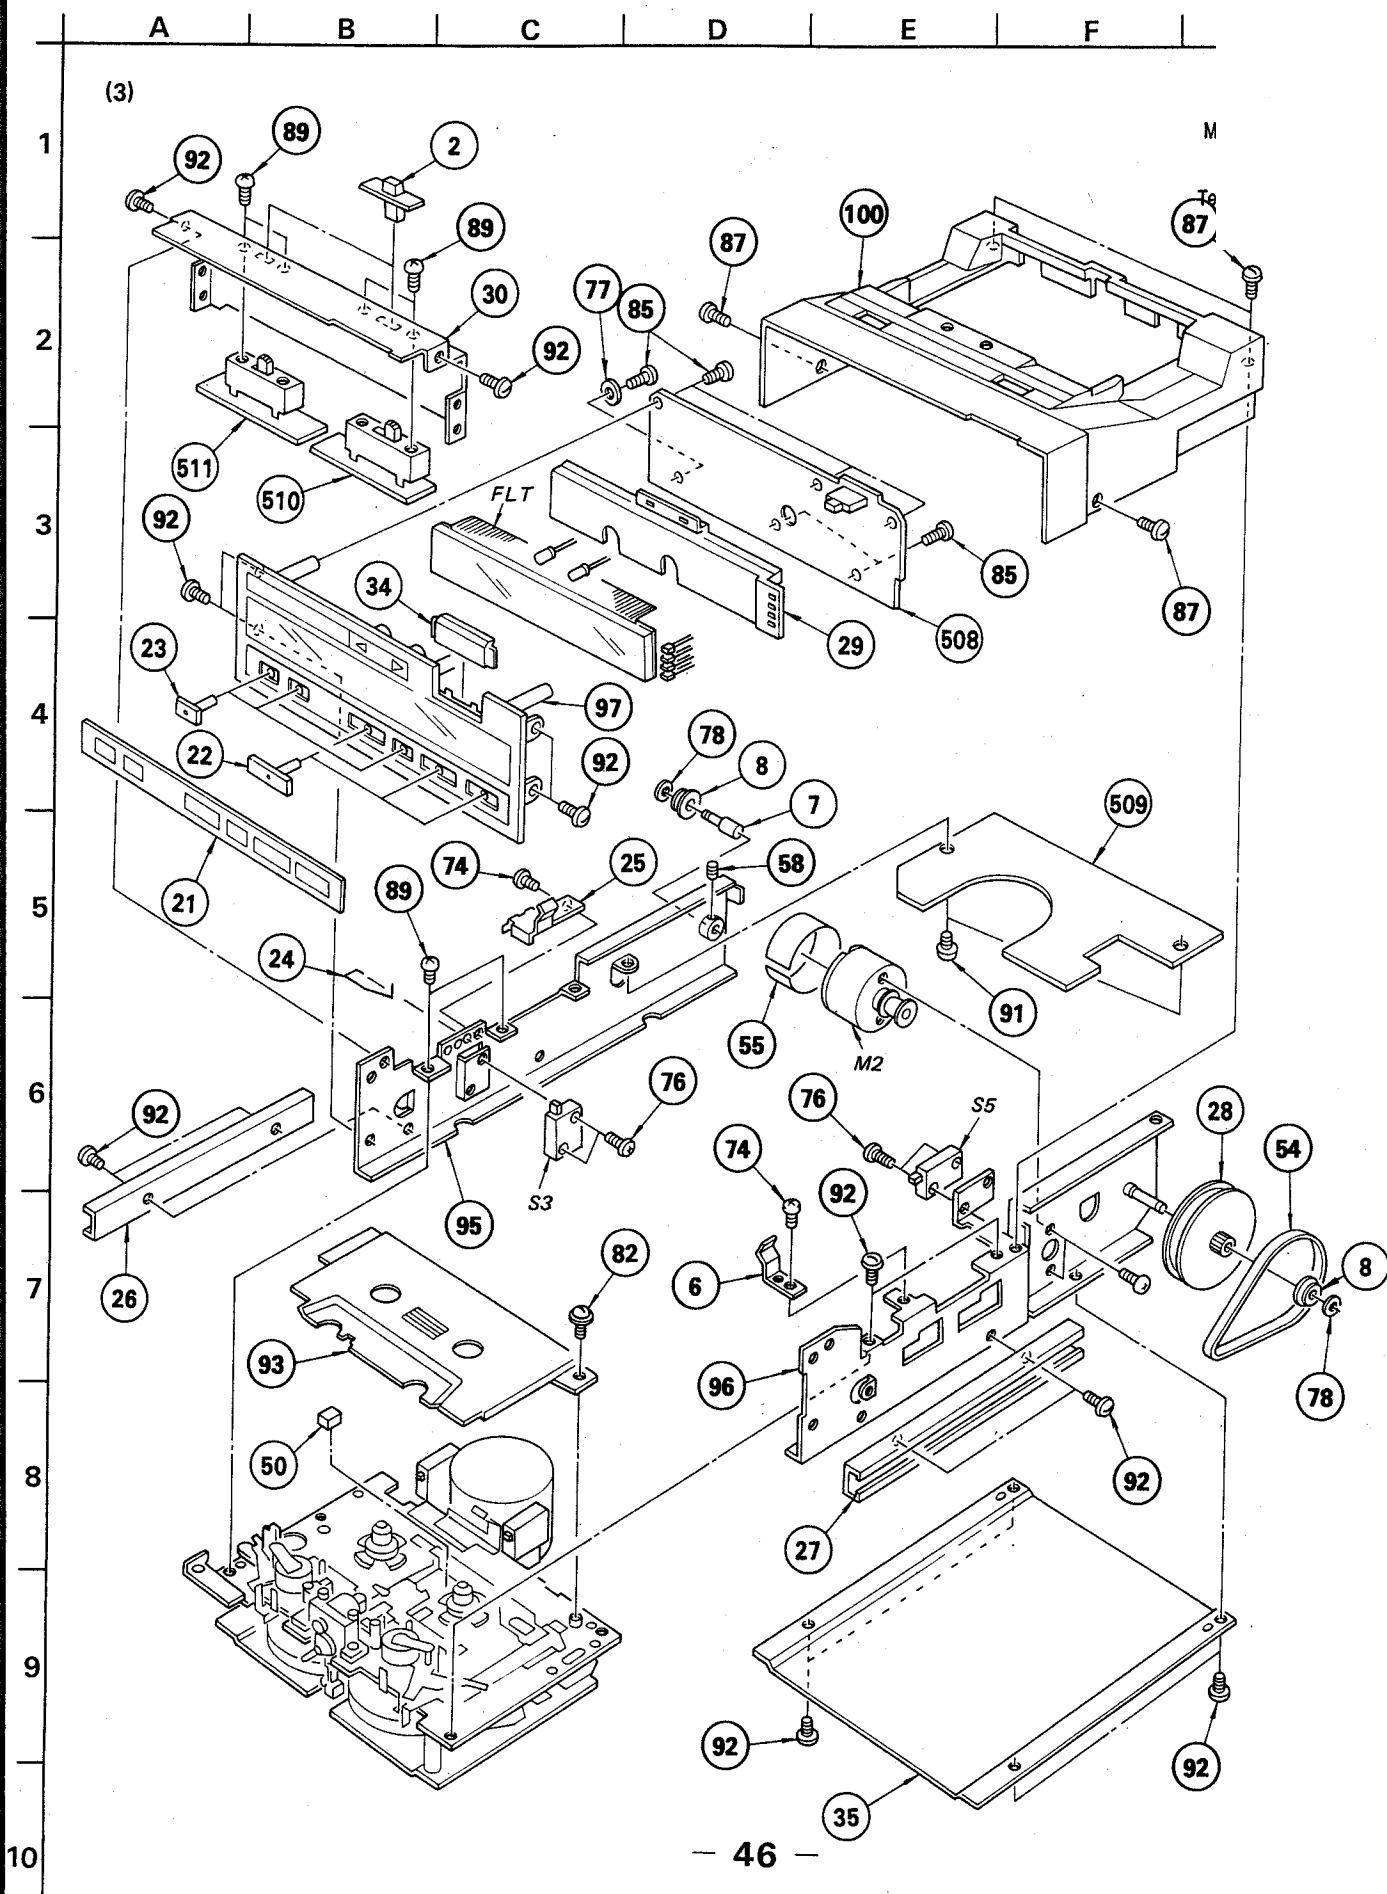

(4)

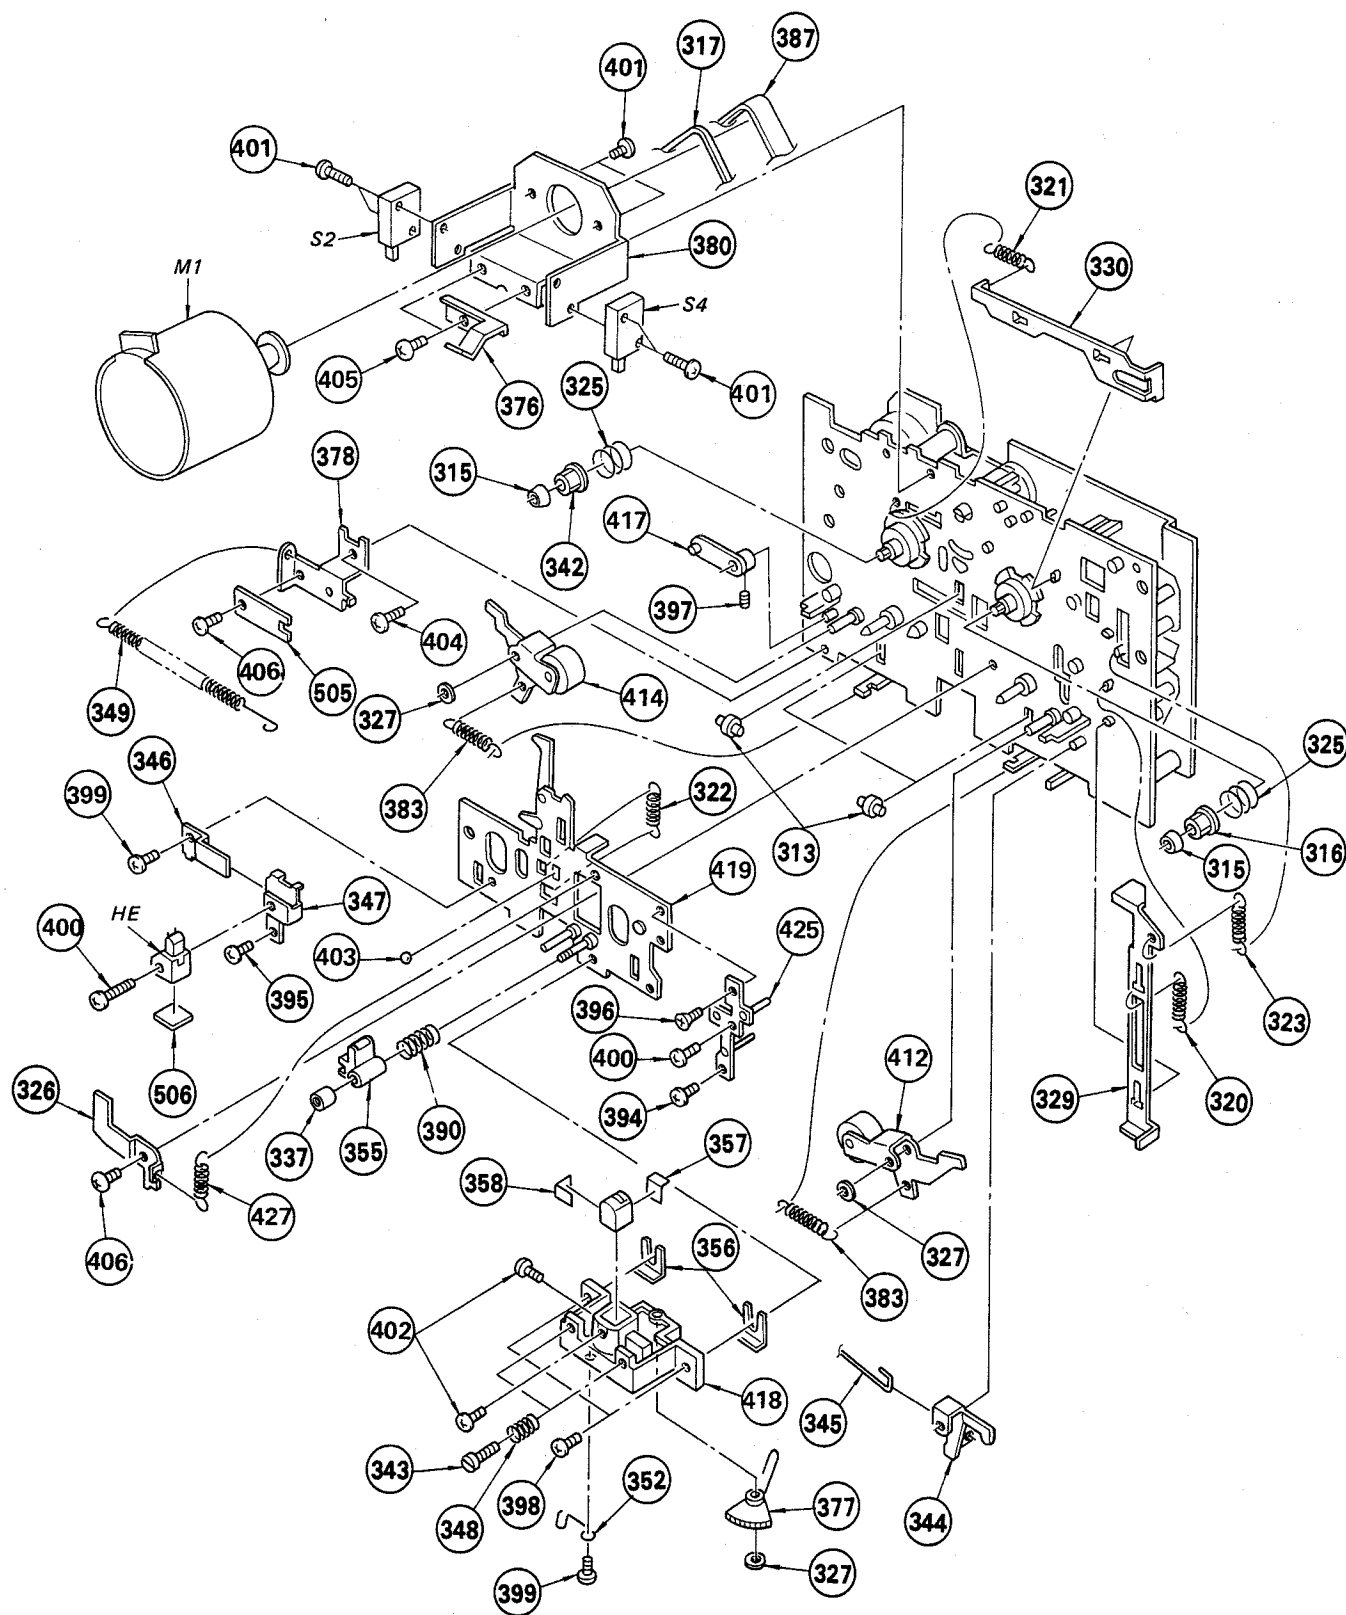

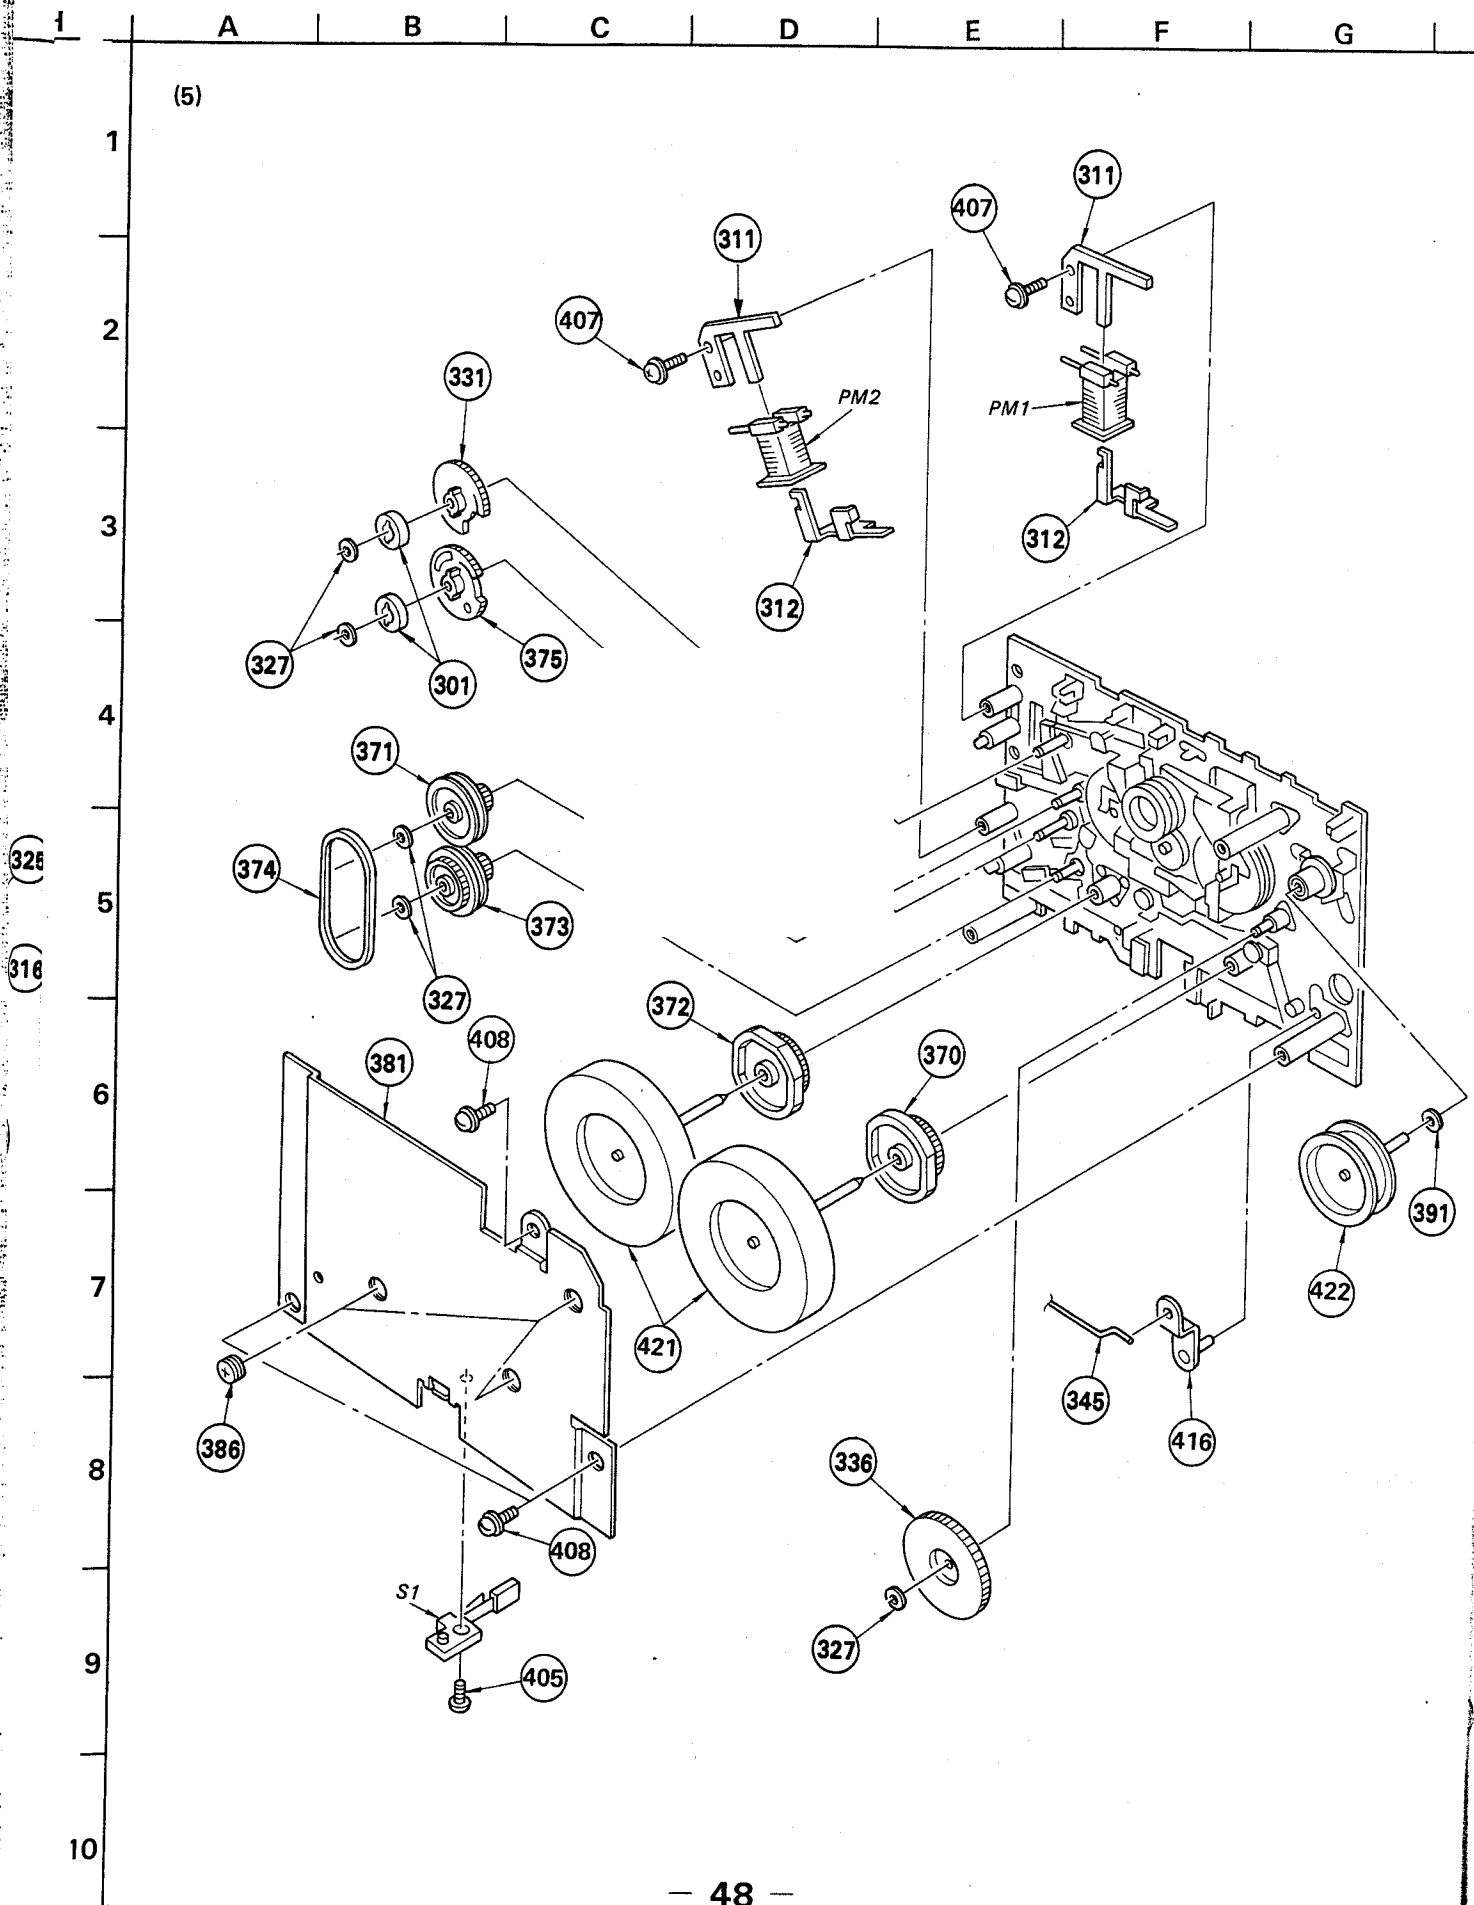

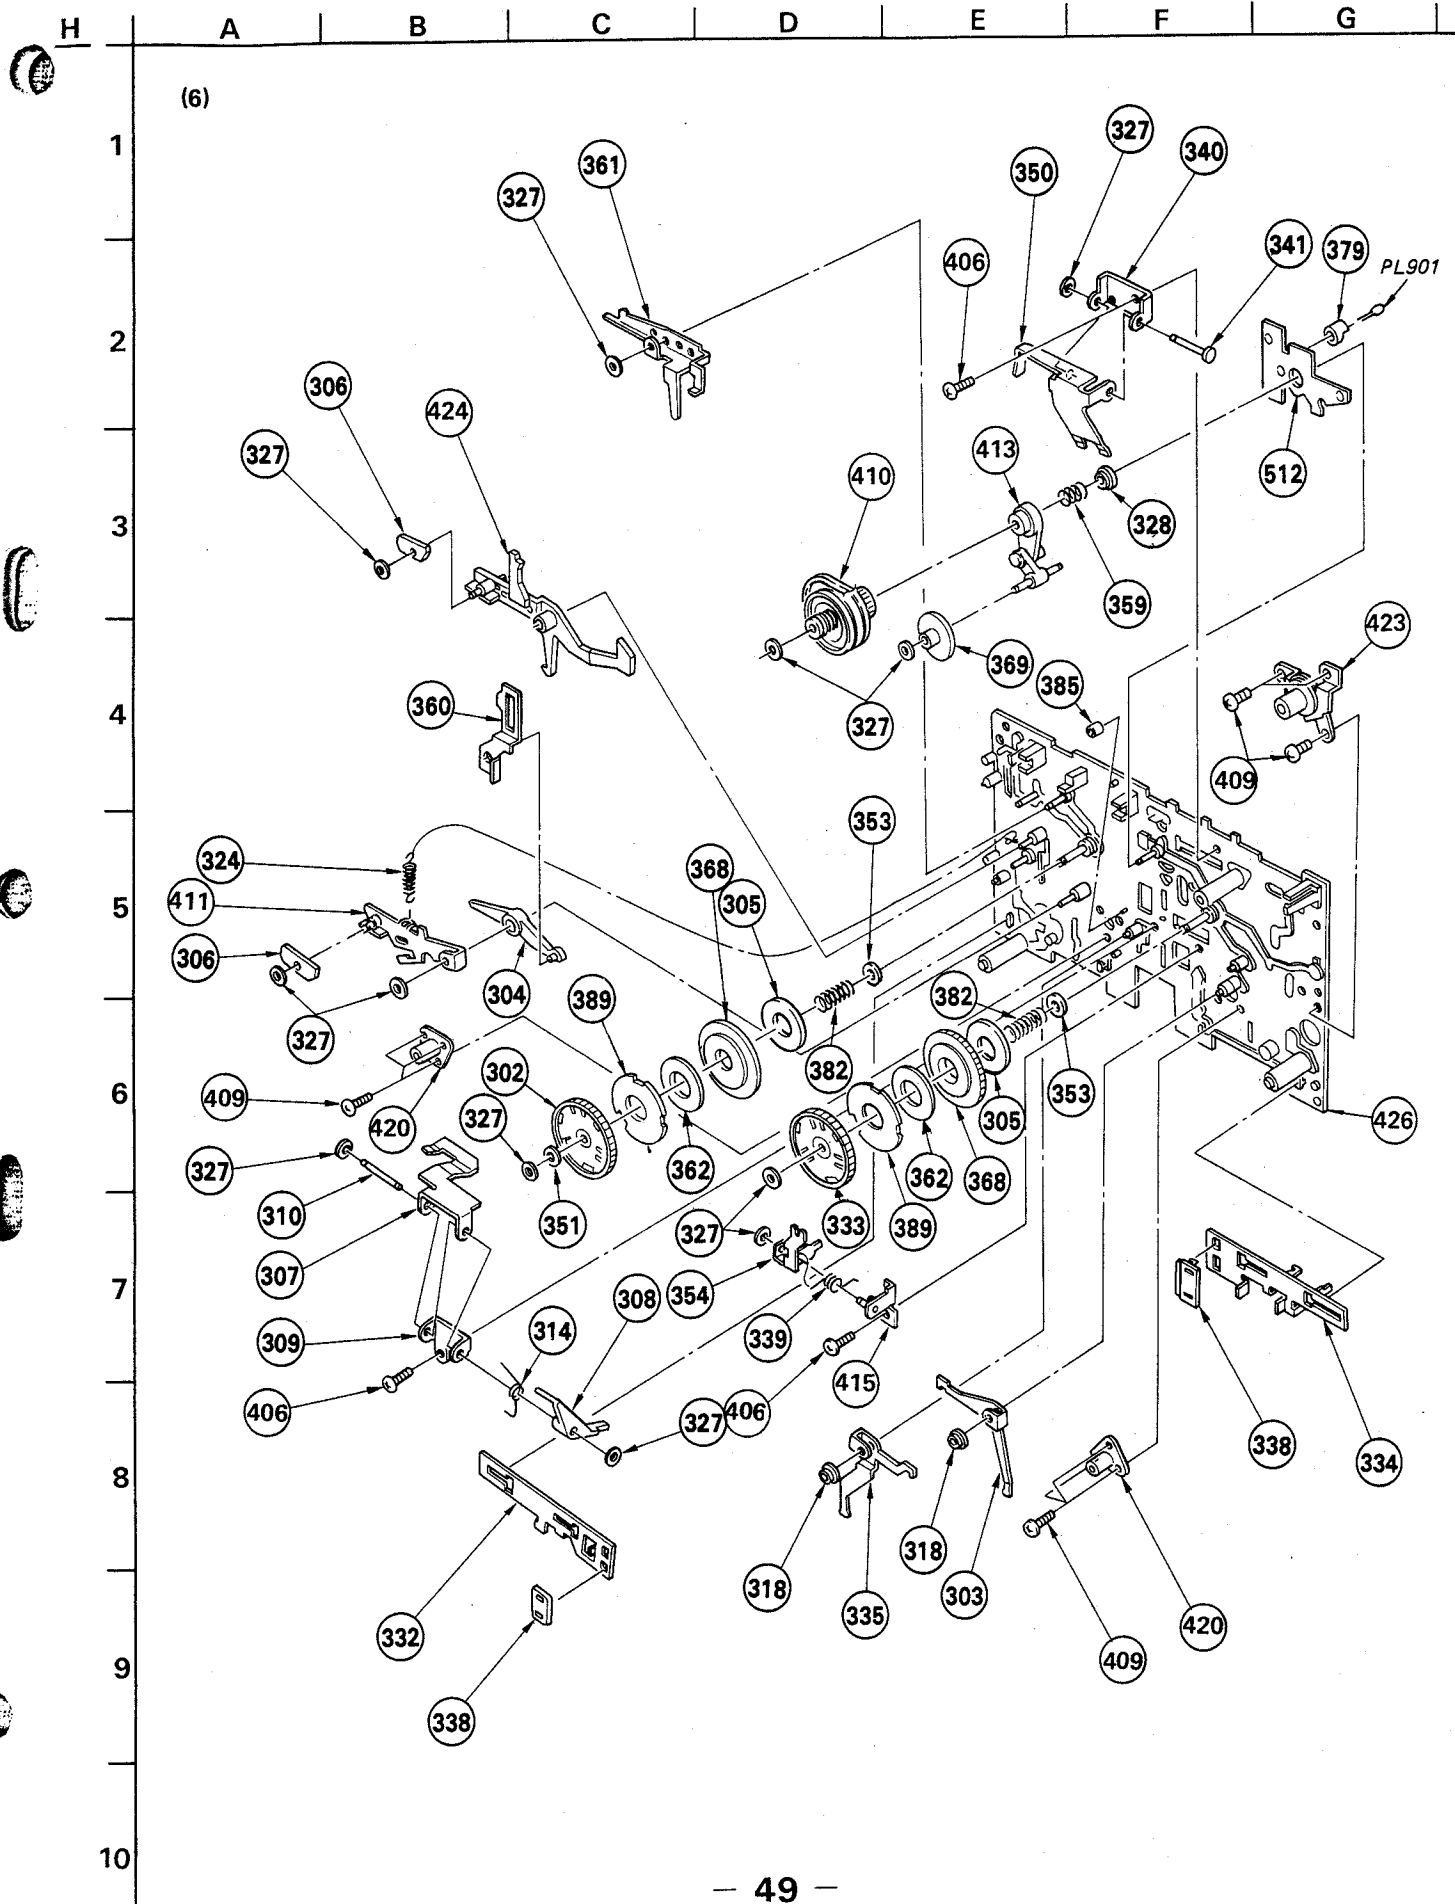

GENERAL SECTION

No.	Part No.	Description
1	2-259-121-00	SCREW, TR
2	3-307-538-31	KNOB, SWITCH, TIMER
3	3-307-538-41	KNOB, SWITCH, TIMER
4		
5	♣;3-312-905-00	JOINT (A)
6	3-312-908-00	RETAINER (RIGHT), HALF
7	3-312-909-00	SHAFT, ROLLER
8	3-312-910-00	ROLLER (B)
9	♣;3-312-911-00	JOINT (B)
10	♣;3-312-913-00	PLATE, SHIELD
11	♣;3-312-917-00	BUTTON, PAUSE
12	♣;3-312-918-00	BUTTON, FWD
13	♣;3-312-920-00	BUTTON, STOP
14	3-312-921-00	ROLLER (F.L)
15	3-312-923-00	ROLLER (F.R)
16	3-312-924-00	PLATE, ORNAMENTAL, CONTROL
17	♣;3-312-925-00	SHEET, INSULATING
18	3-312-926-00	RACK
19	♣;3-312-927-00	NUT, PLATE
20	3-312-928-00	SHEET, FUNCTION
21	3-312-929-00	SHEET, DRAWER
22	♣;3-312-930-00	BUTTON, AMS
23	♣;3-312-931-00	BUTTON, MEMORY
24	3-312-932-00	ARM, DETECTION, HALF
25	3-312-933-00	RETAINER (L), HALF
26	♣;3-312-934-00	RAIL (LEFT)
27	♣;3-312-935-00	RAIL (RIGHT)
28	3-312-936-00	GEAR, LOADING
29	♣;3-312-937-00	HOLDER, FL TUBE
30	♣;3-312-941-00	FRAME, DRAWER
31	♣;3-312-942-00	FRAME (A)
32	♣;3-312-943-00	FRAME (C)
33	♣;3-312-945-00	COVER, CONTROL
34	3-312-946-00	BUTTON, DRAWER
35	♣;3-312-947-02	PLATE, BOTTOM, DRAWER
36	3-312-948-00	KNOB (RIGHT), CONTROL
37	3-312-949-00	KNOB (LEFT), CONTROL
38	♣;3-312-950-03	PLATE, BOTTOM
39	♣;3-312-952-12	(US,Canadian)...PLATE, JACK
39	3-312-952-22	(E).....PLATE, JACK
39	3-312-952-32	(AEP).....PLATE, JACK
39	3-312-952-42	(UK).....PLATE, JACK
40	3-312-953-00	CASE
41		
42	♣;3-312-963-00	INSULATOR

GENERAL SECTION

No.	Part No.	Description
43	♣;3-312-964-00	INSULATOR, SWITCH
44	♣;3-312-965-00	PLATE, SHIELD, HEAD
45	3-312-966-00	(US,Canadian)...LABEL, MODEL NUMBER
45	3-312-967-00	(E).....LABEL, MODEL NUMBER
45	3-312-969-00	(UK).....LABEL, MODEL NUMBER
45	3-312-971-00	(AEP).....LABEL, MODEL NUMBER
46	3-312-974-00	SCREW, TRANSPORT
47		
48		
49	3-312-977-00	COVER, ROLLER
50	3-312-978-00	SHEET, RUBBER
51	3-537-790-11	SUPPORT, TENSION ARM
52	3-558-708-21	WASHER, STOPPER
53	3-572-365-01	SHEET (A), INSULATING
54	3-573-911-21	BELT, FLAT
55	3-575-457-00	PLATE (B), SHIELD, MOTOR
56	♣;3-575-567-00	(E).....COVER, SWITCH
57	3-576-332-11	FOOT, F
58	3-701-505-00	SET SCREW, DOUBLE POINT 3X3
59	♣;3-701-832-00	HINGE, CIRCUIT BOARD
60	3-703-244-00	BUSHING, CORD
61	3-703-486-00	+PTTW 3X5
62	♣;3-703-678-00	(US)...LABEL, CAUTION, NEW UL
64	♣;3-703-680-00	(US)...LABEL, CAUTION, SUB, NEW UL
65	3-703-713-01	STICKER, SONY SYMBOL (10)
66	3-831-441-11	CUSHION, 23X4X0.5
67	4-808-459-81	SCREW (B), MOTOR LOCK
68	♣;4-861-002-11	HEAT SINK
69	4-862-348-00	CUSHION
70	4-864-313-00	WASHER (9P), CONNECTOR
71	4-886-821-11	SCREW, M3 CASE
72	4-886-976-00	ESCUTCHEON, POWER KNOB
73	7-621-559-20	SCREW +K 2.6X4
74	7-621-775-00	SCREW +B 2.6X3
75	7-621-775-20	SCREW +B 2.6X5
76	7-621-775-40	SCREW +B 2.6X8
77	7-623-911-01	WASHER, NYLONE
78	7-624-102-04	STOP RING 1.5, TYPE -E
79	7-627-452-18	SCREW, PRECISION +K 2X3
80	7-682-546-04	SCREW +BVT 3X5 (S)
81	7-682-547-09	SCREW +B 3X6
82	7-685-104-19	SCREW +P 2X6 TYPE2 NON-SLIT
83	7-685-145-11	SCREW +P 3X6 TYPE2 NON-SLIT
84	7-685-534-19	SCREW +BTP 2.6X8 TYPE2 N-S

NOTE:

- Items with no part number and no description are not stocked because they are seldom required for routine service.
- Items marked "♣" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- Due to standardization, parts with part numbers (Δ-ΔΔΔ-ΔΔΔ-XX or Δ-ΔΔΔΔ-ΔΔΔ-X) may be different from those used in the set.

CAPACITORS:

- All capacitors are in μF . Common capacitors are omitted. Refer to the following lists for their part numbers.
- MF: μF , PF: $\mu\mu\text{F}$.

RESISTORS

- All resistors are in ohms. Common 1/4W, 1/8W and 1/16W carbon resistors are omitted. Refer to the following lists for their part numbers.

- F: nonflammable

COILS

- MMH: mH, UH: μH

GENERAL SECTION

No.	Part No.	Description
85	7-685-534-24	SCREW +P 2.6X8 TYPE2 NON-SLIT
86	7-685-545-19	SCREW +BTP 3X6 TYPE2 N-S
87	7-685-751-09	SCREW, TOTSU BTT 3X6
88	7-685-860-04	SCREW +BVTT 2.6X4 (S)
89	7-685-861-01	SCREW +BVTT 2.6X5 (S)
90	7-685-870-01	SCREW +BVTT 3X5 (S)
91	7-685-871-01	SCREW +BVTT 3X6 (S)
92	7-687-711-39	SCREW, TOTSU BTT 3X5
93	X-3312-902-0	PLATE ASSY, ORNAMENTAL, MD
94	•;X-3312-904-0	FRAME (B) ASSY
95	•;X-3312-905-0	PLATE (LEFT) ASSY, SIDE, MD
96	•;X-3312-906-0	PLATE (RIGHT) ASSY, SIDE, MD
97	X-3312-907-0	PANEL ASSY, DRAWER
98	X-3312-908-0	PANEL ASSY, FRONT
99	•;X-3312-909-0	CHASSIS ASSY, AMPLIFIER
100	X-3312-910-0	COVER ASSY, MD
101	X-4886-805-0	KNOB (L) ASSY, POWER
102	3-703-043-31	(Canadian).....LABEL, CAUTION
103	•;3-701-946-30	(US).....LABEL, FUSE
103	•;3-701-948-14	(AEP, UK, E1, E2).....LABEL, CAUTION
104	3-703-044-26	(Canadian).....LABEL, CAUTION
105	4-875-455-21	COVER, CAPACITOR
106	9-911-837-XX	SHEET, VIBRATION PROOF

ACCESSORY & PACKING MATERIAL

No.	Part No.	Description
151	1-556-793-31	CORD, CONNECTION
152	3-701-630-00	BAG, POLYETHYLENE
154	3-773-308-11	(AEP, Canadian, UK, E)....MANUAL INSTRUCTION
155	3-773-308-21	(US).....MANUAL INSTRUCTION
156	3-773-308-41	(AEP).....MANUAL INSTRUCTION
157	3-793-828-11	QUESTIONNAIRE
158	X-3307-105-0	ROD ASSY, CLEANING HEAD
159	3-312-976-01	SHEET, PROTECTION, PANEL

MECHANISM SECTION

No.	Part No.	Description
301	1-452-202-00	MAGNET
302	3-307-305-02	GEAR (T), REEL
303	•;3-307-306-00	LEVER, SELECT, REVERSE
304	3-307-307-00	LEVER, FWD
305	3-307-313-00	PLATE, YOKE
306	3-307-315-00	ARBOR, MOVABLE
307	3-307-319-00	RETAINER, TAKE-UP GEAR
308	3-307-328-00	LEVER, TAKE-UP SELECTION
309	•;3-307-329-00	PLATE, FULCRUM, SELECTION LEVER
310	3-307-330-00	PIN, FULCRUM PLATE
311	3-307-332-00	ARBOR, FIXED
312	3-307-333-00	ARBOR, TRIGGER
313	3-307-348-00	ROLLER
314	3-307-355-00	SPRING
315	3-307-362-00	CAP, REEL
316	3-307-363-00	CLAW (N), REEL
317	3-307-366-00	BELT, FAST FORWARD
318	3-307-367-00	BUSHING, SELECT LEVER
319		
320	3-307-373-00	SPRING, TENSION
321	3-307-374-00	SPRING, TENSION
322	3-307-375-00	SPRING, TENSION
323	3-307-377-00	SPRING, TENSION
324	3-307-378-00	SPRING, TENSION
325	3-307-380-00	SPRING, COMPRESSION
326	3-307-391-00	SPRING
327	3-307-394-00	RETAINER (B), THRUST
328	3-307-395-00	RETAINER, SPRING
329	3-307-397-00	SLIDER, PAUSE
330	•;3-307-399-00	SLIDER, MODE
331	3-307-401-00	GEAR, FF CAM
332	•;3-307-403-00	SLIDER, FWD
333	3-307-412-00	GEAR, TAKE-UP REEL
334	•;3-307-420-00	SLIDER, REVERSE
335	•;3-307-421-00	LEVER (R), FWD SELECTION
336	3-307-423-00	GEAR (S), DRIVING
337	3-307-435-00	NUT, ADJUSTMENT, TAPE GUIDE
338	•;3-307-437-00	BLOCK, HEAD SELECTION
339	3-307-441-00	SPRING
340	•;3-307-443-00	BRACKET, RETAINER, SUPPLY GEAR
341	•;3-307-445-00	SHAFT, RETAINER, SUPPLY GEAR
342	3-307-447-00	CLAW (R), REEL
343	3-307-448-00	SCREW, ADJUSTMENT, AZIMUTH
344	•;3-307-449-00	LEVER (R), PAUSE
345	•;3-307-450-00	ROD, PULL, PAUSE

NOTE:

- Items with no part number and no description are not stocked because they are seldom required for routine service.
- Items marked "•" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- Due to standardization, parts with part numbers (Δ-ΔΔΔ-ΔΔΔ-XX or Δ-ΔΔΔΔ-ΔΔΔ-X) may be different from those used in the set.

CAPACITORS:

- All capacitors are in μF. Common capacitors are omitted. Refer to the following lists for their part numbers.
- MF: μF, PF: μμF.

RESISTORS

- All resistors are in ohms. Common 1/4W, 1/8W and 1/16W carbon resistors are omitted. Refer to the following lists for their part numbers.

- F : nonflammable

COILS

- MMH : mH, UH : μH

MECHANISM SECTION

No.	Part No.	Description
346	3-307-457-00	SPRING
347	3-307-458-00	PLATE (L), ADJUSTMENT, HEAD
348	3-307-460-00	SPRING, COMPRESSION
349	3-307-461-00	SPRING, TENSION
350	3-307-464-00	RETAINER, SUPPLY GEAR
351	3-307-465-00	RETAINER, TAKE-UP
352	3-307-466-00	CLAMP
353	3-307-467-00	RETAINER, SPRING
354	3-307-469-00	LEVER, SELECTION, SUPPLY
355	3-307-470-00	GUIDE (L), TAPE
356	3-307-477-41	SEAM (A), HEAD ADJUSTMENT (t=0.05)
356	3-307-477-01	SEAM (A), HEAD ADJUSTMENT (t=0.1)
356	3-307-477-11	SEAM (A), HEAD ADJUSTMENT (t=0.2)
356	3-307-477-21	SEAM (A), HEAD ADJUSTMENT (t=0.3)
356	3-307-477-31	SEAM (A), HEAD ADJUSTMENT (t=0.4)
357	3-307-480-00	SEAM (B), HEAD ADJUSTMENT (t=0.05)
357	3-307-479-01	SEAM (B), HEAD ADJUSTMENT (t=0.1)
357	3-307-479-11	SEAM (B), HEAD ADJUSTMENT (t=0.2)
357	3-307-479-21	SEAM (B), HEAD ADJUSTMENT (t=0.3)
357	3-307-479-31	SEAM (B), HEAD ADJUSTMENT (t=0.4)
358	3-307-481-00	BASE, HEAD
359	3-307-486-00	SPRING, COMPRESSION
360	3-307-487-00	STOPPER, FR
361	3-307-490-00	LEVER, FF
362	3-307-493-01	SPACER
362	3-307-493-11	SPACER
362	3-307-493-21	SPACER
362	3-307-493-31	SPACER
362	3-307-493-41	SPACER
362	3-307-493-51	SPACER
368	3-307-953-00	MAGNET, REEL TABLE
369	3-307-970-00	GEAR, FR
370	3-312-403-00	GEAR (S), PINION
371	3-312-405-00	PULLEY, DRIVING
372	3-312-406-00	GEAR (T), PINION
373	3-312-408-00	GEAR (B), CONVERSION
374	3-312-409-00	BELT, DRIVING
375	3-312-412-00	GEAR (B), CAM, FWD
376	3-312-414-00	RETAINER (B), HALF
377	3-312-415-00	GEAR, ROTARY HEAD
378	3-312-417-00	HOLDER, PC BOARD, HEAD
379	3-312-418-00	RUBBER, HOLDER, LAMP
380	3-312-422-00	BRACKET, MOTOR
381	3-312-423-00	RETAINER (H), THRUST
382	3-312-429-00	SPRING, COMPRESSION
383	3-312-432-00	SPRING, TENSION
384		

MECHANISM SECTION

No.	Part No.	Description
385	3-538-051-00	RUBBER, BRAKE
386	3-555-169-00	SCREW, ADJUSTMENT
387	3-558-349-00	BELT, CAPSTAN
389	3-561-827-11	PLATE (A), HYSTERESIS
390	3-644-718-00	SPRING, COMPRESSION
391	3-701-438-11	WASHER, 2.5
392		
393		
394	3-701-467-00	SCREW, LOCK
395	7-621-255-00	SCREW +P 2X4
396	7-621-555-30	SCREW +K 2X5
397	7-621-731-08	SET SCREW 2X2.5
398	7-621-770-87	SCREW +P 2.6X5
399	7-621-772-00	SCREW +B 2X3
400	7-621-772-40	SCREW +B 2X8
401	7-621-775-40	SCREW +B 2.6X8
402	7-627-552-07	SCREW, PRECISION +P 1.7X2.5
403	7-671-111-11	STEEL BALL 1.5MM
404	7-685-750-01	SCREW +PTT 3X5 (S)
405	7-685-790-01	SCREW +PTT 2.6X4 (S)
406	7-685-860-04	SCREW +BVT 2.6X4 (S)
407	7-687-204-21	TOTSU PTPWH 2X6 NON-SLIT, TYPE2
408	7-687-246-21	SCREW, TOTSU PTPWH 3X8, TYPE2
409	7-687-701-39	SCREW, TOTSU BTT 2.6X4
410	A-2142-022-A	PULLEY ASSY, FR
411	X-3307-305-0	LEVER ASSY, FWD LOCK
412	X-3307-307-6	PINCH ROLLER (N) ASSY
413	X-3307-312-0	LEVER ASSY, FR
414	X-3307-316-3	PINCH ROLLER (R) ASSY
415	X-3307-317-0	PLATE ASSY, FULCRUM, LEVER
416	X-3307-319-0	ARM (A) ASSY, PAUSE
417	3-312-428-00	ARM (B) PAUSE
418	X-3307-321-0	HOLDER ASSY, HEAD
419	X-3307-323-0	CHASSIS (R) ASSY, HEAD
420	X-3307-338-0	BEARING ASSY, CAPSTAN
421	X-3307-339-0	FLYWHEEL (H) ASSY
422	X-3307-341-2	PULLEY ASSY, DUMMY
423	X-3307-342-0	BEARING ASSY, DUMMY PULLEY
424	X-3307-348-0	LEVER ASSY, FF LOCK
425	X-3307-920-0	PLATE ASSY, ADJUSTMENT
426	X-3307-349-1	CHASSIS ASSY, MECHANISM
427	3-570-914-00	SPRING, TENSION

NOTE:

- Items with no part number and no description are not stocked because they are seldom required for routine service.
- Items marked " " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- Due to standardization, parts with part numbers (Δ-ΔΔΔ-ΔΔΔ-XX or Δ-ΔΔΔΔ-ΔΔΔ-X) may be different from those used in the set.

CAPACITORS:

- All capacitors are in μF. Common capacitors are omitted. Refer to the following lists for their part numbers.
- MF: μF, PF: μμF.

RESISTORS

- All resistors are in ohms. Common 1/4W, 1/8W and 1/16W carbon resistors are omitted. Refer to the following lists for their part numbers.
- F : nonflammable

COILS

- MMH : mH, UH : μH

ELECTRICAL PARTS

Ref.No.	Part No.	Description
501	▲-1-526-576-31	(E).....SELECTOR, POWER VOLTAGE
502	▲-1-526-609-00	(US).....CONNECTOR, AC OUTLET
502	▲-1-526-694-00	(AEP).....CONNECTOR, AC OUTLET
502	▲-1-526-751-00	(UK).....CONNECTOR, AC OUTLET
502	▲-1-526-882-00	(Canadian)...CONNECTOR, AC OUTLET
503	▲-1-533-131-00	HOLDER, FUSE
504	▲-1-551-479-00	(E).....CORD, POWER
504	▲-1-551-628-00	(US, Canadian)...CORD, POWER
504	▲-1-555-990-00	(AEP).....CORD, POWER
504	▲-1-556-560-00	(UK).....CORD, POWER
505	●-1-608-170-00	PC BOARD, HEAD TRANSLATION
506	●-1-608-268-00	PC BOARD, ERASE HEAD
507	●-1-609-542-00	PC BOARD, CONTROL SW
508	●-1-609-543-00	PC BOARD, FL
509	●-1-609-544-00	PC BOARD, TRANSLATION
510	●-1-609-545-00	PC BOARD, DOLBY SWITCH
511	●-1-609-546-00	PC BOARD, TAPE SWITCH
512	●-1-609-547-00	PC BOARD, PHOTO
513	●-1-609-548-00	PC BOARD, PLAYBACK
514	●-1-609-549-00	PC BOARD, RECORD
515	●-1-609-550-00	PC BOARD, REC VOL
516	●-1-609-551-00	PC BOARD, JACK
517	●-1-609-552-00	PC BOARD, SYSTEM CONTROL
518	●-1-609-553-00	PC BOARD, 9P REMOTE CONTROL
519	●-1-609-554-00	PC BOARD, TIMER SW
520	●-1-609-555-00	PC BOARD, 5P REMOTE CONTROL
521	●-1-609-556-00	PC BOARD, TRANSISTOR (A)
522	●-1-609-741-00	PC BOARD, TRANSISTOR (B)
523	●-1-610-222-00	PC BOARD, ISS
524	●-A-2056-194-A	MOUNTED PCB, AUDIO
525	●-A-2096-010-A	MOUNTED PCB, FL
526	●-1-609-872-00	(AEP)...PC BOARD, FUSE
C101	1-123-354-00	ELECT 3.3MF 20% 50V
C102	1-123-356-00	ELECT 10MF 20% 16V
C103	1-161-321-00	CERAMIC 680PF 10% 50V
C104	1-161-271-00	CERAMIC 100PF 5% 50V
C105	1-107-165-00	MICA 56PF 5% 500V
C106	1-161-322-00	CERAMIC 820PF 10% 50V
C107	1-107-167-00	MICA 75PF 5% 500V
C108	1-130-305-00	FILM 0.022MF 5% 100V
C109	1-123-353-00	ELECT 2.2MF 20% 50V
C110	1-108-571-00	MYLAR 0.0047MF 5% 50V
C111	1-161-316-00	CERAMIC 270PF 10% 50V
C112	1-123-319-00	ELECT 47MF 20% 16V

ELECTRICAL PARTS

Ref.No.	Part No.	Description			
C113	1-123-319-00	ELECT	47MF	20%	16V
C114	1-123-353-00	ELECT	2.2MF	20%	50V
C115	1-130-630-00	FILM	0.068MF	5%	50V
C116	1-130-635-00	FILM	0.18MF	5%	50V
C117	1-130-634-00	FILM	0.15MF	5%	50V
C118	1-130-632-00	FILM	0.1MF	5%	50V
C119	1-130-621-00	FILM	0.012MF	5%	50V
C120	1-130-633-00	FILM	0.12MF	5%	50V
C121	1-130-632-00	FILM	0.1MF	5%	50V
C122	1-108-559-00	MYLAR	0.0015MF	5%	50V
C123	1-123-356-00	ELECT	10MF	20%	25V
C124	1-130-631-00	FILM	0.082MF	5%	50V
C125	1-108-575-00	MYLAR	0.0068MF	5%	50V
C126	1-130-628-00	FILM	0.047MF	5%	50V
C127	1-130-629-00	FILM	0.056MF	5%	50V
C128	1-108-570-00	MYLAR	0.0043MF	5%	50V
C129	1-123-369-00	ELECT	4.7MF	20%	50V
C130	1-123-319-00	ELECT	47MF	20%	16V
C131	1-123-319-00	ELECT	47MF	20%	16V
C132	1-123-356-00	ELECT	10MF	20%	16V
C133	1-130-634-00	FILM	0.15MF	5%	50V
C134	1-130-628-00	FILM	0.047MF	5%	50V
C135	1-130-625-00	FILM	0.027MF	5%	50V
C136	1-130-633-00	FILM	0.12MF	5%	50V
C137	1-123-356-00	ELECT	10MF	20%	25V
C138	1-130-631-00	FILM	0.082MF	5%	50V
C139	1-108-575-00	MYLAR	0.0068MF	5%	50V
C140	1-130-622-00	FILM	0.015MF	5%	50V
C141	1-130-623-00	FILM	0.018MF	5%	50V
C142	1-123-354-00	ELECT	3.3MF	20%	50V
C143	1-123-353-00	ELECT	2.2MF	20%	50V
C144	1-123-369-00	ELECT	4.7MF	20%	50V
C145	1-123-319-00	ELECT	47MF	20%	16V
C146	1-130-621-00	FILM	0.012MF	5%	50V
C147	1-108-565-00	MYLAR	0.0027MF	5%	50V
C148	1-130-627-00	FILM	0.039MF	5%	50V
C149	1-108-563-00	MYLAR	0.0022MF	5%	50V
C150	1-108-555-00	MYLAR	0.001MF	5%	50V
C151	1-130-627-00	FILM	0.039MF	5%	50V
C152	1-108-571-00	MYLAR	0.0047MF	5%	50V
C153	1-130-627-00	FILM	0.039MF	5%	50V
C154	1-141-225-00	CAP, TUNING, TRIMAR			
C155	1-161-271-00	CERAMIC	100PF	5%	50V
C156	1-123-307-00	ELECT	100MF	20%	10V
C157	1-123-307-00	ELECT	100MF	20%	10V

NOTE:

- Items with no part number and no description are not stocked because they are seldom required for routine service.
- Items marked "●" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- Due to standardization, parts with part numbers (Δ-ΔΔΔ-ΔΔΔ-XX or Δ-ΔΔΔΔ-ΔΔΔ-X) may be different from those used in the set.

CAPACITORS:

- All capacitors are in μF. Common capacitors are omitted. Refer to the following lists for their part numbers. MF:μF, PF:μμF.

RESISTORS

- All resistors are in ohms. Common 1/4W, 1/8W and 1/16W carbon resistors are omitted. Refer to the following lists for their part numbers.

- F : nonflammable

COILS

- MMH : mH, UH : μH

The components identified by shading and mark ▲ are critical for safety. Replace only with part number specified.

Les composants identifiés par une trame et une marque ▲ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

ELECTRICAL PARTS

Ref.No.	Part No.	Description			
C205	1-107-165-00	MICA	56PF	5%	500V
C207	1-107-167-00	MICA	75PF	5%	500V
C208	1-130-305-00	FILM	0.022MF	5%	100V
C215	1-130-630-00	FILM	0.068MF	5%	50V
C217	1-130-634-00	FILM	0.15MF	5%	50V
C218	1-130-632-00	FILM	0.1MF	5%	50V
C219	1-130-621-00	FILM	0.012MF	5%	50V
C221	1-130-632-00	FILM	0.1MF	5%	50V
C226	1-130-628-00	FILM	0.047MF	5%	50V
C227	1-130-629-00	FILM	0.056MF	5%	50V
C233	1-130-634-00	FILM	0.15MF	5%	50V
C234	1-130-628-00	FILM	0.047MF	5%	50V
C235	1-130-625-00	FILM	0.027MF	5%	50V
C241	1-130-623-00	FILM	0.018MF	5%	50V
C246	1-130-621-00	FILM	0.012MF	5%	50V
C248	1-130-627-00	FILM	0.039MF	5%	50V
C251	1-130-627-00	FILM	0.039MF	5%	50V
C253	1-130-627-00	FILM	0.039MF	5%	50V
C254	1-141-225-00	CAP, TUNING, TRIMAR			
C503	1-123-356-00	ELECT	10MF	20%	16V
C504	1-123-308-00	ELECT	220MF	20%	10V
C505	1-123-308-00	ELECT	220MF	20%	10V
C506	1-123-354-00	ELECT	3.3MF	20%	50V
C507	1-129-714-00	FILM	0.01MF	10%	630V
C508	1-130-295-00	FILM	0.0082MF	5%	100V
C509	1-130-291-00	FILM	0.0056MF	5%	100V
C510	1-130-291-00	FILM	0.0056MF	5%	100V
C511	1-123-353-00	ELECT	2.2MF	20%	50V
C512	1-123-351-00	ELECT	0.47MF	20%	50V
C513	1-130-620-00	FILM	0.01MF	5%	50V
C514	1-123-369-00	ELECT	4.7MF	20%	50V
C515	1-123-351-00	ELECT	0.47MF	20%	50V
C516	1-123-321-00	ELECT	220MF	20%	16V
C517	1-123-321-00	ELECT	220MF	20%	16V
C518	1-123-320-00	ELECT	100MF	20%	16V
C519	1-123-320-00	ELECT	100MF	20%	16V
C520	1-123-337-00	ELECT	1000MF	20%	25V
C521	1-123-337-00	ELECT	1000MF	20%	25V
C522	1-123-369-00	ELECT	4.7MF	20%	50V
C701	1-130-632-00	FILM	0.1MF	5%	50V
C702	1-123-306-00	ELECT	47MF	20%	10V
C703	1-123-353-00	ELECT	2.2MF	20%	50V
C704	1-161-283-00	CERAMIC	22PF	5%	50V
C705	1-161-283-00	CERAMIC	22PF	5%	50V
C706	1-123-351-00	ELECT	0.47MF	20%	50V

ELECTRICAL PARTS

Ref.No.	Part No.	Description			
C707	1-123-351-00	ELECT	0.47MF	20%	50V
C708	1-123-351-00	ELECT	0.47MF	20%	50V
C709	1-123-351-00	ELECT	0.47MF	20%	50V
C710	1-123-351-00	ELECT	0.47MF	20%	50V
C711	1-123-351-00	ELECT	0.47MF	20%	50V
C712	1-123-351-00	ELECT	0.47MF	20%	50V
C713	1-123-351-00	ELECT	0.47MF	20%	50V
C714	1-161-045-00	CERAMIC	0.0033MF	20%	50V
C715	1-161-045-00	CERAMIC	0.0033MF	20%	50V
C716	1-123-319-00	ELECT	47MF	20%	16V
C717	1-123-295-00	ELECT	100MF	20%	6.3V
C718	1-123-333-00	ELECT	100MF	20%	25V
C719	1-161-379-00	CERAMIC	0.01MF	20%	25V
C720	1-161-379-00	CERAMIC	0.01MF	20%	25V
C721	1-130-625-00	FILM	0.027MF	5%	50V
C722	1-130-625-00	FILM	0.027MF	5%	50V
C723	1-123-353-00	ELECT	2.2MF	20%	50V
C724	1-161-379-00	CERAMIC	0.01MF	20%	25V
C725	1-161-379-00	CERAMIC	0.01MF	20%	25V
C726	1-123-351-00	ELECT	0.47MF	20%	50V
C727	1-123-298-00	ELECT	470MF	20%	6.3V
C728	1-131-369-00	TANTALUM	4.7MF	20%	16V
C729	1-123-353-00	ELECT	2.2MF	20%	50V
C730	1-123-296-00	ELECT	220MF	20%	6.3V
C731	1-123-319-00	ELECT	47MF	20%	16V
C732	1-123-319-00	ELECT	47MF	20%	16V
C733	1-123-353-00	ELECT	2.2MF	20%	50V
C734	1-123-380-00	ELECT	1MF	20%	50V
C735	1-123-307-00	ELECT	100MF	20%	10V
C736	1-123-321-00	ELECT	220MF	20%	16V
C737	1-123-356-00	ELECT	10MF	20%	16V
C738	1-123-349-00	ELECT	1000MF	20%	35V
C739	1-123-325-00	ELECT	2200MF	20%	16V
C740	1-123-328-00	ELECT	4.7MF	20%	25V
C741	1-131-347-00	TANTALUM	1MF	20%	35V
C742	1-123-295-00	ELECT	100MF	20%	6.3V
C801	1-123-353-00	ELECT	2.2MF	20%	50V
C802	1-123-353-00	ELECT	2.2MF	20%	50V
C803	1-123-353-00	ELECT	2.2MF	20%	50V
C804	1-123-353-00	ELECT	2.2MF	20%	50V
C805	1-130-626-00	FILM	0.033MF	5%	50V
C806	1-123-332-00	ELECT	47MF	20%	25V
C1000	1-161-749-00	(US,Canadian)..CAP, CERAMIC	10000PF		125V
C1000	1-161-744-00	(AEP,UK,E).....CAP, CERAMIC	10000PF		400V

NOTE:

- Items with no part number and no description are not stocked because they are seldom required for routine service.
- Items marked "♦" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- Due to standardization, parts with part numbers (Δ-ΔΔΔ-ΔΔΔ-XX or Δ-ΔΔΔΔ-ΔΔΔ-X) may be different from those used in the set.

CAPACITORS:

- All capacitors are in μ F. Common capacitors are omitted. Refer to the following lists for their part numbers.
MF: μ F, PF: μ F.

RESISTORS

- All resistors are in ohms. Common 1/4W, 1/8W and 1/16W carbon resistors are omitted. Refer to the following lists for their part numbers.

- F : nonflammable

COILS

- MMH : mH, UH : μ H

ELECTRICAL PARTS

Ref.No.	Part No.	Description
	CNJ501 1-507-761-00	JACK, PIN 4P
	●CNJ701;1-560-263-00	CONNECTOR PIN 9P
	CNJ702 1-561-965-00	SOCKET 5P
	CNP1 ●;1-560-061-31	PIN, CONNECTOR 3P
	CNP2 ●;1-560-062-41	PIN, CONNECTOR 4P
	CNP3 ●;1-560-060-41	PIN, CONNECTOR 2P
	CNP4 ●;1-560-064-00	PIN, CONNECTOR 6P
	CNP5 ●;1-560-060-00	PIN, CONNECTOR 2P
	CNP6 ●;1-560-060-00	PIN, CONNECTOR 2P
	CNP7 ●;1-560-062-41	PIN, CONNECTOR 4P
	CNP8 ●;1-560-062-00	PIN, CONNECTOR 4P
	CNP9 ●;1-560-062-31	PIN, CONNECTOR 4P
	●CNP502;1-560-062-41	PIN, CONNECTOR 4P
	●CNP503;1-560-061-41	PIN, CONNECTOR 3P
	●CNP701;1-560-064-21	PIN, CONNECTOR 6P
	●CNP702;1-560-064-41	PIN, CONNECTOR 6P
	●CNP703;1-560-060-00	PIN, CONNECTOR 2P
	●CNP704;1-560-063-00	PIN, CONNECTOR 5P
	●CNP705;1-560-062-00	PIN, CONNECTOR 4P
	●CNP706;1-560-063-00	PIN, CONNECTOR 5P
	●CNP707;1-560-061-41	PIN, CONNECTOR 3P
	●CNP708;1-560-061-21	PIN, CONNECTOR 3P
	●CNP709;1-560-064-00	PIN, CONNECTOR 6P
	●CNP710;1-560-060-31	PIN, CONNECTOR 2P
	●CNP711;1-560-060-00	PIN, CONNECTOR 2P
	●CNP712;1-560-063-21	PIN, CONNECTOR 5P
	●CNP713;1-560-064-31	PIN, CONNECTOR 6P
	●CNP714;1-560-060-41	PIN, CONNECTOR 2P
	●CNP715;1-560-060-21	PIN, CONNECTOR 2P
	●CNP716;1-560-061-00	PIN, CONNECTOR 3P
	●CNP717;1-560-061-00	PIN, CONNECTOR 3P
	D501 8-719-815-55	DIODE 1S1555
	D502 8-719-815-55	DIODE 1S1555
	D503 8-719-815-55	DIODE 1S1555
	D504 8-719-815-55	DIODE 1S1555
	D505 8-719-815-55	DIODE 1S1555
	D506 8-719-815-55	DIODE 1S1555
	D507 8-719-815-55	DIODE 1S1555
	D508 8-719-815-55	DIODE 1S1555
	D509 8-719-910-64	DIODE HZ6B1L
	D510 8-719-910-64	DIODE HZ6B1L
	D511 8-719-200-02	DIODE 10E-2
	D512 8-719-200-02	DIODE 10E-2
	D513 8-719-200-02	DIODE 10E-2
	D514 8-719-200-02	DIODE 10E-2
	D515 8-719-815-55	DIODE 1S1555

ELECTRICAL PARTS

Ref.No.	Part No.	Description
D516	8-719-815-55	DIODE 1S1555
D701	8-719-815-55	DIODE 1S1555
D702	8-719-815-55	DIODE 1S1555
D703	8-719-815-55	DIODE 1S1555
D704	8-719-815-55	DIODE 1S1555
D705	8-719-815-55	DIODE 1S1555
D706	8-719-200-02	DIODE 10E-2
D707	8-719-815-55	DIODE 1S1555
D708	8-719-815-55	DIODE 1S1555
D709	8-719-990-92	DIODE HZ9A2L
D710	8-719-815-55	DIODE 1S1555
D712	8-719-815-55	DIODE 1S1555
D713	8-719-200-02	DIODE 10E-2
D714	8-719-200-02	DIODE 10E-2
D715	8-719-200-02	DIODE 10E-2
D716	8-719-200-02	DIODE 10E-2
D717	8-719-931-07	DIODE EQB01-07
D718	8-719-910-15	DIODE HZ11B2L
D719	8-719-910-68	DIODE HZ6C2L
D720	8-719-910-43	DIODE HZ24-3L
D721	8-719-903-49	DIODE SLH-54PC3
D722	8-719-903-49	DIODE SLH-54PC3
D723	8-719-904-08	DIODE SLH-54VC3
D724	8-719-904-07	DIODE SLH-54DC3
D726	8-719-910-29	DIODE HZ12C3L
D727	8-719-200-02	DIODE 10E-2
D728	8-719-815-55	DIODE 1S1555
D729	8-719-815-55	DIODE 1S1555
D730	8-719-101-44	DIODE RD4.3EL3
D801	8-719-911-19	DIODE 1SS119
D802	8-719-911-19	DIODE 1SS119
D803	8-719-911-19	DIODE 1SS119
D804	8-719-911-19	DIODE 1SS119
D805	8-719-910-66	DIODE HZ6B3L
D806	8-719-904-14	DIODE PY5724K
D807	8-719-904-14	DIODE PY5724K
D808	8-719-904-14	DIODE PY5724K
D809	8-719-904-14	DIODE PY5724K
D811	8-719-903-49	DIODE SLH-54PC3
D812	8-719-903-49	DIODE SLH-54PC3
F1	1-532-536-00	(US,Canadian)...FUSE, GLASS-TUBE
F1	1-532-078-00	(AEP,UK,E).....FUSE, TIME-LAG
F2	1-532-536-00	(US,Canadian)...FUSE, GLASS-TUBE
F2	1-532-078-00	(AEP,UK,E).....FUSE, TIME-LAG
F3	1-532-078-00	(AEP).....FUSE, TIME-LAG

NOTE:

- Items with no part number and no description are not stocked because they are seldom required for routine service.
- Items marked " ● " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- Due to standardization, parts with part numbers (Δ-ΔΔΔ-ΔΔΔ-XX or Δ-ΔΔΔΔ-ΔΔΔ-X) may be different from those used in the set.

CAPACITORS:

- All capacitors are in μF. Common capacitors are omitted. Refer to the following lists for their part numbers.
MF:μF, PF:μuF.

RESISTORS

- All resistors are in ohms. Common 1/4W, 1/8W and 1/16W carbon resistors are omitted. Refer to the following lists for their part numbers.

- F : nonflammable

COILS

- MMH : mH, UH : μH

ELECTRICAL PARTS

Ref.No.	Part No.	Description
FLT	1-519-284-00	INDICATOR TUBE, FLUORESCENT
HE	8-825-535-20	HEAD, ERASE (ES237-36)
HRP	8-825-548-10	HEAD, R/P (PA242-3602)
IC101	8-759-300-76	IC CX-174A-2
IC102	8-759-300-76	IC CX-174A-2
IC201	8-759-300-76	IC CX-174A-2
IC202	8-759-300-76	IC CX-174A-2
IC501	8-759-700-39	IC NJM4562S-D
IC502	8-759-600-02	IC M5218L
IC701	8-755-640-30	IC CX564-03
IC702	8-759-600-54	IC M50783SP
IC703	8-759-812-90	IC LB1290
IC704	8-759-800-57	IC LB1262
IC705	8-759-240-50	IC TC4050BP
IC706	8-759-240-50	IC TC4050BP
IC707	8-759-700-46	IC CX10034
IC708	8-759-962-08	IC BA6208
IC801	8-759-905-48	IC MSL9512RS
IC802	8-759-906-02	IC BA6146
IC803	8-759-906-02	IC BA6146
L101	1-408-262-00	MICRO INDUCTOR 27MMH
L102	1-408-255-00	MICRO INDUCTOR 6.8MMH
L103	1-408-260-00	MICRO INDUCTOR 18MMH
L104	1-408-259-00	MICRO INDUCTOR 15MMH
L201	1-408-262-00	MICRO INDUCTOR 27MMH
L202	1-408-255-00	MICRO INDUCTOR 6.8MMH
L203	1-408-260-00	MICRO INDUCTOR 18MMH
L204	1-408-259-00	MICRO INDUCTOR 15MMH
L501	1-407-177-XX	MICRO INDUCTOR 470UH
L701	1-407-169-XX	MICRO INDUCTOR 100UH
L702	1-407-169-XX	MICRO INDUCTOR 100UH
L703	1-407-169-XX	MICRO INDUCTOR 100UH
L704	1-407-169-XX	MICRO INDUCTOR 100UH
L705	1-407-169-XX	MICRO INDUCTOR 100UH
L706	1-407-169-XX	MICRO INDUCTOR 100UH
L707	1-407-169-XX	MICRO INDUCTOR 100UH
L708	1-407-169-XX	MICRO INDUCTOR 100UH
L709	1-407-169-XX	MICRO INDUCTOR 100UH
LPF101	1-231-388-00	FILTER, LOWPASS
LPF201	1-231-388-00	FILTER, LOWPASS
M1	X-3307-340-0	MOTOR (H) ASSY
M2	X-3312-903-0	MOTOR (L) ASSY
PL901	1-518-259-00	LAMP, PILOT

ELECTRICAL PARTS

Ref.No.	Part No.	Description
PM1	1-454-316-00	SOLENOID, PLUNGER
PM2	1-454-316-00	SOLENOID, PLUNGER
Q101	8-729-334-58	TRANSISTOR 2SC1345
Q102	8-729-663-48	TRANSISTOR 2SC1364-8
Q103	8-729-663-48	TRANSISTOR 2SC1364-8
Q104	8-729-663-48	TRANSISTOR 2SC1364-8
Q105	8-729-663-48	TRANSISTOR 2SC1364-8
Q106	8-729-663-48	TRANSISTOR 2SC1364-8
Q107	8-729-663-48	TRANSISTOR 2SC1364-8
Q108	8-729-663-48	TRANSISTOR 2SC1364-8
Q109	8-729-663-48	TRANSISTOR 2SC1364-8
Q110	8-729-663-48	TRANSISTOR 2SC1364-8
Q111	8-729-663-48	TRANSISTOR 2SC1364-8
Q112	8-729-663-48	TRANSISTOR 2SC1364-8
Q113	8-729-663-48	TRANSISTOR 2SC1364-8
Q114	8-729-663-48	TRANSISTOR 2SC1364-8
Q115	8-729-663-48	TRANSISTOR 2SC1364-8
Q116	8-729-663-48	TRANSISTOR 2SC1364-8
Q117	8-729-663-48	TRANSISTOR 2SC1364-8
Q118	8-729-100-13	TRANSISTOR 2SC2001-K2
Q201	8-729-334-58	TRANSISTOR 2SC1345-E
Q202	8-729-663-48	TRANSISTOR 2SC1364-8
Q203	8-729-663-48	TRANSISTOR 2SC1364-8
Q204	8-729-663-48	TRANSISTOR 2SC1364-8
Q205	8-729-663-48	TRANSISTOR 2SC1364-8
Q206	8-729-663-48	TRANSISTOR 2SC1364-8
Q207	8-729-663-48	TRANSISTOR 2SC1364-8
Q208	8-729-663-48	TRANSISTOR 2SC1364-8
Q209	8-729-663-48	TRANSISTOR 2SC1364-8
Q210	8-729-663-48	TRANSISTOR 2SC1364-8
Q211	8-729-663-48	TRANSISTOR 2SC1364-8
Q212	8-729-663-48	TRANSISTOR 2SC1364-8
Q213	8-729-663-48	TRANSISTOR 2SC1364-8
Q214	8-729-663-48	TRANSISTOR 2SC1364-8
Q215	8-729-663-48	TRANSISTOR 2SC1364-8
Q216	8-729-663-48	TRANSISTOR 2SC1364-8
Q217	8-729-663-48	TRANSISTOR 2SC1364-8
Q218	8-729-100-13	TRANSISTOR 2SC2001-K2
Q501	8-729-663-48	TRANSISTOR 2SC1364-8
Q502	8-729-602-67	TRANSISTOR 2SA1026-7
Q503	8-729-663-48	TRANSISTOR 2SC1364-8
Q504	8-729-663-48	TRANSISTOR 2SC1364-8
Q505	8-729-663-47	TRANSISTOR 2SC1364
Q506	8-729-663-47	TRANSISTOR 2SC1364

NOTE:

- Items with no part number and no description are not stocked because they are seldom required for routine service.
- Items marked "▲" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- Due to standardization, parts with part numbers (Δ-ΔΔΔ-ΔΔΔ-XX or Δ-ΔΔΔΔ-ΔΔΔ-X) may be different from those used in the set.

CAPACITORS:

- All capacitors are in μF. Common capacitors are omitted. Refer to the following lists for their part numbers.
- MF: μF, PF: μμF.

RESISTORS

- All resistors are in ohms. Common 1/4W, 1/8W and 1/16W carbon resistors are omitted. Refer to the following lists for their part numbers.

- F : nonflammable

COILS

- MMH : mH, UH : μH

ELECTRICAL PARTS

Ref.No.	Part No.	Description			
Q507	8-729-663-48	TRANSISTOR 2SC1364-8			
Q508	8-729-602-67	TRANSISTOR 2SA1026-7			
Q509	8-729-663-48	TRANSISTOR 2SC1364-8			
Q510	8-729-663-48	TRANSISTOR 2SC1364-8			
Q511	8-729-602-67	TRANSISTOR 2SA1026-7			
Q512	8-729-141-42	TRANSISTOR 2SD414			
Q513	8-729-315-22	TRANSISTOR 2SD1152			
Q514	8-729-315-22	TRANSISTOR 2SD1152			
Q515	8-729-203-02	TRANSISTOR 2SK30A-0			
Q516	8-729-384-48	TRANSISTOR 2SA844			
Q517	8-729-384-48	TRANSISTOR 2SA844			
Q518	8-729-154-83	TRANSISTOR 2SB548			
Q519	8-729-203-02	TRANSISTOR 2SK30A-0			
Q701	8-729-602-67	TRANSISTOR 2SA1026-7			
Q702	8-729-602-67	TRANSISTOR 2SA1026-7			
Q703	8-729-663-47	TRANSISTOR 2SC1364			
Q704	8-729-663-47	TRANSISTOR 2SC1364			
Q705	8-729-602-67	TRANSISTOR 2SA1026-7			
Q706	8-729-177-43	TRANSISTOR 2SD774			
Q707	8-729-663-47	TRANSISTOR 2SC1364			
Q708	8-729-201-78	TRANSISTOR 2SD1406			
Q709	8-729-602-67	TRANSISTOR 2SA1026-7			
Q711	8-729-663-47	TRANSISTOR 2SC1364			
Q712	8-729-180-92	TRANSISTOR 2SD809-K			
Q713	8-729-602-67	TRANSISTOR 2SA1026-7			
Q714	8-729-663-47	TRANSISTOR 2SC1364			
Q715	8-729-663-47	TRANSISTOR 2SC1364			
Q717	8-729-602-67	TRANSISTOR 2SA1026-7			
Q718	8-729-602-67	TRANSISTOR 2SA1026-7			
Q719	8-729-602-67	TRANSISTOR 2SA1026-7			
Q720	8-729-602-67	TRANSISTOR 2SA1026-7			
Q901	8-729-110-21	TRANSISTOR PH102-K			
Q902	8-729-110-21	TRANSISTOR PH102-K			
R005	1-246-489-00	CARBON	4.7K	5%	1/4W
R006	1-246-489-00	CARBON	4.7K	5%	1/4W
R101	1-246-509-00	CARBON	33K	5%	1/4W
R102	1-246-473-00	CARBON	1K	5%	1/4W
R103	1-246-529-00	CARBON	220K	5%	1/4W
R104	1-246-489-00	CARBON	4.7K	5%	1/4W
R105	1-246-473-00	CARBON	1K	5%	1/4W
R106	1-246-485-00	CARBON	3.3K	5%	1/4W
R107	1-246-465-00	CARBON	470	5%	1/4W
R108	1-246-493-00	CARBON	6.8K	5%	1/4W
R109	1-246-473-00	CARBON	1K	5%	1/4W
R110	1-246-506-00	CARBON	24K	5%	1/4W

ELECTRICAL PARTS

Ref.No.	Part No.	Description			
R111	1-214-709-00	METAL	150	1%	1/4W
R112	1-246-524-00	CARBON	130K	5%	1/4W
R113	1-214-746-00	METAL	5.1K	1%	1/4W
R114	1-246-497-00	CARBON	10K	5%	1/4W
R116	1-246-499-00	CARBON	12K	5%	1/4W
R117	1-246-503-00	CARBON	18K	5%	1/4W
R118	1-246-529-00	CARBON	220K	5%	1/4W
R119	1-246-473-00	CARBON	1K	5%	1/4W
R120	1-247-903-00	CARBON	1M	5%	1/6W
R121	1-246-501-00	CARBON	15K	5%	1/4W
R122	1-246-501-00	CARBON	15K	5%	1/4W
R123	1-246-501-00	CARBON	15K	5%	1/4W
R124	1-247-859-00	CARBON	15K	5%	1/6W
R125	1-246-545-00	CARBON	1M	5%	1/4W
R126	1-247-888-00	CARBON	240K	5%	1/6W
R127	1-247-888-00	CARBON	240K	5%	1/6W
R128	1-247-865-00	CARBON	27K	5%	1/6W
R129	1-247-857-00	CARBON	12K	5%	1/6W
R130	1-247-859-00	CARBON	15K	5%	1/6W
R131	1-246-492-00	CARBON	6.2K	5%	1/4W
R132	1-246-436-00	CARBON	30	5%	1/4W
R133	1-246-502-00	CARBON	16K	5%	1/4W
R134	1-247-803-00	CARBON	68	5%	1/6W
R135	1-246-545-00	CARBON	1M	5%	1/4W
R136	1-247-886-00	CARBON	200K	5%	1/6W
R137	1-247-839-00	CARBON	2.2K	5%	1/6W
R138	1-246-501-00	CARBON	15K	5%	1/4W
R139	1-246-545-00	CARBON	1M	5%	1/4W
R140	1-246-509-00	CARBON	33K	5%	1/4W
R141	1-246-508-00	CARBON	30K	5%	1/4W
R142	1-246-475-00	CARBON	1.2K	5%	1/4W
R143	1-246-455-00	CARBON	180	5%	1/4W
R144	1-246-453-00	CARBON	150	5%	1/4W
R145	1-246-459-00	CARBON	270	5%	1/4W
R146	1-246-533-00	CARBON	330K	5%	1/4W
R147	1-214-737-00	METAL	2.2K	1%	1/4W
R148	1-247-859-00	CARBON	15K	5%	1/6W
R149	1-246-504-00	CARBON	20K	5%	1/4W
R150	1-246-485-00	CARBON	3.3K	5%	1/4W
R151	1-246-497-00	CARBON	10K	5%	1/4W
R152	1-246-485-00	CARBON	3.3K	5%	1/4W
R153	1-246-529-00	CARBON	220K	5%	1/4W
R154	1-247-888-00	CARBON	240K	5%	1/6W
R155	1-247-888-00	CARBON	240K	5%	1/6W
R156	1-247-821-00	CARBON	390	5%	1/6W

NOTE:

- Items with no part number and no description are not stocked because they are seldom required for routine service.
- Items marked "•" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- Due to standardization, parts with part numbers (Δ-ΔΔΔ-ΔΔΔ-XX or Δ-ΔΔΔΔ-ΔΔΔ-X) may be different from those used in the set.

CAPACITORS:

- All capacitors are in μF. Common capacitors are omitted. Refer to the following lists for their part numbers.
- MF: μF, PF: μμF.

RESISTORS

- All resistors are in ohms. Common 1/4W, 1/8W and 1/16W carbon resistors are omitted. Refer to the following lists for their part numbers.

- F: nonflammable

COILS

- MMH: mH, UH: μH

ELECTRICAL PARTS

Ref.No.	Part No.	Description			
R534	1-247-863-00	CARBON	22K	5%	1/6W
R535	1-246-487-00	CARBON	3.9K	5%	1/4W
R536	1-246-480-00	CARBON	2K	5%	1/4W
R537	1-246-485-00	CARBON	3.3K	5%	1/4W
R538	1-246-467-00	CARBON	560	5%	1/4W
R539	1-246-529-00	CARBON	220K	5%	1/4W
R540	1-246-497-00	CARBON	10K	5%	1/4W
R541	1-246-521-00	CARBON	100K	5%	1/4W
R555	1-212-849-00	FUSIBLE	4.7	5%	1/4W F
R556	1-212-849-00	FUSIBLE	4.7	5%	1/4W F
R557	1-246-471-00	CARBON	820	5%	1/4W
R558	1-246-471-00	CARBON	820	5%	1/4W
R701	1-246-521-00	CARBON	100K	5%	1/4W
R702	1-246-521-00	CARBON	100K	5%	1/4W
R703	1-246-497-00	CARBON	10K	5%	1/4W
R704	1-246-477-00	CARBON	1.5K	5%	1/4W
R705	1-247-871-00	CARBON	47K	5%	1/6W
R706	1-246-505-00	CARBON	22K	5%	1/4W
R707	1-246-505-00	CARBON	22K	5%	1/4W
R708	1-246-505-00	CARBON	22K	5%	1/4W
R709	1-246-505-00	CARBON	22K	5%	1/4W
R710	1-246-505-00	CARBON	22K	5%	1/4W
R711	1-246-505-00	CARBON	22K	5%	1/4W
R712	1-246-505-00	CARBON	22K	5%	1/4W
R713	1-246-505-00	CARBON	22K	5%	1/4W
R714	1-246-473-00	CARBON	1K	5%	1/4W
R715	1-246-473-00	CARBON	1K	5%	1/4W
R716	1-246-473-00	CARBON	1K	5%	1/4W
R717	1-246-473-00	CARBON	1K	5%	1/4W
R718	1-246-473-00	CARBON	1K	5%	1/4W
R719	1-246-473-00	CARBON	1K	5%	1/4W
R720	1-246-473-00	CARBON	1K	5%	1/4W
R721	1-246-473-00	CARBON	1K	5%	1/4W
R722	1-246-457-00	CARBON	220	5%	1/4W
R723	1-246-457-00	CARBON	220	5%	1/4W
R724	1-246-459-00	CARBON	270	5%	1/4W
R725	1-246-459-00	CARBON	270	5%	1/4W
R726	1-247-871-00	CARBON	47K	5%	1/6W
R727	1-247-863-00	CARBON	22K	5%	1/6W
R728	1-247-863-00	CARBON	22K	5%	1/6W
R729	1-247-871-00	CARBON	47K	5%	1/6W
R730	1-247-895-00	CARBON	470K	5%	1/6W
R731	1-246-537-00	CARBON	470K	5%	1/4W
R732	1-246-513-00	CARBON	47K	5%	1/4W
R733	1-246-513-00	CARBON	47K	5%	1/4W

ELECTRICAL PARTS

Ref.No.	Part No.	Description			
R734	1-246-497-00	CARBON	10K	5%	1/4W
R735	1-246-505-00	CARBON	22K	5%	1/4W
R736	1-244-867-00	CARBON	560	5%	1/2W
R738	1-246-475-00	CARBON	1.2K	5%	1/4W
R739	1-246-489-00	CARBON	4.7K	5%	1/4W
R740	1-246-497-00	CARBON	10K	5%	1/4W
R743	1-246-412-00	CARBON	3	5%	1/4W
R744	1-246-473-00	CARBON	1K	5%	1/4W
R745	1-246-489-00	CARBON	4.7K	5%	1/4W
R746	1-247-821-91	CARBON	390	5%	1/6W
R747	1-244-867-00	CARBON	560	5%	1/2W
R748	1-246-490-00	CARBON	5.1K	5%	1/4W
R749	1-246-505-00	CARBON	22K	5%	1/4W
R750	1-246-505-00	CARBON	22K	5%	1/4W
R751	1-246-521-00	CARBON	100K	5%	1/4W
R752	1-246-513-00	CARBON	47K	5%	1/4W
R753	1-247-863-00	CARBON	22K	5%	1/6W
R754	1-247-847-00	CARBON	4.7K	5%	1/6W
R755	1-246-477-00	CARBON	1.5K	5%	1/4W
R756	1-246-477-00	CARBON	1.5K	5%	1/4W
R757	1-246-505-00	CARBON	22K	5%	1/4W
R758	1-246-531-00	CARBON	270K	5%	1/4W
R759	1-246-449-00	CARBON	100	5%	1/4W
R760	1-246-497-00	CARBON	10K	5%	1/4W
R761	1-246-505-00	CARBON	22K	5%	1/4W
R762	1-246-512-00	CARBON	43K	5%	1/4W
R763	1-246-495-00	CARBON	8.2K	5%	1/4W
R764	1-246-473-00	CARBON	1K	5%	1/4W
R765	1-246-489-00	CARBON	4.7K	5%	1/4W
R766	1-246-513-00	CARBON	47K	5%	1/4W
R767	1-244-857-00	CARBON	220	5%	1/2W
R769	1-214-764-00	METAL	30K	1%	1/4W
R770	1-246-489-00	CARBON	4.7K	5%	1/4W
R771	1-246-505-00	CARBON	22K	5%	1/4W
R772	1-246-467-00	CARBON	560	5%	1/4W
R773	1-246-489-00	CARBON	4.7K	5%	1/4W
R774	1-246-439-00	CARBON	39	5%	1/4W
R775	1-244-882-00	CARBON	2.4K	5%	1/2W
R776	1-246-441-00	CARBON	47	5%	1/4W
R778	1-246-513-00	CARBON	47K	5%	1/4W
R801	1-247-883-00	CARBON	150K	5%	1/6W
R802	1-247-855-00	CARBON	10K	5%	1/6W
R803	1-247-883-00	CARBON	150K	5%	1/6W
R804	1-247-855-00	CARBON	10K	5%	1/6W
R805	1-247-855-00	CARBON	10K	5%	1/6W

NOTE:

- Items with no part number and no description are not stocked because they are seldom required for routine service.
- Items marked "▲" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- Due to standardization, parts with part numbers (Δ-ΔΔΔ-ΔΔΔ-XX or Δ-ΔΔΔΔ-ΔΔΔ-X) may be different from those used in the set.

CAPACITORS:

- All capacitors are in μF . Common capacitors are omitted. Refer to the following lists for their part numbers.
- MF: μF , PF: $\mu\mu\text{F}$.

RESISTORS

- All resistors are in ohms. Common 1/4W, 1/8W and 1/16W carbon resistors are omitted. Refer to the following lists for their part numbers.

- F : nonflammable

COILS

- MMH : mH, UH : μH

The components identified by shading and mark ▲ are critical for safety. Replace only with part number specified.

Les composants identifiés par une trame et une marque ▲ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

ELECTRICAL PARTS

Ref.No.	Part No.	Description
R806	1-247-813-00	CARBON 180 5% 1/6W
R807	1-247-825-00	CARBON 560 5% 1/6W
R808	1-246-451-00	CARBON 120 5% 1/4W
RV101	1-226-236-00	RES, ADJ, CARBON 10K
RV102	1-226-237-00	RES, ADJ, CARBON 20K
RV103	1-226-236-00	RES, ADJ, CARBON 10K
RV201	1-226-236-00	RES, ADJ, CARBON 10K
RV202	1-226-237-00	RES, ADJ, CARBON 20K
RV203	1-226-236-00	RES, ADJ, CARBON 10K
RV501	1-226-991-00	RES, VAR, SLIDE 20K/20K
RY501	1-515-473-00	RELAY
S1	1-554-410-00	SWITCH, LEAF
S2	1-554-411-00	SWITCH, PUSH (1 KEY)
S3	1-554-422-00	SWITCH, PUSH (1 KEY)
S4	1-554-411-00	SWITCH, PUSH (1 KEY)
S5	1-554-411-00	SWITCH, PUSH (1 KEY)
S501	1-554-423-00	SWITCH, SLIDE
S502	1-553-802-00	SWITCH, SLIDE
S701	1-554-303-00	SWITCH, KEY BOARD
S702	1-554-303-00	SWITCH, KEY BOARD
S703	1-554-303-00	SWITCH, KEY BOARD
S704	1-554-303-00	SWITCH, KEY BOARD
S705	1-554-303-00	SWITCH, KEY BOARD
S706	1-554-303-00	SWITCH, KEY BOARD
S707	1-554-303-00	SWITCH, KEY BOARD
S708	1-554-303-00	SWITCH, KEY BOARD

ELECTRICAL PARTS

Ref.No.	Part No.	Description
S710	1-554-208-00	SWITCH, SLIDE
S711	1-554-078-00	SWITCH, SLIDE
S801	1-554-303-00	SWITCH, KEY BOARD
S802	1-554-303-00	SWITCH, KEY BOARD
S803	1-554-303-00	SWITCH, KEY BOARD
S804	1-554-303-00	SWITCH, KEY BOARD
S805	1-554-303-00	SWITCH, KEY BOARD
S806	1-554-303-00	SWITCH, KEY BOARD
S807	1-554-424-00	SWITCH, PUSH
AS1000	1-553-319-00	(US,Canadian)...SWITCH, PUSH (AC POWER)
AS1000	1-553-318-00	(AEP,E).....SWITCH, PUSH (AC POWER)
AS1000	1-553-447-00	(UK).....SWITCH, PUSH (AC POWER)
T501	1-433-257-00	TRANSFORMER, BIAS OSCILLATOR
AT1000	1-447-585-00	(US,Canadian)...TRANSFORMER, POWER
AT1000	1-447-584-00	(AEP,UK).....TRANSFORMER, POWER
AT1000	1-447-588-00	(E).....TRANSFORMER, POWER
TH701	1-800-194-11	THERMISTORC DIRECT-HEATING DISK
TH702	1-800-194-11	THERMISTORC DIRECT-HEATING DISK
W2	1-535-115-00	TERMINAL
W3	1-535-116-00	TERMINAL
W4	1-535-117-00	TERMINAL
W5	1-535-115-00	TERMINAL
X701	1-527-822-00	OSCILLATOR, CERAMIC
X702	1-527-973-00	OSCILLATOR, CERAMIC

NOTE:

- Items with no part number and no description are not stocked because they are seldom required for routine service.
- Items marked "▲" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- Due to standardization, parts with part numbers (Δ-ΔΔΔ-ΔΔΔ-XX or Δ-ΔΔΔΔ-ΔΔΔ-X) may be different from those used in the set.

CAPACITORS:

- All capacitors are in μF. Common capacitors are omitted. Refer to the following lists for their part numbers.
- MF:μF, PF:μμF.

RESISTORS

- All resistors are in ohms. Common 1/4W, 1/8W and 1/16W carbon resistors are omitted. Refer to the following lists for their part numbers.
- F: nonflammable

COILS

- MMH: mH, UH: μH

The components identified by shading and mark ▲ are critical for safety. Replace only with part number specified.

Les composants identifiés par une trame et une marque ▲ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

Sony Corporation
Consumer Products Group
Technical Support Dept.