

TA-AV561

SERVICE MANUAL

*US Model
Canadian Model
AEP Model
UK Model
E Model
Australian Model*



TA-AV561 is the amplifier section in SEN-561.

Photo : AEP model

This amplifier incorporates the Dolby Pro Logic Surround system.
Manufactured under license from Dolby Laboratories Licensing Corporation.
"Dolby," the double-D symbol  and "Pro Logic" are trademarks of Dolby Laboratories Licensing Corporation.

POWER OUTPUT AND TOTAL HARMONIC DISTORTION: (US model)

With 8 ohm loads both channels driven, from 70 - 20,000 Hz; rated 100 watts per channel minimum RMS power, with no more than 0.9 % total harmonic distortion from 250 milliwatts to rated output.

Power output

US, Canadian model :

- 120 W + 120 W (front, at rear/center/woofer off at 1 kHz, 0.9 % T.H.D., 8 ohms)
- 20 W + 20 W (rear, at front/center/woofer off at 1 kHz, 8 ohms)
- 35 W (center, at front/rear/woofer off at 1 kHz, 6 ohms)
- 40 W (woofer, at front/rear/center off at 40 Hz, 4 ohms)

SPECIFICATIONS

European, UK, and Australian model:
(FRONT)

DIN power output

80 W + 80 W (at rear/centre/woofer off at 1 kHz, 8 ohms)

Continuous RMS power output

110 W + 110 W (at rear/centre/woofer off at 1 kHz, 10% T.H.D., 8 ohms)

Music power output

160 W + 160 W (at rear/centre/woofer off, 8 ohms)

(REAR)

20 W + 20 W (at front/centre/woofer off at 1 kHz, 8 ohms)

(CENTER)

30 W (at front/rear/woofer off at 1 kHz, 8 ohms)

(WOOFER)

40 W (at front/rear/centre off at 40 Hz, 4 ohms)

Other Countries model:

Peak music power output

1800 W (total)

— Continued on next page —

INTEGRATED STEREO AMPLIFIER
SONY®

(FRONT)

Continuous RMS power output

100 W + 100 W (at rear/
centre/woofer off at
1 kHz, 5% T.H.D.,
8 ohms)

(REAR)

20 W + 20 W (at front/
centre/woofer off at
1 kHz, 8 ohms)

(CENTER)

35 W (at front/rear/
woofer off at 1 kHz,
6 ohms)

(WOOFER)

40 W (at front/rear/centre
off at 40 Hz, 4 ohms)

Inputs

	Sensitivity	Impedance
PHONO	2.5 mV	50 kilohms
CD	400 mV	
TAPE, VIDEO 1, 2, TUNER	250 mV	50 kilohms

Outputs

TAPE REC OUT, VIDEO
1: Voltage 250 mV,
Impedance 1 kilohms
PHONES: Accepts low
and high impedance
headphones

TONE

±8 dB at 100 Hz and
10 kHz

General

Power
requirements

US, Canadian model :

120V AC, 60Hz

European and UK model:

220 - 230 V AC,
50/60 Hz

Other Countries model:

110 - 120/220 - 240 V AC,
50/60 Hz

Power
consumption

European and UK model:

200 W

Other Countries model:

220 W

AC outlets

US, Canadian model :

3 switched, total 120W.

Other Countries model :

3 switched, total 100W max.

Dimensions · 430 x 160 x 355 mm

Mass (Approx.)

9.3 kg

Supplied
accessories

Remote controller
(remote) (1)
Size AA (R6) batteries (2)

Design and specifications are subject to
change without notice.

TABLE OF CONTENTS

Section	Title	Page
SECTION 1. GENERAL		4
SECTION 2. DIAGRAMS		
2-1.	Circuit boards location	5
2-2.	Schematic Diagram — Display Section —	6
2-3.	Printed Wiring Board — Display Section —	9
2-4.	Schematic Diagram — Main Section —	14
2-5.	Printed Wiring Board — Main Section —	19
2-6.	IC Pin Function	
	• IC401 Graphic Control (uPD78043)	23
SECTION 3. EXPLODED VIEWS		
3-1.	Front Panel Section	24
3-2.	Back Panel Section	25
3-3.	Chassis Section	26
SECTION 4. ELECTRICAL PARTS LIST		27

SAFETY-RELATED COMPONENT WARNING !!

COMPONENTS IDENTIFIED BY MARK Δ OR DOTTED
LINE WITH MARK Δ ON THE SCHEMATIC DIAGRAMS
AND IN THE PARTS LIST ARE CRITICAL TO SAFE
OPERATION. REPLACE THESE COMPONENTS WITH
SONY PARTS WHOSE PART NUMBERS APPEAR AS
SHOWN IN THIS MANUAL OR IN SUPPLEMENTS
PUBLISHED BY SONY.

ATTENTION AU COMPOSANT AYANT RAPPORT À LA SÉCURITÉ!!

LES COMPOSANTS IDENTIFIÉS PAR UNE MARQUE Δ
SUR LES DIAGRAMMES SCHÉMATIQUES ET LA LISTE
DES PIÈCES SONT CRITIQUES POUR LA SÉCURITÉ
DE FONCTIONNEMENT. NE REMPLACER CES
COMPOSANTS QUE PAR DES PIÈCES SONY DONT
LES NUMÉROS SONT DONNÉS DANS CE MANUEL OU
DANS LES SUPPLÉMENTS PUBLIÉS PAR SONY.

[Lighting of all FLs and LEDs]

When the power supply plug is connected to the outlet (standby state), and the **[3 CLASSIC]** button and **[POWER]** button are pressed simultaneously, the FL tubes and LEDs light up.

[Key Check]

With all the FLs and LEDs lit, when the **[3 CLASSIC]** button and **[WOFFER ON/OFF]** button are pressed simultaneously, "SET **" is displayed.

When the **[3 CLASSIC]** button and **[WOFFER ON/OFF]** button are pressed simultaneously again, the Key Check mode is set and "KEY 0" is displayed.

Each time a button other than **[POWER]** is pressed, the display will count up to "KEY 21".

A button already pressed will not be counted when pressed again.

When the button is pressed for the 22nd time, "AMP" is displayed and the key check mode is ended.

NOTE: The ** of "SET **" differs according to the version of the microprocessor.


To exit the test mode, disconnect the power supply plug from the outlet.

• Abbreviation

FL : Fluorescent Indicator Tube

MODEL IDENTIFICATION

— BACK PANEL —

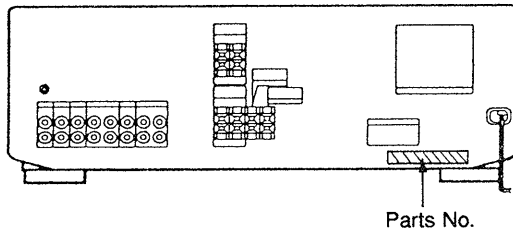

MODEL	PARTS NO.
US model	4-979-454-0□
Canadian model	4-979-454-1□
AEP, German, italian model	4-979-454-2□
UK model	4-979-454-3□
E model	4-979-454-4□
Singapore model	4-979-454-6□
Australian model	4-979-454-7□

SAFETY CHECK-OUT

After correcting the original service problem, perform the following safety checks before releasing the set to the customer:

Check the antenna terminals, metal trim, "metallized" knobs, screws, and all other exposed metal parts for AC leakage. Check leakage as described below.

LEAKAGE

The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 0.5 mA (500 microamperes). Leakage current can be measured by any one of three methods.

1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufacturers' instructions to use these instruments.
2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.
3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The "limit" indication is 0.75 V, so analog meters must have an accurate low-voltage scale. The Simpson 250 and Sanwa SH-63Trd are examples of a passive VOM that is suitable. Nearly all battery operated digital multimeters that have a 2V AC range are suitable. (See Fig. A)


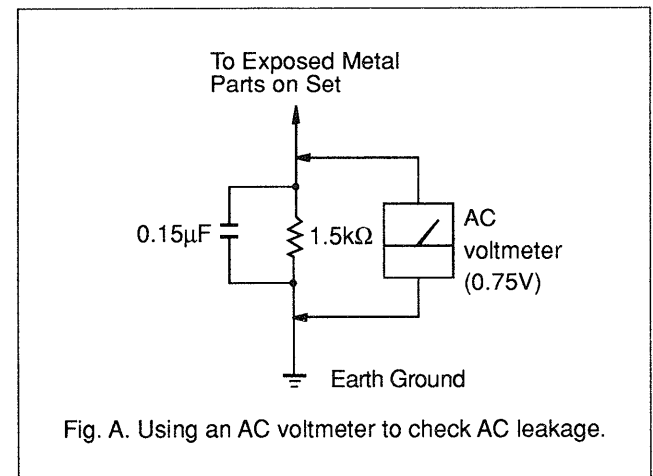


Fig. A. Using an AC voltmeter to check AC leakage.

SECTION 1 GENERAL


This section is extracted from instruction manual.

FRONT PANEL

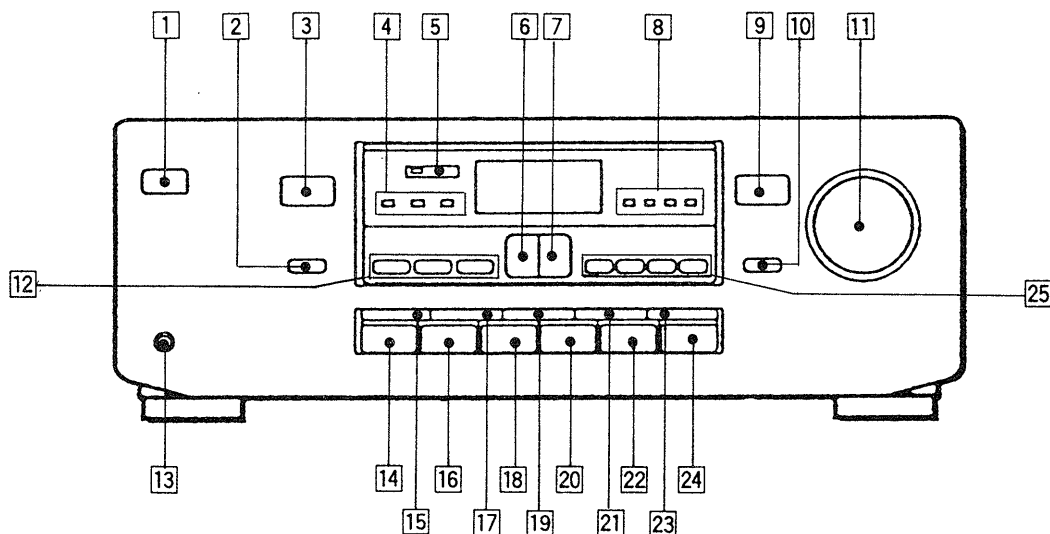

- | | |
|---|--|
| 1 POWER button (US, Canadian model)
POWER switch (Except US, Canadian model) | 13 HEADPHONES jack |
| 2 CENTER MODE button | 14 VIDEO 1 button |
| 3 DOLBY PRO LOGIC indicator | 15 1 ROCK button |
| 4 SURROUND indicators (DOLBY, HALL, SIMULATED) | 16 VIDEO 2 button |
| 5 STANDBY indicator (Except US, Canadian model) | 17 2 POPS button |
| 6 - button | 18 TAPE button |
| 7 +button | 19 3 CLASSIC button |
| 8 SOUND CONTROL indicators
(TONE, CENTER, REAR, WOOFER) | 20 CD button |
| 9 SUPER WOOFER indicator | 21 4 MOVIE button |
| 10 WOOFER ON/OFF button | 22 TUNER button |
| 11 MASTER VOLUME Knob | 23 5 GAME button |
| 12 SURROUND MODE buttons
(DOLBY, HALL, SIMULATED) | 24 PHONO button |
| | 25 CONTROL MODE button
(TONE, CENTER, REAR, WOOFER) |

REAR PANEL

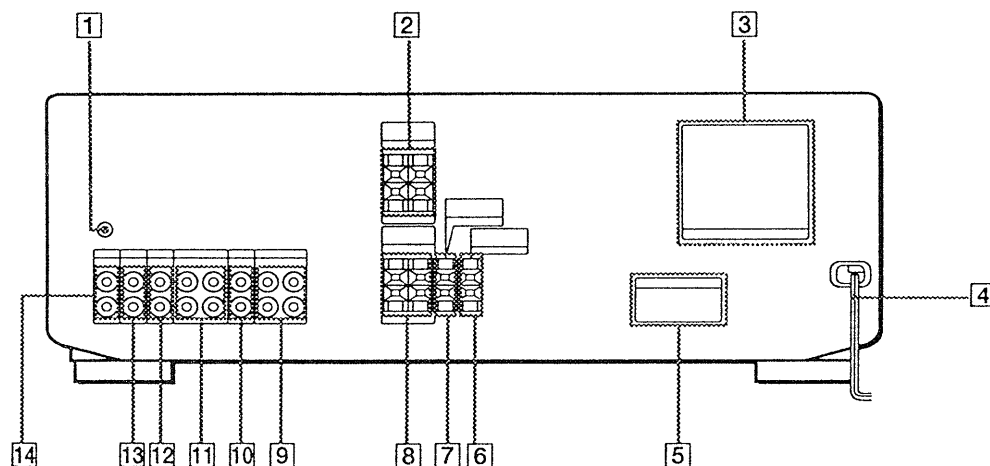


- | | | |
|--|------------------|----------|
| 1 $\varnothing$ ground terminal | 6 WOOFER SPEAKER | 11 TAPE |
| 2 REAR SPEAKERS | 7 CENTER SPEAKER | 12 CD |
| 3 SWITCHED AC OUTLET | 8 FRONT SPEAKERS | 13 TUNER |
| 4 Mains lead | 9 VIDEO 1 | 14 PHONO |
| 5 VOLTAGE SELECTOR
(E, Singapore, Australian model) | 10 VIDEO 2 | |


SECTION 2 DIAGRAMS

2-1. CIRCUIT BOARDS LOCATION


- Abbreviation
CND : Canadian model

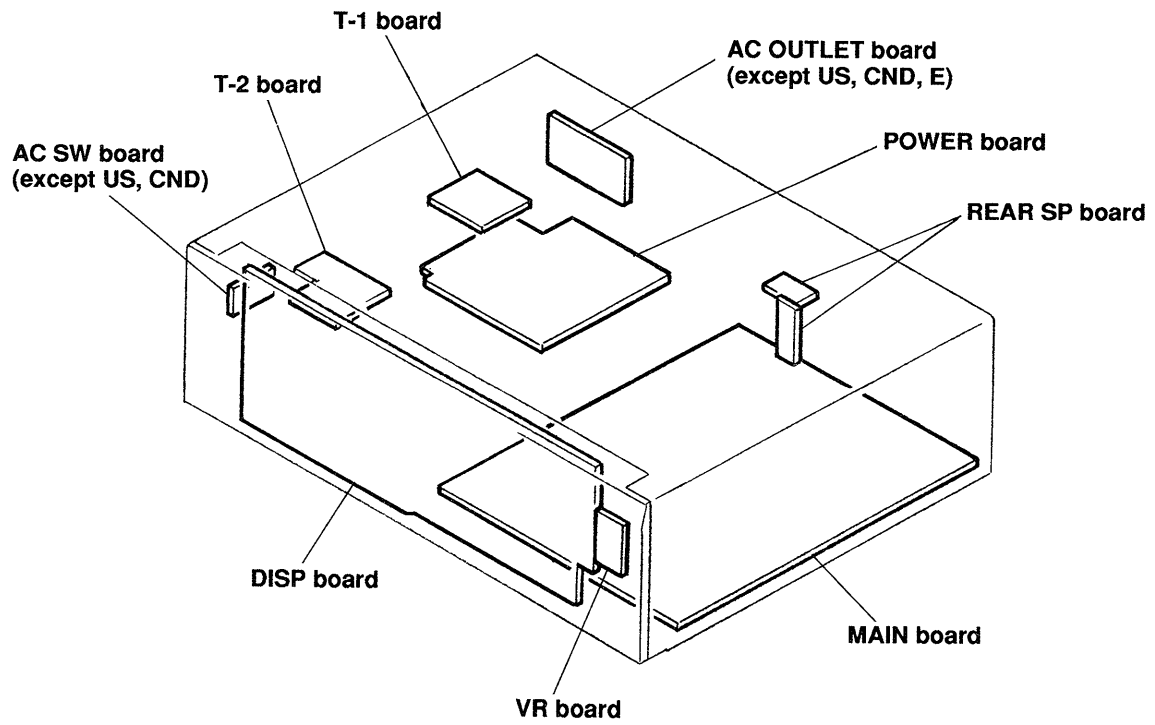

2-2. SCHEMATIC DIAGRAM — DISPLAY SECTION —
• See page 23 for IC Pin Function. (IC401)

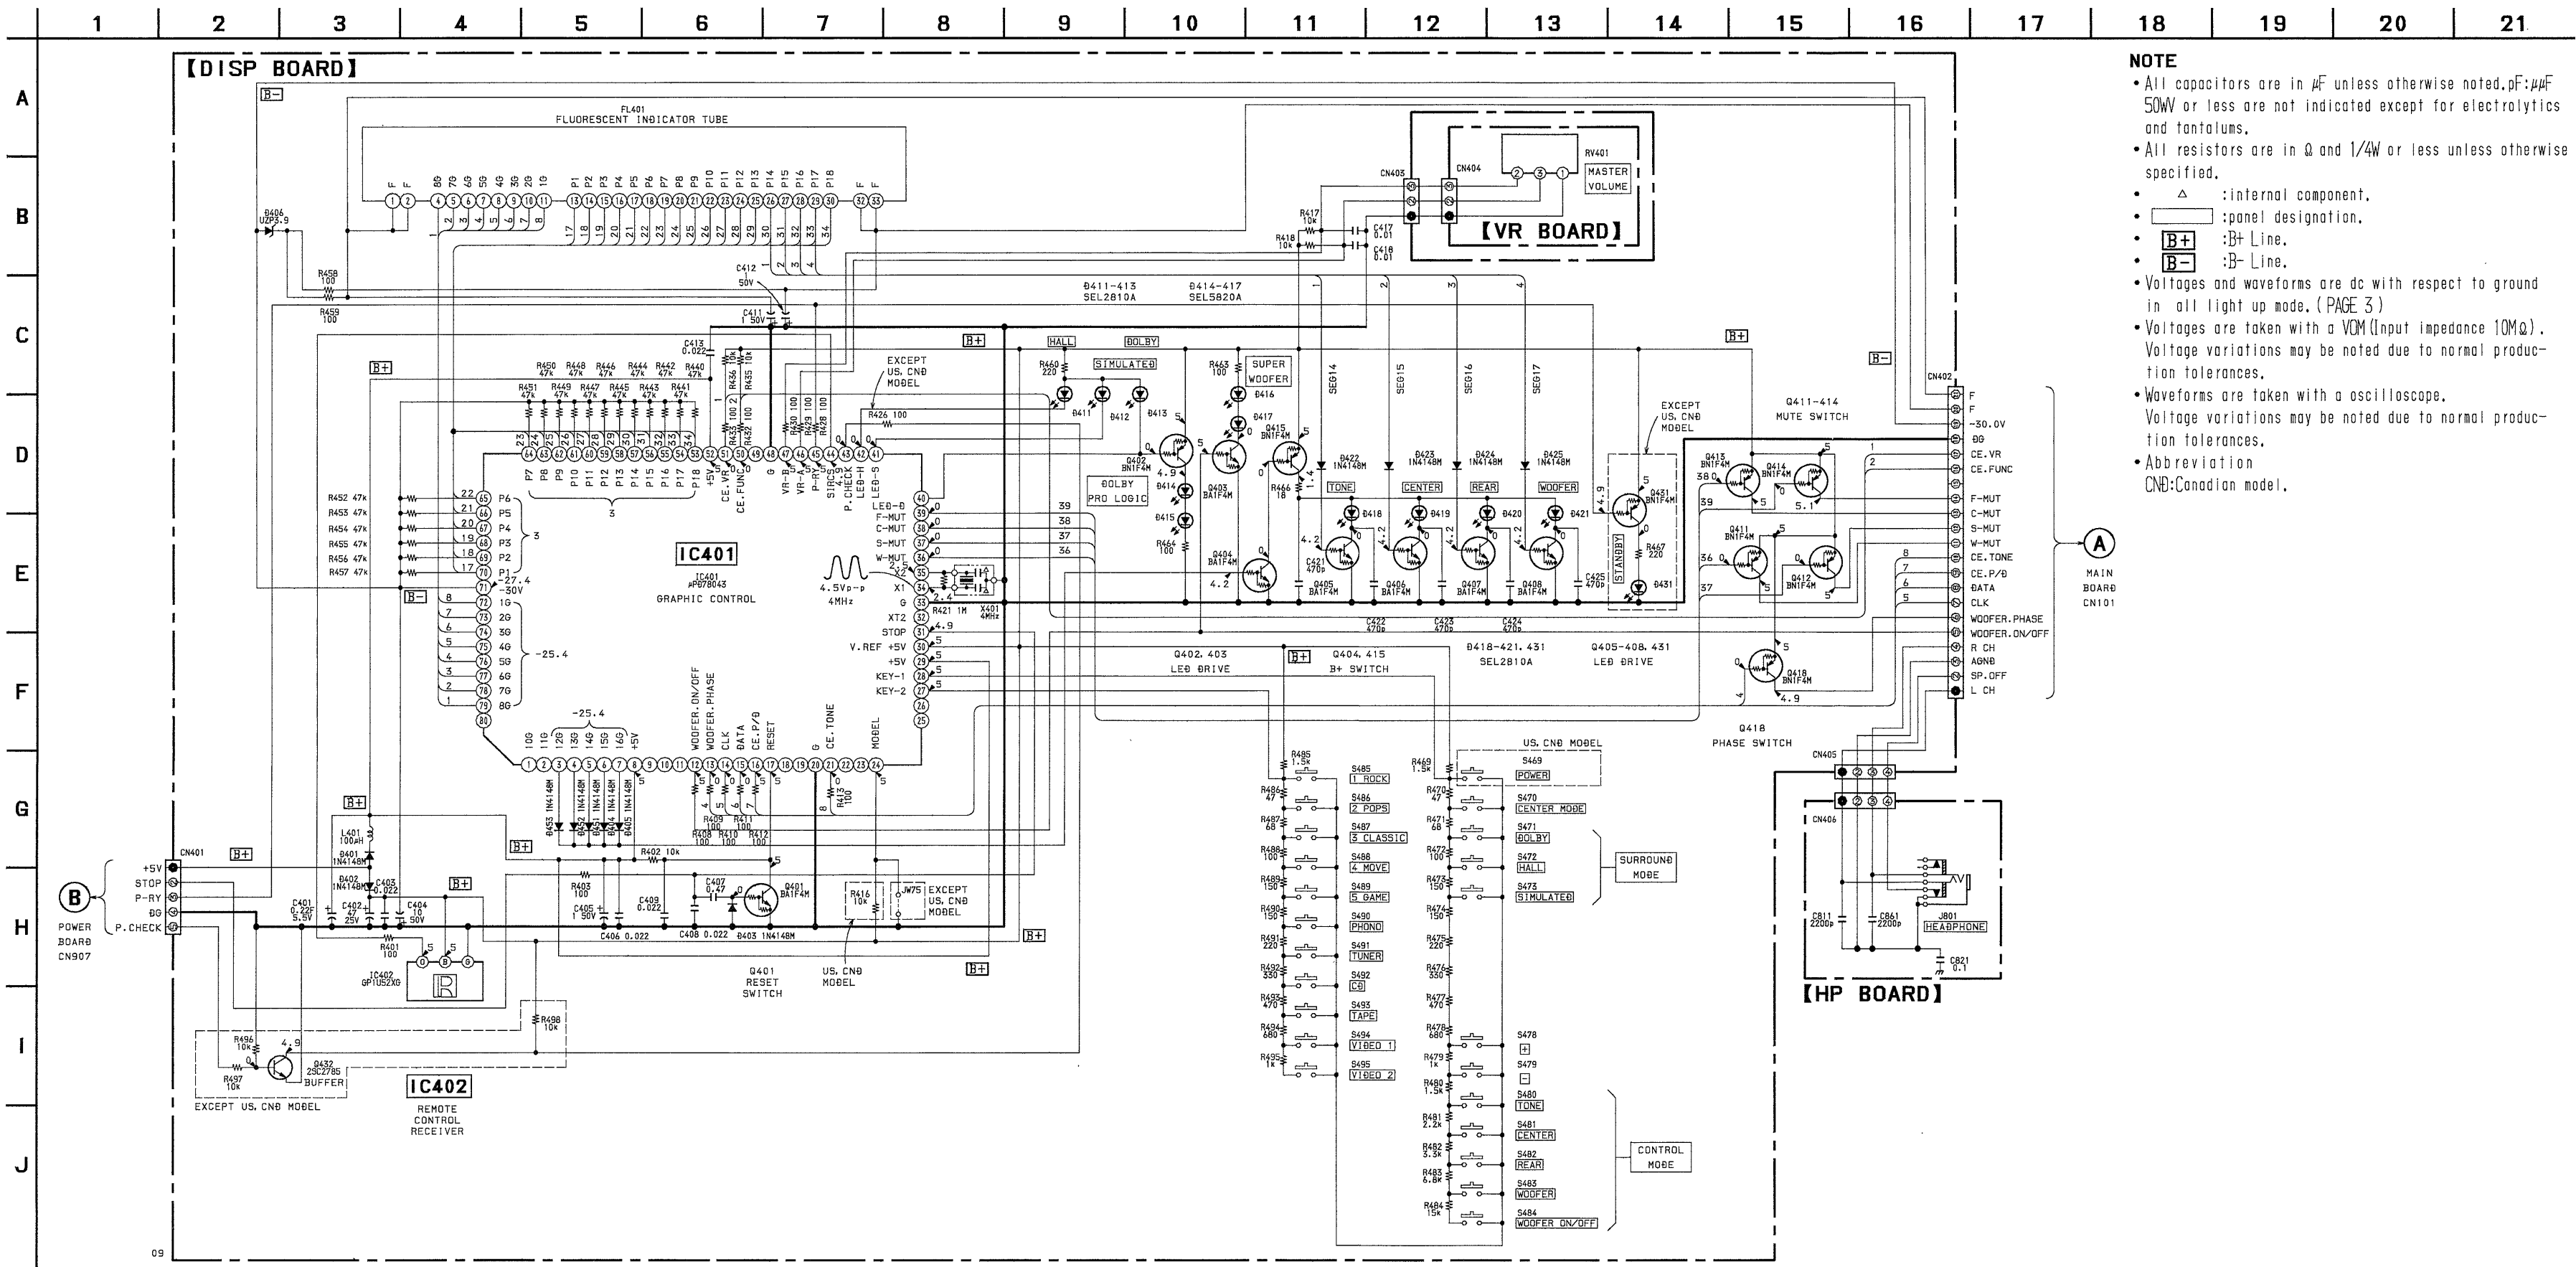

2-3. PRINTED WIRING BOARD — DISPLAY SECTION —
• See page 5 for Circuit Boards Location.

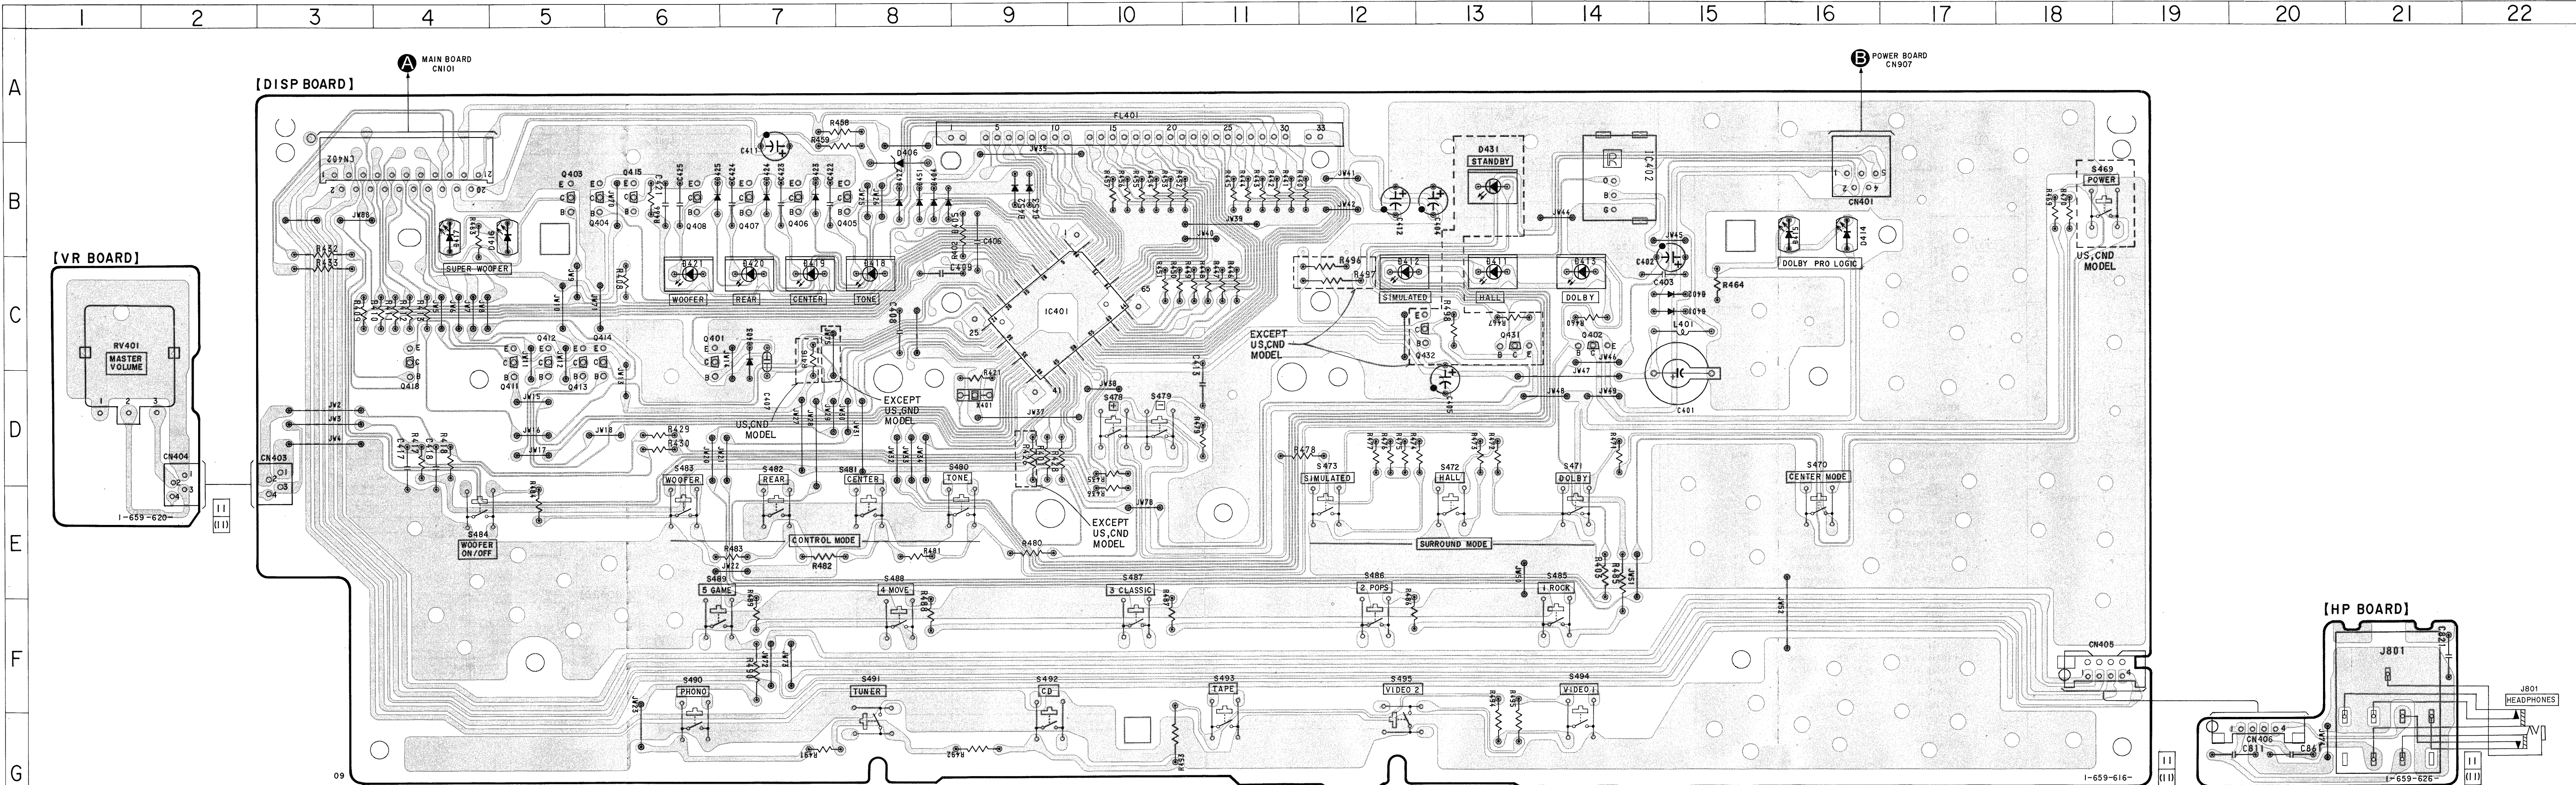


• Semiconductor Location

Ref. No.	Location
D401	C-15
D402	C-15
D403	C-7
D404	B-8
D405	B-8
D406	B-8
D411	C-13
D412	C-12
D413	C-14
D414	B-16
D415	B-16
D416	B-4
D417	B-4
D418	C-8
D419	C-7
D420	C-7
D421	C-6
D422	B-8
D423	B-7
D424	B-7
D425	B-6
D431	B-13
D451	B-8
D452	B-9
D453	B-9
IC401	C-9
IC402	B-14
Q401	C-6
Q402	C-14
Q403	B-5
Q404	B-5
Q405	B-8
Q406	B-7
Q407	B-7
Q408	B-6
Q411	D-5
Q412	C-5
Q413	D-5
Q414	C-5
Q415	B-6
Q418	D-4
Q431	C-13
Q432	C-13


Note:
• : parts extracted from the component side.
• : Pattern from the side which enable seeing.
• Abbreviation
CND : Canadian model.

• IC Block Diagrams


IC821 μ PC1237HA

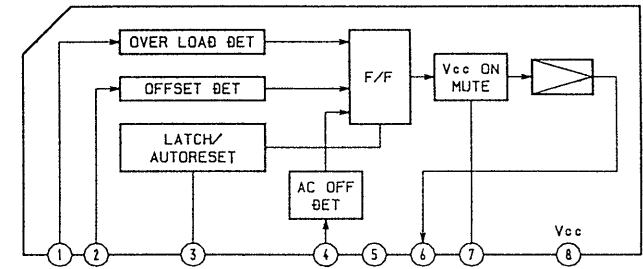


IC112, 113, 114 TC9210P

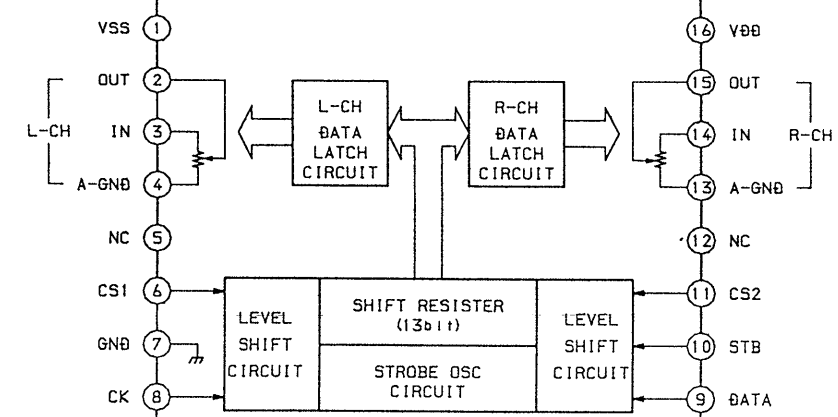


IC103 LA2785

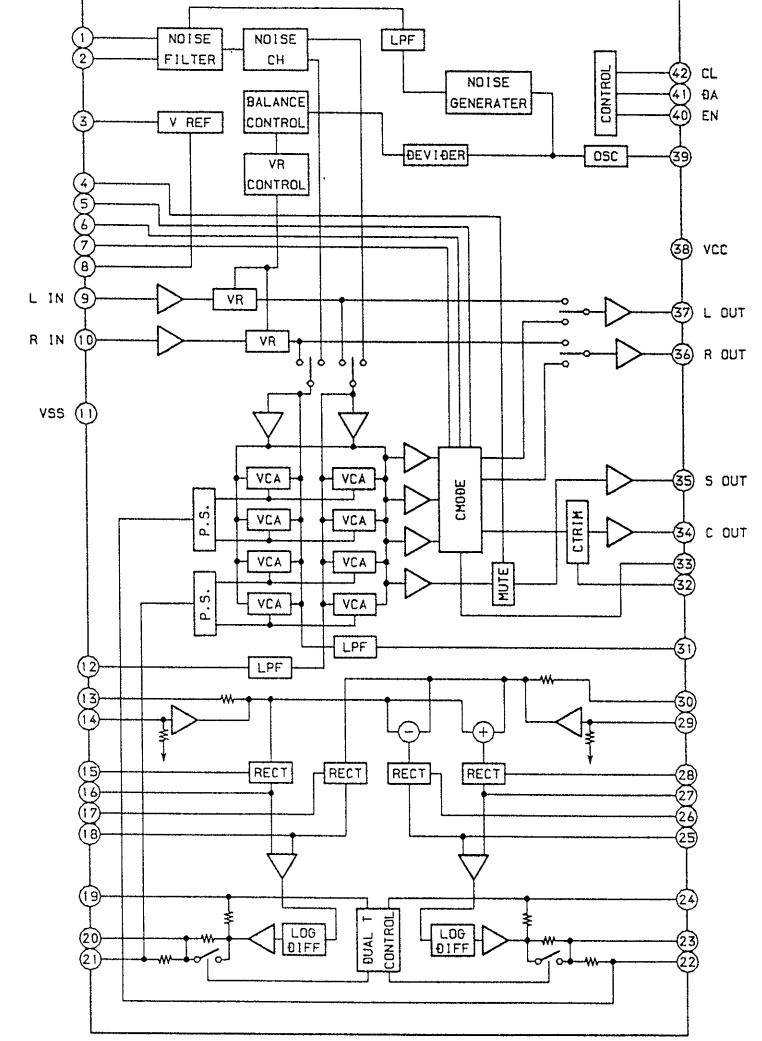


IC951 L78MR06

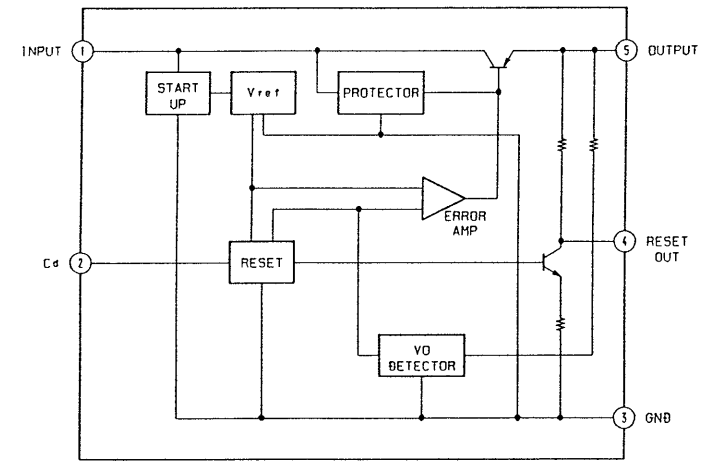


IC104 LV1010

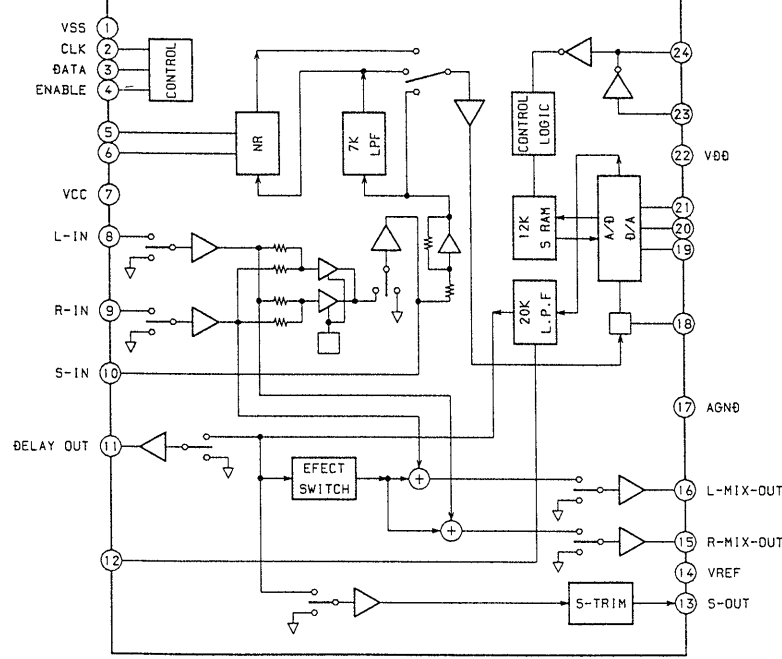


IC102 LC7822


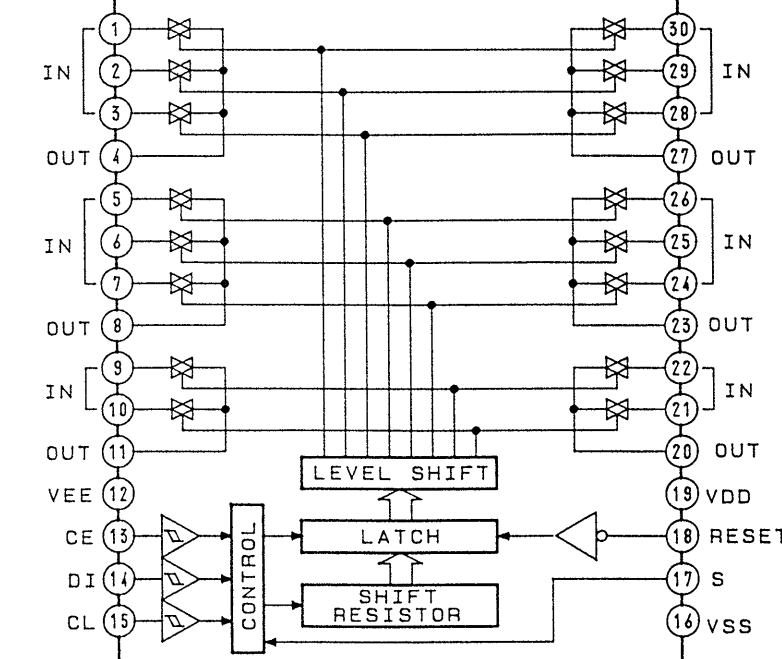


IC105 TC9184P

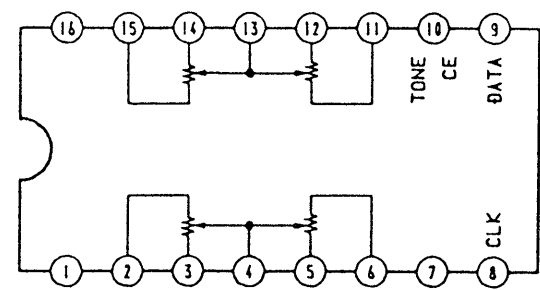

2-4. SCHEMATIC DIAGRAM — MAIN SECTION —

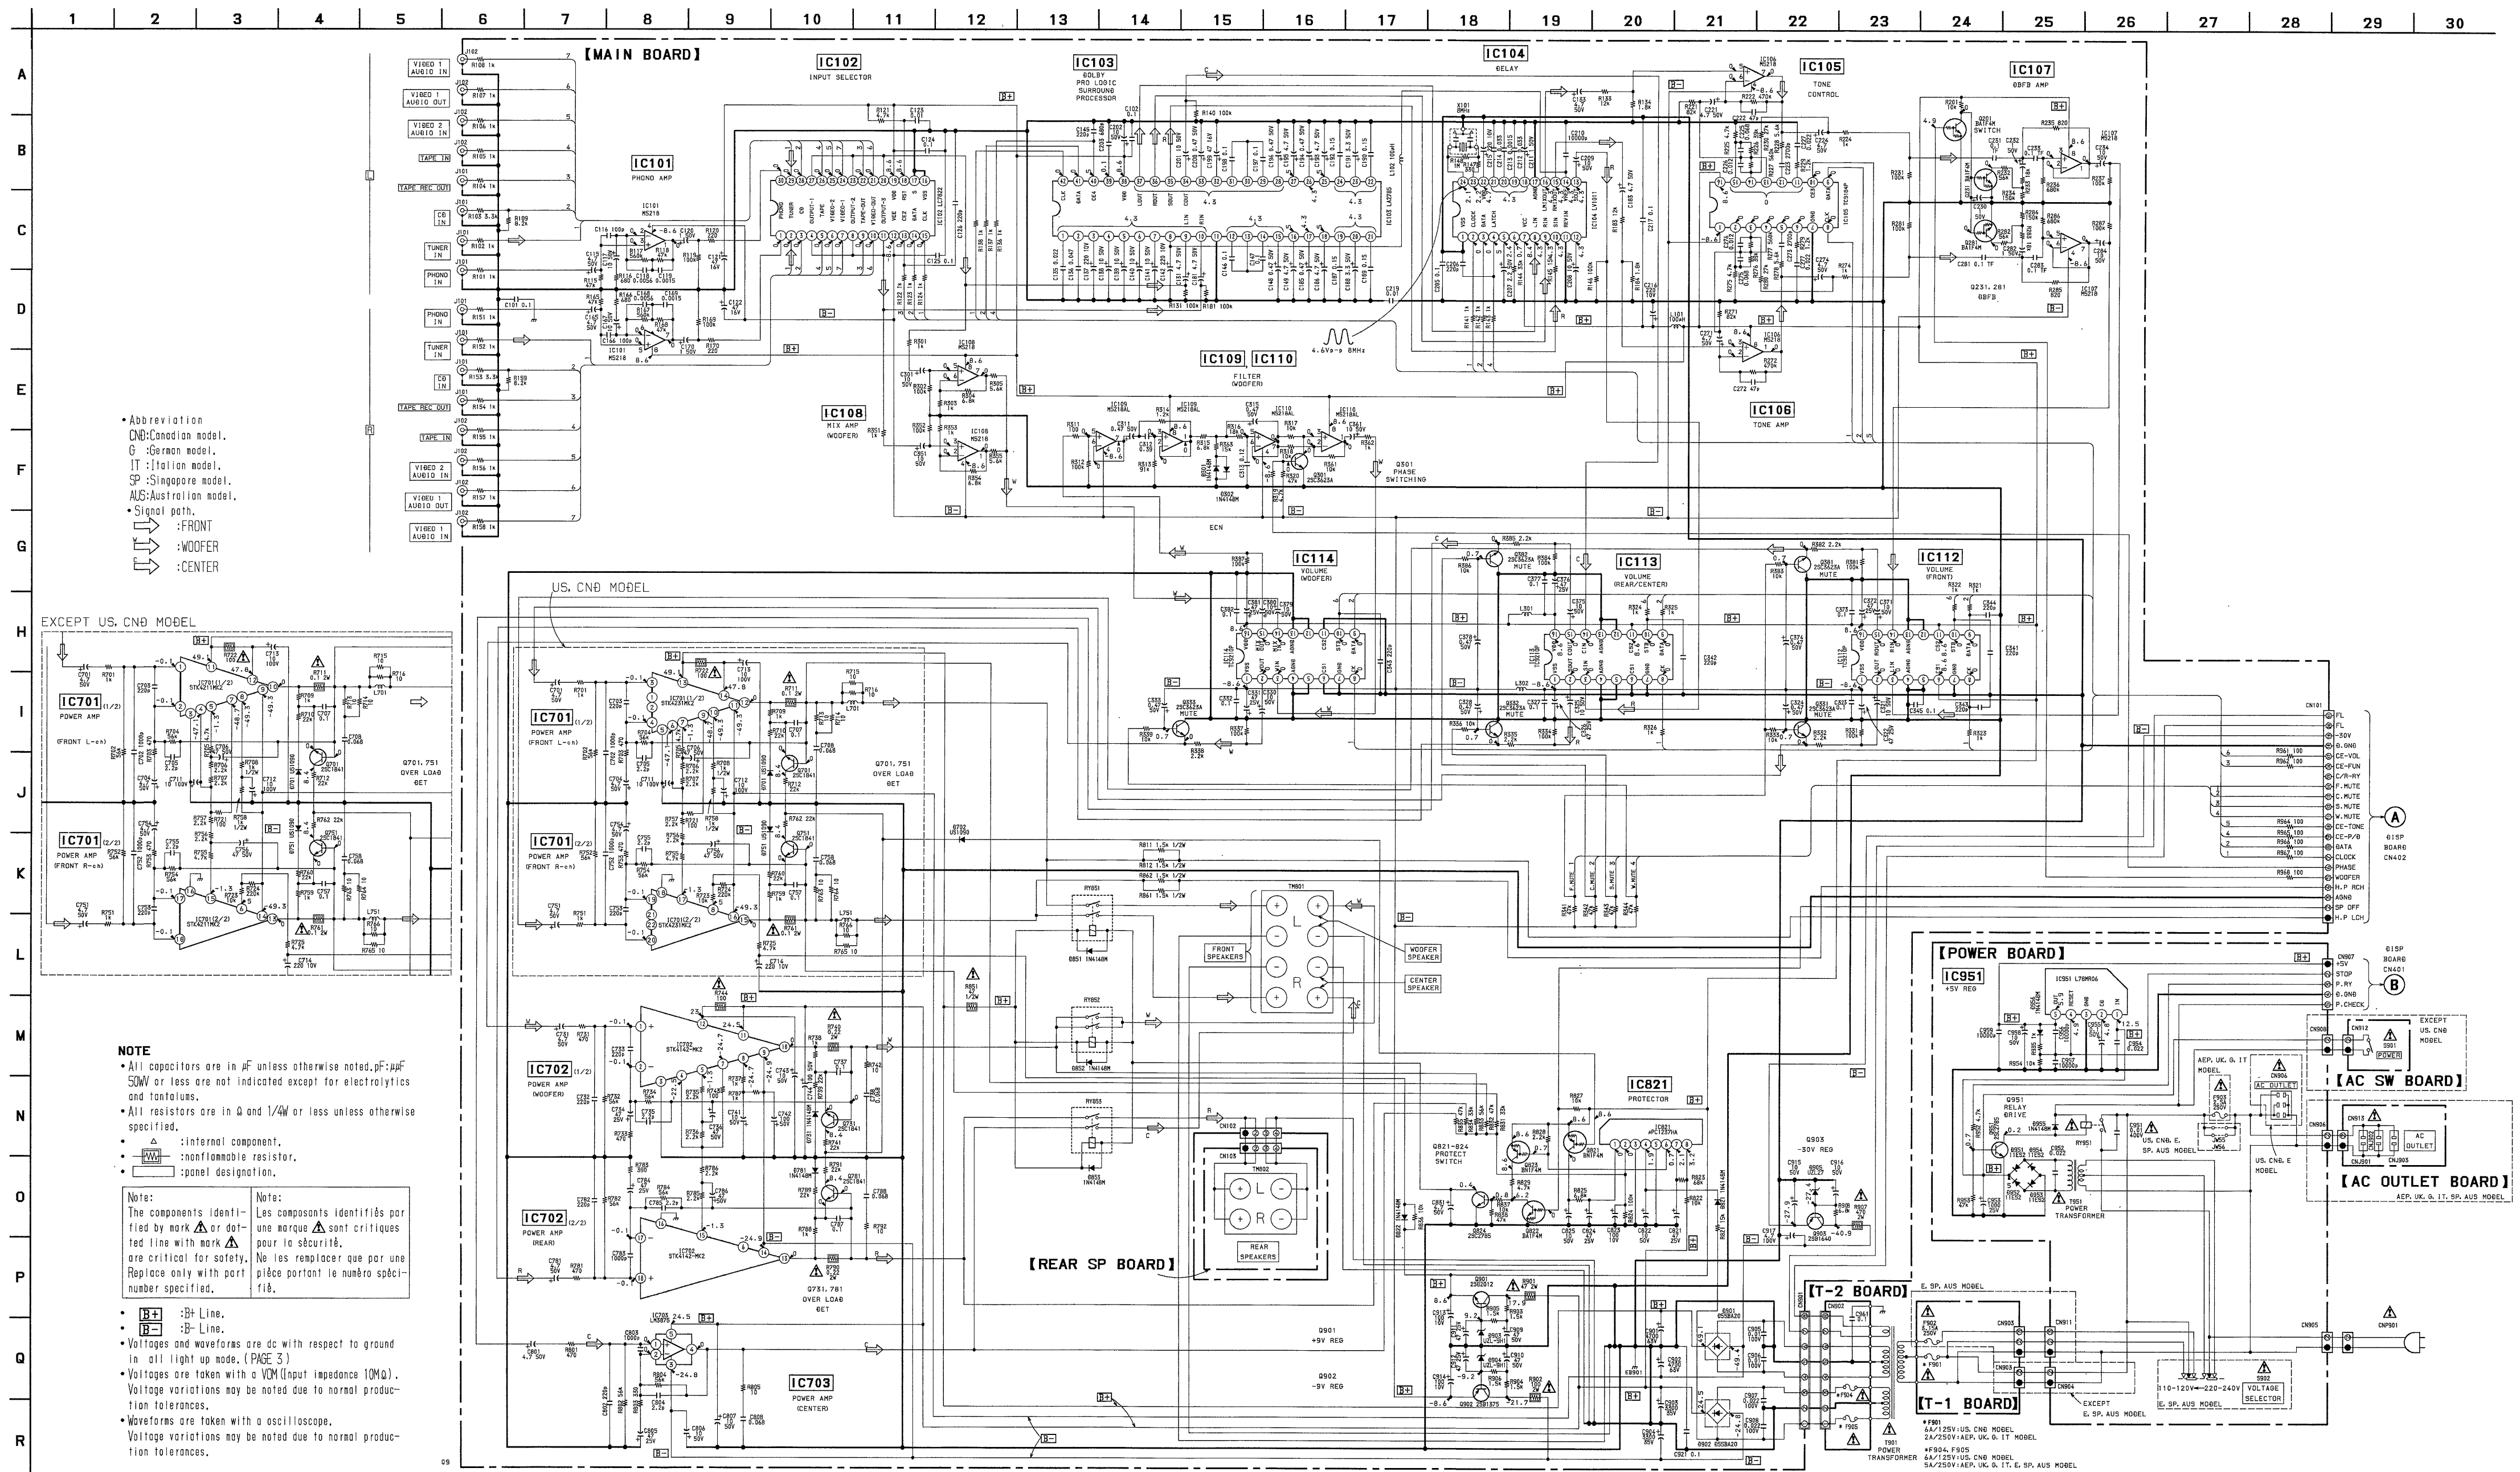



Note:

- : parts extracted from the component side.
- ▤ : Pattern from the side which enable seeing.
- Abbreviation
 - CND : Canadian model.
 - G : German model.
 - IT : Italian model.
 - SP : Singapore model.
 - AUS : Australian model.

2-6. IC PIN FUNCTION

• IC401 GRAPHIC CONTROL (μ PD78043) IC PIN FUNCTIONS

Pin No.	Pin Name	I/O	Function
1-7	10G-16G	O	FL grid signal output.
8	+5V	—	+5V
9-11	—	—	Not used.
12	WOOFER ON/OFF	O	Woofers ON/OFF signal output.
13	WOOFER PHASE	O	Woofers phase control signal output.
14	CLK	O	Serial clock output.
15	DATA	O	Serial data output.
16	CE. P/D	O	
17	RESET	I	Reset signal input.
18, 19	—	—	Not used.
20	G	—	Ground
21	CE. TONE	O	Chip enable signal output (for IC105).
22, 23	—	—	Not used.
24	MODEL	I	Destination detection setting input.
25, 26	—	—	Not used.
27, 28	KEY-1, KEY-2	I	Key matrix input.
29	+5V	—	+5V
30	VREF +5V	—	
31	STOP	I	Power ON reset input.
32	XT2	I	Not used.
33	G	—	Ground
34	X1	I	X'tal (5 MHz).
35	X2	O	
36	W-MUT	O	Mute control output.
37	S-MUT	O	
38	C-MUT	O	
39	F-MUT	O	
40	LED-D	O	LED drive signal output.
41	LED-S	O	
42	LED-H	O	
43	P CHECK	I	Power check signal input.
44	SIRCS	I	SIRCS signal input.
45	P-RY	O	LED drive signal output.
46, 47	VR-A, VR-B	I	Volume encoder signal input.
48	G	—	Ground
49	—	—	Not used.
50	CE FUNC	O	Chip enable signal output (for IC102).
51	CE VR	O	Chip enable signal output (for IC112-114).
52	+5V	—	+5V
53-70	P1-P18	O	FL segment signal output.
71	-30V	—	-30V for FL
72-79	1G-8G	O	FL segment signal output.
80	—	—	FL grid signal output.

• Abbreviation

FL : Fluorescent Indicator Tube

SECTION 3

EXPLODED VIEWS

NOTE:


- -XX, -X mean standardized parts, so they may have some difference from the original one.
- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- The mechanical parts with no reference number in the exploded views are not supplied.

- Hardware (# mark) list and accessories and packing materials are given in the last of this parts list.
- Abbreviation
 CND : Canadian model
 G : German model
 IT : Italian model
 SP : Singapore model
 AUS : Australian model

The components identified by mark Δ or dotted line with mark Δ are critical for safety.
 Replace only with part number specified.


Les composants identifiés par une marque Δ sont critiques pour la sécurité.
 Ne les remplacer que par une pièce portant le numéro spécifié.

3-1. FRONT PANEL SECTION

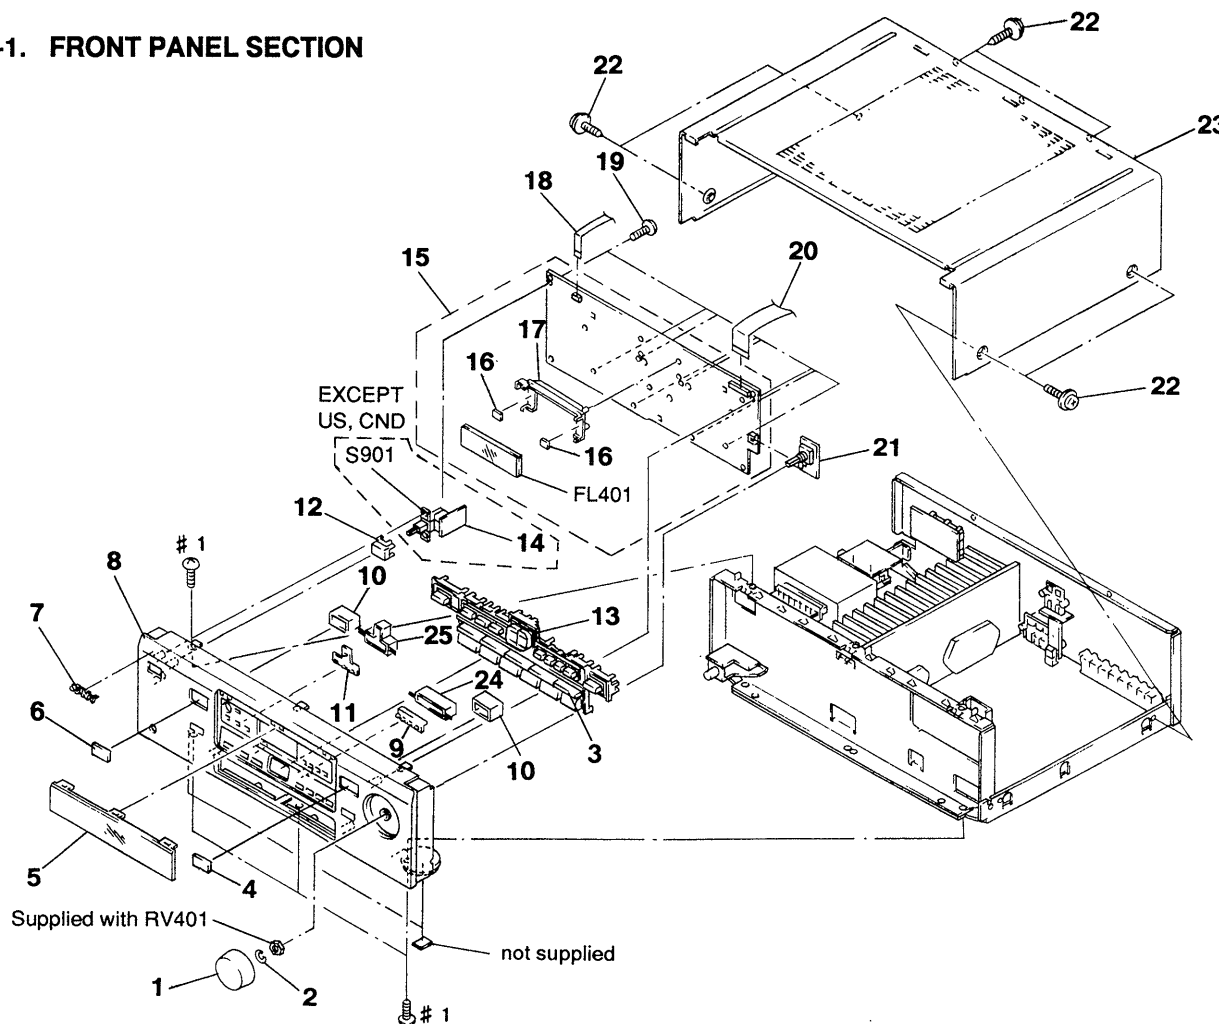

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
1	4-980-107-01	KNOB (VOL)		* 14	1-659-621-11	AC SW BOARD (EXCEPT US, CND)	
2	3-350-426-01	SPRING, RING		* 15	A-4389-267-A	DISP BOARD, COMPLETE (US, CND)	
3	4-979-941-01	BUTTON (SUR)		* 15	A-4389-275-A	DISP BOARD, COMPLETE (EXCEPT US, CND)	
4	4-979-937-11	FILTER		* 16	4-921-941-01	CUSHION (FL)	
5	4-979-942-01	WINDOW (US, CND)		* 17	4-979-943-01	HOLDER, FL TUBE	
5	4-979-942-11	WINDOW (AEP, UK, E, G, IT, SP, AUS)		18	1-769-867-11	WIRE (FLAT TYPE) (5 CORE)	
6	4-979-937-01	FILTER		19	4-951-620-01	SCREW (2. 6X8), +BVTP	
7	4-963-404-21	EMBLEM (5-A), SONY		20	1-773-154-11	WIRE (FLAT TYPE) (21 CORE)	
8	4-979-934-01	PANEL, FRONT		* 21	1-659-620-11	VR BOARD	
9	4-982-815-01	LENS (CON)		22	3-704-366-01	SCREW (CASE) (M3X8)	
* 10	4-982-462-01	HOUSE, LED		* 23	4-979-945-01	CASE (414532)	
11	4-982-814-01	LENS (SUR)		24	4-982-817-01	BOX (CON), LED	
12	4-979-936-01	BUTTON (P-T) (US, CND)		25	4-982-816-01	BOX (SUR), LED	
12	4-980-109-01	BUTTON (P-M) (AEP, UK, E, G, IT, SP, AUS)		FL401	1-517-512-11	INDICATOR TUBE, FLUORESCENT	
13	4-979-935-01	BUTTON (F-6)		Δ S901	1-572-267-51	SWITCH, PUSH (1 KEY) (POWER)	(EXCEPT US, CND)

3-2. BACK PANEL SECTION

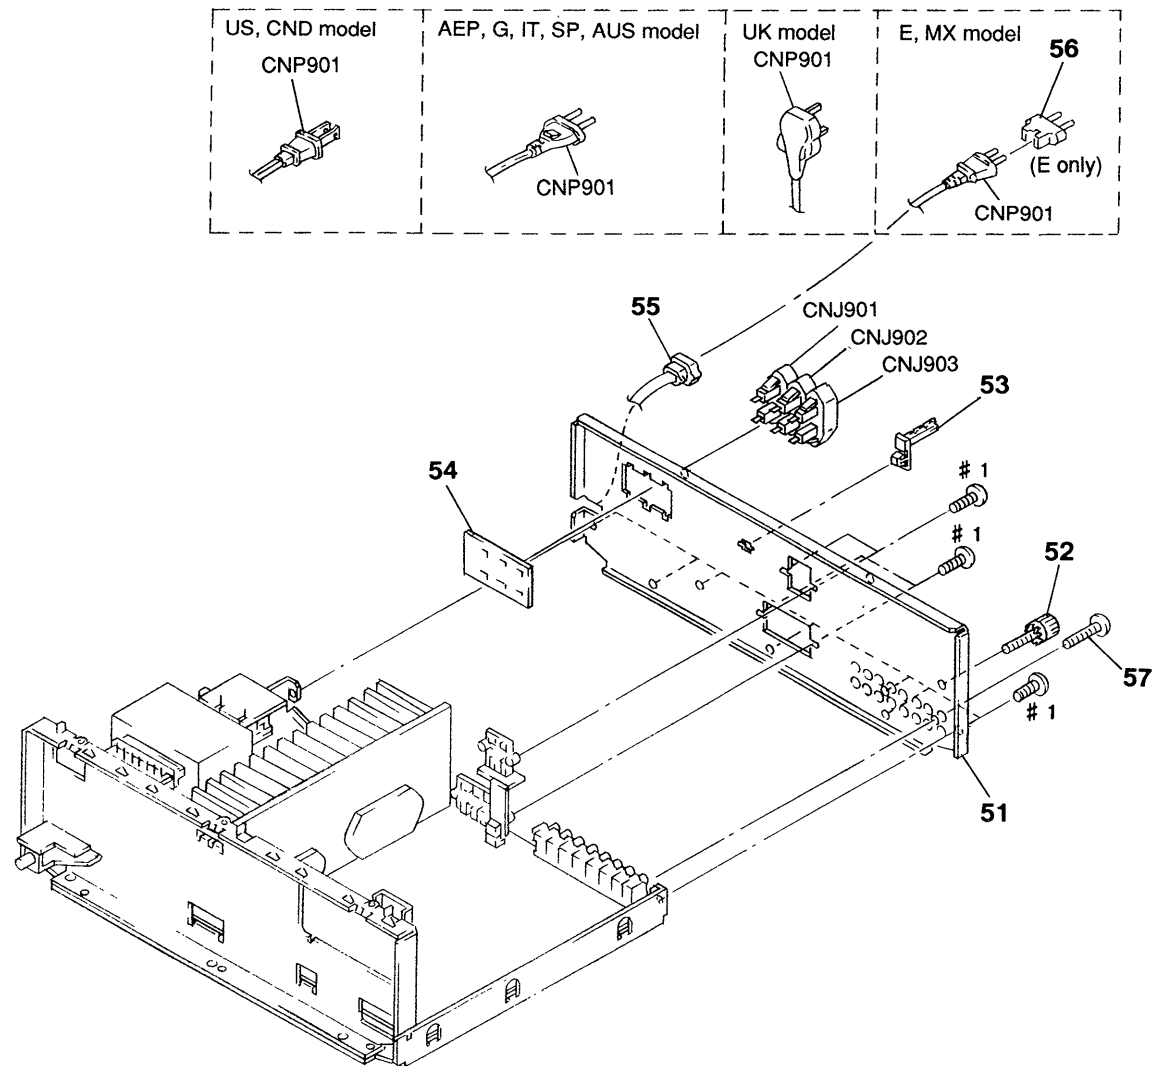


The components identified by mark  or dotted line with mark  are critical for safety.
Replace only with part number specified.

Les composants identifiés par une marque  sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
* 51	4-979-954-01	PANEL, BACK (US)		 56	1-569-007-11	ADAPTER, CONVERSION 2P (E)	
* 51	4-979-954-11	PANEL, BACK (CND)		57	3-704-515-01	SCREW (BV/RING)	
* 51	4-979-954-21	PANEL, BACK (AEP, G, IT)		 CNJ901	1-526-794-11	OUTLET, AC (AC OUTLET)	(AEP, UK, G, IT, SP, AUS)
* 51	4-979-954-31	PANEL, BACK (UK)					
* 51	4-979-954-41	PANEL, BACK (E)		 CNJ902	1-526-794-11	OUTLET, AC (AC OUTLET)	(AEP, UK, G, IT, SP, AUS)
* 51	4-979-954-61	PANEL, BACK (SP)		 CNJ903	1-526-794-11	OUTLET, AC (AC OUTLET)	(AEP, UK, G, IT, SP, AUS)
* 51	4-979-954-71	PANEL, BACK (AUS)		 CNP901	1-575-651-11	CORD, POWER (AEP, G, IT, SP)	
52	4-947-010-01	SCREW, FEEDER FIXED		 CNP901	1-575-653-11	CORD, POWER (E)	
* 53	4-956-370-12	BAND, PLUG FIXED (UK, AUS)		 CNP901	1-690-608-11	CORD, POWER (AUS)	
* 54	1-660-078-11	AC OUTLET BOARD (AEP, UK, G, IT, SP, AUS)		 CNP901	1-690-609-21	CORD, POWER (US, CND)	
* 55	3-703-244-00	BUSHING (2104), CORD		 CNP901	1-751-520-21	CORD, POWER (UK)	
55	3-703-571-11	BUSHING (S) (4516), CORD (E)					

3-3. CHASSIS SECTION

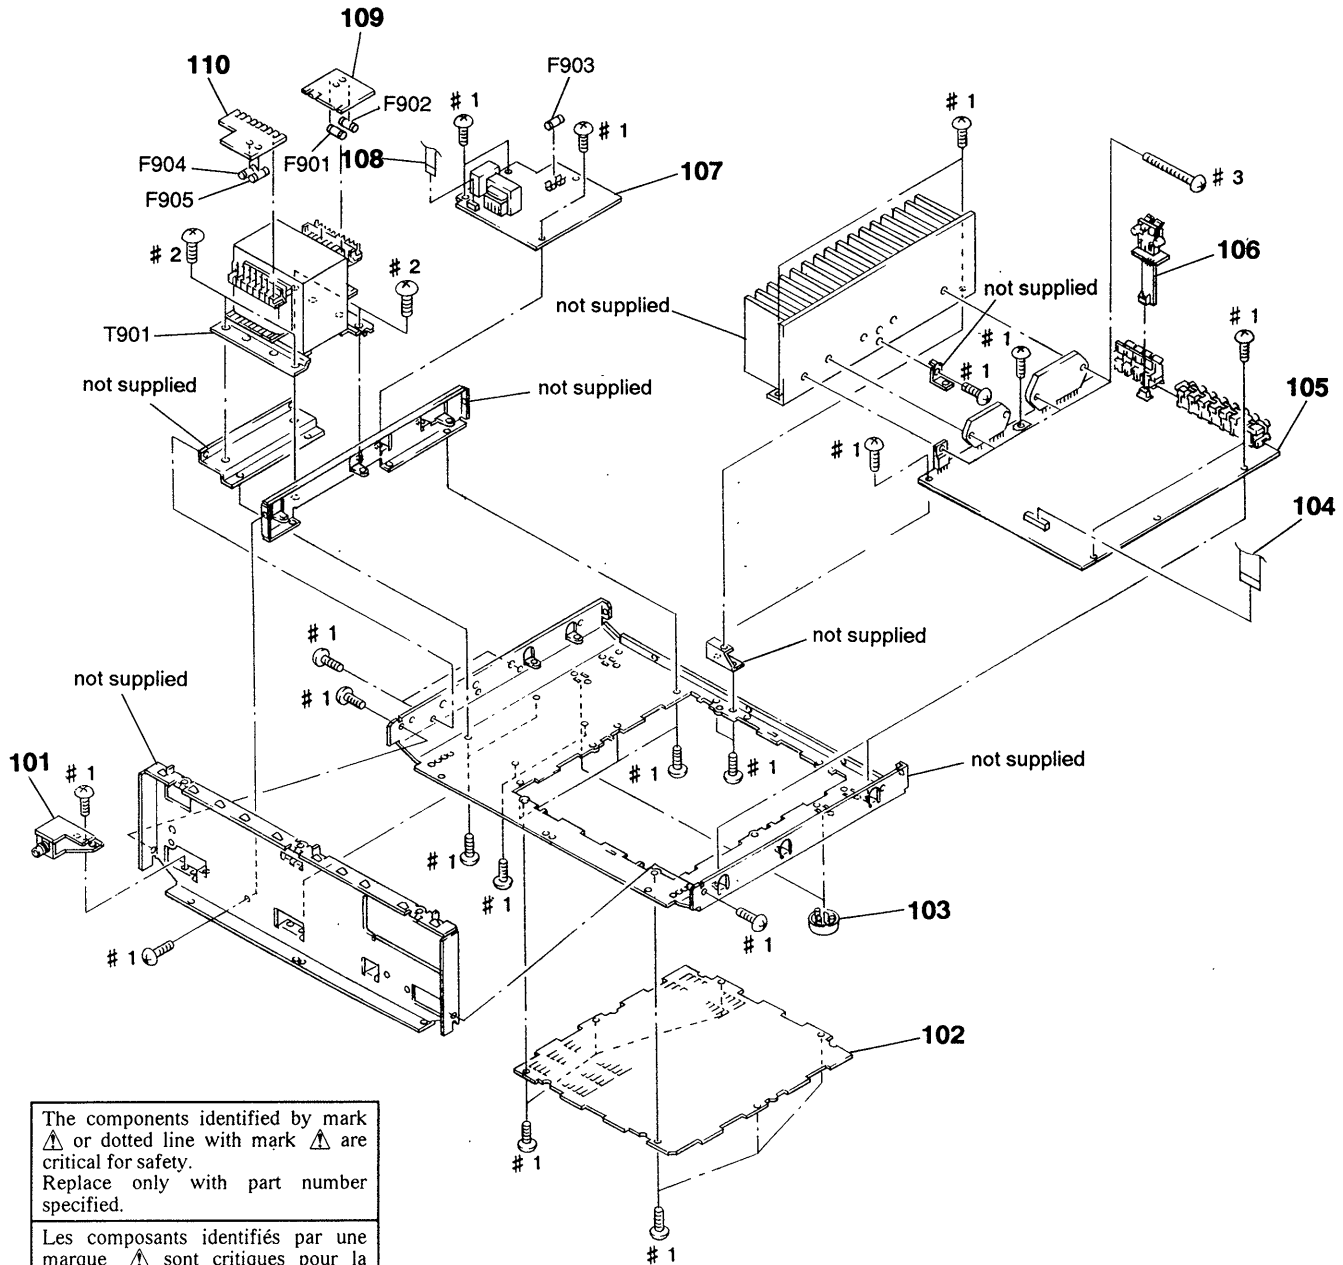

Ref. No.	Part No.	Description
* 101	1-659-626-11	HP BOARD
* 102	4-979-946-01	PLATE, BOTTOM
103	X-3371-405-1	FOOT (SMALL) ASSY
104	1-773-154-11	WIRE (FLAT TYPE) (21 CORE)
* 105	A-4389-265-A	MAIN BOARD, COMPLETE (US, CND)
* 105	A-4389-273-A	MAIN BOARD, COMPLETE (AEP, UK, E, G, IT, SP, AUS)
* 106	1-659-604-11	REAR SP BOARD
* 107	1-659-617-11	POWER BOARD
108	1-769-867-11	WIRE (FLAT TYPE) (5 CORE)
* 109	1-659-618-11	T-1 BOARD
* 110	1-659-619-11	T-2 BOARD
$\triangle$ F901	1-532-203-00	FUSE, TIME LAG (2A/250V) (AEP, UK, G, IT)
$\triangle$ F901	1-576-110-11	FUSE (6A/125V) (US, CND)

Ref. No.	Part No.	Description	Remark
$\triangle$ F902	1-532-237-00	FUSE, TIME LAG (3.15A/250V) (E, SP, AUS)	
$\triangle$ F903	1-532-286-00	FUSE, TIME LAG (2.5A/250V) (AEP, UK, G, IT, SP, AUS)	
$\triangle$ F904	1-532-299-00	FUSE, TIME LAG (5A/250V) (AEP, UK, G, IT, E, SP, AUS)	
$\triangle$ F904	1-576-110-11	FUSE (6A/125V) (US, CND)	
$\triangle$ F905	1-532-299-00	FUSE, TIME LAG (5A/250V) (AEP, UK, G, IT, E, SP, AUS)	
$\triangle$ F905	1-576-110-11	FUSE (6A/125V) (US, CND)	
$\triangle$ T901	1-429-455-11	TRANSFORMER, POWER (US)	
$\triangle$ T901	1-429-456-11	TRANSFORMER, POWER (AEP, UK, G, IT, SP, AUS)	
$\triangle$ T901	1-429-457-11	TRANSFORMER, POWER (E)	
$\triangle$ T901	1-429-572-11	TRANSFORMER, POWER (CND)	

SECTION 4

ELECTRICAL PARTS LIST

AC OUTLET

AC SW

DISP

NOTE:

The components identified by mark Δ or dotted line with mark Δ are critical for safety. Replace only with part number specified.

Les composants identifiés par une marque Δ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

When indicating parts by reference number, please include the board name.

- Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.
- -XX, -X mean standardized parts, so they may have some difference from the original one.
- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- RESISTORS
All resistors are in ohms
METAL: Metal-film resistor
METAL OXIDE: Metal Oxide-film resistor
F : nonflammable

- SEMICONDUCTORS
In each case, u: μ , for example:
uA...: μ A..., uPA...: μ PA..., uPB...: μ PB...,
uPC...: μ PC..., uPD...: μ PD...
- CAPACITORS
uF : μ F
- COILS
uH : μ H
- Abbreviation
CND : Canadian model
G : German model
IT : Italian model
SP : Singapore model
AUS : Australian model

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
*	1-660-078-11	AC OUTLET BOARD (AEP, UK, G, IT, SP, AUS)		C411	1-124-903-11	ELECT	1uF 20% 50V
		*****		C412	1-124-903-11	ELECT	1uF 20% 50V
		< CONNECTOR >		C413	1-161-494-00	CERAMIC	0.022uF 25V
Δ CNJ901	1-526-794-11	OUTLET, AC (AC OUTLET)		C417	1-162-306-11	CERAMIC	0.01uF 30% 16V
		(AEP, UK, G, IT, SP, AUS)		C418	1-162-306-11	CERAMIC	0.01uF 30% 16V
Δ CNJ902	1-526-794-11	OUTLET, AC (AC OUTLET)		C421	1-162-290-31	CERAMIC	470PF 10% 50V
		(AEP, UK, G, IT, SP, AUS)		C422	1-162-290-31	CERAMIC	470PF 10% 50V
Δ CNJ903	1-526-794-11	OUTLET, AC (AC OUTLET)		C423	1-162-290-31	CERAMIC	470PF 10% 50V
		(AEP, UK, G, IT, SP, AUS)		C424	1-162-290-31	CERAMIC	470PF 10% 50V
		*****		C425	1-162-290-31	CERAMIC	470PF 10% 50V
		< CONNECTOR >					
*	1-659-621-11	AC SW BOARD (EXCEPT US, CND)		* CN401	1-568-848-11	SOCKET, CONNECTOR 5P	
		*****		* CN402	1-568-864-11	SOCKET, CONNECTOR 21P	
		< CONNECTOR >		CN403	1-750-194-11	CONNECTOR, BOARD TO BOARD 4P	
* CN912	1-568-951-11	PIN, CONNECTOR 2P (EXCEPT US, CND)		CN405	1-770-397-11	HOUSING, CONNECTOR(PC BOARD) 4P	
		< SWITCH >					
Δ S901	1-572-267-51	SWITCH, PUSH (1 KEY) (POWER)		D401	8-719-987-63	DIODE	1N4148M
		(EXCEPT US, CND)		D402	8-719-987-63	DIODE	1N4148M
		*****		D403	8-719-987-63	DIODE	1N4148M
				D404	8-719-987-63	DIODE	1N4148M
				D405	8-719-987-63	DIODE	1N4148M
*	A-4389-267-A	DISP BOARD, COMPLETE (US, CND)		D406	8-719-014-34	DIODE	UZP-3.9BA
		*****		D411	8-719-301-49	DIODE	SEL2810A (HALL)
*	A-4389-275-A	DISP BOARD, COMPLETE (EXCEPT US, CND)		D412	8-719-301-49	DIODE	SEL2810A (SIMULATED)
		*****		D413	8-719-301-49	DIODE	SEL2810A (DOLBY)
				D414	8-719-032-98	DIODE	SEL5820A (DOLBY PRO LOGIC)
*	4-921-941-01	CUSHION (FL)		D415	8-719-032-98	DIODE	SEL5820A (DOLBY PRO LOGIC)
*	4-979-943-01	HOLDER, FL TUBE		D416	8-719-032-98	DIODE	SEL5820A (SUPER WOOFER)
		< CAPACITOR >		D417	8-719-032-98	DIODE	SEL5820A (SUPER WOOFER)
				D418	8-719-301-49	DIODE	SEL2810A (TONE)
				D419	8-719-301-49	DIODE	SEL2810A (CENTER)
C401	1-125-486-11	DOUBLE LAYERS	0.22F 5.5V	D420	8-719-301-49	DIODE	SEL2810A (REAR)
C402	1-104-664-11	ELECT	47uF 20% 25V	D421	8-719-301-49	DIODE	SEL2810A (WOOFER)
C403	1-161-494-00	CERAMIC	0.022uF 25V	D422	8-719-987-63	DIODE	1N4148M
C404	1-126-964-11	ELECT	10uF 20% 50V	D423	8-719-987-63	DIODE	1N4148M
C405	1-124-903-11	ELECT	1uF 20% 50V	D424	8-719-987-63	DIODE	1N4148M
C406	1-161-494-00	CERAMIC	0.022uF 25V	D425	8-719-987-63	DIODE	1N4148M
C407	1-136-173-00	FILM	0.47uF 5% 50V	D431	8-719-301-49	DIODE	SEL2810A (STANDBY)
C408	1-161-494-00	CERAMIC	0.022uF 25V				(EXCEPT US, CND)
C409	1-161-494-00	CERAMIC	0.022uF 25V				

DISP

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
D451	8-719-987-63	DIODE 1N4148M		R429	1-247-807-31	CARBON 100 5% 1/4W	
D452	8-719-987-63	DIODE 1N4148M		R430	1-247-807-31	CARBON 100 5% 1/4W	
D453	8-719-987-63	DIODE 1N4148M		R432	1-247-807-31	CARBON 100 5% 1/4W	
< FLUORESCENT INDIATOR >				R433	1-247-807-31	CARBON 100 5% 1/4W	
FL401	1-517-512-11	INDICATOR TUBE, FLUORESCENT		R435	1-249-429-11	CARBON 10K 5% 1/4W	
< IC >				R436	1-249-429-11	CARBON 10K 5% 1/4W	
IC401	8-759-366-87	IC uPD78043AGF-033-3B9		R440	1-249-437-11	CARBON 47K 5% 1/4W	
IC402	8-749-920-83	IC GP1U52XB		R441	1-249-437-11	CARBON 47K 5% 1/4W	
< COIL >				R442	1-249-437-11	CARBON 47K 5% 1/4W	
L401	1-410-521-11	INDUCTOR 100uH		R443	1-249-437-11	CARBON 47K 5% 1/4W	
< TRANSISTOR >				R444	1-249-437-11	CARBON 47K 5% 1/4W	
Q401	8-729-900-36	TRANSISTOR DTC124ES		R445	1-249-437-11	CARBON 47K 5% 1/4W	
Q402	8-729-900-63	TRANSISTOR DTA124ES		R446	1-249-437-11	CARBON 47K 5% 1/4W	
Q403	8-729-900-36	TRANSISTOR DTC124ES		R447	1-249-437-11	CARBON 47K 5% 1/4W	
Q404	8-729-900-36	TRANSISTOR DTC124ES		R448	1-249-437-11	CARBON 47K 5% 1/4W	
Q405	8-729-900-36	TRANSISTOR DTC124ES		R449	1-249-437-11	CARBON 47K 5% 1/4W	
Q406	8-729-900-36	TRANSISTOR DTC124ES		R450	1-249-437-11	CARBON 47K 5% 1/4W	
Q407	8-729-900-36	TRANSISTOR DTC124ES		R451	1-249-437-11	CARBON 47K 5% 1/4W	
Q408	8-729-900-36	TRANSISTOR DTC124ES		R452	1-249-437-11	CARBON 47K 5% 1/4W	
Q411	8-729-900-63	TRANSISTOR DTA124ES		R453	1-249-437-11	CARBON 47K 5% 1/4W	
Q412	8-729-900-63	TRANSISTOR DTA124ES		R454	1-249-437-11	CARBON 47K 5% 1/4W	
Q413	8-729-900-63	TRANSISTOR DTA124ES		R455	1-249-437-11	CARBON 47K 5% 1/4W	
Q414	8-729-900-63	TRANSISTOR DTA124ES		R456	1-249-437-11	CARBON 47K 5% 1/4W	
Q415	8-729-900-63	TRANSISTOR DTA124ES		R457	1-249-437-11	CARBON 47K 5% 1/4W	
Q418	8-729-900-36	TRANSISTOR DTC124ES		R458	1-247-807-31	CARBON 100 5% 1/4W	
Q431	8-729-900-63	TRANSISTOR DTA124ES (EXCEPT US, CND)		R459	1-247-807-31	CARBON 100 5% 1/4W	
Q432	8-729-119-79	TRANSISTOR 2SC2785-FEK (EXCEPT US, CND)		R460	1-249-409-11	CARBON 220 5% 1/4W F	
< RESISTOR >				R463	1-247-807-31	CARBON 100 5% 1/4W	
R401	1-247-807-31	CARBON 100 5% 1/4W		R464	1-247-807-31	CARBON 100 5% 1/4W	
R402	1-249-429-11	CARBON 10K 5% 1/4W		R466	1-249-396-11	CARBON 18 5% 1/4W F	
R403	1-247-807-31	CARBON 100 5% 1/4W		R467	1-249-409-11	CARBON 220 5% 1/4W F	(EXCEPT US, CND)
R408	1-247-807-31	CARBON 100 5% 1/4W		R469	1-249-419-11	CARBON 1.5K 5% 1/4W F	
R409	1-247-807-31	CARBON 100 5% 1/4W		R470	1-249-401-11	CARBON 47 5% 1/4W F	
R410	1-247-807-31	CARBON 100 5% 1/4W		R471	1-249-403-11	CARBON 68 5% 1/4W F	
R411	1-247-807-31	CARBON 100 5% 1/4W		R472	1-247-807-31	CARBON 100 5% 1/4W	
R412	1-247-807-31	CARBON 100 5% 1/4W		R473	1-249-407-11	CARBON 150 5% 1/4W F	
R413	1-247-807-31	CARBON 100 5% 1/4W		R474	1-249-407-11	CARBON 150 5% 1/4W F	
R416	1-249-429-11	CARBON 10K 5% 1/4W (US, CND)		R475	1-249-409-11	CARBON 220 5% 1/4W F	
R417	1-249-429-11	CARBON 10K 5% 1/4W		R476	1-249-411-11	CARBON 330 5% 1/4W	
R418	1-249-429-11	CARBON 10K 5% 1/4W		R477	1-249-413-11	CARBON 470 5% 1/4W F	
R421	1-247-903-00	CARBON 1M 5% 1/4W		R478	1-249-415-11	CARBON 680 5% 1/4W F	
R426	1-247-807-31	CARBON 100 5% 1/4W		R479	1-249-417-11	CARBON 1K 5% 1/4W F	
(EXCEPT US, CND)				R480	1-249-419-11	CARBON 1.5K 5% 1/4W F	
R428	1-247-807-31	CARBON 100 5% 1/4W		R481	1-249-421-11	CARBON 2.2K 5% 1/4W F	
				R482	1-249-423-11	CARBON 3.3K 5% 1/4W F	
				R483	1-249-427-11	CARBON 6.8K 5% 1/4W F	
				R484	1-249-431-11	CARBON 15K 5% 1/4W	
				R485	1-249-419-11	CARBON 1.5K 5% 1/4W F	
				R486	1-249-401-11	CARBON 47 5% 1/4W F	
				R487	1-249-403-11	CARBON 68 5% 1/4W F	

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
R488	1-247-807-31	CARBON 100 5% 1/4W		C861	1-162-302-11	CERAMIC 0.0022uF 30% 16V	
R489	1-249-407-11	CARBON 150 5% 1/4W F				< CONNECTOR >	
R490	1-249-407-11	CARBON 150 5% 1/4W F		CN406	1-770-388-11	PIN, CONNECTOR (PC BOARD) 4P	
R491	1-249-409-11	CARBON 220 5% 1/4W F				< JACK >	
R492	1-249-411-11	CARBON 330 5% 1/4W		J801	1-569-113-11	JACK, LARGE TYPE (HEADPHONES)	
R493	1-249-413-11	CARBON 470 5% 1/4W F				*****	
R494	1-249-415-11	CARBON 680 5% 1/4W F		*	A-4389-265-A	MAIN BOARD, COMPLETE (US, CND)	
R495	1-249-417-11	CARBON 1K 5% 1/4W F				*****	
R496	1-249-429-11	CARBON 10K 5% 1/4W F					
		(EXCEPT US, CND)					
R497	1-249-429-11	CARBON 10K 5% 1/4W F		*	A-4389-273-A	MAIN BOARD, COMPLETE	
		(EXCEPT US, CND)				*****	
						(AEP, UK, E, G, IT, SP, AUS)	
		< SWITCH >					
S469	1-554-303-21	SWITCH, TACTILE (POWER) (US, CND)			7-685-646-79	SCREW +BVTP 3X8 TYPE2 N-S	
S470	1-554-303-21	SWITCH, TACTILE (CENTER MODE)				< CAPACITOR >	
S471	1-554-303-21	SWITCH, TACTILE (DOLBY)		C101	1-136-165-00	FILM 0.1uF 5% 50V	
S472	1-554-303-21	SWITCH, TACTILE (HALL)		C102	1-164-159-11	CERAMIC 0.1uF 50V	
S473	1-554-303-21	SWITCH, TACTILE (SIMULATED)		C115	1-126-963-11	ELECT 4.7uF 20% 50V	
S478	1-554-303-21	SWITCH, TACTILE (+)		C116	1-162-282-31	CERAMIC 100PF 10% 50V	
S479	1-554-303-21	SWITCH, TACTILE (-)		C117	1-126-964-11	ELECT 10uF 20% 50V	
S480	1-554-303-21	SWITCH, TACTILE (TONE)					
S481	1-554-303-21	SWITCH, TACTILE (CENTER)		C118	1-130-480-00	MYLAR 0.0056uF 5% 50V	
S482	1-554-303-21	SWITCH, TACTILE (REAR)		C119	1-130-473-00	MYLAR 0.0015uF 5% 50V	
S483	1-554-303-21	SWITCH, TACTILE (WOOFER)		C120	1-124-903-11	ELECT 1uF 20% 50V	
S484	1-554-303-21	SWITCH, TACTILE (WOOFER ON/OFF)		C121	1-126-967-11	ELECT 47uF 20% 16V	
S485	1-554-303-21	SWITCH, TACTILE (1 ROCK)		C122	1-126-967-11	ELECT 47uF 20% 16V	
S486	1-554-303-21	SWITCH, TACTILE (2 POPS)					
S487	1-554-303-21	SWITCH, TACTILE (3 CLASSIC)		C123	1-162-306-11	CERAMIC 0.01uF 30% 16V	
S488	1-554-303-21	SWITCH, TACTILE (4 MOVE)		C124	1-164-159-11	CERAMIC 0.1uF 50V	
S489	1-554-303-21	SWITCH, TACTILE (5 GAME)		C125	1-164-159-11	CERAMIC 0.1uF 50V	
S490	1-554-303-21	SWITCH, TACTILE (PHONO)		C126	1-162-286-31	CERAMIC 220PF 10% 50V	
S491	1-554-303-21	SWITCH, TACTILE (TUNER)		C131	1-126-963-11	ELECT 4.7uF 20% 50V	
S492	1-554-303-21	SWITCH, TACTILE (CD)		C133	1-126-963-11	ELECT 4.7uF 20% 50V	
S493	1-554-303-21	SWITCH, TACTILE (TAPE)		C135	1-101-005-00	CERAMIC 22000PF 50V	
S494	1-554-303-21	SWITCH, TACTILE (VIDEO 1)		C136	1-130-491-00	MYLAR 0.047uF 5% 50V	
S495	1-554-303-21	SWITCH, TACTILE (VIDEO 2)		C137	1-126-923-11	ELECT 220uF 20% 10V	
		< VIBRATOR >		C138	1-126-964-11	ELECT 10uF 20% 50V	
X401	1-577-101-11	VIBRATOR, CERAMIC (4MHz)		C139	1-126-964-11	ELECT 10uF 20% 50V	
		*****		C140	1-126-964-11	ELECT 10uF 20% 50V	
*	1-659-626-11	HP BOARD		C141	1-126-964-11	ELECT 10uF 20% 50V	
		*****		C142	1-126-923-11	ELECT 220uF 20% 10V	
		< CAPACITOR >		C145	1-162-286-31	CERAMIC 220PF 10% 50V	
C811	1-162-302-11	CERAMIC 0.0022uF 30% 16V		C146	1-136-165-00	FILM 0.1uF 5% 50V	
C821	1-164-159-11	CERAMIC 0.1uF 50V		C147	1-136-165-00	FILM 0.1uF 5% 50V	
				C148	1-124-902-00	ELECT 0.47uF 20% 50V	
				C149	1-126-963-11	ELECT 4.7uF 20% 50V	
				C165	1-126-963-11	ELECT 4.7uF 20% 50V	
				C166	1-162-282-31	CERAMIC 100PF 10% 50V	

MAIN

Ref. No.	Part No.	Description			Remark	Ref. No.	Part No.	Description			Remark
C167	1-126-964-11	ELECT	10uF	20%	50V	C234	1-126-964-11	ELECT	10uF	20%	50V
C168	1-130-480-00	MYLAR	0.0056uF	5%	50V	C271	1-126-963-11	ELECT	4.7uF	20%	50V
C169	1-130-473-00	MYLAR	0.0015uF	5%	50V	C272	1-162-215-31	CERAMIC	47PF	5%	50V
C170	1-124-903-11	ELECT	1uF	20%	50V	C273	1-161-006-11	CERAMIC	0.0027uF	10%	25V
C181	1-126-963-11	ELECT	4.7uF	20%	50V	C274	1-126-963-11	ELECT	4.7uF	20%	50V
C183	1-126-963-11	ELECT	4.7uF	20%	50V	C275	1-130-493-00	MYLAR	0.068uF	5%	50V
C185	1-124-902-00	ELECT	0.47uF	20%	50V	C276	1-130-484-00	MYLAR	0.012uF	5%	50V
C186	1-126-963-11	ELECT	4.7uF	20%	50V	C277	1-130-487-00	MYLAR	0.022uF	5%	50V
C187	1-136-167-00	FILM	0.15uF	5%	50V	C281	1-136-165-00	FILM	0.1uF	5%	50V
C188	1-126-962-11	ELECT	3.3uF	20%	50V	C282	1-124-903-11	ELECT	1uF	20%	50V
C189	1-136-167-00	FILM	0.15uF	5%	50V	C283	1-136-165-00	FILM	0.1uF	5%	50V
C190	1-136-167-00	FILM	0.15uF	5%	50V	C284	1-126-964-11	ELECT	10uF	20%	50V
C191	1-126-962-11	ELECT	3.3uF	20%	50V	C301	1-126-964-11	ELECT	10uF	20%	50V
C192	1-136-167-00	FILM	0.15uF	5%	50V	C311	1-124-902-00	ELECT	0.47uF	20%	50V
C193	1-126-963-11	ELECT	4.7uF	20%	50V	C312	1-136-172-00	FILM	0.39uF	5%	50V
C194	1-124-902-00	ELECT	0.47uF	20%	50V	C313	1-136-166-00	FILM	0.12uF	5%	50V
C195	1-126-963-11	ELECT	4.7uF	20%	50V	C315	1-124-902-00	ELECT	0.47uF	20%	50V
C196	1-124-902-00	ELECT	0.47uF	20%	50V	C321	1-126-964-11	ELECT	10uF	20%	50V
C197	1-136-165-00	FILM	0.1uF	5%	50V	C322	1-104-664-11	ELECT	47uF	20%	25V
C198	1-136-165-00	FILM	0.1uF	5%	50V	C323	1-164-159-11	CERAMIC	0.1uF		50V
C199	1-126-967-11	ELECT	47uF	20%	16V	C324	1-124-902-00	ELECT	0.47uF	20%	50V
C200	1-124-902-00	ELECT	0.47uF	20%	50V	C325	1-126-964-11	ELECT	10uF	20%	50V
C201	1-126-964-11	ELECT	10uF	20%	50V	C326	1-104-664-11	ELECT	47uF	20%	25V
C202	1-126-964-11	ELECT	10uF	20%	50V	C327	1-164-159-11	CERAMIC	0.1uF		50V
C203	1-162-292-31	CERAMIC	680PF	10%	50V	C328	1-124-902-00	ELECT	0.47uF	20%	50V
C205	1-136-165-00	FILM	0.1uF		50V	C330	1-126-964-11	ELECT	10uF	20%	50V
C206	1-162-286-31	CERAMIC	220PF	10%	50V	C331	1-104-664-11	ELECT	47uF	20%	25V
C207	1-124-925-11	ELECT	2.2uF	20%	100V	C332	1-164-159-11	CERAMIC	0.1uF		50V
C208	1-126-964-11	ELECT	10uF	20%	50V	C333	1-124-902-00	ELECT	0.47uF	20%	50V
C209	1-126-964-11	ELECT	10uF	20%	50V	C341	1-162-286-31	CERAMIC	220PF	10%	50V
C210	1-162-306-11	CERAMIC	0.01uF	30%	16V	C342	1-162-286-31	CERAMIC	220PF	10%	50V
C211	1-124-903-11	ELECT	1uF	20%	50V	C343	1-162-286-31	CERAMIC	220PF	10%	50V
C212	1-130-489-00	MYLAR	0.033uF	5%	50V	C344	1-162-286-31	CERAMIC	220PF	10%	50V
C213	1-130-473-00	MYLAR	0.0015uF	5%	50V	C345	1-164-159-11	CERAMIC	0.1uF		50V
C214	1-130-489-00	MYLAR	0.033uF	5%	50V	C351	1-126-964-11	ELECT	10uF	20%	50V
C215	1-126-923-11	ELECT	220uF	20%	10V	C361	1-126-964-11	ELECT	10uF	20%	50V
C216	1-126-923-11	ELECT	220uF	20%	10V	C371	1-126-964-11	ELECT	10uF	20%	50V
C217	1-164-159-11	CERAMIC	0.1uF		50V	C372	1-104-664-11	ELECT	47uF	20%	25V
C219	1-162-306-11	CERAMIC	0.01uF	30%	16V	C373	1-164-159-11	CERAMIC	0.1uF		50V
C221	1-126-963-11	ELECT	4.7uF	20%	50V	C374	1-124-902-00	ELECT	0.47uF	20%	50V
C222	1-162-215-31	CERAMIC	47PF	5%	50V	C375	1-126-964-11	ELECT	10uF	20%	50V
C223	1-161-006-11	CERAMIC	0.0027uF	10%	25V	C376	1-104-664-11	ELECT	47uF	20%	25V
C224	1-126-963-11	ELECT	4.7uF	20%	50V	C377	1-164-159-11	CERAMIC	0.1uF		50V
C225	1-130-493-00	MYLAR	0.068uF	5%	50V	C378	1-124-902-00	ELECT	0.47uF	20%	50V
C226	1-130-484-00	MYLAR	0.012uF	5%	50V	C379	1-126-964-11	ELECT	10uF	20%	50V
C227	1-130-487-00	MYLAR	0.022uF	5%	50V	C380	1-126-964-11	ELECT	10uF	20%	50V
C230	1-124-903-11	ELECT	1uF	20%	50V	C381	1-104-664-11	ELECT	47uF	20%	25V
C231	1-136-165-00	FILM	0.1uF	5%	50V	C382	1-164-159-11	CERAMIC	0.1uF		50V
C232	1-124-903-11	ELECT	1uF	20%	50V	C701	1-126-963-11	ELECT	4.7uF	20%	50V
C233	1-136-165-00	FILM	0.1uF	5%	50V	C702	1-162-294-31	CERAMIC	0.001uF	10%	50V

Ref. No.	Part No.	Description			Remark	Ref. No.	Part No.	Description			Remark
C703	1-162-286-31	CERAMIC	220PF	10%	50V	C825	1-126-964-11	ELECT	10uF	20%	50V
C704	1-126-963-11	ELECT	4. 7uF	20%	50V	C831	1-126-963-11	ELECT	4. 7uF	20%	50V
C705	1-162-191-31	CERAMIC	2. 2PF	10%	50V	C901	1-128-493-11	ELECT	4700uF	20%	63V
C706	1-126-967-11	ELECT	47uF	20%	50V	C902	1-128-493-11	ELECT	4700uF	20%	63V
C707	1-136-165-00	FILM	0. 1uF	5%	50V	C903	1-128-549-11	ELECT	3300uF	20%	35V
C708	1-130-493-00	MYLAR	0. 068uF	5%	50V	C904	1-128-549-11	ELECT	3300uF	20%	35V
C711	1-124-667-11	ELECT	10uF	20%	100V	C905	1-106-367-00	MYLAR	0. 01uF	5%	200V
C712	1-124-667-11	ELECT	10uF	20%	100V	C906	1-106-367-00	MYLAR	0. 01uF	5%	200V
C713	1-124-667-11	ELECT	10uF	20%	100V	C907	1-106-375-12	MYLAR	0. 022uF	5%	200V
C714	1-126-923-11	ELECT	220uF	20%	10V	C908	1-106-375-12	MYLAR	0. 022uF	5%	200V
C731	1-126-963-11	ELECT	4. 7uF	20%	50V	C909	1-126-967-11	ELECT	47uF	20%	50V
C732	1-162-286-31	CERAMIC	220PF	10%	50V	C910	1-126-967-11	ELECT	47uF	20%	50V
C733	1-162-286-31	CERAMIC	220PF	10%	50V	C911	1-104-664-11	ELECT	47uF	20%	25V
C734	1-104-664-11	ELECT	47uF	20%	25V	C912	1-104-664-11	ELECT	47uF	20%	25V
C735	1-162-191-31	CERAMIC	2. 2PF	10%	50V	C913	1-126-933-11	ELECT	100uF	20%	10V
C736	1-126-967-11	ELECT	47uF	20%	50V	C914	1-126-933-11	ELECT	100uF	20%	10V
C737	1-136-165-00	FILM	0. 1uF	5%	50V	C915	1-126-964-11	ELECT	10uF	20%	50V
C738	1-130-493-00	MYLAR	0. 068uF	5%	50V	C916	1-126-964-11	ELECT	10uF	20%	50V
C741	1-126-964-11	ELECT	10uF	20%	50V	C917	1-128-581-11	ELECT	4. 7uF	20%	100V
C742	1-126-968-11	ELECT	100uF	20%	50V	C921	1-136-165-00	FILM	0. 1uF	5%	50V
C743	1-126-964-11	ELECT	10uF	20%	50V			< CONNECTOR >			
C744	1-126-968-11	ELECT	100uF	20%	50V	CN101	1-568-838-11	SOCKET, CONNECTOR 21P			
C751	1-126-963-11	ELECT	4. 7uF	20%	50V	CN102	1-770-721-11	CONNECTOR, BOARD TO BOARD 4P			
C752	1-162-294-31	CERAMIC	0. 001uF	10%	50V			< DIODE >			
C753	1-162-286-31	CERAMIC	220PF	10%	50V	D301	8-719-987-63	DIODE 1N4148M			
C754	1-126-963-11	ELECT	4. 7uF	20%	50V	D302	8-719-987-63	DIODE 1N4148M			
C755	1-162-191-31	CERAMIC	2. 2PF	10%	50V	D701	8-719-815-85	DIODE 1S1585			
C756	1-126-967-11	ELECT	47uF	20%	50V	D702	8-719-815-85	DIODE 1S1585			
C757	1-136-165-00	FILM	0. 1uF	5%	50V	D731	8-719-987-63	DIODE 1N4148M			
C758	1-130-493-00	MYLAR	0. 068uF	5%	50V	D751	8-719-815-85	DIODE 1S1585			
C781	1-126-963-11	ELECT	4. 7uF	20%	50V	D781	8-719-987-63	DIODE 1N4148M			
C782	1-162-286-31	CERAMIC	220PF	10%	50V	D821	8-719-987-63	DIODE 1N4148M			
C783	1-162-294-31	CERAMIC	0. 001uF	10%	50V	D822	8-719-987-63	DIODE 1N4148M			
C784	1-104-664-11	ELECT	47uF	20%	25V	D851	8-719-987-63	DIODE 1N4148M			
C785	1-162-191-31	CERAMIC	2. 2PF	10%	50V	D852	8-719-987-63	DIODE 1N4148M			
C786	1-126-967-11	ELECT	47uF	20%	50V	D853	8-719-987-63	DIODE 1N4148M			
C787	1-136-165-00	FILM	0. 1uF	5%	50V	D901	8-719-510-68	DIODE D5SBA20F01			
C788	1-130-493-00	MYLAR	0. 068uF	5%	50V	D902	8-719-510-68	DIODE D5SBA20F01			
C801	1-126-963-11	ELECT	4. 7uF	20%	50V	D903	8-719-001-21	DIODE UZL-9H1			
C802	1-162-286-31	CERAMIC	220PF	10%	50V	D904	8-719-001-21	DIODE UZL-9H1			
C803	1-162-294-31	CERAMIC	0. 001uF	10%	50V	D905	8-719-002-48	DIODE UZL-27H			
C804	1-162-191-31	CERAMIC	2. 2PF	10%	50V			< GROUND TERMINAL >			
C805	1-104-664-11	ELECT	47uF	20%	25V	EB901	1-537-770-21	TERMINAL BOARD, GROUND			
C806	1-126-964-11	ELECT	10uF	20%	50V			< IC >			
C807	1-126-964-11	ELECT	10uF	20%	50V	IC101	8-759-634-50	IC M5218AL			
C808	1-130-493-00	MYLAR	0. 068uF	5%	50V						
C821	1-104-664-11	ELECT	47uF	20%	25V						
C822	1-126-964-11	ELECT	10uF	20%	50V						
C823	1-126-933-11	ELECT	100uF	20%	10V						
C824	1-104-664-11	ELECT	47uF	20%	25V						

MAIN

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
IC102	8-759-805-14	IC LC7822		Q824	8-729-119-79	TRANSISTOR 2SC2785-FEK	
IC103	8-759-248-74	IC LA2785		Q901	8-729-209-15	TRANSISTOR 2SD2012	
IC104	8-759-341-23	IC LV1011		Q902	8-729-141-83	TRANSISTOR 2SB1094-LK	
IC105	8-759-072-32	IC TC9184P		Q913	8-729-030-19	TRANSISTOR 2SB1640	
IC106	8-759-634-50	IC M5218AL		< RESISTOR >			
IC107	8-759-634-50	IC M5218AL		R101	1-249-417-11	CARBON 1K 5% 1/4W F	
IC108	8-759-634-50	IC M5218AL		R102	1-249-417-11	CARBON 1K 5% 1/4W F	
IC109	8-759-634-50	IC M5218AL		R103	1-249-423-11	CARBON 3.3K 5% 1/4W F	
IC110	8-759-634-50	IC M5218AL		R104	1-249-417-11	CARBON 1K 5% 1/4W F	
IC112	8-759-281-42	IC TC9210P		R105	1-249-417-11	CARBON 1K 5% 1/4W F	
IC113	8-759-281-42	IC TC9210P		R106	1-249-417-11	CARBON 1K 5% 1/4W F	
IC114	8-759-281-42	IC TC9210P		R107	1-249-417-11	CARBON 1K 5% 1/4W F	
IC701	8-749-921-04	IC STK-4211MK-2	(AEP, UK, E, G, IT, MX, SP, AUS)	R108	1-249-417-11	CARBON 1K 5% 1/4W F	
IC701	8-749-921-68	IC STK-4231MK2 (US, CND)		R109	1-249-428-11	CARBON 8.2K 5% 1/4W F	
IC702	8-749-900-96	IC STK-4142MK2		R115	1-249-437-11	CARBON 47K 5% 1/4W	
IC703	8-759-069-56	IC LM3875-Q		R116	1-249-415-11	CARBON 680 5% 1/4W F	
IC821	8-759-111-68	IC uPC1237HA		R117	1-247-897-11	CARBON 560K 5% 1/4W	
< JACK >				R118	1-249-437-11	CARBON 47K 5% 1/4W	
J101	1-766-558-41	JACK, PIN 8P		R119	1-249-441-11	CARBON 100K 5% 1/4W	
J102	1-766-558-31	JACK, PIN 8P	(PHONO, TUNER, CD IN/TAPE REC OUT)	R120	1-249-409-11	CARBON 220 5% 1/4W F	
(TAPE, VIDEO 1, VIDEO 2 IN/VIDEO 1, VIDEO 2 OUT)				R121	1-249-425-11	CARBON 4.7K 5% 1/4W F	
< COIL >				R122	1-249-417-11	CARBON 1K 5% 1/4W F	
L101	1-410-521-11	INDUCTOR 100uH		R123	1-249-417-11	CARBON 1K 5% 1/4W F	
L102	1-410-521-11	INDUCTOR 100uH		R124	1-249-417-11	CARBON 1K 5% 1/4W F	
L301	1-410-521-11	INDUCTOR 100uH		R131	1-249-441-11	CARBON 100K 5% 1/4W	
L302	1-410-521-11	INDUCTOR 100uH		R133	1-249-430-11	CARBON 12K 5% 1/4W	
L701	1-420-872-00	COIL, AIR-CORE		R134	1-249-420-11	CARBON 1.8K 5% 1/4W F	
L751	1-420-872-00	COIL, AIR-CORE		R136	1-249-417-11	CARBON 1K 5% 1/4W F	
< TRANSISTOR >				R137	1-249-417-11	CARBON 1K 5% 1/4W F	
Q201	8-729-900-36	TRANSISTOR DTC124ES		R138	1-249-417-11	CARBON 1K 5% 1/4W F	
Q231	8-729-900-36	TRANSISTOR DTC124ES		R140	1-249-441-11	CARBON 100K 5% 1/4W	
Q281	8-729-900-36	TRANSISTOR DTC124ES		R141	1-249-417-11	CARBON 1K 5% 1/4W F	
Q301	8-729-141-30	TRANSISTOR 2SC3623A-LK		R142	1-249-417-11	CARBON 1K 5% 1/4W F	
Q331	8-729-141-30	TRANSISTOR 2SC3623A-LK		R143	1-249-417-11	CARBON 1K 5% 1/4W F	
Q332	8-729-141-30	TRANSISTOR 2SC3623A-LK		R144	1-249-435-11	CARBON 33K 5% 1/4W	
Q333	8-729-141-30	TRANSISTOR 2SC3623A-LK		R145	1-249-431-11	CARBON 15K 5% 1/4W	
Q381	8-729-141-30	TRANSISTOR 2SC3623A-LK		R146	1-249-441-11	CARBON 100K 5% 1/4W	
Q382	8-729-141-30	TRANSISTOR 2SC3623A-LK		R147	1-249-411-11	CARBON 330 5% 1/4W	
Q701	8-729-140-84	TRANSISTOR 2SC1841-PAFAEA		R148	1-247-903-00	CARBON 1M 5% 1/4W	
Q731	8-729-140-84	TRANSISTOR 2SC1841-PAFAEA		R151	1-249-417-11	CARBON 1K 5% 1/4W F	
Q751	8-729-140-84	TRANSISTOR 2SC1841-PAFAEA		R152	1-249-417-11	CARBON 1K 5% 1/4W F	
Q781	8-729-140-84	TRANSISTOR 2SC1841-PAFAEA		R153	1-249-423-11	CARBON 3.3K 5% 1/4W F	
Q821	8-729-900-63	TRANSISTOR DTA124ES		R154	1-249-417-11	CARBON 1K 5% 1/4W F	
Q822	8-729-900-36	TRANSISTOR DTC124ES		R155	1-249-417-11	CARBON 1K 5% 1/4W F	
Q823	8-729-900-63	TRANSISTOR DTA124ES		R156	1-249-417-11	CARBON 1K 5% 1/4W F	
				R157	1-249-417-11	CARBON 1K 5% 1/4W F	
				R158	1-249-417-11	CARBON 1K 5% 1/4W F	
				R159	1-249-428-11	CARBON 8.2K 5% 1/4W F	
				R165	1-249-437-11	CARBON 47K 5% 1/4W	
				R166	1-249-415-11	CARBON 680 5% 1/4W F	

Ref. No.	Part No.	Description	Remark			Ref. No.	Part No.	Description	Remark		
R167	1-247-897-11	CARBON	560K	5%	1/4W	R316	1-249-432-11	CARBON	18K	5%	1/4W
R168	1-249-437-11	CARBON	47K	5%	1/4W	R317	1-249-429-11	CARBON	10K	5%	1/4W
R169	1-249-441-11	CARBON	100K	5%	1/4W	R318	1-249-429-11	CARBON	10K	5%	1/4W
R170	1-249-409-11	CARBON	220	5%	1/4W F	R319	1-249-425-11	CARBON	4.7K	5%	1/4W F
R181	1-249-441-11	CARBON	100K	5%	1/4W	R320	1-249-437-11	CARBON	47K	5%	1/4W
R183	1-249-430-11	CARBON	12K	5%	1/4W	R321	1-249-417-11	CARBON	1K	5%	1/4W F
R184	1-249-420-11	CARBON	1.8K	5%	1/4W F	R322	1-249-417-11	CARBON	1K	5%	1/4W F
R201	1-249-429-11	CARBON	10K	5%	1/4W	R323	1-249-417-11	CARBON	1K	5%	1/4W F
R221	1-249-440-11	CARBON	82K	5%	1/4W	R324	1-249-417-11	CARBON	1K	5%	1/4W F
R222	1-247-895-00	CARBON	470K	5%	1/4W	R325	1-249-417-11	CARBON	1K	5%	1/4W F
R224	1-249-417-11	CARBON	1K	5%	1/4W F	R326	1-249-417-11	CARBON	1K	5%	1/4W F
R225	1-249-425-11	CARBON	4.7K	5%	1/4W F	R331	1-249-441-11	CARBON	100K	5%	1/4W
R226	1-249-436-11	CARBON	39K	5%	1/4W	R332	1-249-421-11	CARBON	2.2K	5%	1/4W F
R227	1-247-897-11	CARBON	560K	5%	1/4W	R333	1-249-429-11	CARBON	10K	5%	1/4W
R228	1-249-426-11	CARBON	5.6K	5%	1/4W	R334	1-249-441-11	CARBON	100K	5%	1/4W
R229	1-249-418-11	CARBON	1.2K	5%	1/4W F	R335	1-249-421-11	CARBON	2.2K	5%	1/4W F
R230	1-249-434-11	CARBON	27K	5%	1/4W	R336	1-249-429-11	CARBON	10K	5%	1/4W
R231	1-249-441-11	CARBON	100K	5%	1/4W	R337	1-249-441-11	CARBON	100K	5%	1/4W
R232	1-249-438-11	CARBON	56K	5%	1/4W	R338	1-249-421-11	CARBON	2.2K	5%	1/4W F
R233	1-249-432-11	CARBON	18K	5%	1/4W	R339	1-249-429-11	CARBON	10K	5%	1/4W
R234	1-247-883-00	CARBON	150K	5%	1/4W	R341	1-249-437-11	CARBON	47K	5%	1/4W
R235	1-249-416-11	CARBON	820	5%	1/4W F	R342	1-249-437-11	CARBON	47K	5%	1/4W
R236	1-247-899-11	CARBON	680K	5%	1/4W	R343	1-249-437-11	CARBON	47K	5%	1/4W
R237	1-249-441-11	CARBON	100K	5%	1/4W	R344	1-249-437-11	CARBON	47K	5%	1/4W
R271	1-249-440-11	CARBON	82K	5%	1/4W	R351	1-249-417-11	CARBON	1K	5%	1/4W F
R272	1-247-895-00	CARBON	470K	5%	1/4W	R352	1-249-441-11	CARBON	100K	5%	1/4W
R274	1-249-417-11	CARBON	1K	5%	1/4W F	R353	1-249-417-11	CARBON	1K	5%	1/4W F
R275	1-249-425-11	CARBON	4.7K	5%	1/4W F	R354	1-249-427-11	CARBON	6.8K	5%	1/4W
R276	1-249-436-11	CARBON	39K	5%	1/4W	R355	1-249-426-11	CARBON	5.6K	5%	1/4W
R277	1-247-897-11	CARBON	560K	5%	1/4W	R361	1-249-429-11	CARBON	10K	5%	1/4W
R278	1-249-426-11	CARBON	5.6K	5%	1/4W	R362	1-249-417-11	CARBON	1K	5%	1/4W F
R279	1-249-418-11	CARBON	1.2K	5%	1/4W F	R363	1-249-429-11	CARBON	10K	5%	1/4W
R280	1-249-434-11	CARBON	27K	5%	1/4W	R381	1-249-441-11	CARBON	100K	5%	1/4W
R281	1-249-441-11	CARBON	100K	5%	1/4W	R382	1-249-421-11	CARBON	2.2K	5%	1/4W F
R282	1-249-438-11	CARBON	56K	5%	1/4W	R383	1-249-429-11	CARBON	10K	5%	1/4W
R283	1-249-432-11	CARBON	18K	5%	1/4W	R384	1-249-441-11	CARBON	100K	5%	1/4W
R284	1-247-883-00	CARBON	150K	5%	1/4W	R385	1-249-421-11	CARBON	2.2K	5%	1/4W F
R285	1-249-416-11	CARBON	820	5%	1/4W F	R386	1-249-429-11	CARBON	10K	5%	1/4W
R286	1-247-899-11	CARBON	680K	5%	1/4W	R387	1-249-441-11	CARBON	100K	5%	1/4W
R287	1-249-441-11	CARBON	100K	5%	1/4W	R701	1-249-417-11	CARBON	1K	5%	1/4W F
R301	1-249-417-11	CARBON	1K	5%	1/4W F	R702	1-249-438-11	CARBON	56K	5%	1/4W
R302	1-249-441-11	CARBON	100K	5%	1/4W	R703	1-249-413-11	CARBON	470	5%	1/4W F
R303	1-249-417-11	CARBON	1K	5%	1/4W F	R704	1-249-438-11	CARBON	56K	5%	1/4W
R304	1-249-427-11	CARBON	6.8K	5%	1/4W	R705	1-249-425-11	CARBON	4.7K	5%	1/4W F
R305	1-249-426-11	CARBON	5.6K	5%	1/4W	R706	1-249-421-11	CARBON	2.2K	5%	1/4W F
R311	1-247-807-31	CARBON	100	5%	1/4W	R707	1-249-421-11	CARBON	2.2K	5%	1/4W F
R312	1-249-441-11	CARBON	100K	5%	1/4W	R708	1-260-099-11	CARBON	1K	5%	1/2W
R313	1-247-878-00	CARBON	91K	5%	1/4W	R709	1-249-417-11	CARBON	1K	5%	1/4W F
R314	1-249-418-11	CARBON	1.2K	5%	1/4W F	R710	1-249-433-11	CARBON	22K	5%	1/4W
R315	1-249-427-11	CARBON	6.8K	5%	1/4W F	△R711	1-208-601-11	WIREWOUND	0.1	10%	2W F

The components identified by mark $\triangle$ or dotted line with mark $\triangle$ are critical for safety. Replace only with part number specified.	Les composants identifiés par une marque $\triangle$ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.
--	---

MAIN

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
R712	1-249-433-11	CARBON	22K 5% 1/4W	R791	1-249-433-11	CARBON	22K 5% 1/4W
R713	1-249-393-11	CARBON	10 5% 1/4W F	R792	1-249-393-11	CARBON	10 5% 1/4W F
R714	1-249-393-11	CARBON	10 5% 1/4W F	R801	1-249-413-11	CARBON	470 5% 1/4W F
R715	1-249-393-11	CARBON	10 5% 1/4W F	R802	1-249-438-11	CARBON	56K 5% 1/4W
R716	1-249-393-11	CARBON	10 5% 1/4W F	R803	1-249-411-11	CARBON	330 5% 1/4W
R721	1-249-405-11	CARBON	100 5% 1/4W F	R804	1-249-438-11	CARBON	56K 5% 1/4W
△R722	1-249-405-11	CARBON	100 5% 1/4W F	R805	1-249-393-11	CARBON	10 5% 1/4W F
R723	1-249-429-11	CARBON	10K 5% 1/4W	R811	1-260-101-11	CARBON	1.5K 5% 1/2W
R724	1-247-887-00	CARBON	220K 5% 1/4W	R812	1-260-101-11	CARBON	1.5K 5% 1/2W
R725	1-249-425-11	CARBON	4.7K 5% 1/4W F	R821	1-249-431-11	CARBON	15K 5% 1/4W
R731	1-249-413-11	CARBON	470 5% 1/4W F	R822	1-249-429-11	CARBON	10K 5% 1/4W
R732	1-249-438-11	CARBON	56K 5% 1/4W	R823	1-249-439-11	CARBON	68K 5% 1/4W
R733	1-249-413-11	CARBON	470 5% 1/4W F	R824	1-249-441-11	CARBON	100K 5% 1/4W
R734	1-249-438-11	CARBON	56K 5% 1/4W	R825	1-249-427-11	CARBON	6.8K 5% 1/4W F
R735	1-249-421-11	CARBON	2.2K 5% 1/4W F	R827	1-249-429-11	CARBON	10K 5% 1/4W
R736	1-249-421-11	CARBON	2.2K 5% 1/4W F	R828	1-249-421-11	CARBON	2.2K 5% 1/4W F
R737	1-249-417-11	CARBON	1K 5% 1/4W F	R829	1-249-425-11	CARBON	4.7K 5% 1/4W F
R738	1-249-417-11	CARBON	1K 5% 1/4W F	R831	1-249-435-11	CARBON	33K 5% 1/4W
R739	1-249-433-11	CARBON	22K 5% 1/4W	R832	1-249-437-11	CARBON	47K 5% 1/4W
△R740	1-208-602-11	WIREWOUND	0.22 10% 2W F	R833	1-249-438-11	CARBON	56K 5% 1/4W
R741	1-249-433-11	CARBON	22K 5% 1/4W	R834	1-249-435-11	CARBON	33K 5% 1/4W
R742	1-249-393-11	CARBON	10 5% 1/4W F	R835	1-249-437-11	CARBON	47K 5% 1/4W
R743	1-249-405-11	CARBON	100 5% 1/4W F	R836	1-249-429-11	CARBON	10K 5% 1/4W
△R744	1-249-405-11	CARBON	100 5% 1/4W F	R837	1-249-429-11	CARBON	10K 5% 1/4W
R751	1-249-417-11	CARBON	1K 5% 1/4W F	R838	1-249-437-11	CARBON	47K 5% 1/4W
R752	1-249-438-11	CARBON	56K 5% 1/4W	△R851	1-260-083-11	CARBON	47 5% 1/2W
R753	1-249-413-11	CARBON	470 5% 1/4W F	R861	1-260-101-11	CARBON	1.5K 5% 1/2W
R754	1-249-438-11	CARBON	56K 5% 1/4W	R862	1-260-101-11	CARBON	1.5K 5% 1/2W
R755	1-249-425-11	CARBON	4.7K 5% 1/4W F	△R901	1-215-884-11	METAL OXIDE	47 5% 2W F
R756	1-249-421-11	CARBON	2.2K 5% 1/4W F	△R902	1-215-886-11	METAL OXIDE	100 5% 2W F
R757	1-249-421-11	CARBON	2.2K 5% 1/4W F	R903	1-249-419-11	CARBON	1.5K 5% 1/4W F
R758	1-260-099-11	CARBON	1K 5% 1/2W	R904	1-249-419-11	CARBON	1.5K 5% 1/4W F
R759	1-249-417-11	CARBON	1K 5% 1/4W F	R905	1-249-419-11	CARBON	1.5K 5% 1/4W F
R760	1-249-433-11	CARBON	22K 5% 1/4W	R906	1-249-419-11	CARBON	1.5K 5% 1/4W F
△R761	1-208-601-11	WIREWOUND	0.1 10% 2W F	△R907	1-215-890-11	METAL OXIDE	470 5% 2W F
R762	1-249-433-11	CARBON	22K 5% 1/4W	R908	1-249-427-11	CARBON	6.8K 5% 1/4W F
R763	1-249-393-11	CARBON	10 5% 1/4W F	R961	1-247-807-31	CARBON	100 5% 1/4W
R764	1-249-393-11	CARBON	10 5% 1/4W F	R962	1-247-807-31	CARBON	100 5% 1/4W
R765	1-249-393-11	CARBON	10 5% 1/4W F	R964	1-247-807-31	CARBON	100 5% 1/4W
R766	1-249-393-11	CARBON	10 5% 1/4W F	R965	1-247-807-31	CARBON	100 5% 1/4W
R781	1-249-413-11	CARBON	470 5% 1/4W F	R966	1-247-807-31	CARBON	100 5% 1/4W
R782	1-249-438-11	CARBON	56K 5% 1/4W	R967	1-247-807-31	CARBON	100 5% 1/4W
R783	1-249-412-11	CARBON	390 5% 1/4W F	R968	1-247-807-31	CARBON	100 5% 1/4W
R784	1-249-438-11	CARBON	56K 5% 1/4W	< RELAY >			
R785	1-249-421-11	CARBON	2.2K 5% 1/4W F	RY851	1-755-141-11	RELAY	
R786	1-249-421-11	CARBON	2.2K 5% 1/4W F	RY852	1-515-920-11	RELAY (24V)	
R787	1-249-417-11	CARBON	1K 5% 1/4W F	RY853	1-515-920-11	RELAY (24V)	
R788	1-249-417-11	CARBON	1K 5% 1/4W F				
R789	1-249-433-11	CARBON	22K 5% 1/4W				
△R790	1-208-602-11	WIREWOUND	0.22 10% 2W F				

The components identified by mark △ or dotted line with mark △ are critical for safety.
Replace only with part number specified.

Les composants identifiés par une marque △ sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.

Ref. No.	Part No.	Description	Remark
< TERMINAL >			
TM801	1-694-055-11	TERMINAL BOARD (SP) (FRONT, CENTER, WOOFER, SPEAKER)	
< VIBRATOR >			
X101	1-579-125-11	VIBRATOR, CERAMIC (8MHz)	

*	1-659-617-11	POWER BOARD *****	
< CAPACITOR >			
△C951	1-161-744-51	CERAMIC 0.01uF 400V	
C952	1-130-487-00	MYLAR 0.022uF 5% 50V	
C953	1-124-557-11	ELECT 1000uF 20% 25V	
C954	1-161-494-00	CERAMIC 0.022uF 25V	
C955	1-124-463-00	ELECT 0.1uF 20% 50V	
C956	1-162-306-11	CERAMIC 0.01uF 30% 16V	
C957	1-162-306-11	CERAMIC 0.01uF 30% 16V	
C958	1-124-907-11	ELECT 10uF 20% 50V	
C959	1-162-306-11	CERAMIC 0.01uF 30% 16V	
< CONNECTOR >			
CN904	1-564-321-00	PIN, CONNECTOR 2P (US, CND, AEP, UK, G, IT)	
CN905	1-564-321-00	PIN, CONNECTOR 2P	
△CN906	1-540-042-11	OUTLET, AC (NONPOLAR) (3P) (AC OUTLET) (E)	
CN906	1-564-321-00	PIN, CONNECTOR 2P (AEP, UK, G, IT, SP, AUS)	
△CN906	1-540-061-11	OUTLET, AC (POLAR) (AC OUTLET) (US, CND)	
* CN907	1-568-824-11	SOCKET, CONNECTOR 5P	
* CN911	1-564-687-11	PIN, CONNECTOR 3P (E, SP, AUS)	
< DIODE >			
D951	8-719-024-99	DIODE 11ES2-NTA2B	
D952	8-719-024-99	DIODE 11ES2-NTA2B	
D953	8-719-024-99	DIODE 11ES2-NTA2B	
D954	8-719-024-99	DIODE 11ES2-NTA2B	
D955	8-719-987-63	DIODE 1N4148M	
D956	8-719-987-63	DIODE 1N4148M	
< FUSE >			
△F903	1-532-286-00	FUSE, TIME LAG (2.5A/250V) (AEP, UK, G, IT)	
< FUSE HOLDER >			
FH910	1-533-217-31	HOLDER, FUSE (AEP, UK, G, IT)	
FH911	1-533-217-31	HOLDER, FUSE (AEP, UK, G, IT)	
< IC >			
IC951	8-759-820-13	IC L78MR06	

Ref. No.	Part No.	Description	Remark
< TRANSISTOR >			
Q951	8-729-119-78	TRANSISTOR 2SC2785-HFE	
< RESISTOR >			
R935	1-249-417-11	CARBON 1K 5% 1/4W F	
R952	1-249-425-11	CARBON 4.7K 5% 1/4W F	
R953	1-249-437-11	CARBON 47K 5% 1/4W	
R954	1-249-429-11	CARBON 10K 5% 1/4W	
< RELAY >			
△RY951	1-515-999-11	RELAY, POWER	
< SWITCH >			
△S902	1-571-309-31	SWITCH (VOLTAGE SELECTOR) (E, SP, AUS)	
< TRANSFORMER >			
△T951	1-450-358-11	TRANSFORMER, POWER (AEP, UK, E, G, IT, SP, AUS)	
△T951	1-450-361-11	TRANSFORMER, POWER (US, CND)	

*	1-659-604-11	REAR SP BOARD *****	
< CONNECTOR >			
CN902	1-770-725-11	CONNECTOR, BOARD TO BOARD 4P	
< TERMINAL >			
TM802	1-537-240-11	TERMINAL BOARD (CHECKER PIN) (REAR SPEAKERS)	

*	1-659-618-11	T-1 BOARD *****	
< FUSE >			
△F901	1-532-203-00	FUSE, TIME LAG (2A/250V) (AEP, UK, G, IT)	
△F901	1-576-110-11	FUSE (6A/125V) (US, CND)	
△F902	1-532-237-00	FUSE, TIME LAG (3.15A/250V) (E, SP, AUS)	
< FUSE HOLDER >			
FH901	1-533-217-31	HOLDER, FUSE	
FH902	1-533-217-31	HOLDER, FUSE	
FH903	1-533-217-31	HOLDER, FUSE (E, SP, AUS)	
FH904	1-533-217-31	HOLDER, FUSE (E, SP, AUS)	

The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified.	Les composants identifiés par une marque △ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.
---	---

T-2**VR**

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
*	1-659-619-11	T-2 BOARD ***** < CAPACITOR >		△CNP901	1-690-609-21	CORD, POWER (US, CND)	
C961	1-136-165-00	FILM 0.1uF 50V < CONNECTOR >		△CNP901	1-751-520-21	CORD, POWER (UK)	
CN902	1-766-270-11	PIN, CONNECTOR (PC BOARD) 8P < FUSE >		△F901	1-532-203-00	FUSE, TIME LAG (2A/250V) (AEP, UK, G, IT)	
△F904	1-532-299-00	FUSE, TIME LAG (5A/250V) (AEP, UK, G, IT, E, SP, AUS)		△F901	1-576-110-11	FUSE (6A/125V) (US, CND)	
△F904	1-576-110-11	FUSE (6A/125V) (US, CND)		△F902	1-532-237-00	FUSE, TIME LAG (3.15A/250V) (E, SP, AUS)	
△F905	1-532-299-00	FUSE, TIME LAG (5A/250V) (AEP, UK, G, IT, E, SP, AUS)		△F903	1-532-286-00	FUSE, TIME LAG (2.5A/250V) (AEP, UK, G, IT, SP, AUS)	
△F905	1-576-110-11	FUSE (6A/125V) (US, CND)		△F904	1-532-299-00	FUSE, TIME LAG (5A/250V) (AEP, UK, G, IT, E, SP, AUS)	
		< FUSE HOLDER >		△F904	1-576-110-11	FUSE (6A/125V) (US, CND)	
FH906	1-533-217-31	HOLDER, FUSE		△F905	1-532-299-00	FUSE, TIME LAG (5A/250V) (AEP, UK, G, IT, E, SP, AUS)	
FH907	1-533-217-31	HOLDER, FUSE		△F905	1-576-110-11	FUSE (6A/125V) (US, CND)	
FH908	1-533-217-31	HOLDER, FUSE		FL401	1-517-512-11	INDICATOR TUBE, FLUORESCENT	
FH909	1-533-217-31	HOLDER, FUSE		△S901	1-572-267-51	SWITCH, PUSH (1 KEY) (POWER) (EXCEPT US, CND)	
*****				△T901	1-429-455-11	TRANSFORMER, POWER (US)	
				△T901	1-429-456-11	TRANSFORMER, POWER (AEP, UK, G, IT, SP, AUS)	
				△T901	1-429-457-11	TRANSFORMER, POWER (E)	
				△T901	1-429-572-11	TRANSFORMER, POWER (CND)	

				ACCESSORIES & PACKING MATERIALS			

*	1-659-620-11	VR BOARD ***** < CONNECTOR >		1-473-623-11	REMOTE COMMANDER (RM-U561)		
CN404	1-750-185-11	CONNECTOR, BOARD TO BOARD 4P < VARIABLE RESISTOR >		3-810-503-11	MANUAL, INSTRUCTION (ENGLISH) (US, CND)		
RV401	1-467-869-11	ENCODER, ROTARY (MASTER VOLUME)		3-810-503-21	MANUAL, INSTRUCTION (FRENCH) (CND)		
*****				3-810-503-41	MANUAL, INSTRUCTION (ENGLISH, FRENCH, SPANISH) (AEP, UK, E, SP, AUS)		
				3-810-503-51	MANUAL, INSTRUCTION (GERMAN, DUTCH, SWEDISH, ITALIAN, PORTUGUESE) (AEP, G, IT)		
				3-810-503-61	MANUAL, INSTRUCTION (CHINESE, ARABIC) (E, SP, AUS)		
				3-810-503-71	MANUAL, INSTRUCTION (DANISH, FINNISH) (AEP)		
				*	4-980-414-01	CUSHION (US, CND, AEP, E, G, SP, AUS)	
				*	4-980-414-01	CUSHION (UK, IT)	
					4-980-737-01	COVER, BATTERY (FOR RM-U561)	
				*	4-981-467-01	INDIVIDUAL CARTON (US)	
				*	4-981-468-01	INDIVIDUAL CARTON (AEP, G)	
				*	4-981-468-01	INDIVIDUAL CARTON (UK, IT)	

				HARDWARE LIST			

18	1-769-867-11	WIRE (FLAT TYPE) (5 CORE)		#1	7-685-646-79	SCREW +BVTP 3X8 TYPE2 TT(B)	
20	1-773-154-11	WIRE (FLAT TYPE) (21 CORE)		#2	7-682-560-04	SCREW +BVTT 4X6 (S)	
△56	1-569-007-11	ADAPTER, CONVERSION 2P (E)		#3	7-685-650-91	SCREW +BVTP 3X16 TYPE2 TT(B)	
104	1-773-154-11	WIRE (FLAT TYPE) (21 CORE)		The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified. Les composants identifiés par une marque △ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.			
108	1-769-867-11	WIRE (FLAT TYPE) (5 CORE)					
△CNJ901	1-526-794-11	OUTLET, AC (AC OUTLET) (AEP, UK, G, IT, SP, AUS)					
△CNJ902	1-526-794-11	OUTLET, AC (AC OUTLET) (AEP, UK, G, IT, SP, AUS)					
△CNJ903	1-526-794-11	OUTLET, AC (AC OUTLET) (AEP, UK, G, IT, SP, AUS)					
△CNP901	1-575-651-11	CORD, POWER (AEP, G, IT, SP)					
△CNP901	1-575-653-11	CORD, POWER (E)					
△CNP901	1-690-608-11	CORD, POWER (AUS)					