


TC-42

E Model
USA Model
Canada Model
AEP Model

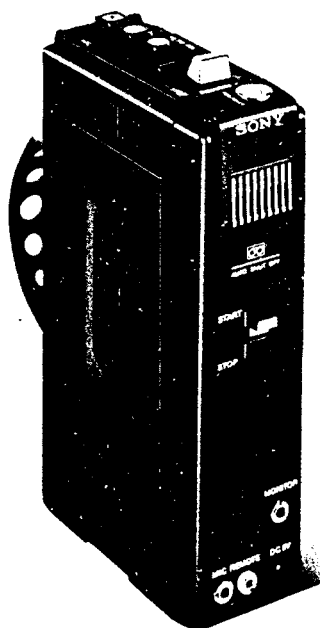

CASSETTE-CORDER

SPECIFICATIONS

Power Requirements:	DC 6 V with four penlight batteries, house hold current with an ac adaptor [AC-9 (USA and Canada), AC-456C (E and AEP)], rechargeable battery pack (BP-23) or 12 V dc with SONY car battery cord (DCC-126)	Input:	MIC input Impedance : low impedance Maximum sensitivity : 0.2 mV (-72 dB)
Track System:	Two-track mono	Output:	MONITOR output Impedance : 8 Ω or 10 k Ω load Output level : 0.775 V (0 dB) with 10 k Ω load
Tape:	SONY tape cassette or equivalent	Speaker:	2 $\frac{3}{4}$ " (70 mm) Dynamic speaker Voice coil impedance : 8 Ω
Tape Speed:	1 $\frac{7}{8}$ ips (4.8 cm/s)	Semiconductors:	1 FET, 13 transistors and 8 diodes
Recording Time: (with C-120 tape cassette)	2.0 hrs total	Dimensions:	2"(W) x 7 $\frac{5}{16}$ "(H) x 4 $\frac{5}{8}$ "(D) (51 x 184 x 111 mm)
Frequency Response:	50 ~ 10,000 Hz	Weight:	2 lb 3 oz (0.98 kg) with four penlight batteries
Wow and Flutter:	0.38 % (RMS) weighted		
Power Output:	500 mW maximum		
Record Bias Frequency:	Approx. 41 kHz		

SONY
SERVICE MANUAL

TABLE OF CONTENTS

<u>Section</u>	<u>Title</u>	<u>Page</u>
	Specifications	1
1.	OUTLINE	
1-1.	Servo Control Circuit Operation	3
1-2.	Auto Shut-off Mechanism Operation	4
1-3.	Block Diagram	5
1-4.	External View	6
1-5.	Internal View	6
2.	DISASSEMBLY	
2-1.	Case (A) and (B) Removal	8
2-2.	Case (C) Removal	9
2-3.	Complete Circuit Board Removal	9
2-4.	Motor Removal	9
2-5.	Belt Removal	9
2-6.	Midway Pulley Removal	10
2-7.	Rewind Idler Slide Removal	10
2-8.	Fast Forward Plate Removal	10
2-9.	Take-up Drum Removal	10
3.	ADJUSTMENTS	
3-1.	Mechanical Adjustments	11
3-2.	Electrical Adjustments/Measurements	13
4.	DIAGRAMS	
4-1.	Schematic Diagram	17
4-2.	Mounting Diagrams	19
4-3.	Level Diagrams	21
5.	EXPLODED VIEWS	
5-1.	Exploded View (1)	23
5-2.	Exploded View (2)	25
5-3.	Exploded View (3)	27
5-4.	Packing	28
6.	ELECTRICAL PARTS LIST	29

When ordering replacement parts, you should use PART NUMBER listed on the Parts List or shown in the EXPLODED VIEW. The reference number should not be used for ordering purposes.

SECTION 1

OUTLINE

1-1. SERVO CONTROL CIRCUIT OPERATION

Stage/Control	Function	Stage/Control	Function
Frequency generator (FG)	This generator is coaxially coupled with dc motor. The frequency of FG varies in direct proportion to the motor rotation.	Speed control R101	This control shifts the filter characteristics.
Discriminator Q101	Active high-pass filter consisting of Q101, C101, C102, R103, R104 and R108 discriminates the output of FG. When the input frequency increases, the output of the discriminator increases, or vice versa.		

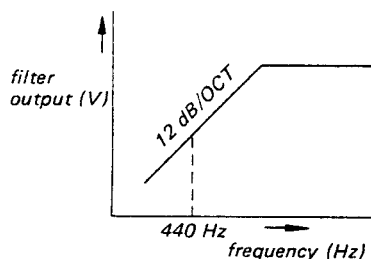


Fig. 1-1. Filter characteristics

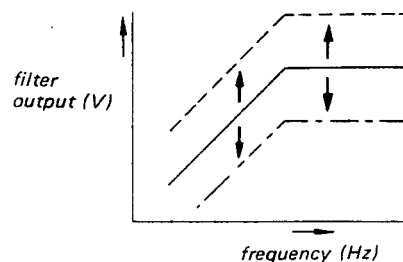


Fig. 1-2. Shift of filter characteristics

Voltage stabilizer D101 This diode stabilizes B+ voltage for Q101 and Q102.

Rectifier D102, D103 These diodes rectify the output of the discriminator as a voltage doubler.

Direct coupled dc amplifier Q102, Q103, Q104 This amplifier amplifies dc component rectified by D102 and D103 to control the motor current. Since the output from FG is not available when starting the motor, no dc component is applied to Q102 base to turn Q102 off. Since Q103 base voltage is high as B+ voltage, Q103 and Q104 are conductive to start the motor.



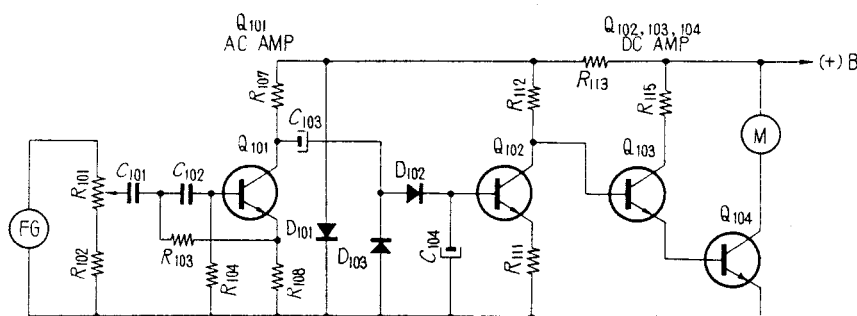


Fig. 1-3. Outline of servo control circuit

1-2. AUTO SHUT-OFF MECHANISM OPERATION

TC-42 mechanism is designed so that the unit will shut itself off automatically at tape end in record or playback mode.

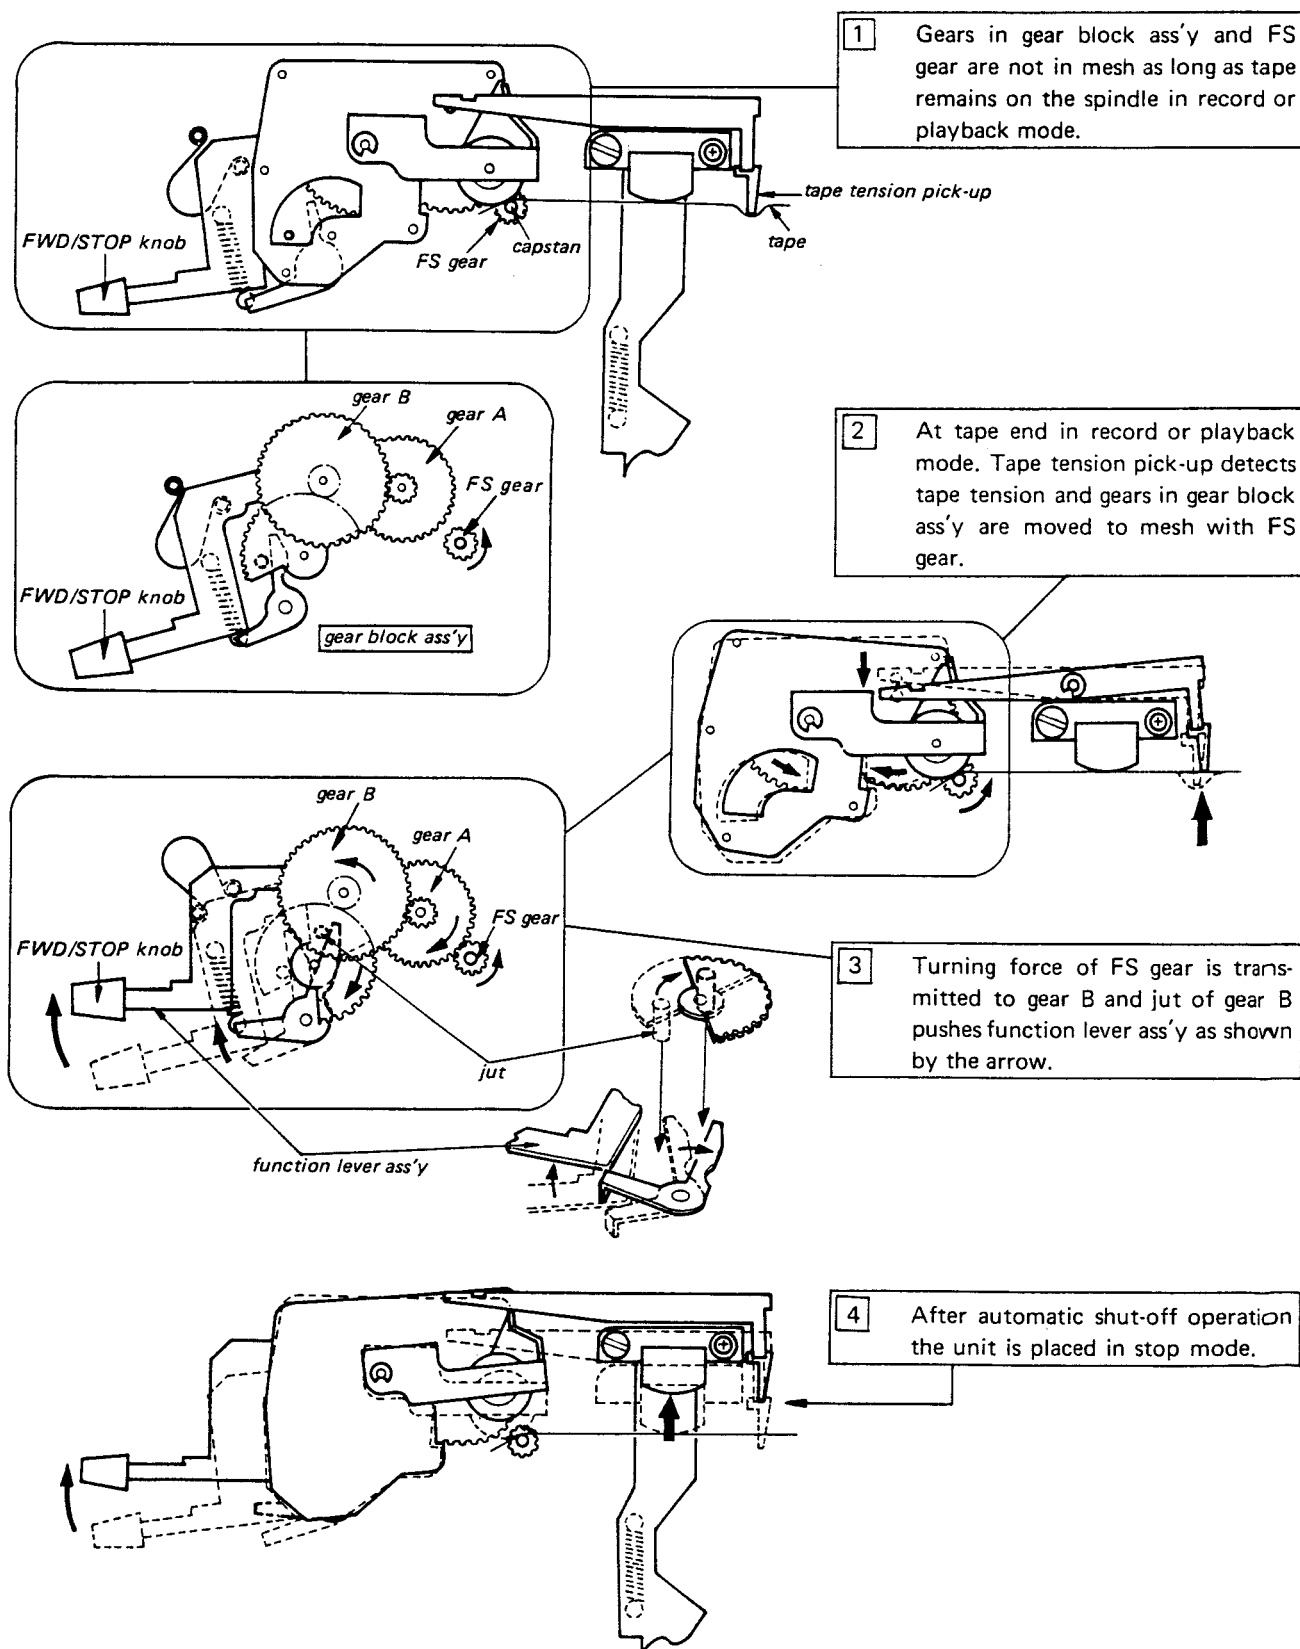

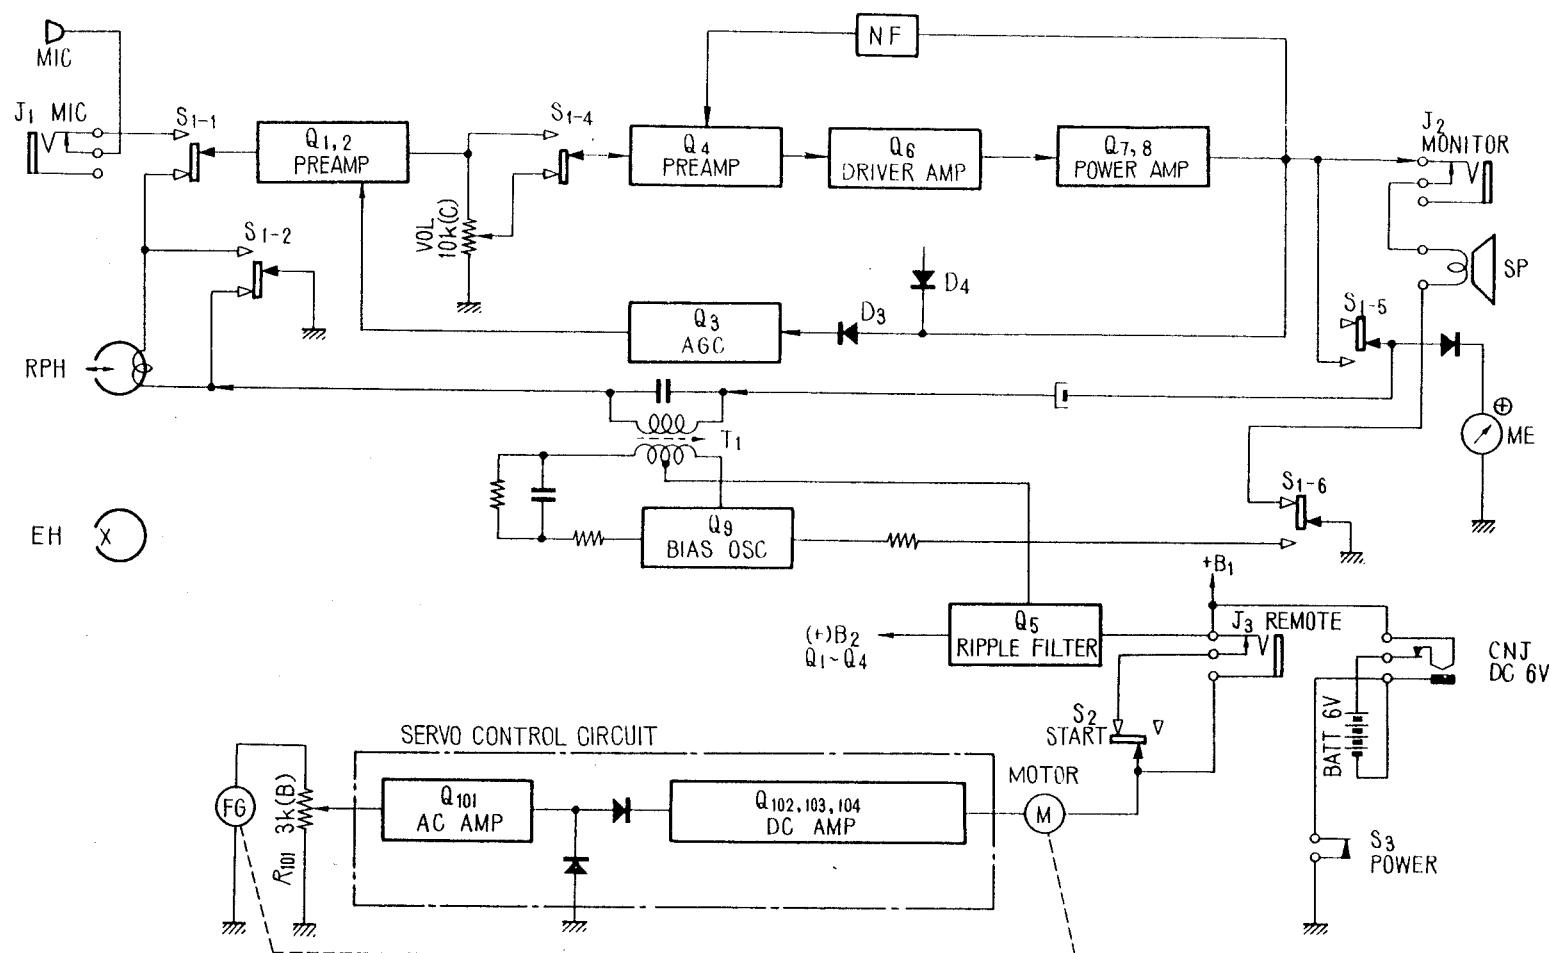


1-3. BLOCK DIAGRAM

Note:


Ref	Switch	Mode
Q1	record/playback	playback
S2	pause	START

1-4. EXTERNAL VIEW

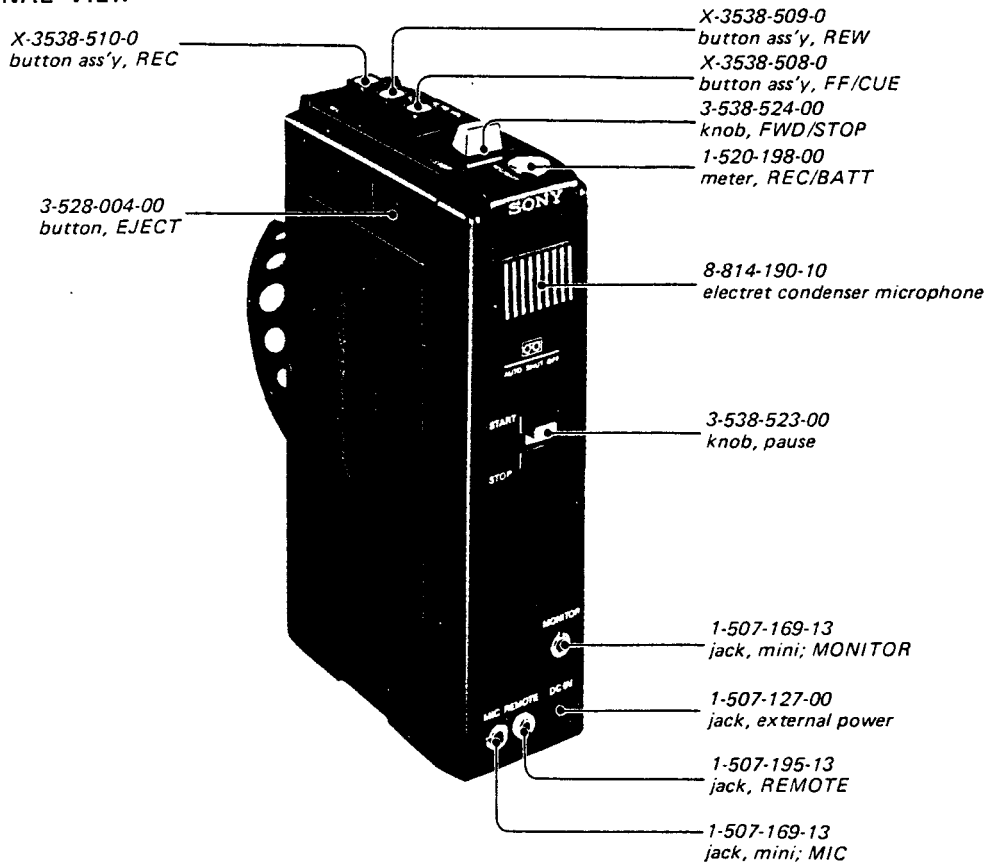


1-5. INTERNAL VIEW




CHASSIS — Top View —

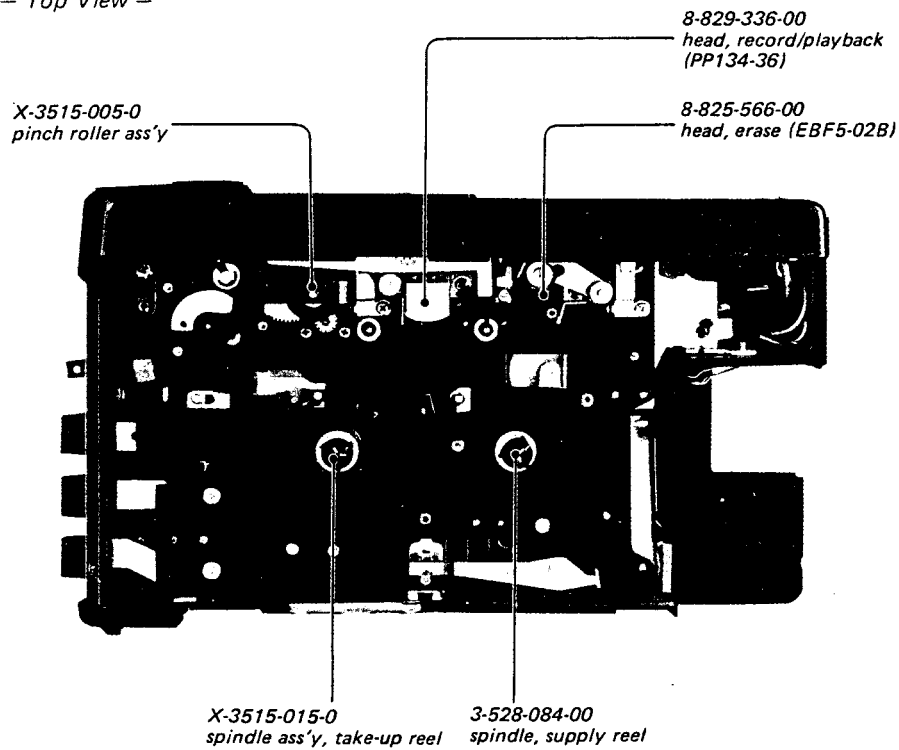


CHASSIS —Rear View—

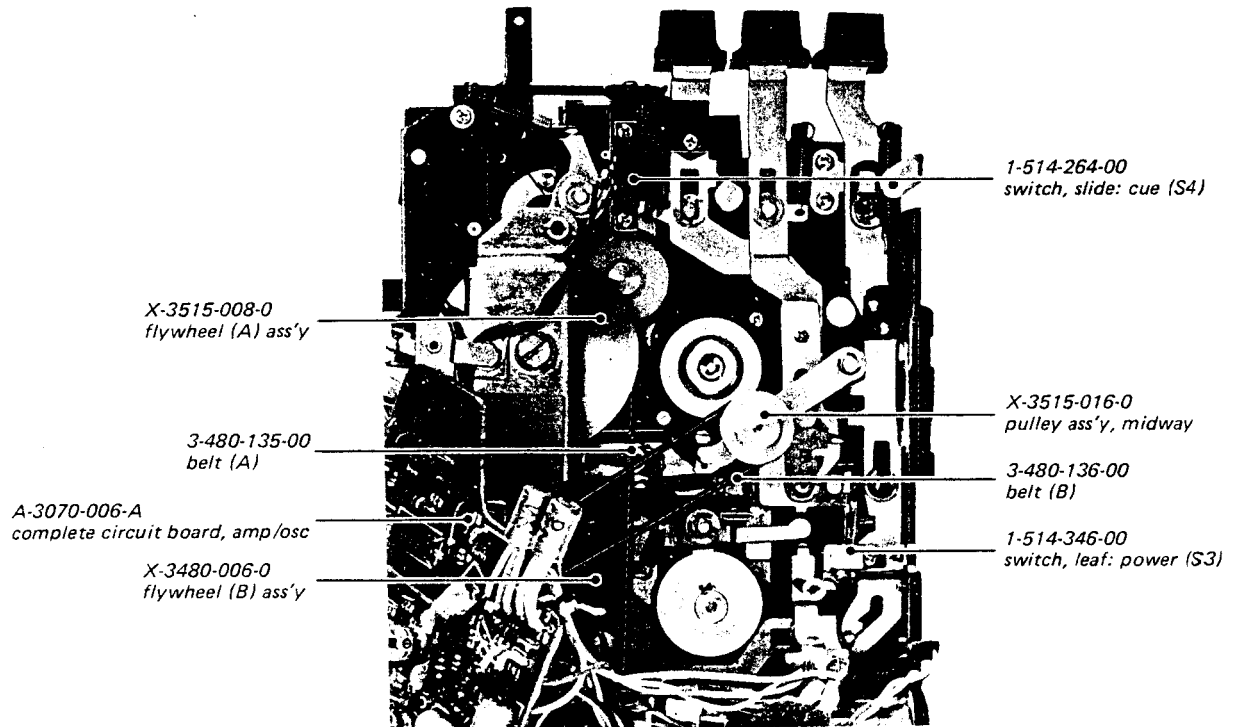


2-1. CASE (A) AND (B) REMOVAL

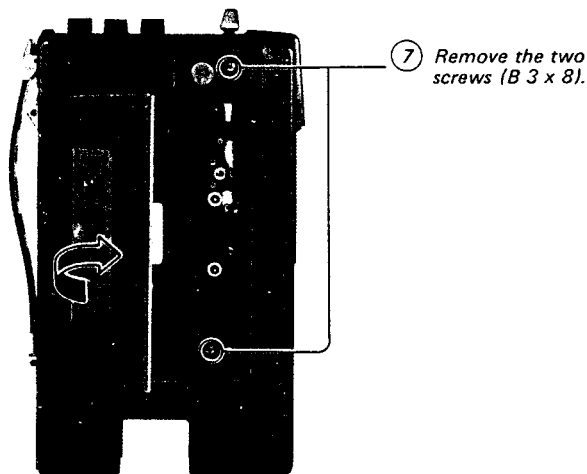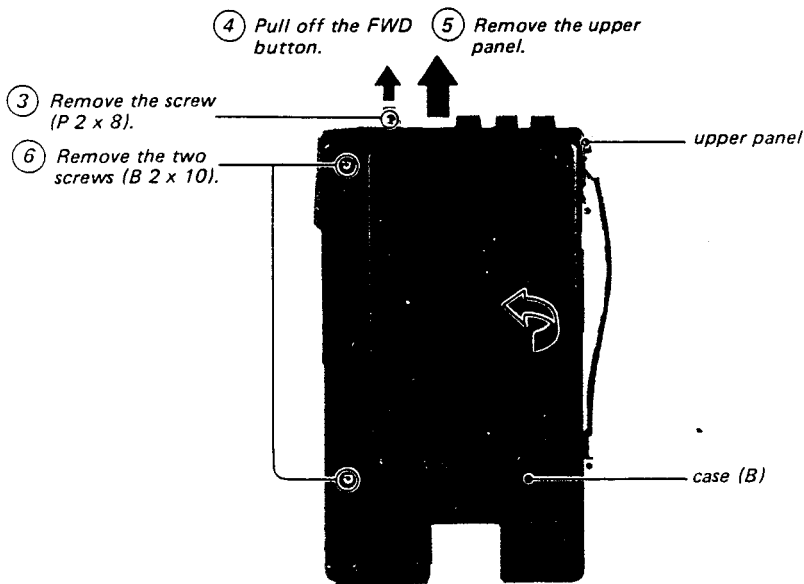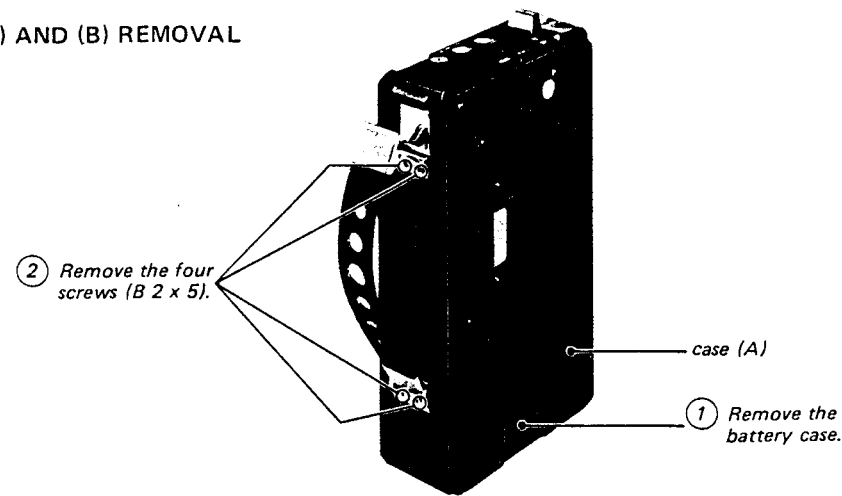


2-2. CASE (C) REMOVAL

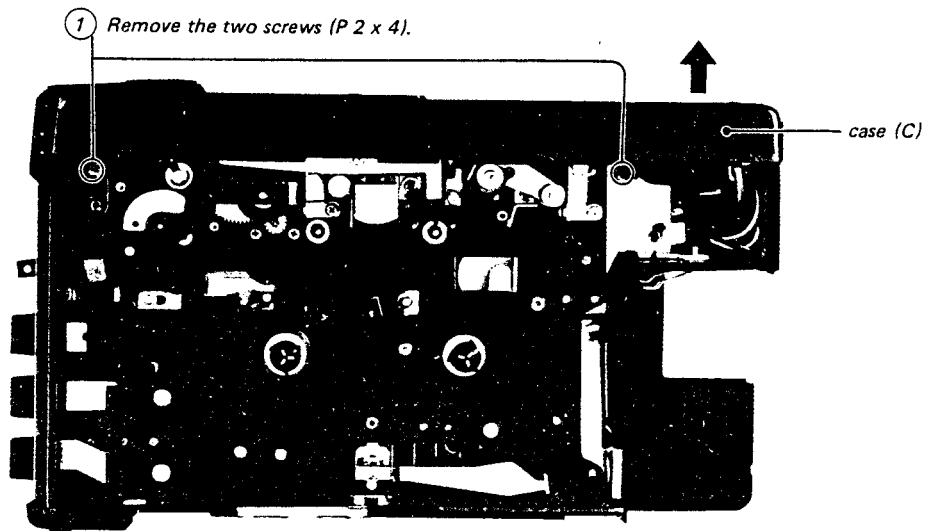


2-3. COMPLETE CIRCUIT BOARD REMOVAL

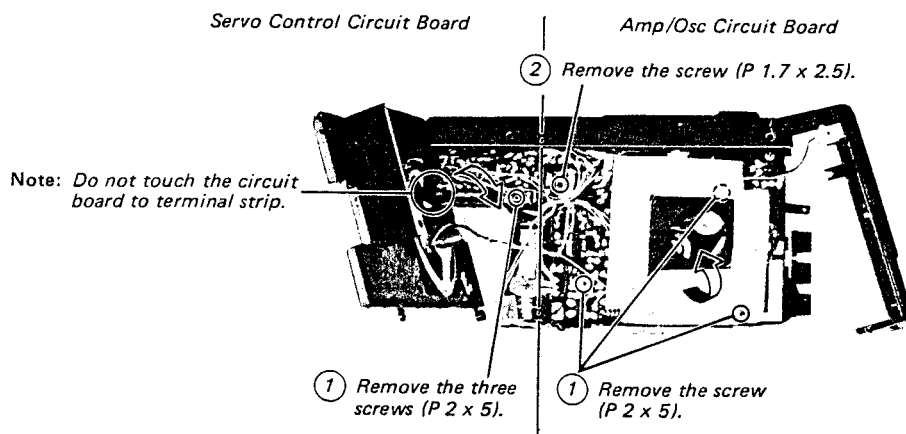


2-4. MOTOR REMOVAL

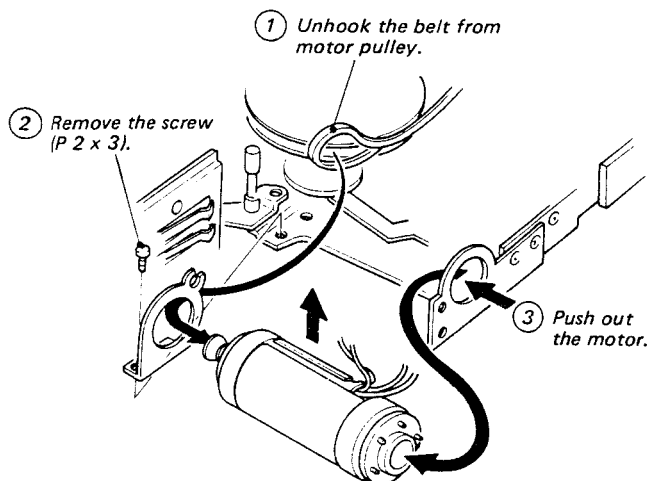


2-5. BELT REMOVAL

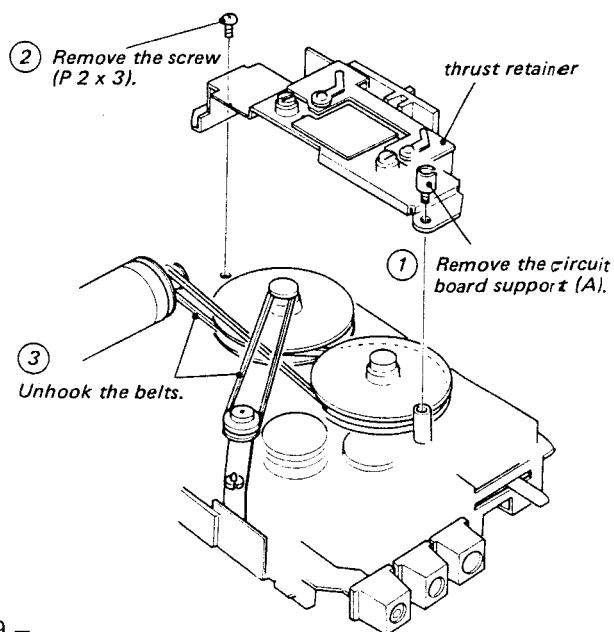


2-6. MIDWAY PULLEY REMOVAL

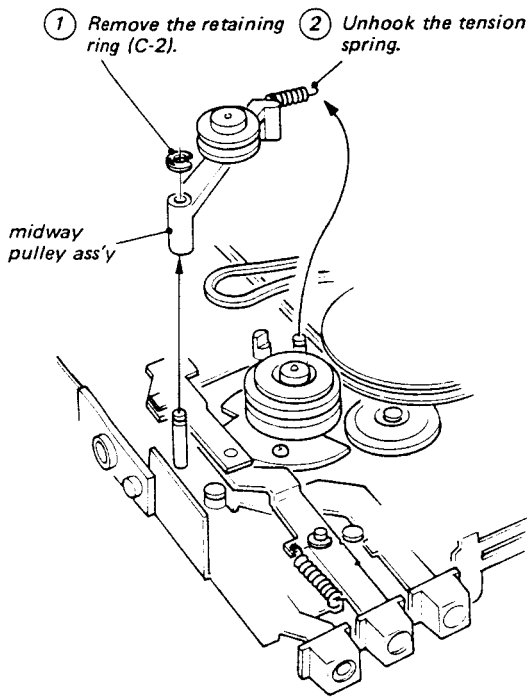


2-8. FAST FORWARD PLATE REMOVAL

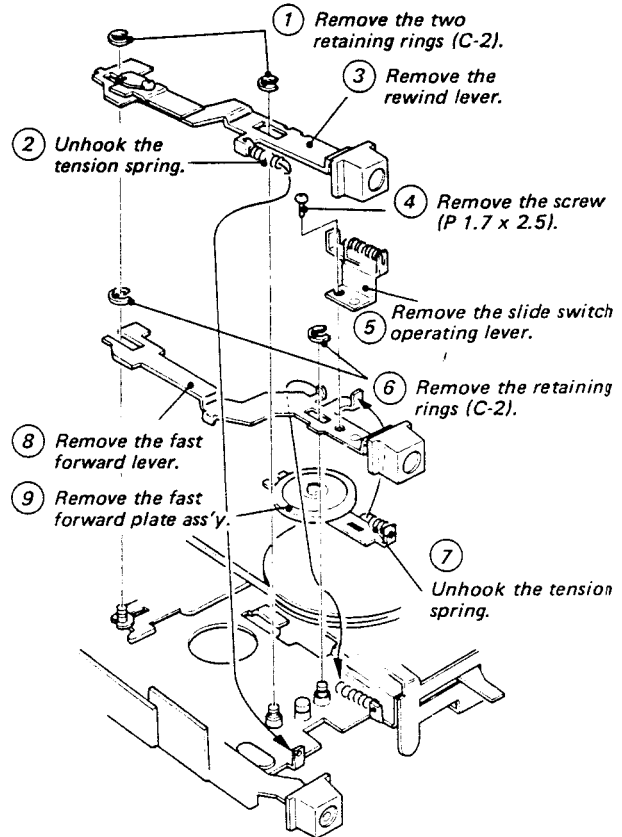

2-7. REWIND IDLER SLIDE REMOVAL

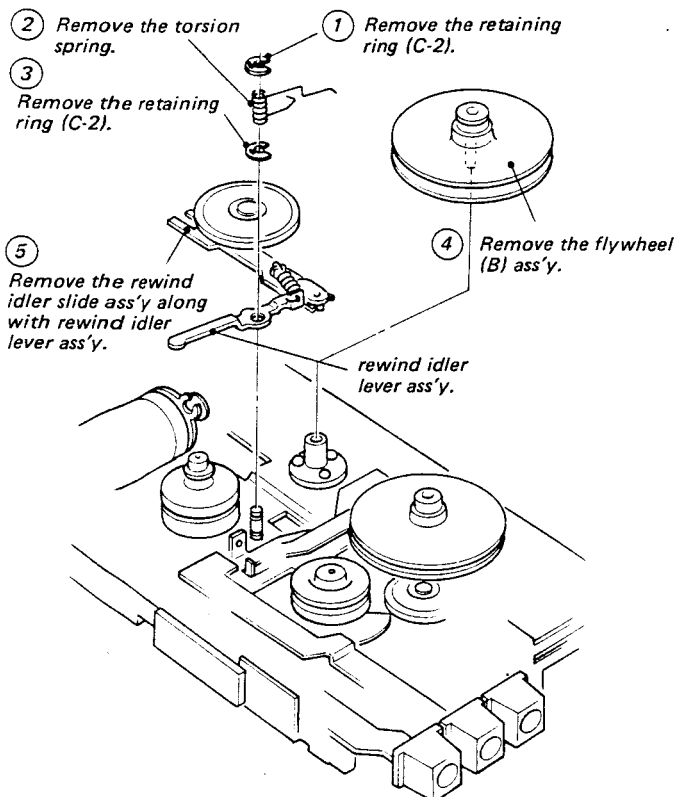

2-9. TAKE-UP DRUM REMOVAL

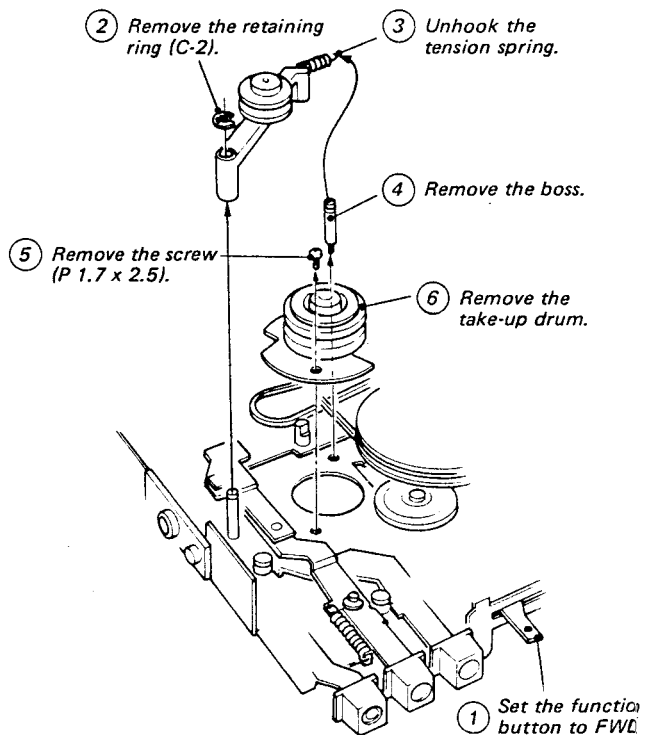


SECTION 3 ADJUSTMENTS

3-1. MECHANICAL ADJUSTMENTS

REW Lever Adjustment



—Stop Mode—

With REW lever fully pushed as shown by the arrow, loosen this screw and adjust lock plate ass'y position.

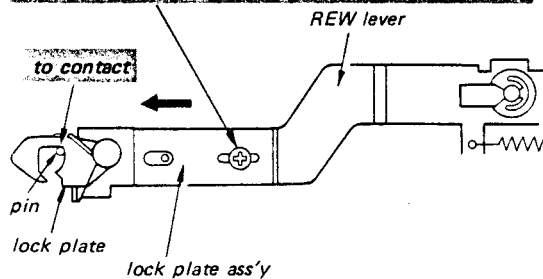

Power Leaf Switch (S3) Adjustment


—Stop Mode—

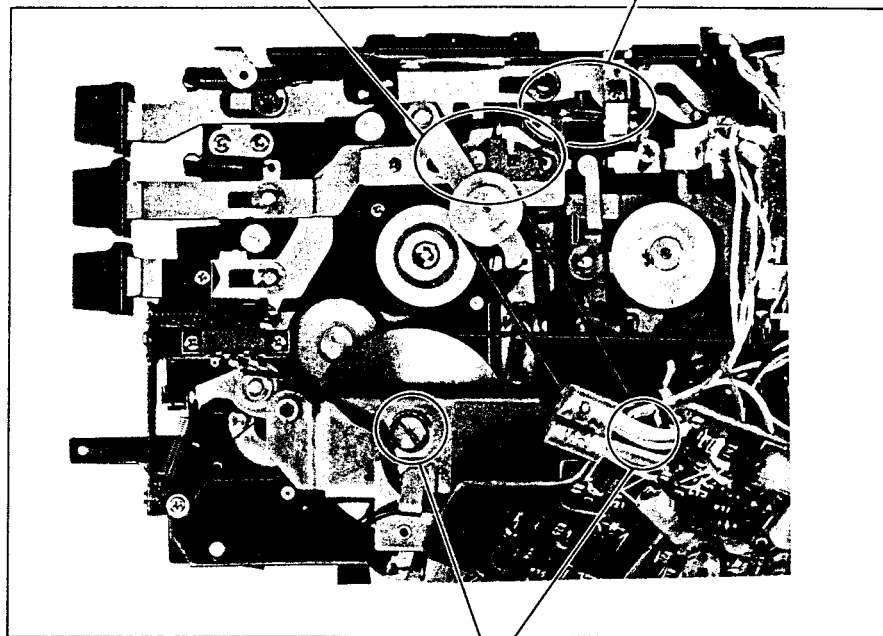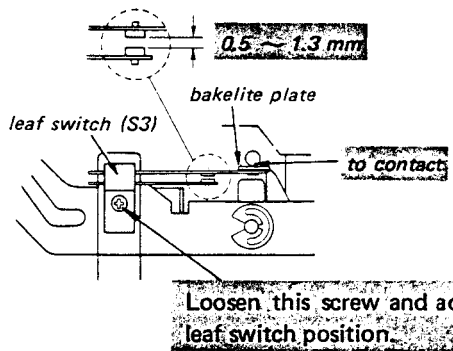

Flywheel Thrust Play Adjustment

—Playback Mode—


1. Setup:

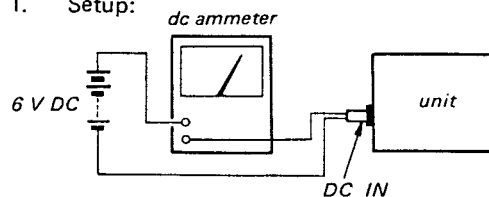

2. Loosen thrust screws for sufficient fly wheel play.
3. Tighten the screws until current suddenly increases, then loosen the screws 1/4 turn.

Pinch Roller Pressure Measurement



—Playback Mode—

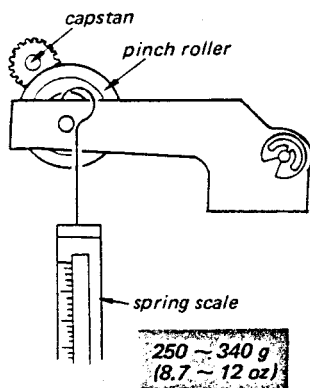


Note: The pressure should be measured just when the pinch roller contacts the capstan after separated.

Torque Measurement

Playback Torque	40 ~ 60 g.cm (0.56 ~ 0.84 oz.inch)
Fast Forward Torque	60 g.cm or more (0.84 oz.inch)
REW Torque	50 g.cm or more (0.7 oz.inch)

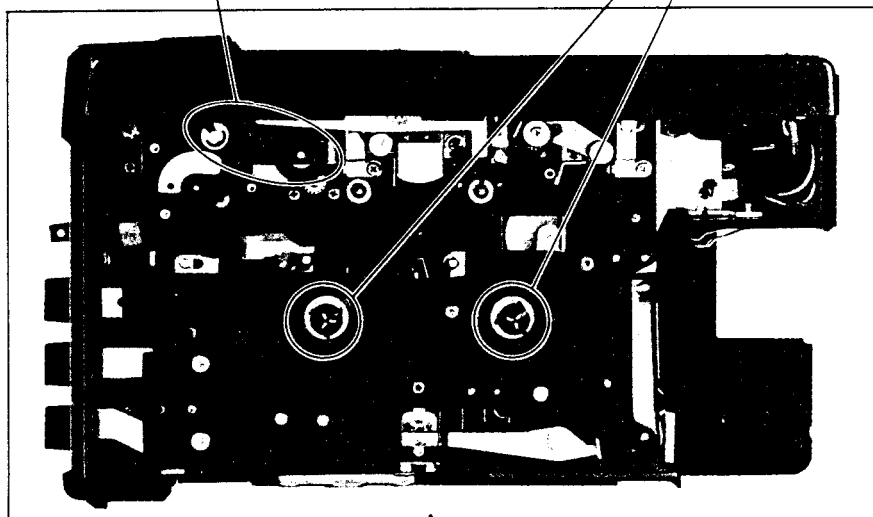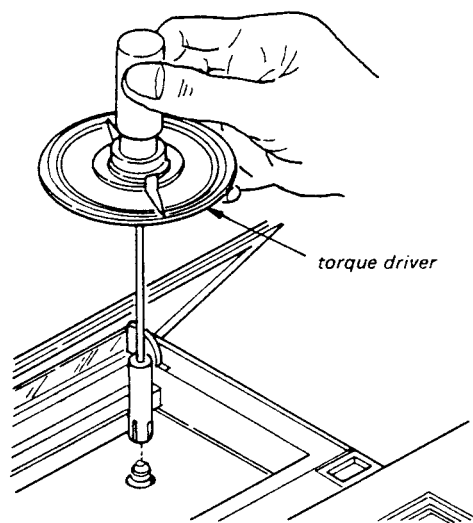

3-2. ELECTRICAL ADJUSTMENTS/ MEASUREMENTS

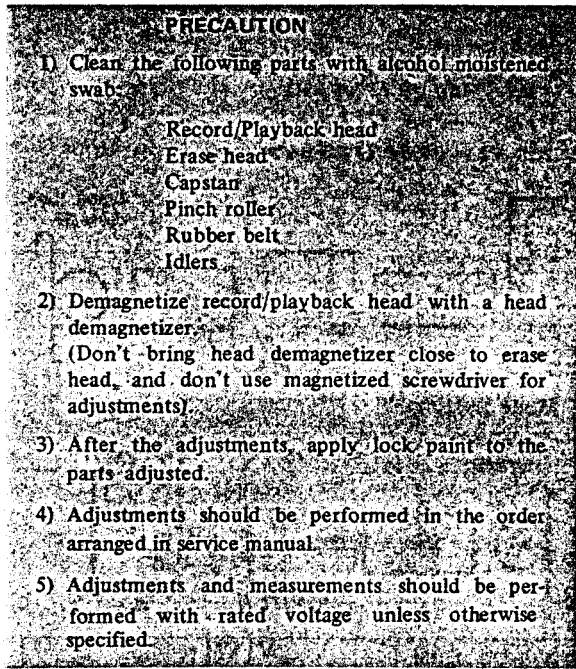

Test Equipment/Tools Required

audio oscillator (af osc)
 VTVM
 digital frequency counter
 1 kHz bandpass filter
 10 k Ω resistor
 attenuator (600 Ω)
 SONY test tapes
 P-4-A81 (6.3 kHz, -10 dB)
 P-4-L81 (333 Hz, 0 dB)
 SPC-4 (1 kHz, 0 dB)
 WS-48 (3 kHz, 0 dB)
 blank tape cassette (completely erased)
 empty cassette
 wow meter
 resistors (8 Ω , 1 W) (10 k Ω , 1/4 W) (600 Ω , 1/4 W)


1. Tape speed Adjustment

Control/Switch Setting:

PB VOL control: mechanical midway


Procedure:

1. Mode: playback

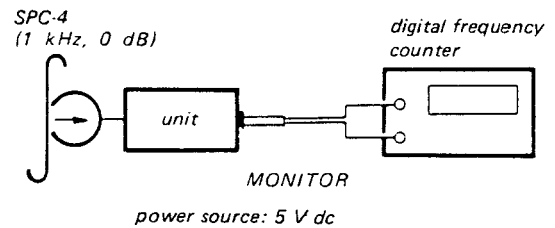

Specification: 990 ~ 1000 Hz

2. If necessary, adjust R101

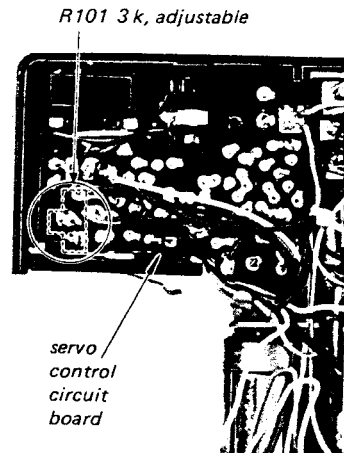

2. Head Azimuth Adjustment


Control/Switch Setting:

PB VOL control: mechanical midway

Procedure:

1. Mode: playback


P-4-A81
(6.3 kHz, -10 dB)

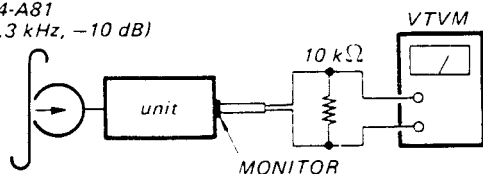

2. Adjust adjusting screw for the biggest peak VTVM reading.

Note: Several peaks may appear, take the biggest.

head azimuth adjusting screw

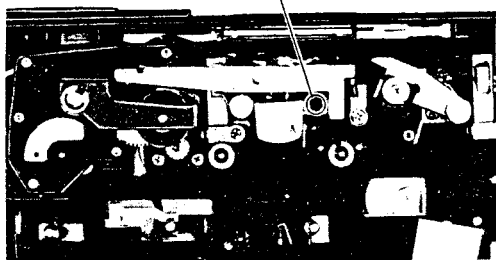


3. Recording Bias Adjustment


Procedure:

1. Mode: record


1. 1 kHz, -80 dB (77.5 μ V)
2. 6 kHz, -80 dB (77.5 μ V)
3. 250 Hz, -80 dB (77.5 μ V)

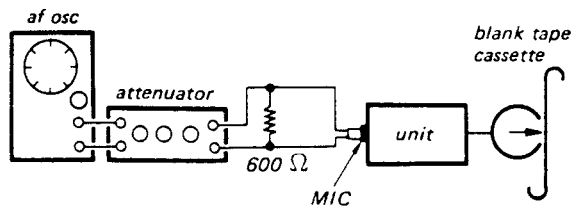



2. Mode : playback

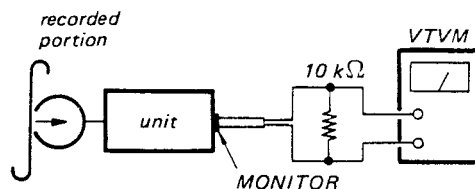

recorded signal	VTVM reading
1 kHz	Adjust PB VOL control for -10 dB (0.25 V)
6 kHz	See figure below
250 Hz	

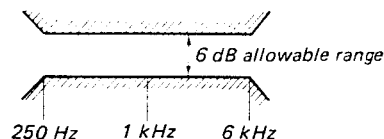

3. If necessary, vary resistance by changing resistor connection as shown.
Lower resistance value decreases high-frequency level.

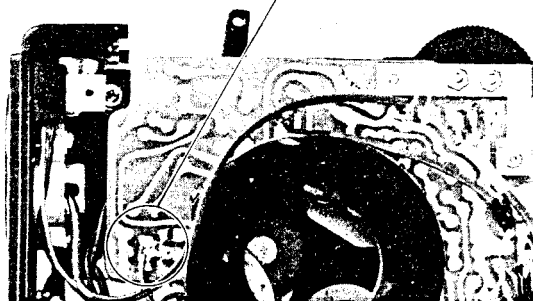


4. Repeat steps 1 through 3 until desired results are achieved.



4. REC/BATT Meter Calibration

Procedure:

1. Supply 3.6 V dc and place unit in playback mode.

2.

Adjust	REC/BATT meter
Change resistor connection (See figure below)	

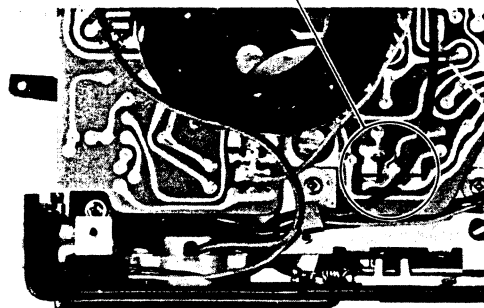

5. Overall Maximum Output Measurement


Control/Switch Setting:

PB VOL control: maximum


Procedure:

1. Mode: record

333 Hz, -60 dB (0.78 mV)
power source: 6 V dc

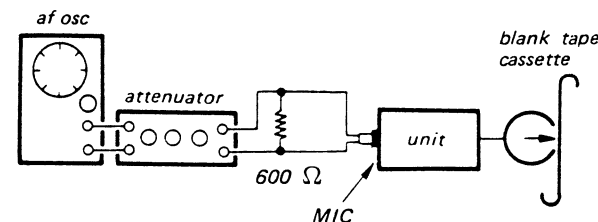

2. Mode: playback

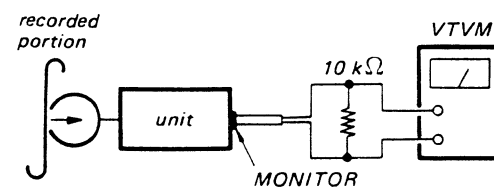


VTVM reading: greater than 1.9 V (8 dB)

6. Playback Signal-to-Noise Ratio Measurement


Procedure:

1. Mode: playback

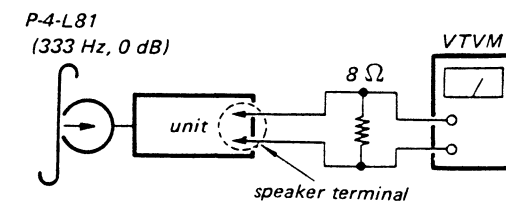

Adjust PB VOL control for +2 dB (0.95 V)

2. Mode: playback

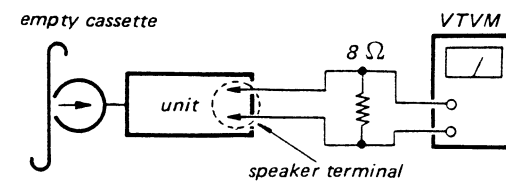

Specification:

$$+2 \text{ dB} - \text{noise level (dB)} = \text{S/N}$$

Power source	S/N
ac adaptor	greater than 36 dB
battery	greater than 42 dB


7. Wow and Flutter Measurement

Control/Switch Setting:

PB VOL control: mechanical midway

Procedure:

1. Mode: playback

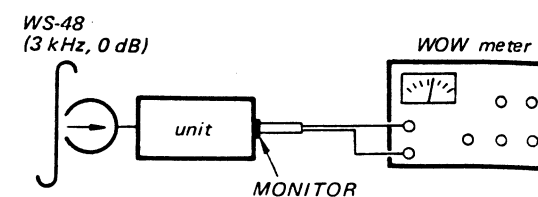


Specification: less than 0.4 % (RMS)

Note: Measure wow and flutter for beginning, midway and end portion of WS-48.

8. Erase Ratio Measurement


Procedure:

1. Mode: record
1 kHz, -20 dB (77.5 mV)
af osc

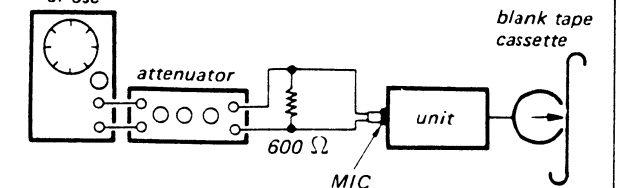


2. Rewind half of recorded portion.

3. Mode: record

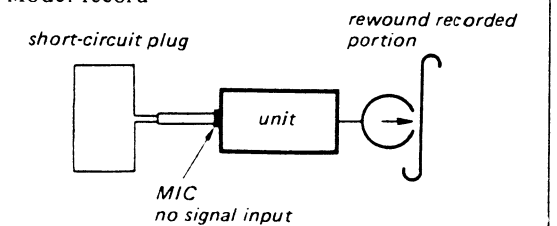


4. Mode: playback

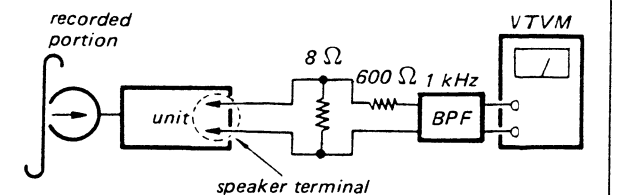

recorded signal	VTVM reading
1 kHz (-20 dB, 77.5 mV)	Adjust PB VOL control for 0 dB (0.775 V)
no signal	less than -60 dB (0.78 mV) (erase ratio greater than 60 dB)


SECTION 4
DIAGRAMS

4-1. SCHEMATIC DIAGRAM

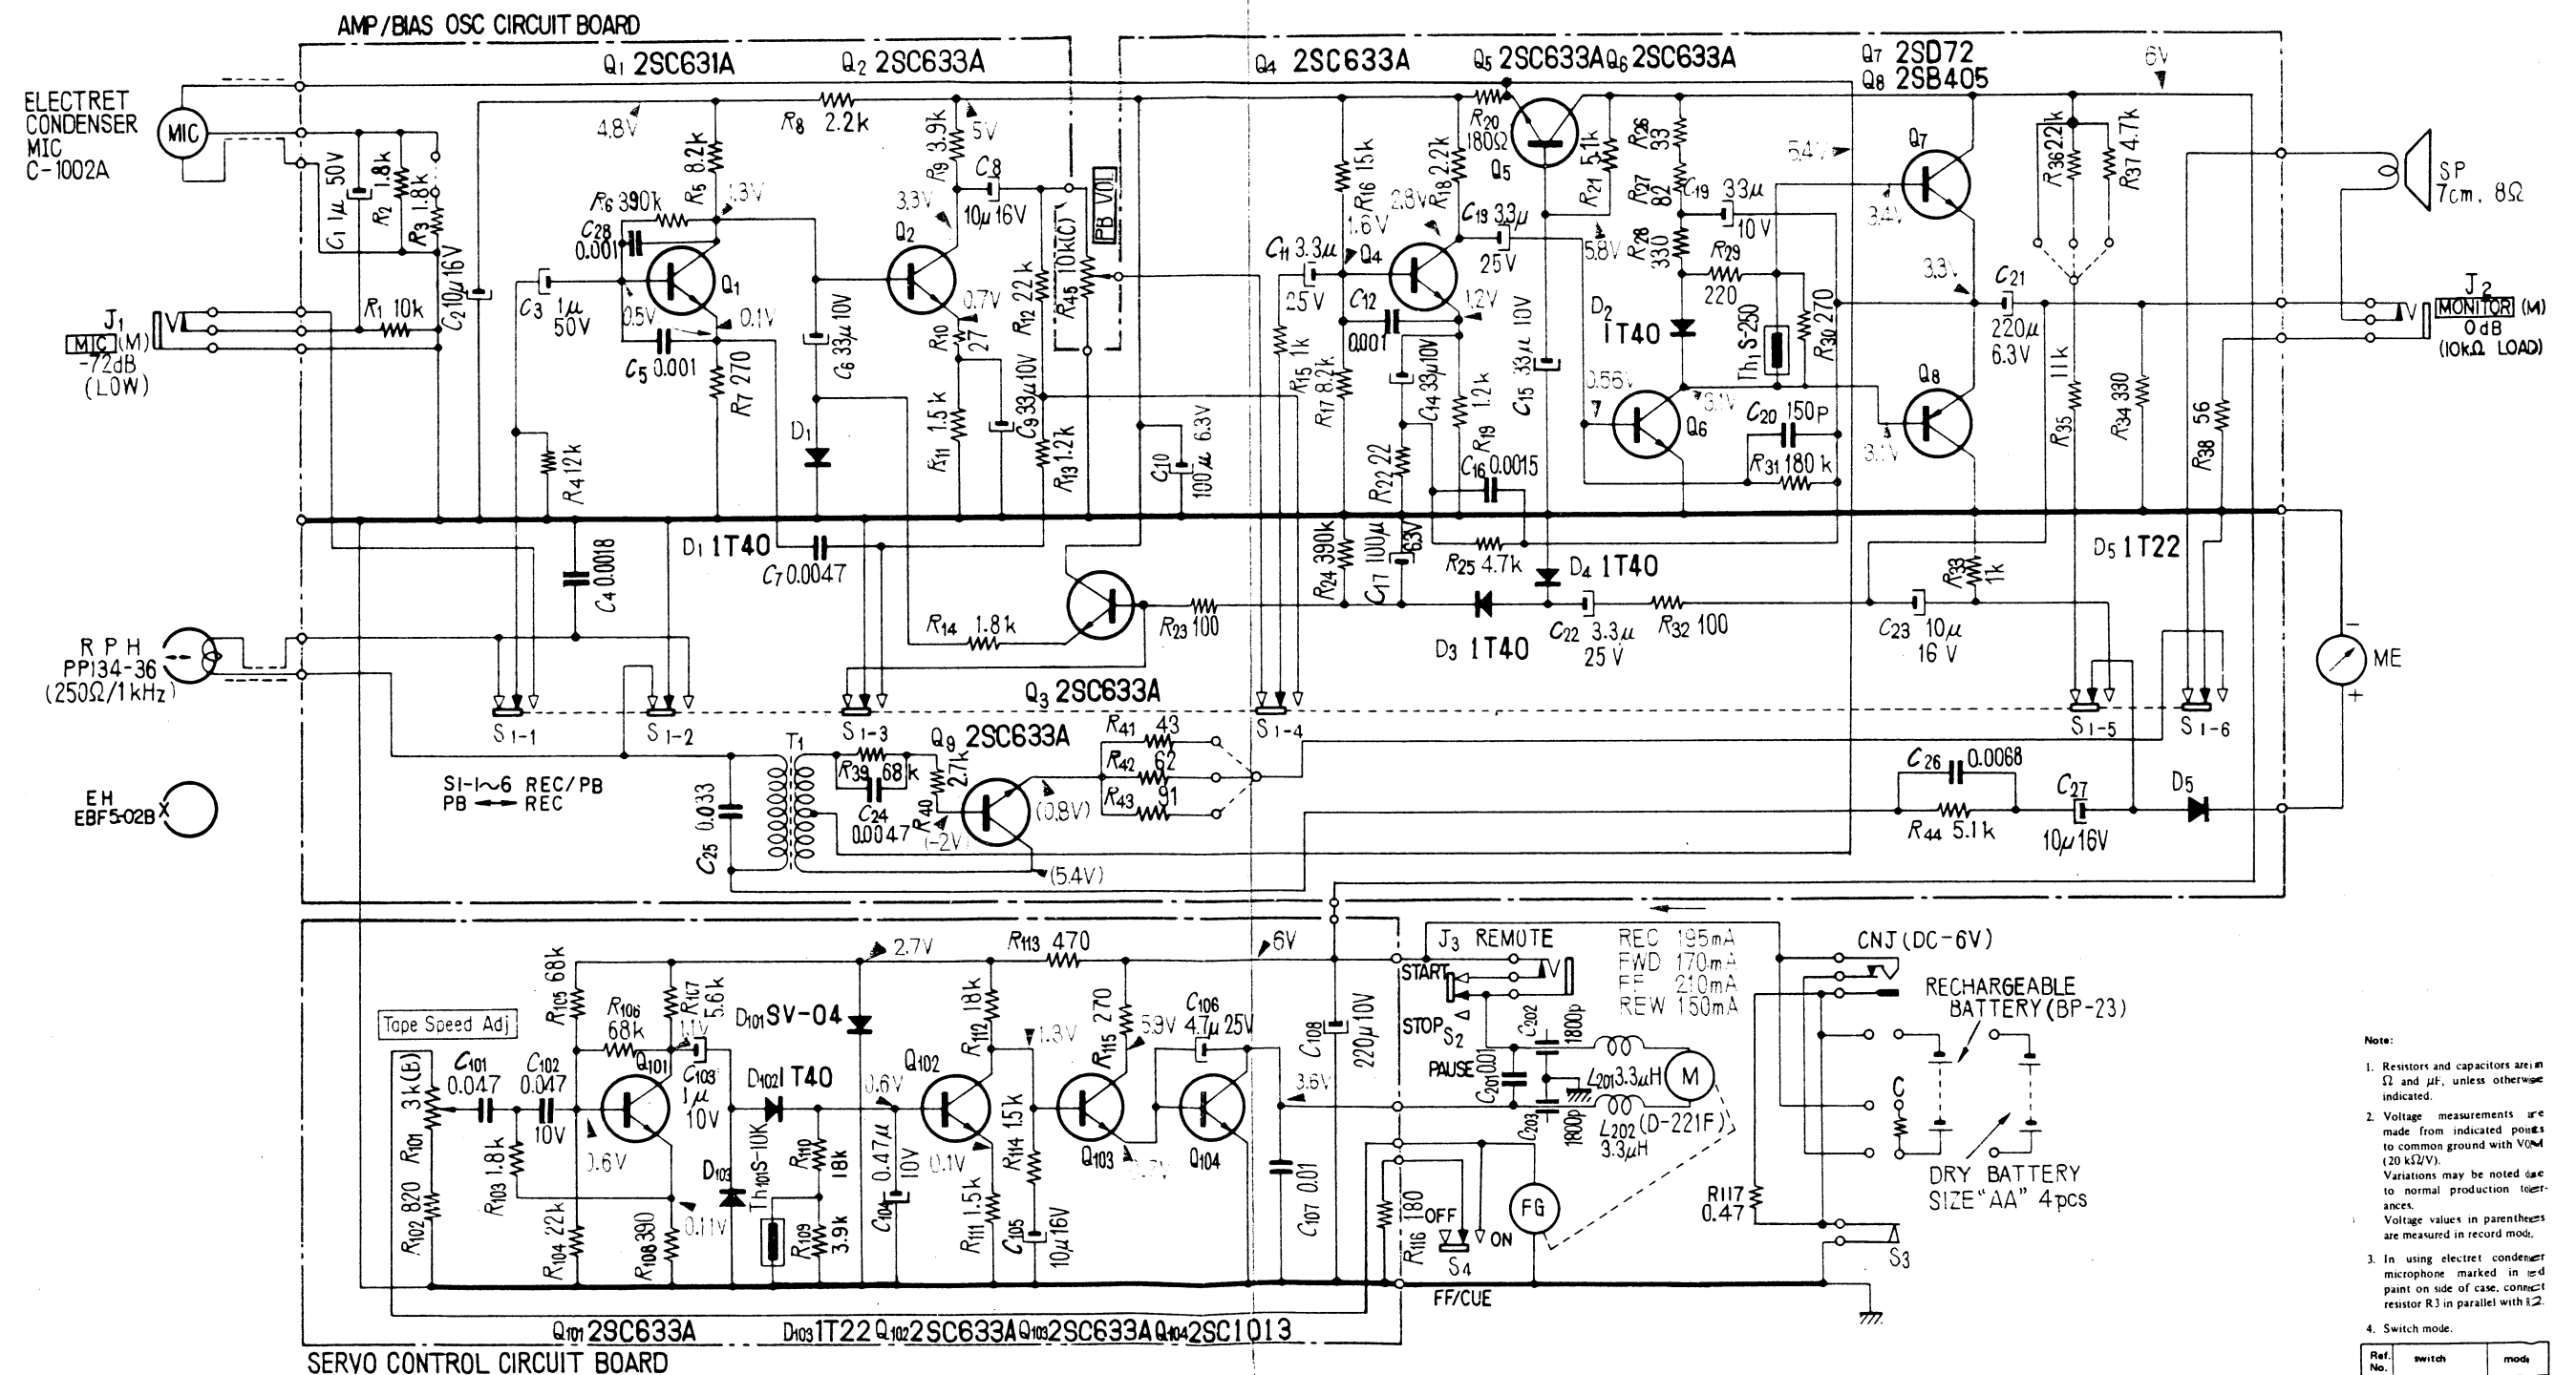

- Note:
- Resistors and capacitors are in Ω and μ F, unless otherwise indicated.
 - Voltage measurements are made from indicated points to common ground with VOM (20 k Ω /V). Variations may be noted due to normal production tolerances. Voltage values in parentheses are measured in record mode.
 - In using electret condenser microphone marked in red point on side of case, connect resistor R3 in parallel with I2.
 - Switch mode.
- | Ref. No. | Switch | Mode |
|----------|-----------------|----------|
| S1 | record/playback | playback |
| S2 | pause | START |
| S3 | power | OFF |
| S4 | CUE | OFF |

4-2. MOUNTING DIAGRAMS
— Conductor Side —

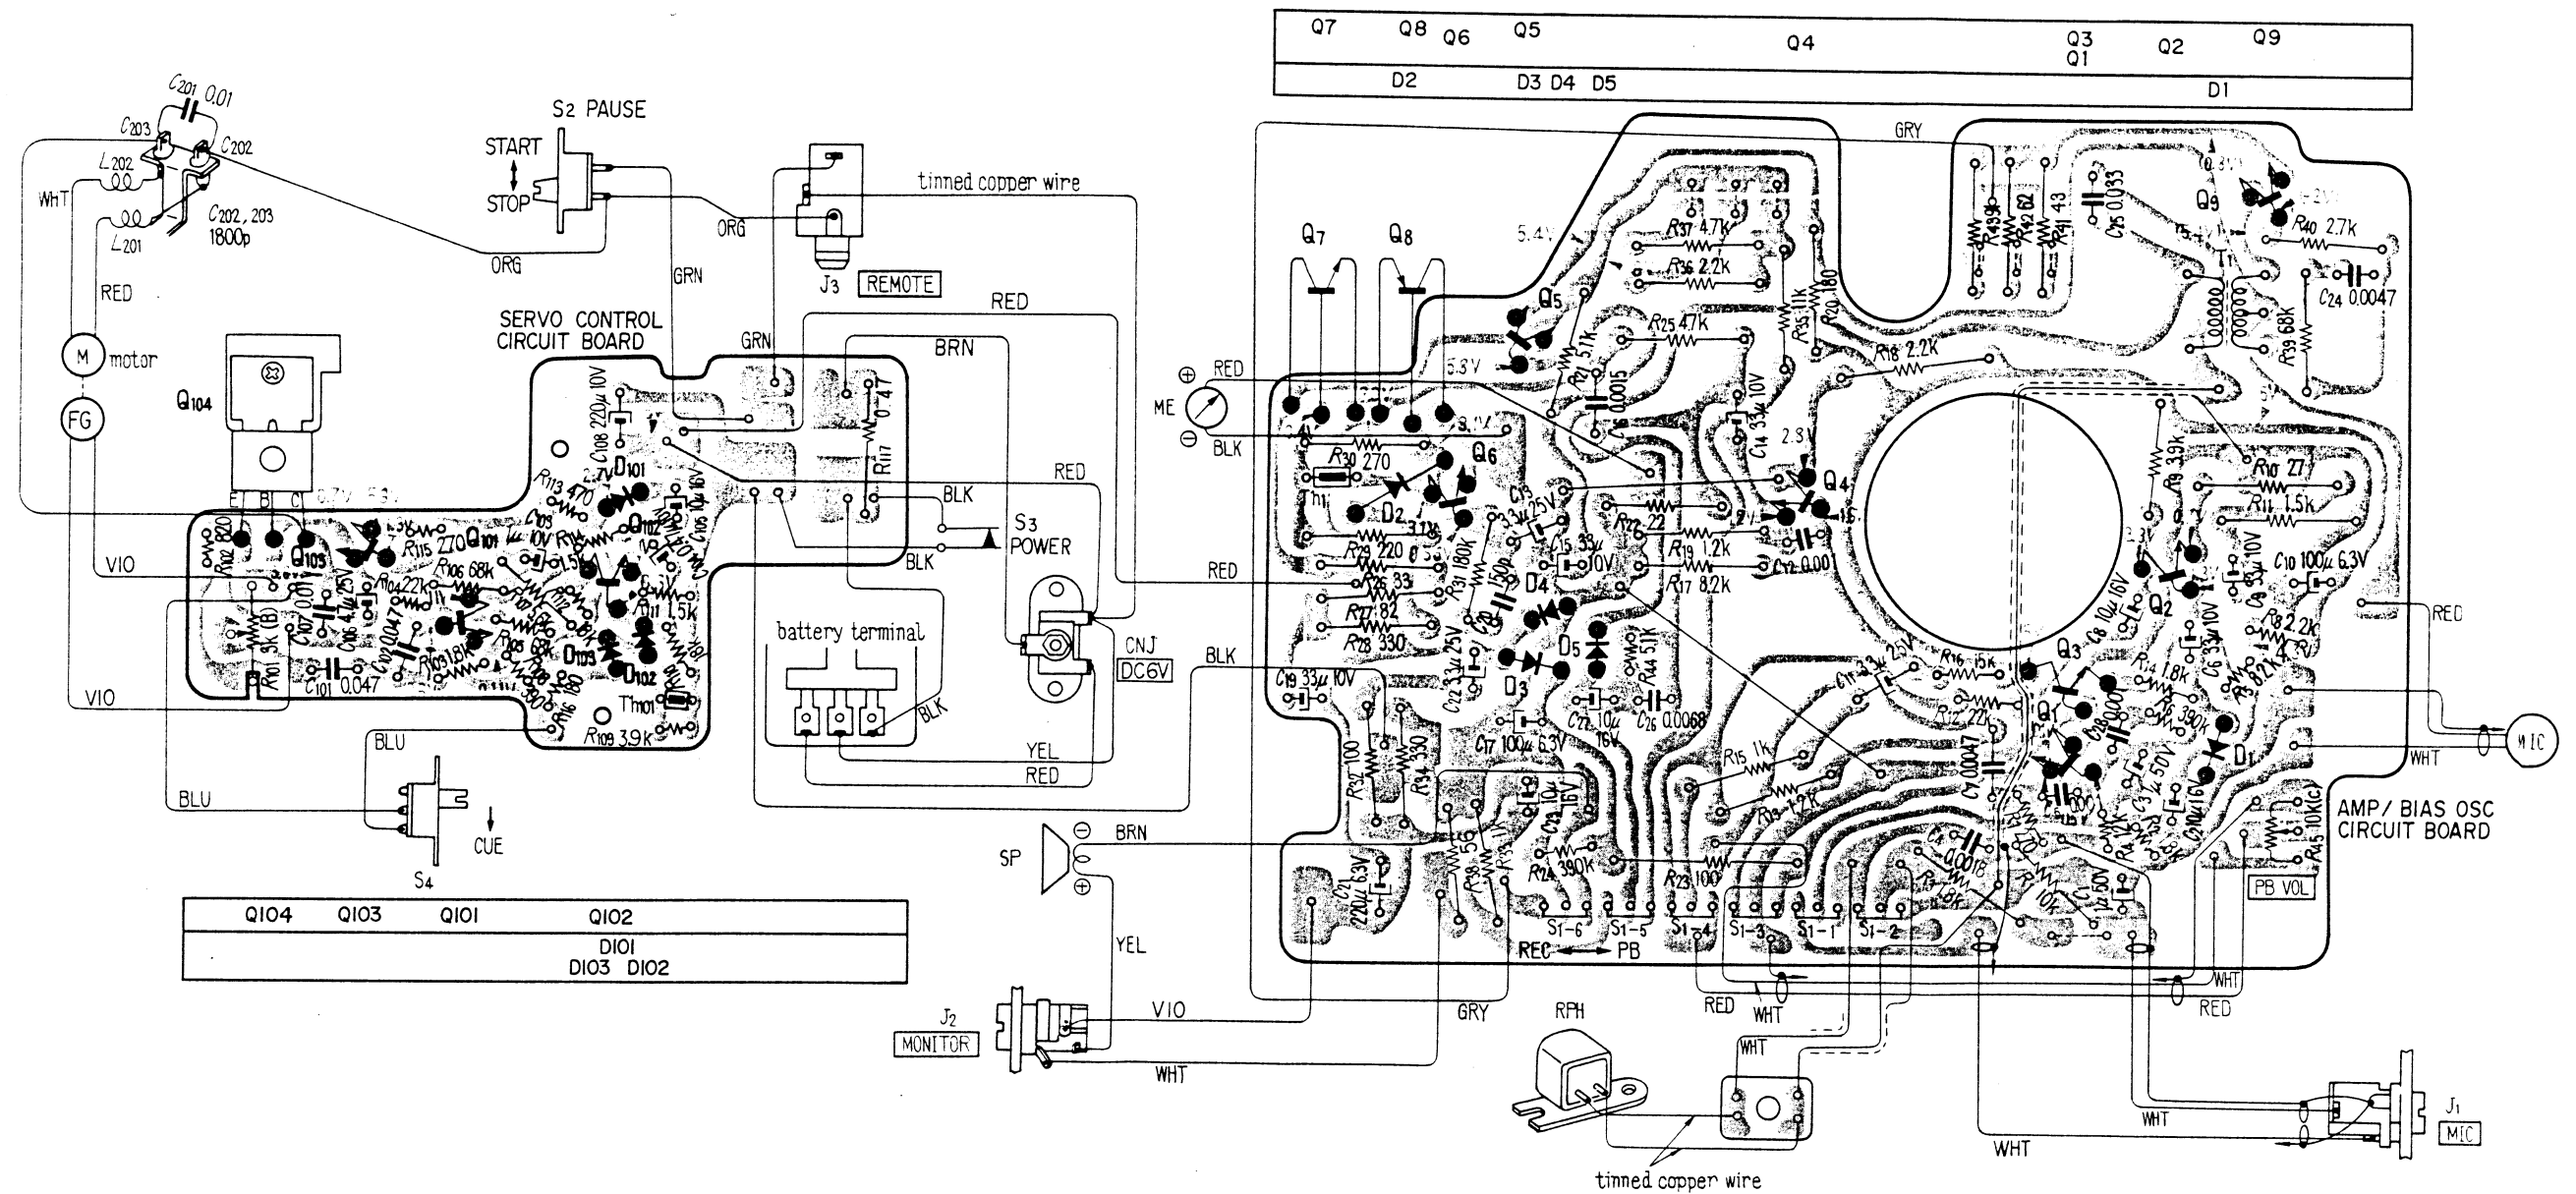

Q1: 2SC631A

Q2 ~ 6, 9
Q101 ~ 103 } 2SC633A

Q7: 2SD72







Q8: 2SB405

Q104: 2SC1013

D1 ~ 4, 102:
1T40

D5, 103: 1T22

D101: SV-04




SECTION 5


EXPLODED VIEWS AND PACKING

4-3. LEVEL DIAGRAM

Playback

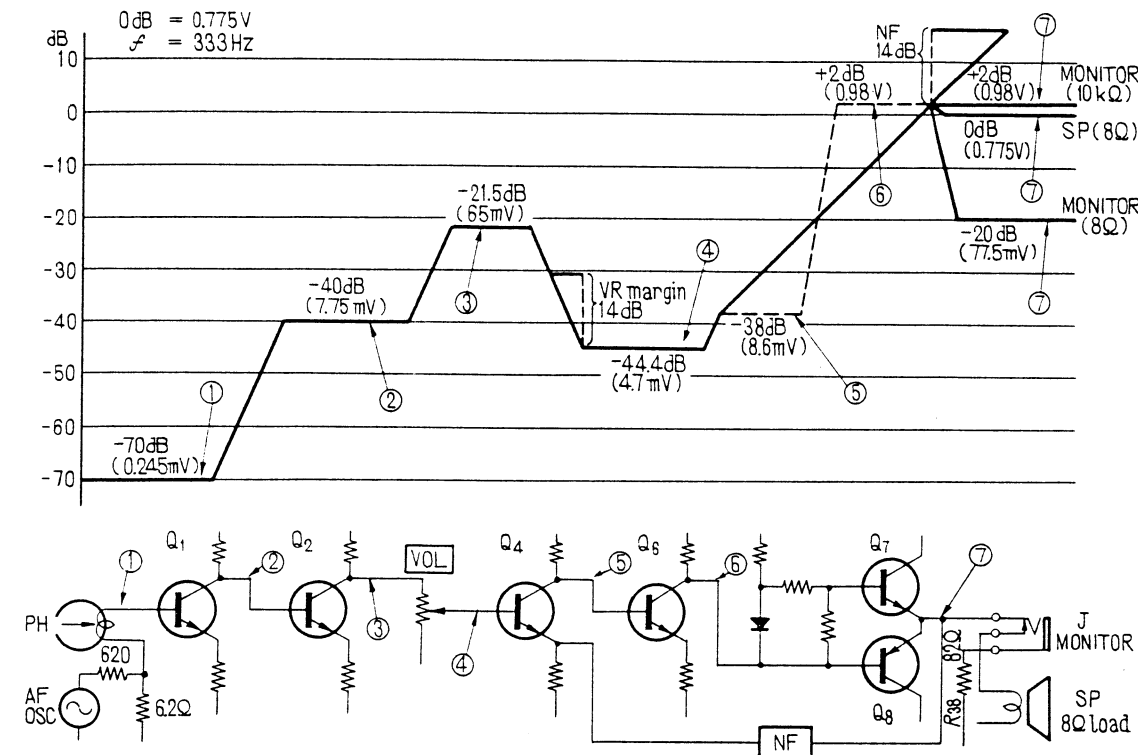

Record

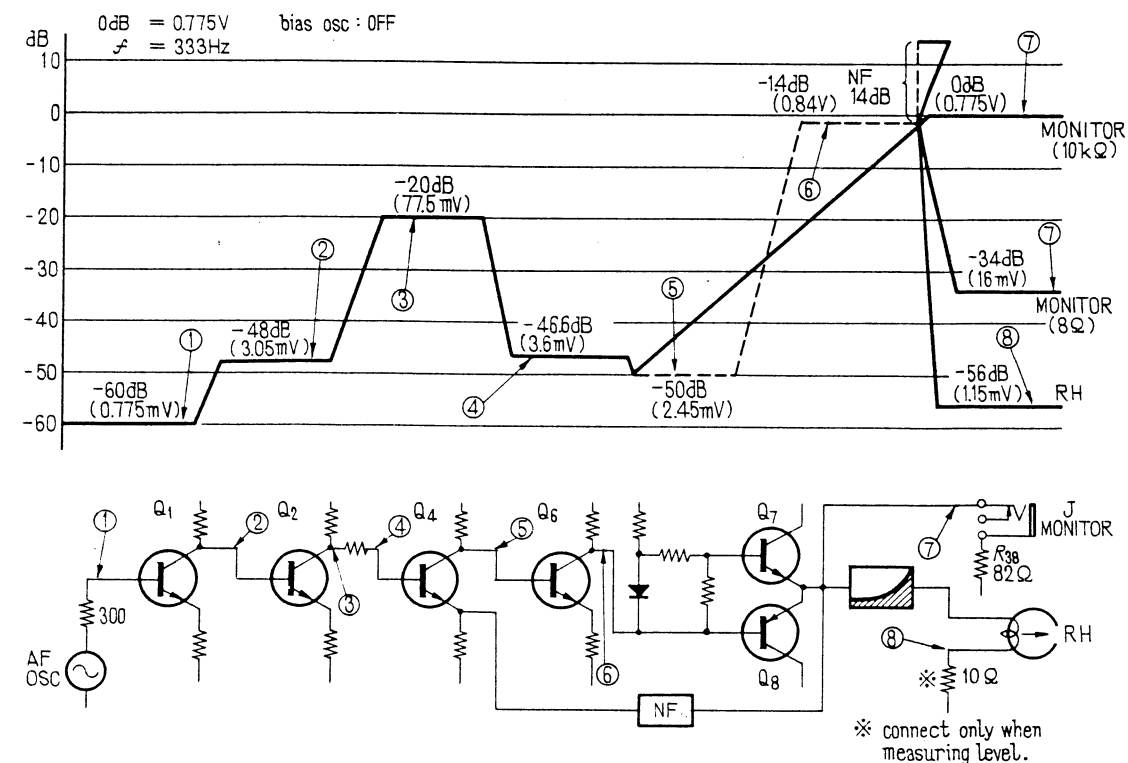

Part No.

Description

SCREWS

7-621-255-13	⊕ P 2 x 3
7-621-255-23	⊕ P 2 x 4
7-621-255-33	⊕ P 2 x 5
7-621-255-43	⊕ P 2 x 6
7-621-255-53	⊕ P 2 x 8
7-621-255-63	⊕ P 2 x 12
7-621-281-13	⊕ P 2 x 2
7-621-500-53	⊕ P 1.7 x 2.5
7-621-555-25	⊕ K 2 x 4
7-621-714-16	⊖ SC 1.7 x 3
7-621-771-18	⊕ B 2 x 5
7-621-773-82	⊕ B 2 x 6
7-621-774-21	⊕ B 2 x 6
7-627-600-53	⊕ K 1.7 x 3
7-627-800-93	⊕ P 1.7 x 4
7-682-527-05	⊕ B 2 x 8 (BLK)
7-682-528-05	⊕ B 2 x 10 (BLK)
7-682-635-01	⊕ PS 2.6 x 6
7-685-105-21	⊕ P 2 x 8, self-tapping
7-685-132-21	⊕ P 2.6 x 5, self tapping

Part No.

Description

WASHERS

7-623-104-12	1.7 mm dia (middle)
7-623-105-12	2 mm dia (middle)
7-623-108-12	3 mm dia (middle)
7-623-205-22	2 mm dia, spring
7-623-205-27	2 mm dia, spring
7-623-405-06	2 mm dia, external tooth

RETAINING RINGS

7-624-106-01	E-3 mm dia
7-624-122-11	C-1.5 mm dia
7-624-124-11	C-2 mm dia

NUTS

7-622-105-05	2 mm dia
7-622-107-05	2.6 mm dia

STEEL BALL

7-671-112-01	2 mm dia
--------------	----------

Hardware Nomenclature

P - Pan Head Screw	⊕	SC - Set Screw	⊖
PS - Pan Head Screw with Spring Washer	⊕	E - Retaining Ring (E Washer)	⊖
K - Flat Countersunk Head Screw	⊕	W - Washer	
B - Binding Head Screw	⊕	SW - Spring Washer	
RK - Oval Countersunk Head Screw	⊕	LW - Lock Washer	
T - Truss Head Screw	⊕	N - Nut	
R - Round Head Screw	⊕		
F - Flat Fillister Head Screw	⊕		

Example -


Type of Slot: ⊕ P 3 x 10

Length in mm (L): L

Diameter in mm (D): D


Type of Head: Head

5-1. EXPLODED VIEW (1)

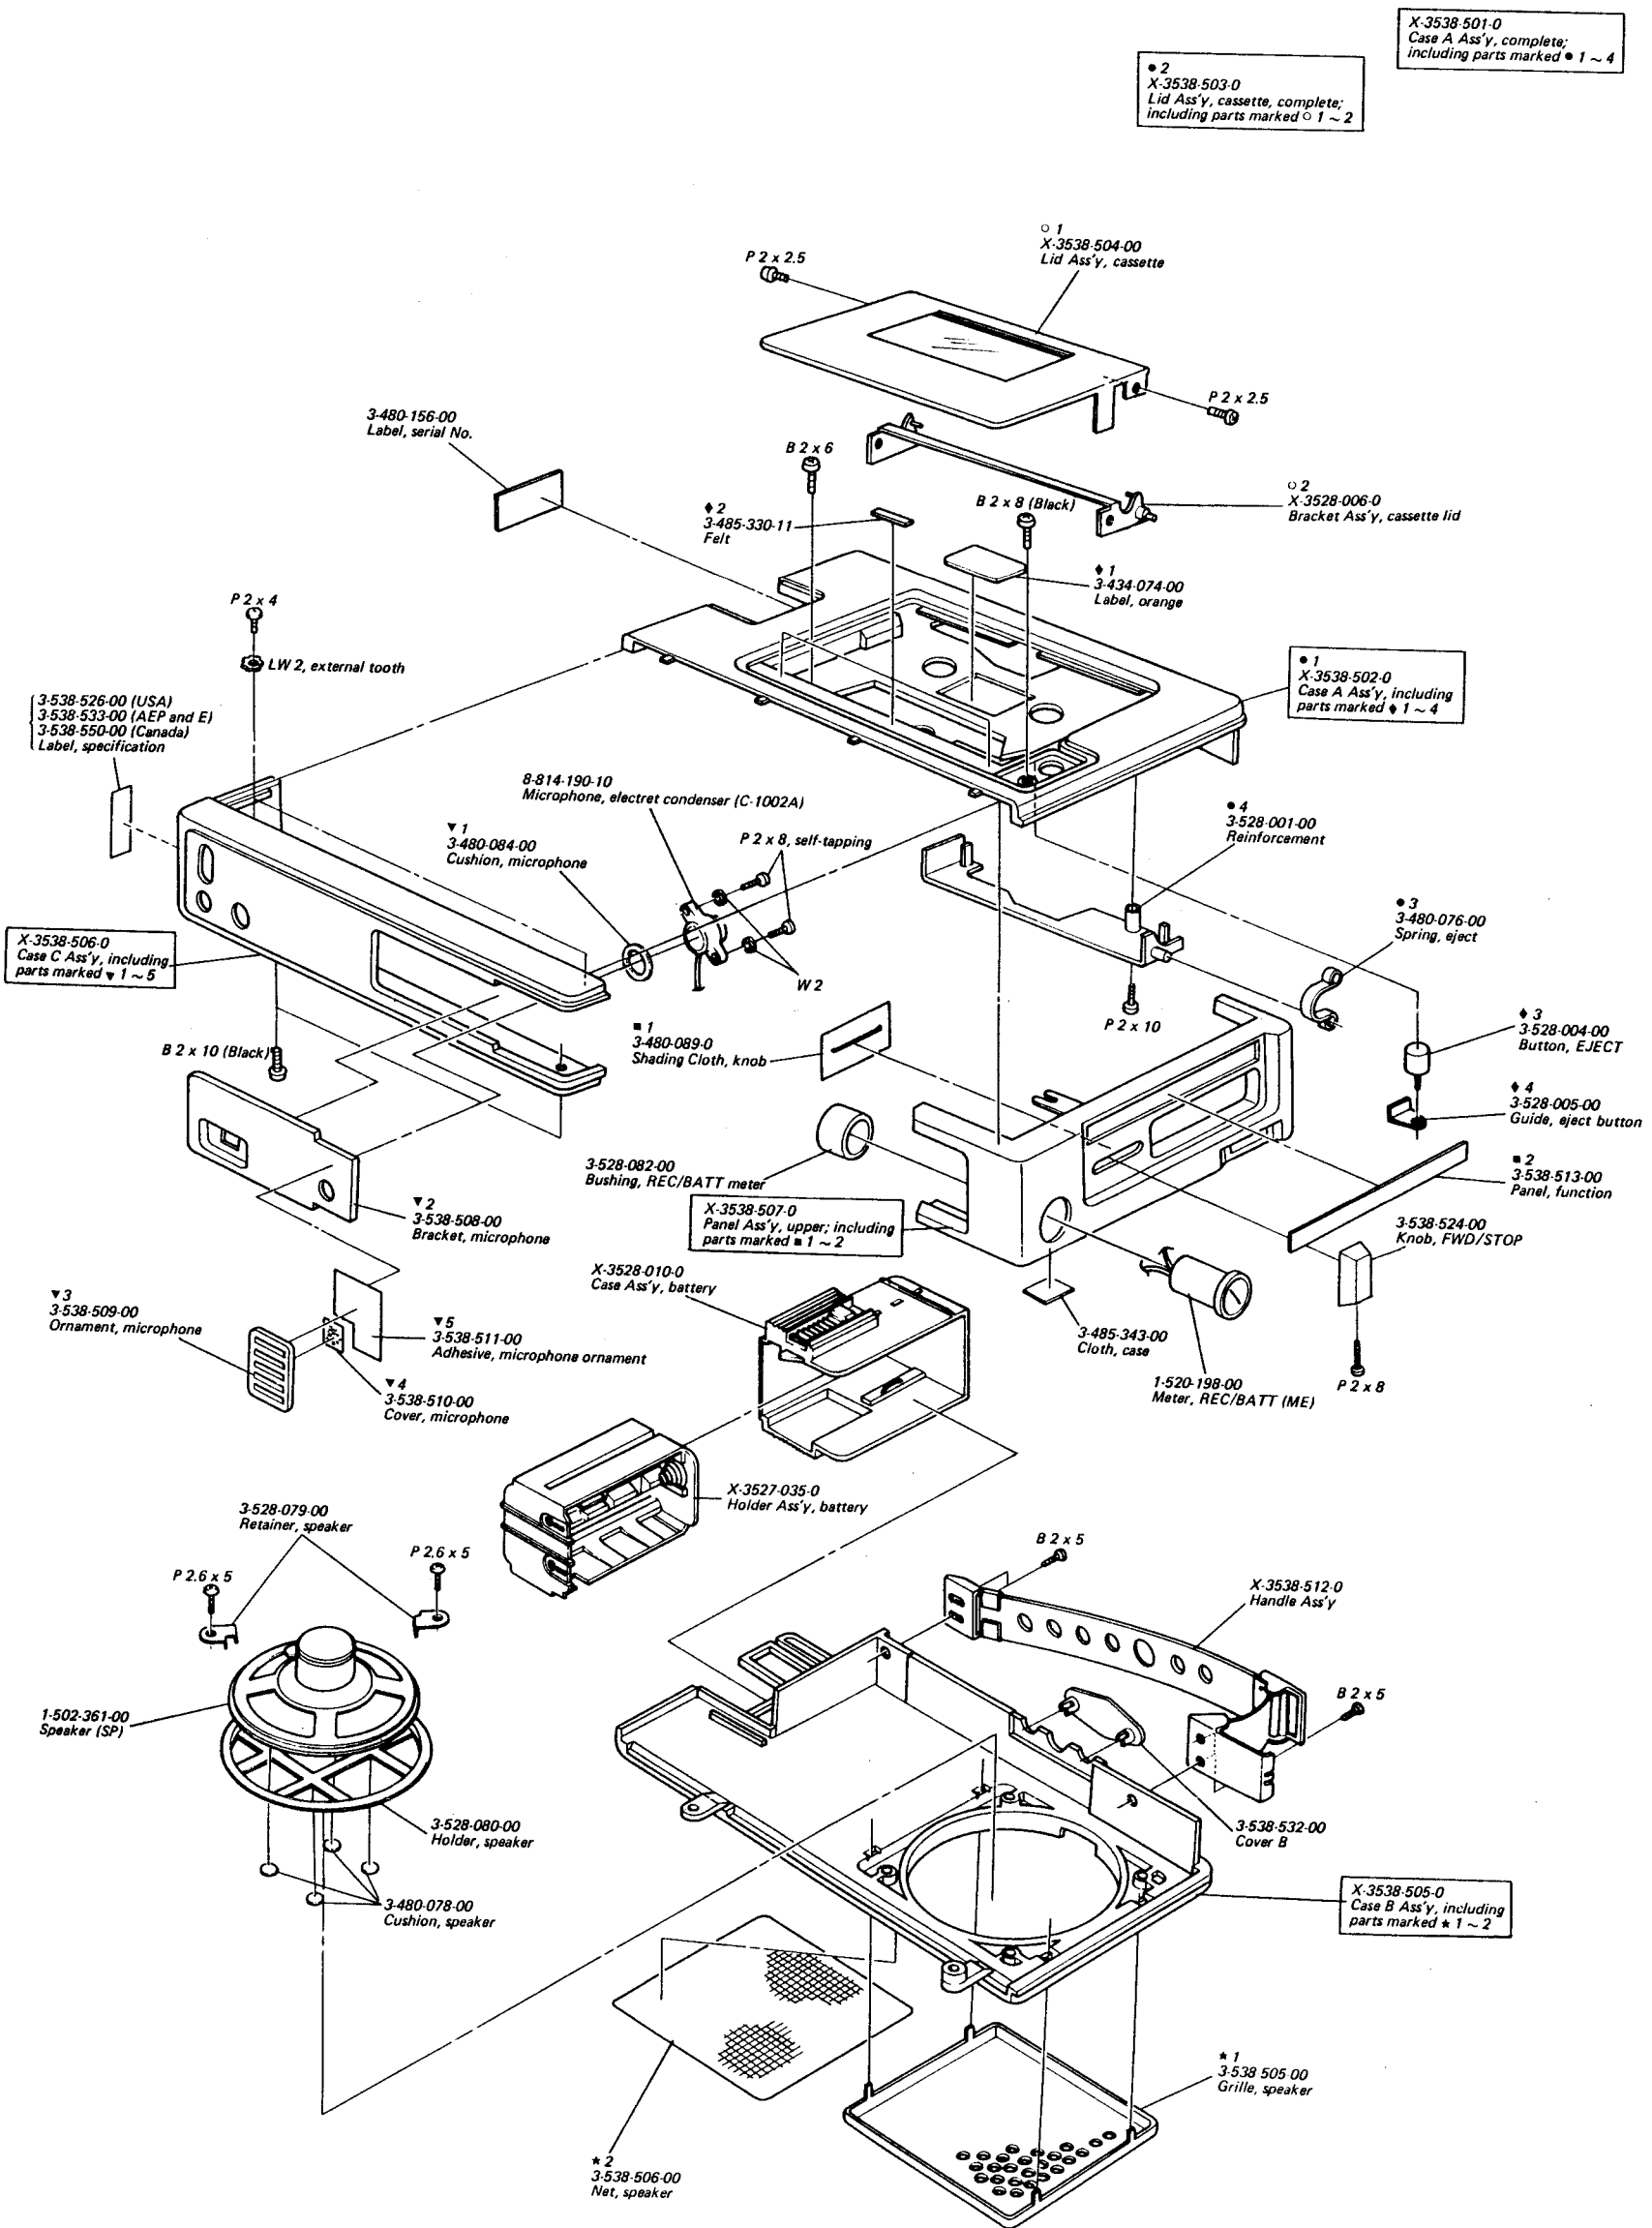


- Note: 1. Parts without part numbers and names are not available.
2. All screws are Phillips type (cross recess type) unless otherwise indicated.
- (-): slotted head


TC-42 TC-42

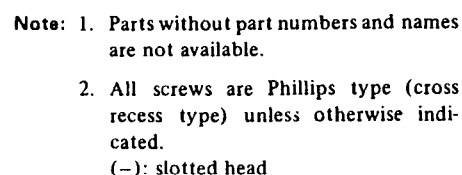

5-3. EXPLODED VIEW (3)

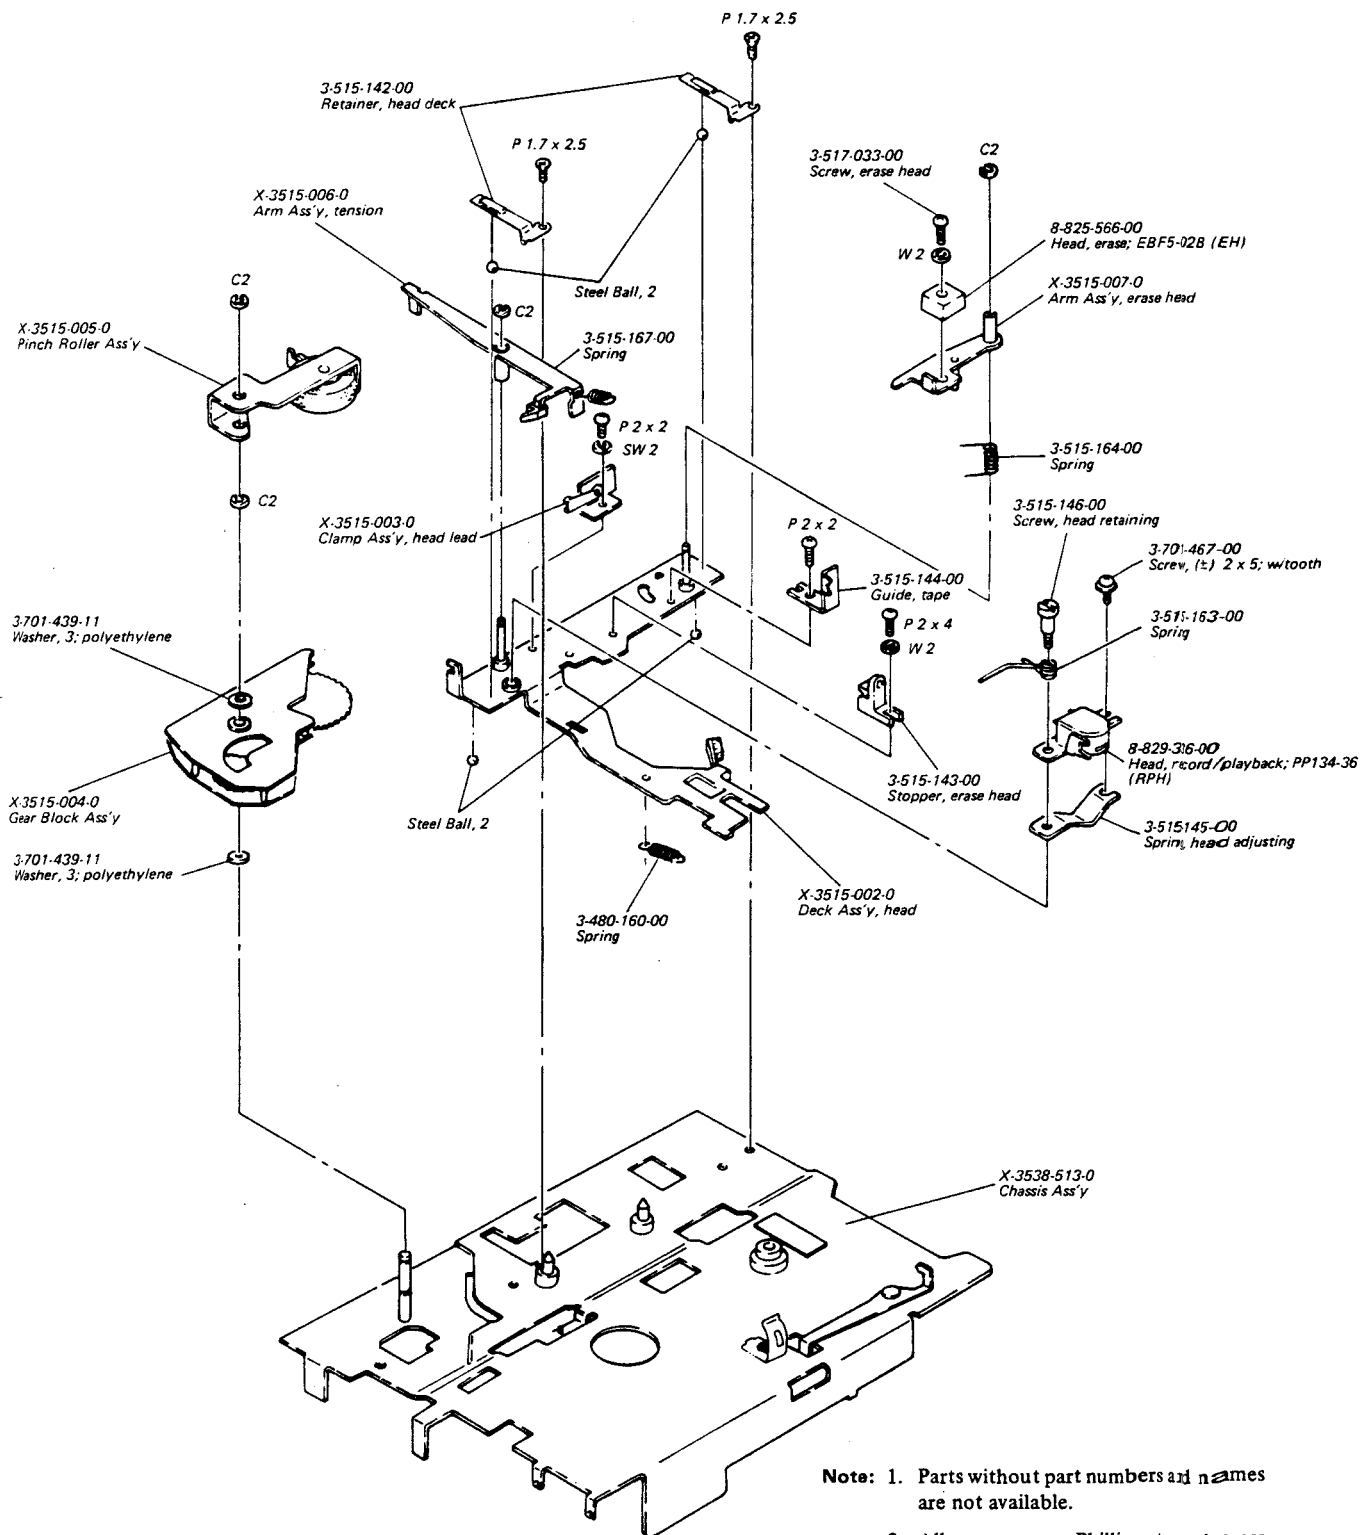

5-4. PACKING

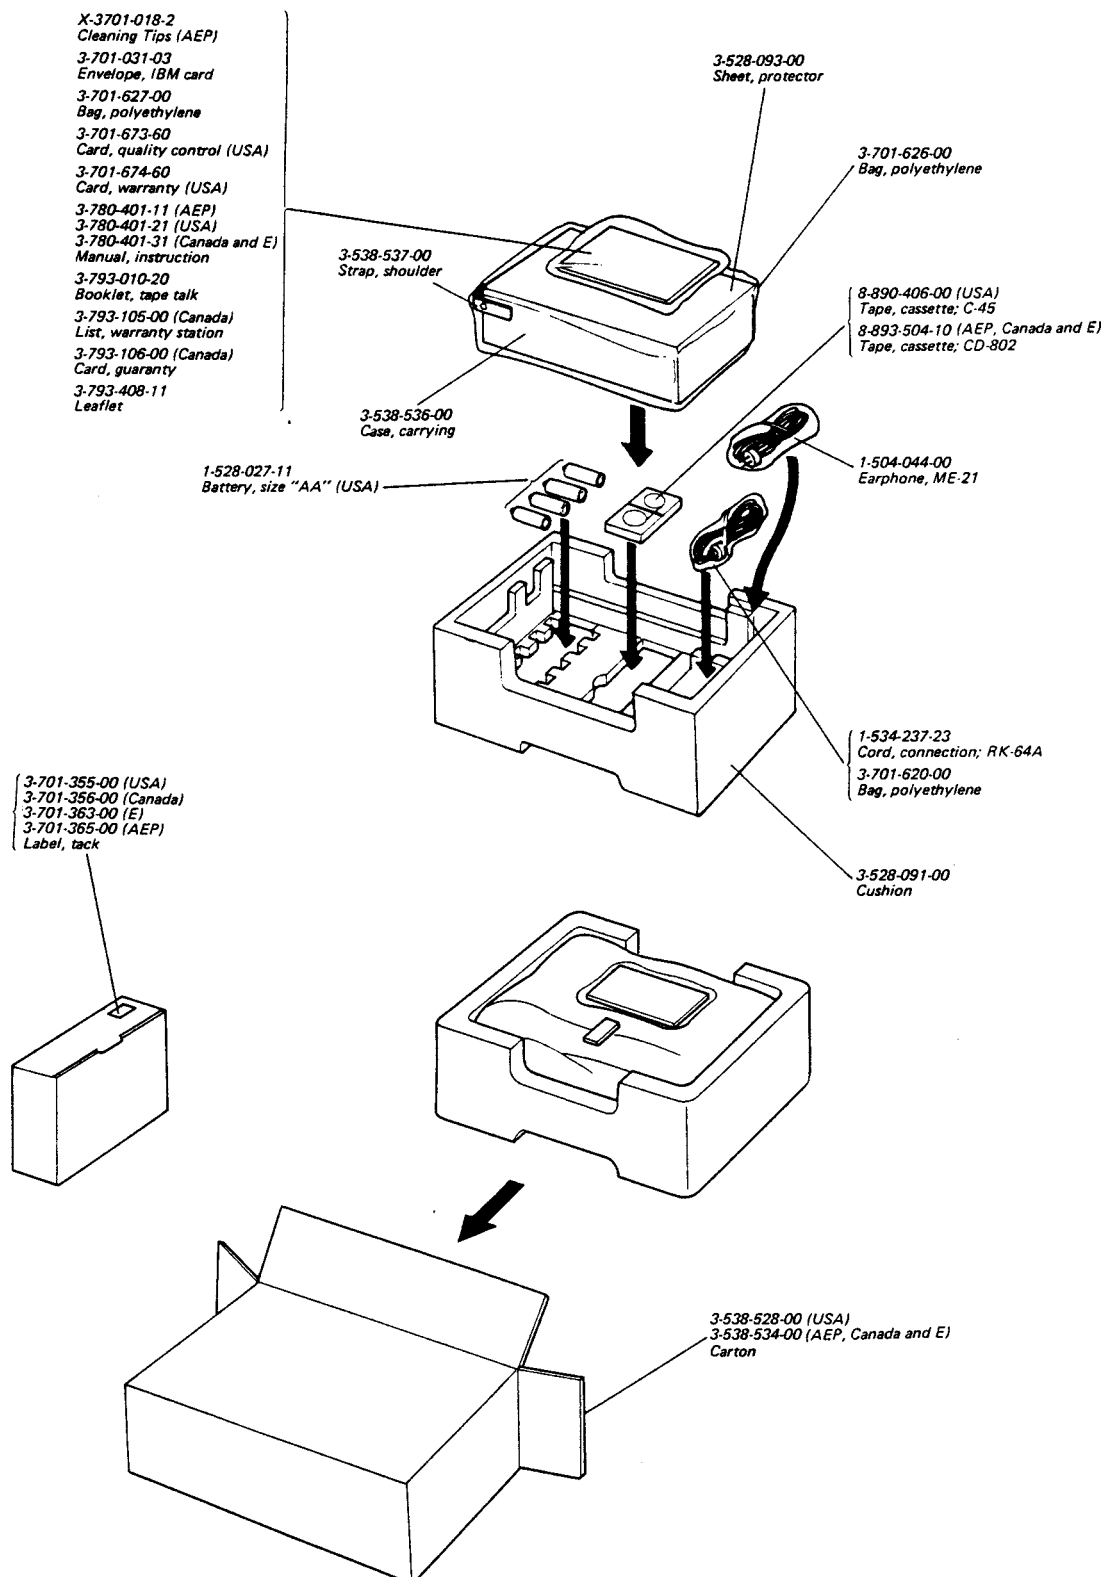

Note: 1. Parts without part numbers and names are not available.

SECTION 6

ELECTRICAL PARTS LIST

Ref. No. Part No. Description

COMPLETE CIRCUIT BOARDS

A-3070-006-A amp/bias osc
A-3065-003-A servo control

SEMICONDUCTORS

Q1	transistor	2SC631A
Q2	transistor	2SC633A
Q3	transistor	2SC633A
Q4	transistor	2SC633A
Q5	transistor	2SC633A
Q6	transistor	2SC633A
Q7	transistor	2SD72
Q8	transistor	2SB405
Q9	transistor	2SC633A
Q101	transistor	2SC633A
Q102	transistor	2SC633A
Q103	transistor	2SC633A
Q104	transistor	2SC1013
D1	diode	1T40
D2	diode	1T40
D3	diode	1T40
D4	diode	1T40
D5	diode	1T22
D101	diode	SV-04
D102	diode	1T40
D103	diode	1T22
Th1	thermistor	S-250
Th101	thermistor	S-10k

COILS and TRANSFORMER

L201	1-407-484-00	coil, micro inductor : 3.3 μ H
L202	1-407-484-00	coil, micro inductor : 3.3 μ H
T1	1-433-105-00	transformer, bias osc

CAPACITORS

All capacitors are in μ F unless otherwise indicated.
(p = μ μ , elect = electrolytic)

C1	1-121-391-11	1	50 V	elect
C2	1-121-651-11	10	16 V	elect
C3	1-121-391-11	1	50 V	elect
C4	1-105-664-12	0.0018	50 V	mylar
C5	1-101-918-11	0.001	25 V	ceramic
C6	1-121-402-11	33	10 V	elect
C7	1-105-669-12	0.0047	50 V	mylar

Ref. No. Part No. Description

C8	1-121-651-11	10	16 V	elect
C9	1-121-402-11	33	10 V	elect
C10	1-121-413-11	100	6.3 V	elect
C11	1-121-392-11	3.3	25 V	elect
C12	1-101-918-11	0.001	25 V	ceramic
C13	1-121-392-11	3.3	25 V	elect
C14	1-121-402-11	33	10 V	elect
C15	1-121-402-11	33	10 V	elect
C16	1-105-663-12	0.0015	50 V	nylar
C17	1-121-413-11	100	6.3 V	elect
C18				
C19	1-121-402-11	33	10 V	elect
C20	1-102-108-11	150 p	50 V	ceramic
C21	1-121-419-11	220	6.3 V	elect
C22	1-121-392-11	3.3	25 V	elect
C23	1-121-651-11	10	16 V	elect
C24	1-105-669-12	0.0047	50 V	nylar
C25	1-105-679-12	0.033	50 V	nylar
C26	1-105-671-12	0.0068	50 V	nylar
C27	1-121-651-11	10	16 V	elect
C28	1-101-918-11	0.001	25 V	ceramic
C101	1-105-681-12	0.047	50 V	nylar
C102	1-105-681-12	0.047	50 V	nylar
C103	1-127-023-11	1	10 V	solid aluminum
C104	1-127-022-11	0.47	10 V	solid aluminum
C105	1-121-651-11	10	16 V	elect
C106	1-121-961-11	4.7	25 V	elect
C107	1-105-833-12	0.01	50 V	nylar
C108	1-121-420-11	220	10 V	elect
C201	1-105-833-12	0.01	50 V	nylar
C202	1-101-599-15	1800 p	50 V	ceramic, feed-through
C203	1-101-599-15	1800 p	50 V	ceramic, feed-through

RESISTORS

All resistors are $\frac{1}{4}$ W, composition type and in Ω unless otherwise indicated. (k = 1000)

R1	1-244-497-12	10 k	1/8 W	carbon
R2	1-244-479-12	1.8 k	1/8 W	carbon
R3	1-244-479-12	1.8 k	1/8 W	carbon
R4	1-244-499-12	12 k	1/8 W	carbon
R5	1-244-495-12	8.2 k	1/8 W	carbon
R6	1-244-535-12	390 k	1/8 W	carbon
R7	1-244-459-12	270	1/8 W	carbon
R8	1-202-391-11	2.2 k		
R9	1-202-397-11	3.9 k		
R10	1-202-335-11	27		
R11	1-202-387-11	1.5 k		
R12	1-202-415-11	22 k		
R13	1-202-385-11	1.2 k		

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>
R14	1-202-389-11	1.8 k
R15	1-244-473-12	1 k 1/8 W carbon
R16	1-244-501-12	15 k 1/8 W carbon
R17	1-244-495-12	8.2 k 1/8 W carbon
R18	1-202-391-11	2.2 k
R19	1-244-475-12	1.2 k 1/8 W carbon
R20	1-202-365-11	180
R21	1-202-400-11	5.1 k
R22	1-202-333-11	22
R23	1-202-359-11	100
R24	1-202-445-11	390 k
R25	1-202-399-11	4.7 k
R26	1-202-337-11	33
R27	1-202-357-11	82
R28	1-202-371-11	330
R29	1-202-367-11	220
R30	1-202-369-11	270
R31	1-202-437-11	180 k
R32	1-202-359-11	100
R33	1-202-383-11	1 k
R34	1-202-371-11	330
R35	1-202-408-11	11 k
R36	1-202-391-11	2.2 k
R37	1-202-399-11	4.7 k
R38	1-202-343-11	56
R39	1-202-427-11	68 k
R40	1-202-393-11	2.7 k
R41	1-202-340-11	43
R42	1-202-344-11	62
R43	1-202-358-11	91
R44	1-202-400-11	5.1 k
R45	1-222-699-00	10 k (C), variable : PB VOL
R101	1-221-320-00	3 k, adjustable: Tape Speed ADJ.
R102	1-201-272-11	820 1/8 W
R103	1-201-650-11	1.8 k 1/8 W
R104	1-201-867-11	22 k 1/8 W

<u>Ref. No.</u>	<u>Part No.</u>	<u>Description</u>
R105	1-202-091-11	68 k 1/8 W
R106	1-202-091-11	68 k 1/8 W
R107	1-202-027-11	5.6 k 1/8 W
R108	1-202-823-11	390 1/8 W
R109	1-202-017-11	3.9 k 1/8 W
R110	1-202-059-11	18 k 1/8 W
R111	1-202-644-11	1.5 k 1/8 W
R112	1-202-059-11	18 k 1/8 W
R113	1-201-453-11	470 1/8 W
R114	1-201-643-11	1.5 k 1/8 W
R115	1-201-996-11	270 1/8 W
R116	1-201-829-11	180 1/8 W
R117	1-217-418-11	0.47 metal oxide, fuse

SWITCHES

S1	1-514-861-22	slide, record/playback
S2	1-514-797-00	slide, pause
S3	1-514-346-00	leaf, power
S4	1-514-264-00	slide, cue

JACKS

CNJ	1-507-127-00	external power
J1	1-507-169-13	mini, MIC
J2	1-507-169-13	mini, MONITOR
J3	1-507-195-13	REMOTE

MISCELLANEOUS

RPH	8-829-336-00	head, record/playback (PP134-36)
EH	8-825-566-00	head, erase (EBF5-02B)
M	8-834-221-00	motor (D221F)
MIC	8-814-190-10	electret condenser microphone (C1002A)
ME	1-520-198-00	meter, REC/BATT
SP	1-502-361-00	speaker
	1-507-901-02	nut (A), jack