


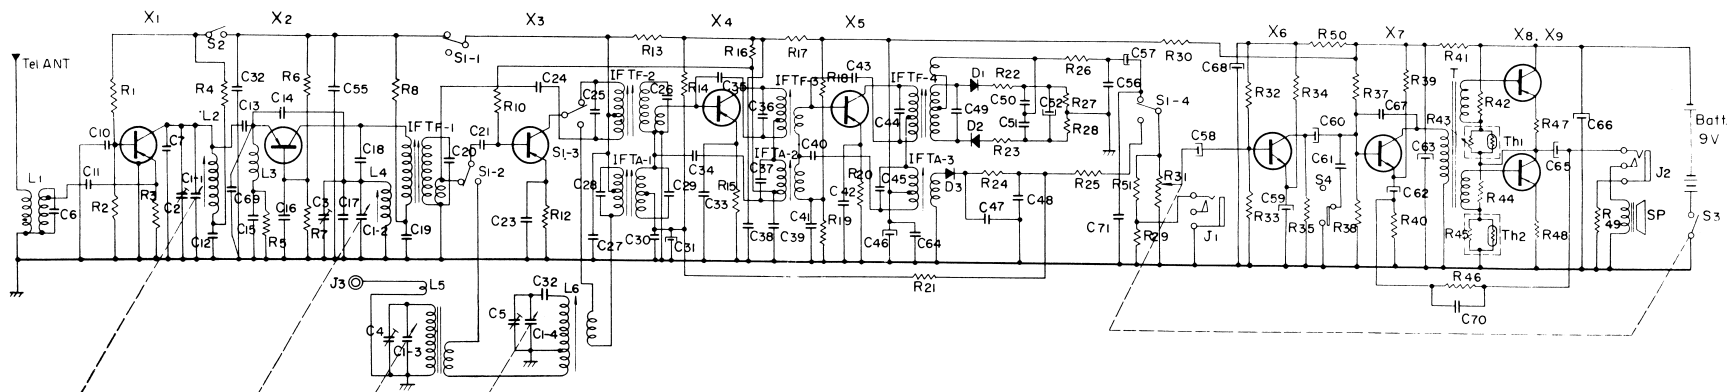

Electronic Parts List

Part No.	Symbol	Description	Part No.	Symbol	Description	Part No.	Symbol	Description	Part No.	Symbol	Description
1-501-040-12	Tel. ANT	Telescopic Antenna	Th ₁		Thermistor CS-120	1-203-418-00	R ₄₀	10Ω 1/6W Carbon	1-101-072-15	C ₃₀	0.01μF Ceramic
1-401-143-11	L ₁	FM, Antenna Coil	Th ₂		CS-120	-594-00	R ₄₁	100Ω " "	1-121-104-00	C ₃₁	10μF 6V Electrolytic
1-425-078-11	L ₂	FM, RF Coil	Resistor			1-204-076-11	R ₄₂	3KΩ " "	1-103-024-11	C ₃₂	130PF Styrol
1-409-017-11	L ₃	FM, IF Trap Coil	1-203-427-00	R ₁	10KΩ 1/6W Carbon		R ₄₃	220Ω (built in Th ₁)	1-101-072-14	C ₃₃	0.01μF Ceramic
1-405-225-11	L ₄	FM, Oscillator Coil	-434-00	R ₂	3.3KΩ " "	1-204-076-11	R ₄₄	3KΩ 1/6W Carbon	-009-11	C ₃₄	1PF " "
1-401-178-11	L ₅	MW, Ferrite Bar Antenna	-421-00	R ₃	1KΩ " "		R ₄₅	220Ω (built in Th ₂)	-010-11	C ₃₅	2PF " "
1-405-235-11	L ₆	MW, Oscillator Coil	-445-00	R ₄	560Ω " "	1-203-446-00	R ₄₆	2KΩ 1/6W Carbon	-533-11	C ₃₆	47PF " "
1-403-226-11	IFTF ₋₁₋₁	FM, Double Tuned IFT	-421-00	R ₅	1KΩ " "	-441-00	R ₄₇	3Ω " "		C ₃₇	150PF (built in IFTA ₋₂)
-226-21	IFTF ₋₁₋₂	"	-439-00	R ₆	12KΩ " "	-441-00	R ₄₈	3Ω " "	1-101-072-15	C ₃₈	0.01μF Ceramic
-225-11	IFTF ₋₂₋₁	"	-460-00	R ₇	2.7KΩ " "	-895-00	R ₄₉	27Ω " "	-072-15	C ₃₉	0.01μF " "
-225-21	IFTF ₋₂₋₂	"	-446-00	R ₈	2KΩ " "	-594-00	R ₅₀	100Ω " "	-009-11	C ₄₀	1PF " "
-224-11	IFTF ₋₃	FM, IF Transformer		R ₉	—deleted—	-429-00	R ₅₁	22KΩ " "	-072-15	C ₄₁	0.01μF " "
-227-11	IFTF ₋₄₋₁	FM, Double Tuned IFT for Discriminator	1-203-425-00	R ₁₀	5.6KΩ 1/6W Carbon		Capacitor		-072-14	C ₄₂	0.01μF " "
-227-21	IFTF ₋₄₋₂	"		R ₁₁	—deleted—	1-151-066-11	C ₁₋₁₋₄	Tuning Capacitor, 4 gang	-009-11	C ₄₃	1PF " "
-080-11	IFTA ₋₁₋₁	MW, Double Tuned IFT	1-203-427-00	R ₁₂	10KΩ 1/6W Carbon		C ₂	Trimmer Capacitor (built in C ₁)	-115-12	C ₄₄	30PF " "
-080-21	IFTA ₋₁₋₂	"	-859-00	R ₁₃	22Ω " "		C ₃	" (" ")		C ₄₅	150PF (built in IFTA ₋₃)
-082-11	IFTA ₋₂	MW, IF Transformer	-431-00	*R ₁₄	120KΩ " "		C ₄	" (" ")	1-121-108-00	C ₄₆	10μF 10V Electrolytic
-081-11	IFTA ₋₃	"	-445-00	R ₁₅	560Ω " "		C ₅	" (" ")	1-101-073-14	C ₄₇	0.02μF Ceramic
1-423-054-11	T	Driver Transformer	-626-00	R ₁₆	9.1KΩ " "	1-101-056-11	C ₆	40PF Ceramic	-073-14	C ₄₈	0.02μF " "
1-513-198-11	S ₁₋₁₋₄	Band Setting Switch	-859-00	R ₁₇	22Ω " "	-538-11	C ₇	18PF " "	1-103-024-11	C ₄₉	130PF Styrol
-197-11	S ₂	FM, Distant/Local Selector Switch	-634-00	R ₁₈	36KΩ " "		C ₈	—deleted—	1-101-030-11	C ₅₀	200PF Ceramic
1-513-067-00	S ₃	Power Switch (built in R ₃₁)	-424-00	R ₁₉	4.7KΩ " "		C ₉	"	-030-11	C ₅₁	200PF " "
1-507-075-11	S ₄	Tone Selector Switch	-445-00	R ₂₀	560Ω " "	1-101-072-15	C ₁₀	0.01μF Ceramic	1-121-112-00	C ₅₂	10μF 3V Electrolytic
-21	J ₁	DET OUT Jack	-438-00	R ₂₁	6.8KΩ " "	-072-15	C ₁₁	0.01μF " "		C ₅₃	—deleted—
0-227-502-02	J ₂	Earphone Jack	-604-00	R ₂₂	330Ω " "	-073-11	C ₁₂	0.02μF " "		C ₅₄	"
1-502-096-11	J ₃	External Antenna Jack	-604-00	R ₂₃	330Ω " "	-011-11	C ₁₃	3PF " "	1-101-072-14	C ₅₅	0.01μF Ceramic
1-528-002-00	SP	Speaker	-423-00	R ₂₄	2.2KΩ " "	-012-11	C ₁₄	5PF " "	-073-14	C ₅₆	0.02μF " "
	Batt.	Battery (9V)	-446-00	R ₂₅	2KΩ " "	1-103-058-12	C ₁₅	500PF Styrol	1-121-112-00	C ₅₇	10μF 3V Electrolytic
			-421-00	R ₂₆	1KΩ " "	1-101-072-15	C ₁₆	0.01μF Ceramic	-108-00	C ₅₈	10μF 10V " "
			-425-00	R ₂₇	5.6KΩ " "	-538-11	C ₁₇	18PF " "	-110-00	C ₅₉	30μF 10V " "
	X ₁	Transistor 2SA166	-425-00	R ₂₈	5.6KΩ " "	-112-12	C ₁₈	50PF " "	-117-00	C ₆₀	5μF 12V " "
	X ₂	2SA124	-446-00	R ₂₉	2KΩ " "	-072-15	C ₁₉	0.01μF " "	1-127-901-00	C ₆₁	0.3μF " (Alox)
	X ₃	2SA122	-859-00	R ₃₀	22Ω " "	-722-11	C ₂₀	25PF " "	1-121-159-00	C ₆₂	100μF 10V " "
	X ₄	2SA122	1-221-237-20	R ₃₁	5KΩ (Volume Control)	-072-15	C ₂₁	0.01μF " "	-159-00	C ₆₃	100μF 10V " "
	X ₅	2SA122	1-203-718-00	R ₃₂	4.2KΩ 1/6W Carbon	-072-15	C ₂₂	0.01μF " "	1-101-072-15	C ₆₄	0.01μF Ceramic
	X ₆	2SD64	-429-00	R ₃₃	22KΩ " "	-073-11	C ₂₃	0.02μF " "	1-121-159-00	C ₆₅	100μF 10V Electrolytic
	X ₇	2SD65	-421-00	R ₃₄	1KΩ " "	-094-11	C ₂₄	7PF " "	-159-00	C ₆₆	100μF 10V " "
	X ₈	2SB51	-446-00	R ₃₅	2KΩ " "	-112-12	C ₂₅	50PF " "		C ₆₇	—deleted—
	X ₉	2SB51		R ₃₆	—deleted—	-722-11	C ₂₆	25PF " "	1-121-159-00	C ₆₈	100μF 10V Electrolytic
	D ₁	Diode 1T23	1-203-718-00	R ₃₇	4.2KΩ 1/6W Carbon	-072-15	C ₂₇	0.01μF " "	1-101-010-11	C ₆₉	2PF Ceramic
	D ₂	" 1T23	-439-00	R ₃₈	12KΩ " "		C ₂₈	150PF (built in IFTA ₋₁)	-075-11	C ₇₀	0.002μF " "
	D ₃	" 1T23	-421-00	R ₃₉	1KΩ " "		C ₂₉	150PF (" ")	-123-11	C ₇₁	100PF " "

* To be adjusted

—Parts Side—

SONY TFM-914

