


Model 204 SELF-SERVICE TUBE TESTER

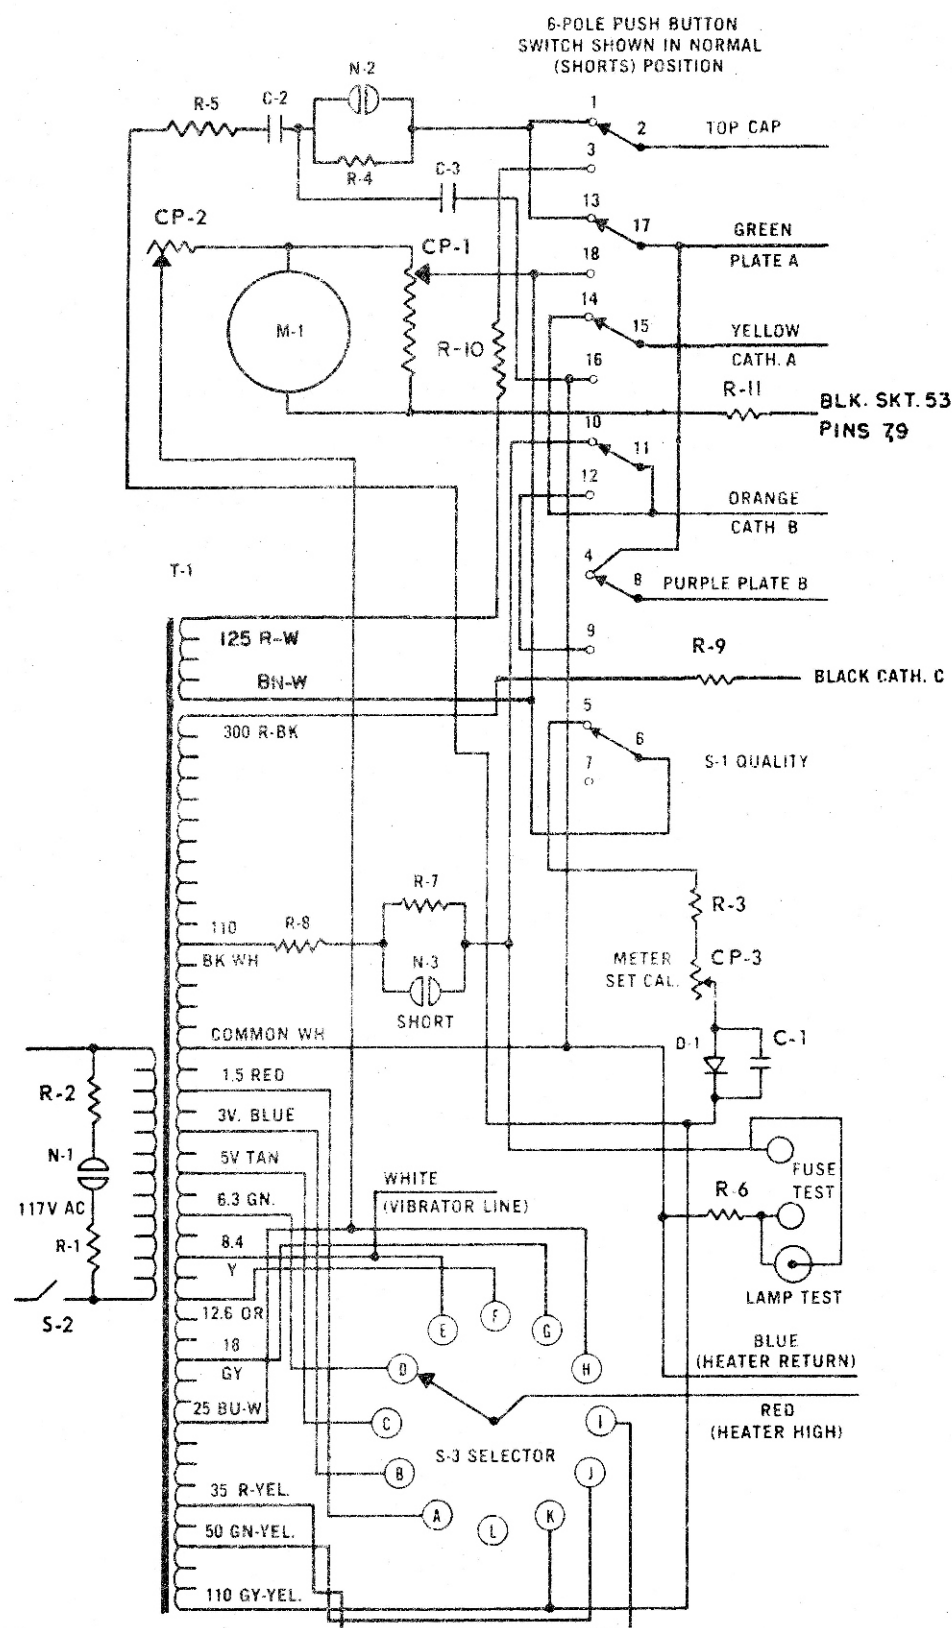

MODEL 204 PARTS LIST

SYMBOL	DESCRIPTION	PART NO.
RESISTORS		
R-1	33K Ohms, 1/2 W, 10%	1-0-37
R-2	33K " " "	1-0-37
R-3	5.6K " " "	1-0-17
R-4	560K " " "	1-0-44
R-5	390K " " "	1-0-7
R-6	100K " " "	1-0-32
R-7	330K " " "	1-0-43
R-8	100K " " "	1-0-32
R-9	6.2K " 2W 5%	1-2-1
R-10	3.3K " 1W 10%	1-1-13
R-11	10K " 1/2 W "	1-0-33
CAPACITORS		
C-1	.01 MFD, 600 V, 10%	3-1-18
C-2	.01 " " "	3-1-18
C-3	.002 " " "	3-1-33
TRANSFORMER, METER, RECTIFIER		
T-1	Power Transformer	10-1-25
M-1	0-5 MA Meter w/ Colored Scale	11-1-21
D-1	10 MA Diode Rectifier	19-1-1
SWITCHES and CONTROLS		
S-1	6 Pole Push Button Switch	6-2-10
S-2	SPST Power Switch	6-3-1
S-3	12 Position Selector Switch	6-2-5
CP-1	200 Ohms Meter Setting Control	5-1-32
CP-2	1 K Ohms Meter Cal. Pot.	5-1-2
CP-3	5 K Ohms Diode Cal. Pot	5-1-26
MISCELLANEOUS		
N-1, 2, 3	NE-51 Lamp	17-1-3
N-4, 5	# 44 Lamp	17-1-4
NS-1,2,3,4,5	Neon Socket w/Bracket	16-1-10
LS-1	Lamp - Test Socket w/ Bracket	16-1-8
JE-1,2,3,4	Clear Plastic Jewels	16-1-15CNF
JE-5	Red Plastic Jewel	16-1-11R
PS-1	Pin Straighteners	8-2-5
GC-1	Grid Clip w/ Plastic Housing	27-1-3
K-1	Knob, Unlined, Black w/ Set Screw	15-1-3
K-2	Knob, Lined, Black w/ Set Screw	15-1-4
K-3	Knob, Red Push Button	15-1-12R
SKT-1 to 12	Sockets, 8 Pin Octal	8-1-1
SKT-13 to 24	Sockets, 12 Pin Compactron	8-1-18
SKT-25	Sockets, 2 Pin	8-1-34
SKT-26, 27	Sockets, 8 Pin Localt	8-1-2
SKT-28 to 31	Sockets, 9 Pin Novar (Magnoval)	8-1-19
SKT-32	Sockets, 4 Pin Vibrator	8-3-2
SKT-33	Sockets, 3 Pin Vibrator	8-3-1
SKT-34 to 54	Sockets, 9 Pin Miniature	8-1-5
SKT-55	Sockets, 10 Pin Decal	8-1-25
SKT-56	Sockets, 10 Pin Miniature	8-1-17
SKT-57 to 66	Sockets, 7 Pin Miniature	8-1-6
SKT-67	Sockets, 7 Pin Nuvisor	8-1-21
SKT-68	Sockets, 5 Pin Nuvisor	8-1-15