



OLSEN RA-490 (MX-601)

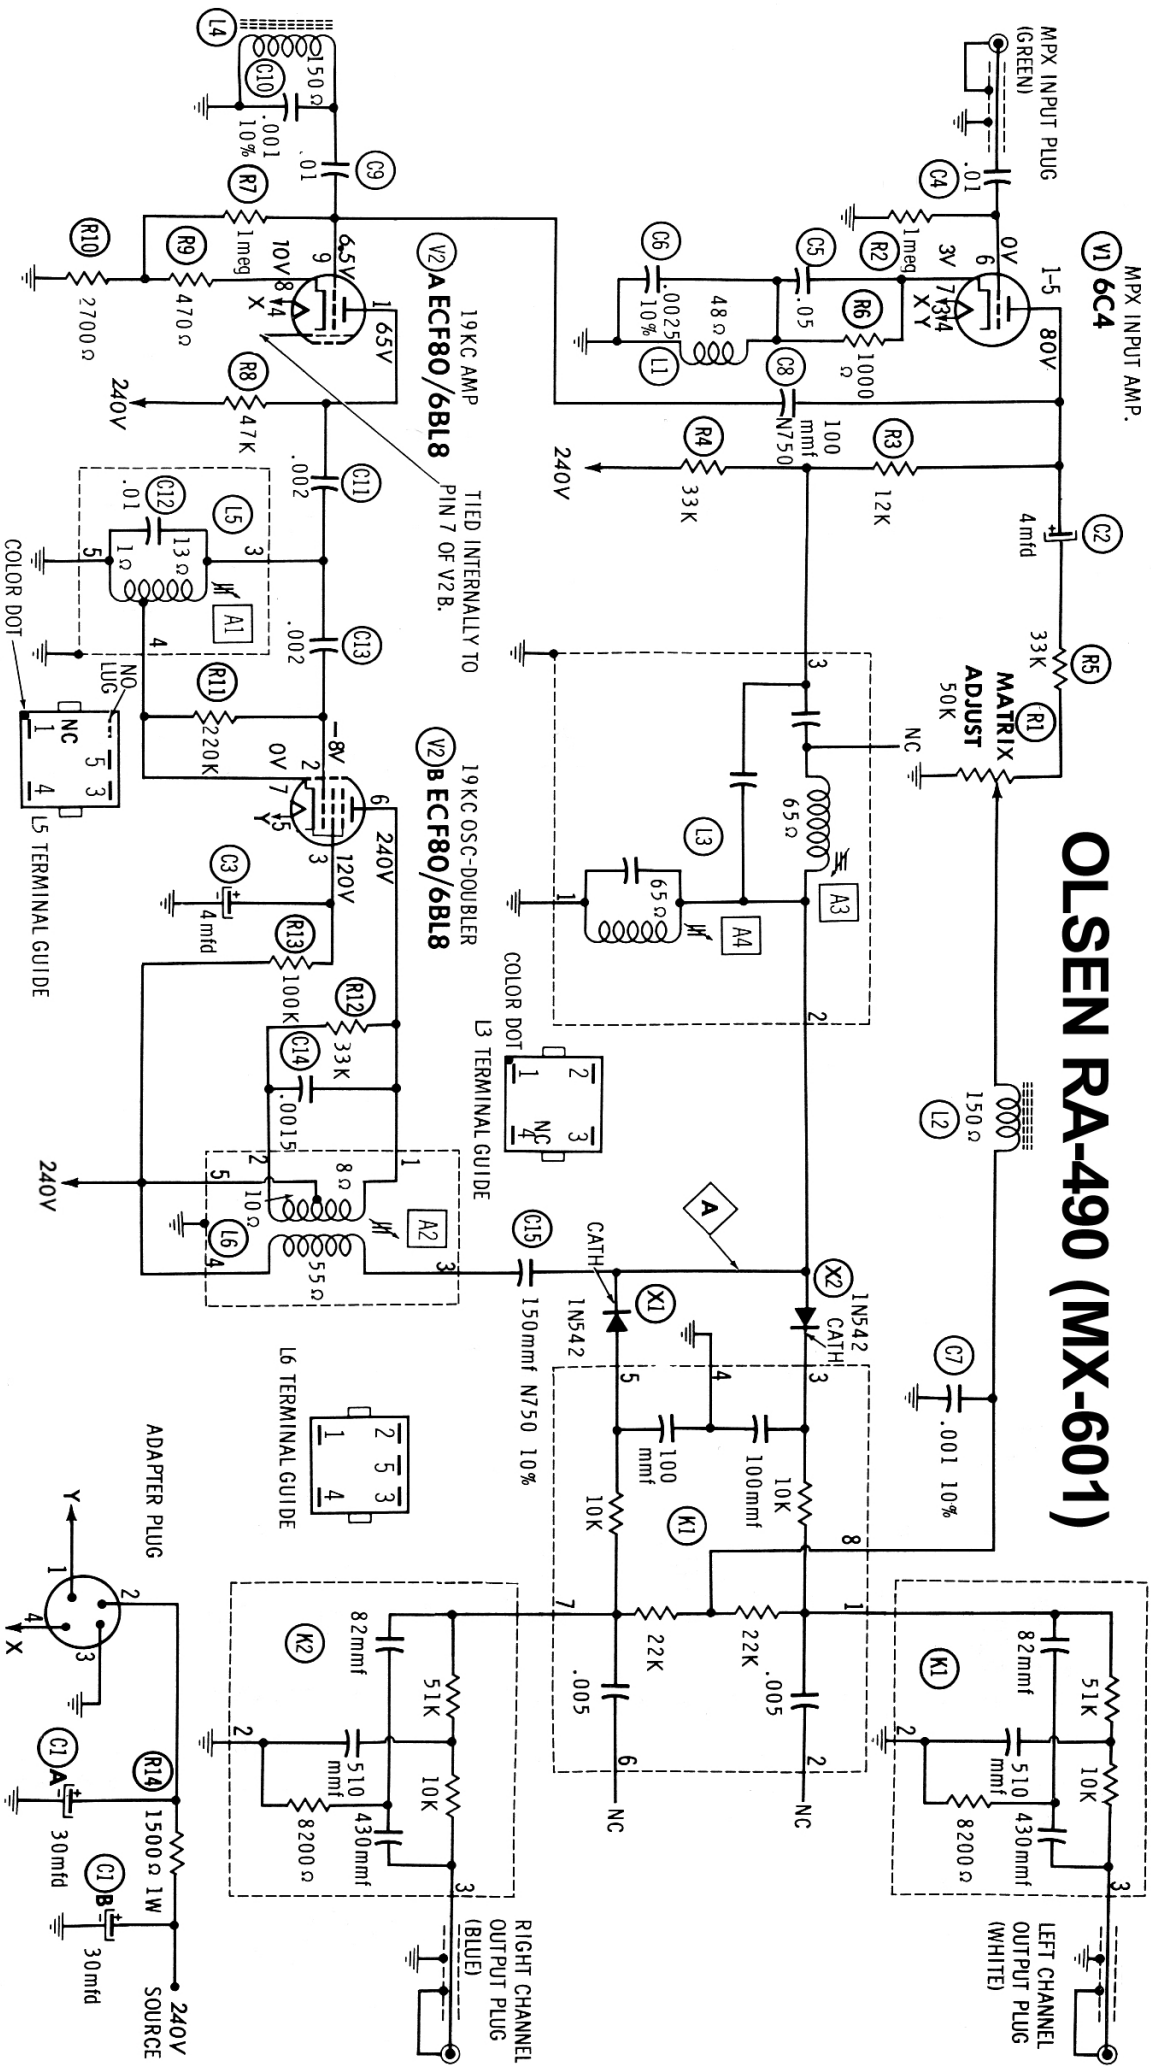

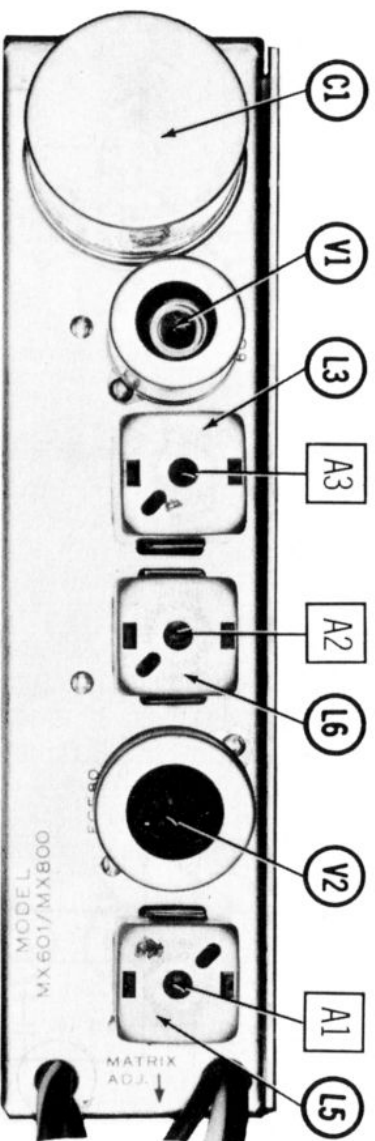

Olsen RA-490 (MX-601) Stereo Multiplex Alignment

MULTIPLEX ADAPTER ALIGNMENT USING FM STEREO GENERATOR & AUDIO OSCILLATOR				
SIGNAL GENERATOR	CHANNEL	ADJUST	REMARKS	
1. 19KC to MPX Input, low side to chassis.	Vert. Amp. to pin 2 of V2; low side to chassis.	A1	Adjust for maximum deflection. Set scope to lock in 2 cycles.	
2. "	Vert. Amp. to point A, low side to chassis.	A2	Adjust for maximum deflection of 4-cycle waveform.	
3. 67KC to MPX Input, low side to chassis.	"	A3, A4	Adjust for MINIMUM deflection.	