



Alignment and Layout on Data Sheet 130

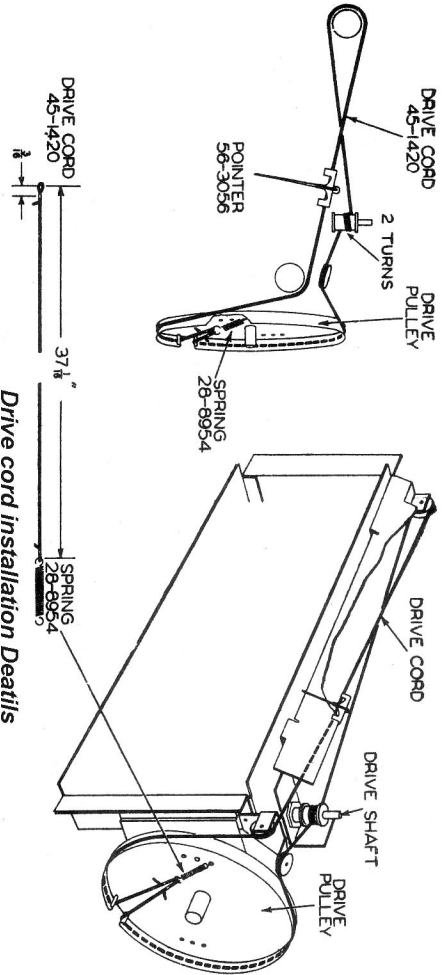

Drive cord installation Details

Sig. Gen.	Dial Settings	Special Instructions	Adjust Trimmers
	Receiver		
265 kc.	Plates fully meshed	Preset C300B fully tight. Then adjust for maximum in order as numbered — 1, 2, 3, 4.	2. C301A 1. C301B 4. C300B 3. C300A
1600 kc.	1600 kc.	Adjust for maximum.	C402C
590 kc.	590 kc.	Adjust C404 for maximum while rocking tuning control.	C404
1600 kc.	1600 kc.	Adjust for maximum.	C402C
1500 kc.	1500 kc.	Adjust for maximum.	C402B
1500 kc.	1500 kc.	Adjust for maximum.	C402A

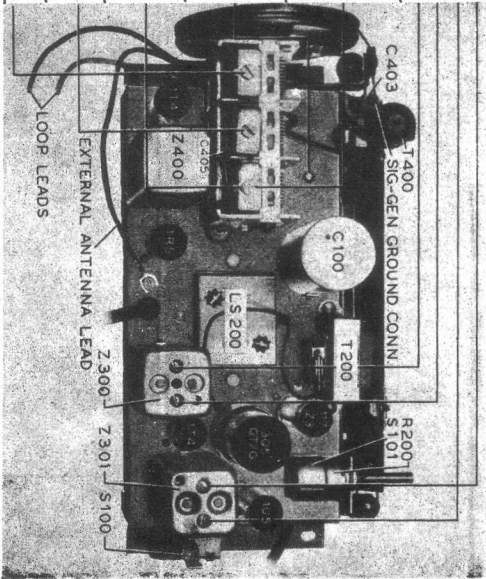

Chassis view, showing trimmer locations.

MODEL 409

1946-47 ALIGNMENT DATA