



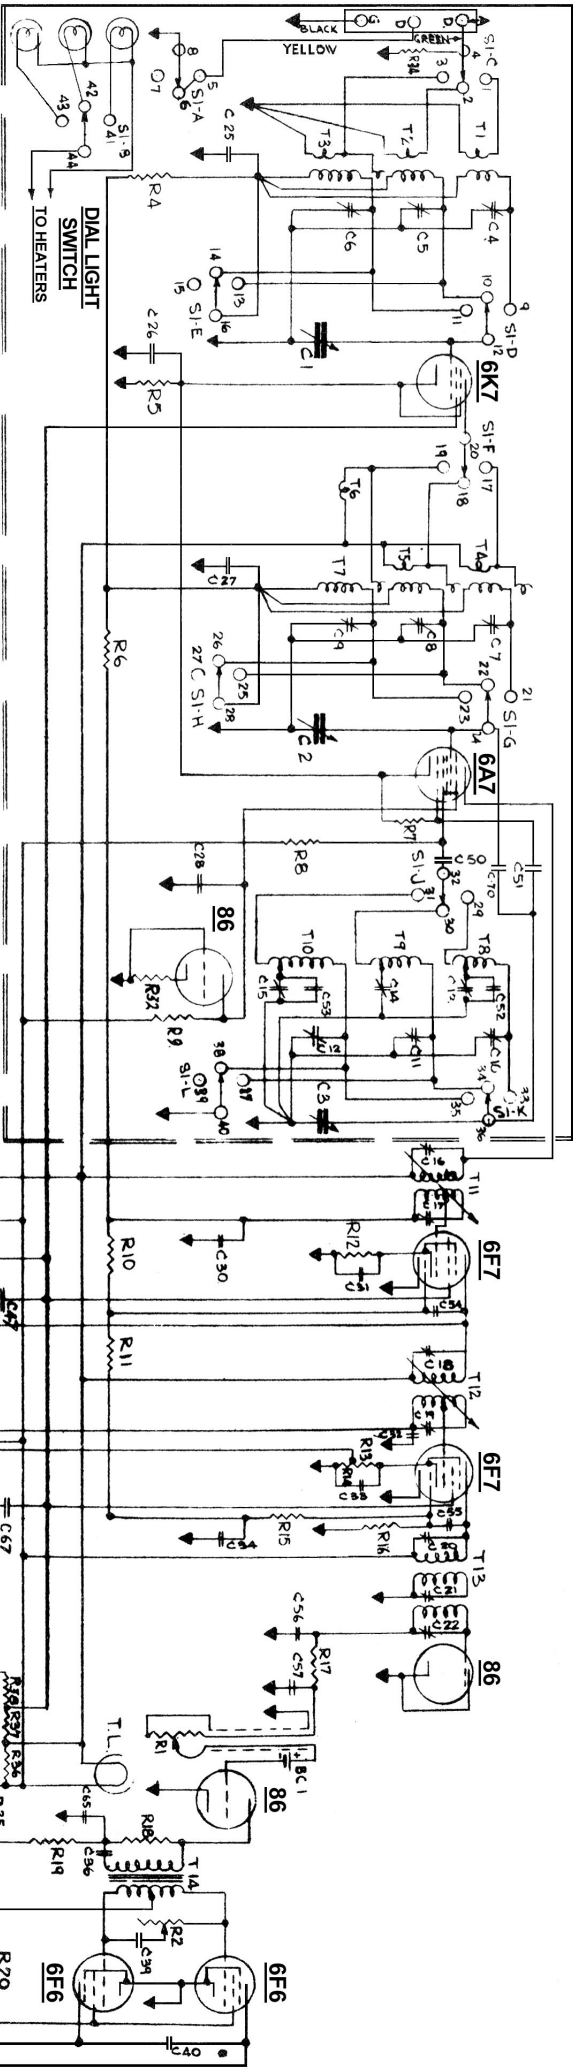


Rogers Model "11/13" Chassis 6R1331 Rogers Model "CUSTOM BUILT" Chassis 6R1332

- DOUBLET & PILOT LIGHTS
- ANTENNA
- INTERSTAGE
- OSCILLATOR

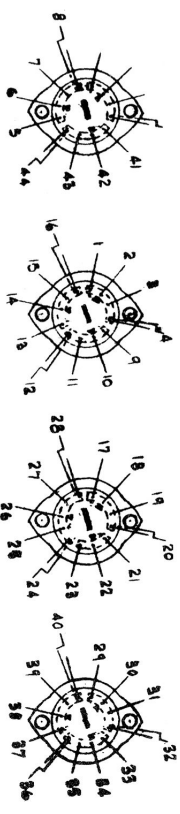

BOTTOM OF CHASSIS → TOP OF CHASSIS
 DIAGRAM OF WAVE CHANGE SWITCH CONNECTIONS FROM FRONT OF CHASSIS

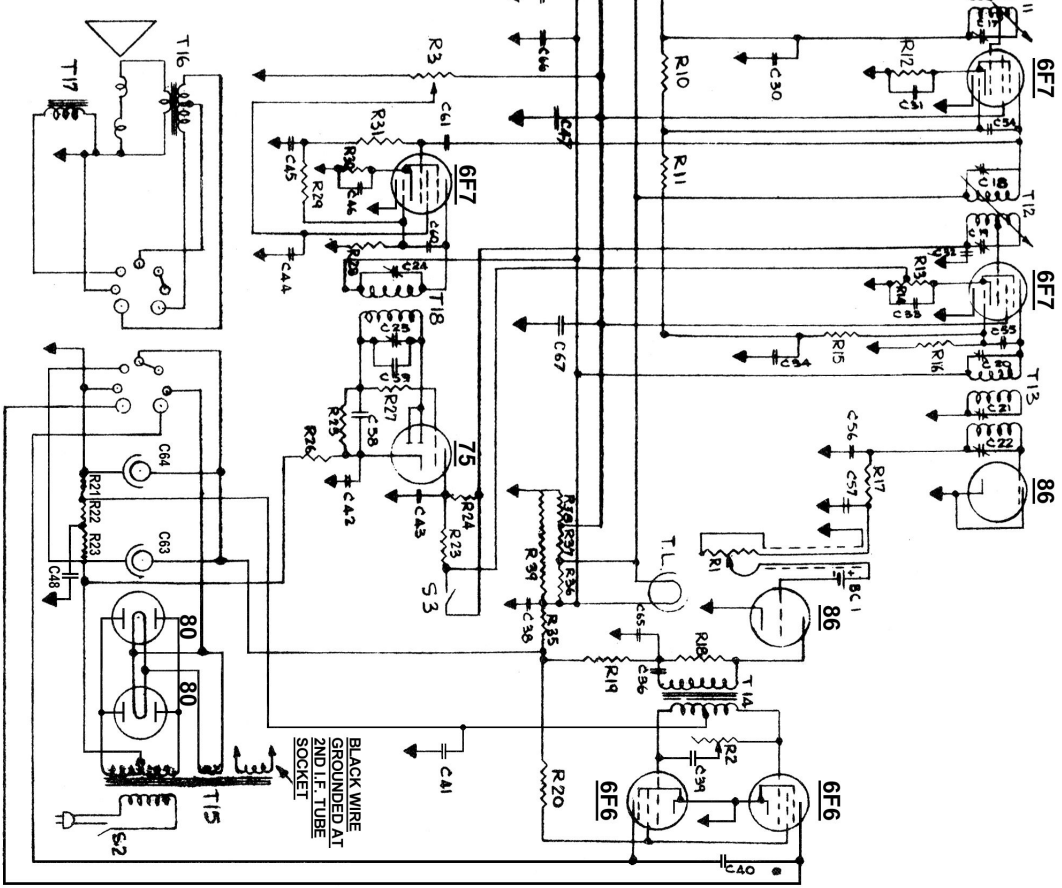

BLACK WIRE
 GROUNDED AT
 2ND I.F. TUBE
 SOCKET

RESISTORS

Item #	Resistance	Part #
Variable		
R1	1,000,000 Ohm	L.C.13466
R2	10,000,000 Ohm	T.C.13400
R3	100,000 Ohm	S.C.13525
Graphite		
R4	100,000 Ohm	40531
R5	150 Ohm	35313
R6	100,000 Ohm	40531
R7	50,000 Ohm	33301
R8	20,000 Ohm	40546
R9	20,000 Ohm	40542
R10	500,000 Ohm	33303
R11	500,000 Ohm	33303
R12	400 Ohm	33310
R13	400 Ohm	33310
R14	1,000 Ohm	33315
R15	500,000 Ohm	33303
R16	500,000 Ohm	33303
R17	50,000 Ohm	33301
R18	50,000 Ohm	33301
R19	50,000 Ohm	33301
R20	750 Ohm	40543
R21	50,000 Ohm	33301
R22	50,000 Ohm	33301
R23	500,000 Ohm	33303
R24	250,000 Ohm	33316
R25	250,000 Ohm	33316
R26	10,000 Ohm	33316
R27	250,000 Ohm	33316
R28	500,000 Ohm	33303
R29	500,000 Ohm	33303
R30	400 Ohm	33310
R31	1,000,000 Ohm	33306
R32	2,000 Ohm	33319
R33	50,000 Ohm	33301
R34	10,000 Ohm	33316
Wire Wound		
R35	1,180 Ohm	
R36	3,600 Ohm	
R37	10,000 Ohm	
R38	10,000 Ohm	
R39	20,000 Ohm	

CONDENSERS

Item #	Capacitance	Part #
Variable Air		
C1	450 mmf. Gang	13521
C2	450 mmf. Gang	R.&M.
C3	450 mmf. Gang	13365
Variable Mica		
C4	S.W. Ant. Pad.	
C5	P.C. Ant. Pad.	
C6	B.C. Ant. Pad.	5363
C7	S.W. Int. P. Pad.	
C8	P.C. Int. P. Pad.	5355
C9	B.C. Int. P. Pad.	
C10	S.W. Osc. Pad.	
C11	P.C. Osc. Pad.	5355
C12	B.C. Osc. Pad.	
C13	S.W. Osc. S. Pad.	
C14	P.C. Osc. S. Pad.	5287
C15	B.C. Osc. S. Pad.	4670
C16	1st I. F. Pad.	4639
C17	1st I. F. Pad.	
C18	2nd I. F. Pad.	
C19	2nd I. F. Pad.	
C20	3rd I. F. Pad.	
C21	3rd I. F. Pad.	
C22	3rd I. F. Pad.	
C23	Sup. I. F. Pad.	
C24	Sup. I. F. Pad.	

CONDENSERS

Item #	Capacitance	Part #
Mica		
C30	200 mmf.	37905
C31	100 mmf.	37906
C32	1500 mmf.	34122
C33	200 mmf.	37908
C34	50 mmf.	37904
C35	50 mmf.	37904
C36	200 mmf.	37902
C37	100 mmf.	37906
C38	25 mmf.	37910
C39	200 mmf.	37905
C40	50 mmf.	37904
C41	50 mmf.	37904
C42	200 mmf.	37902
C43	100 mmf.	37906
C44	25 mmf.	37910
C45	200 mmf.	37905
C46	50 mmf.	37904
C47	50 mmf.	37904
C48	200 mmf.	37902
C49	100 mmf.	37906
C50	25 mmf.	37910
C51	200 mmf.	37905
C52	50 mmf.	37904
C53	50 mmf.	37904
C54	200 mmf.	37902
C55	100 mmf.	37906
C56	25 mmf.	37910
C57	200 mmf.	37905
C58	50 mmf.	37904
C59	50 mmf.	37904
C60	200 mmf.	37902
C61	100 mmf.	37906
C62	25 mmf.	37910
C63	200 mmf.	37905
C64	50 mmf.	37904
C65	50 mmf.	37904
C66	200 mmf.	37902
C67	100 mmf.	37906
C68	25 mmf.	37910
C69	200 mmf.	37905
C70	50 mmf.	37904

Neutralizing Capacity


Parts List

Rogers "11/13"

Chassis 6R1331

Rogers "Custom Built"

Chassis 6R1332

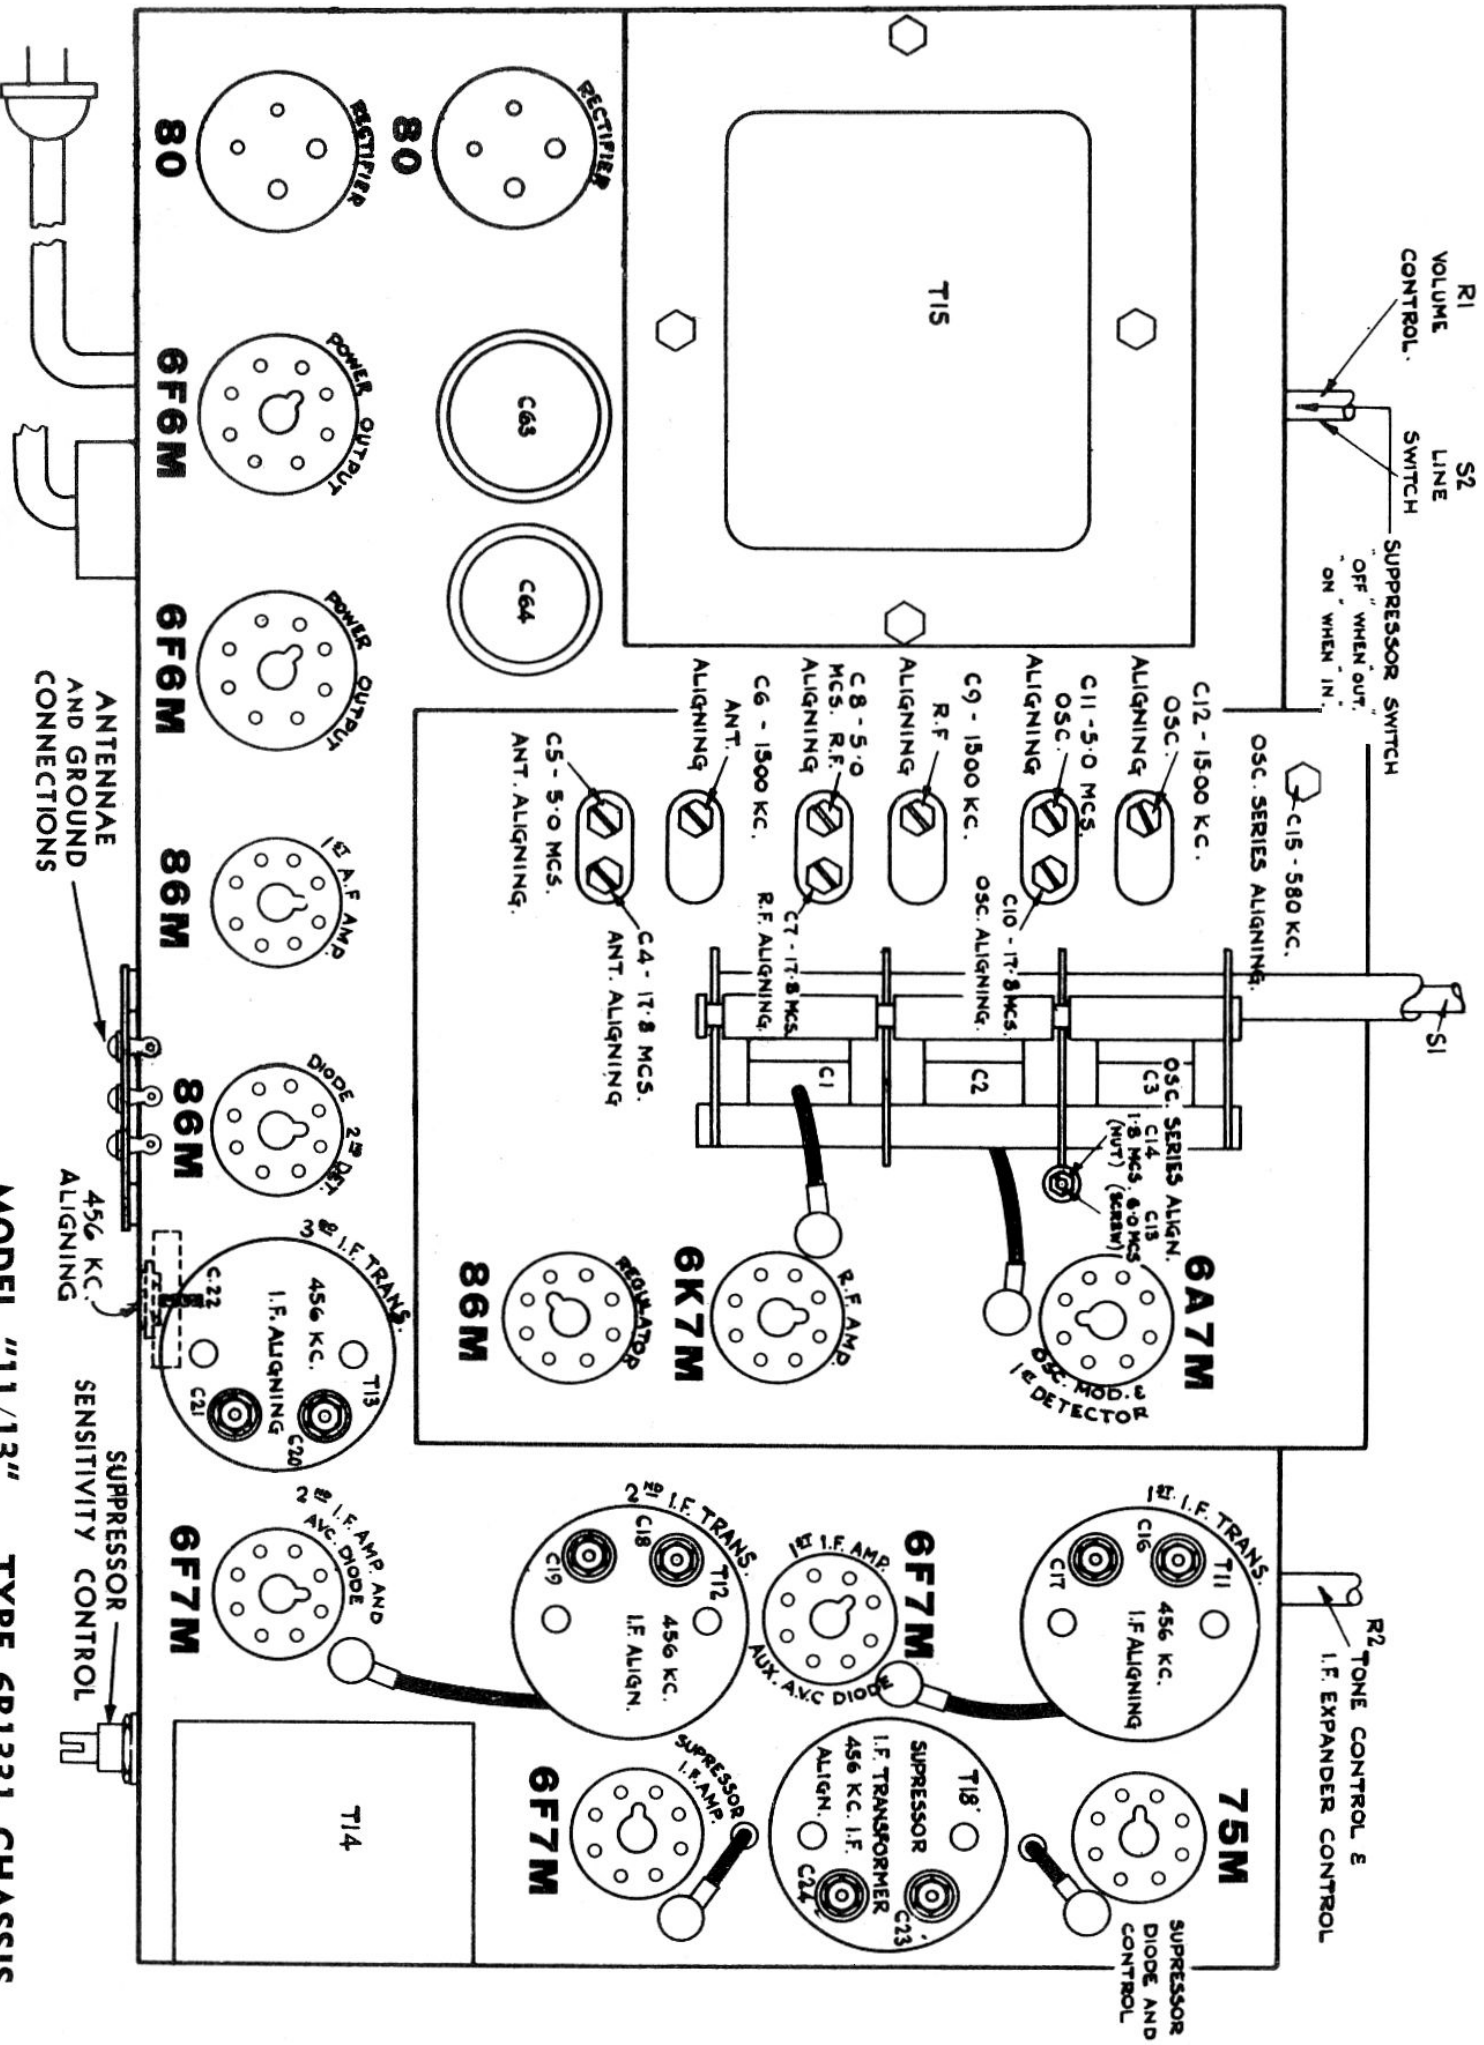

MODEL "11/13" TYPE 6R1331 CHASSIS