


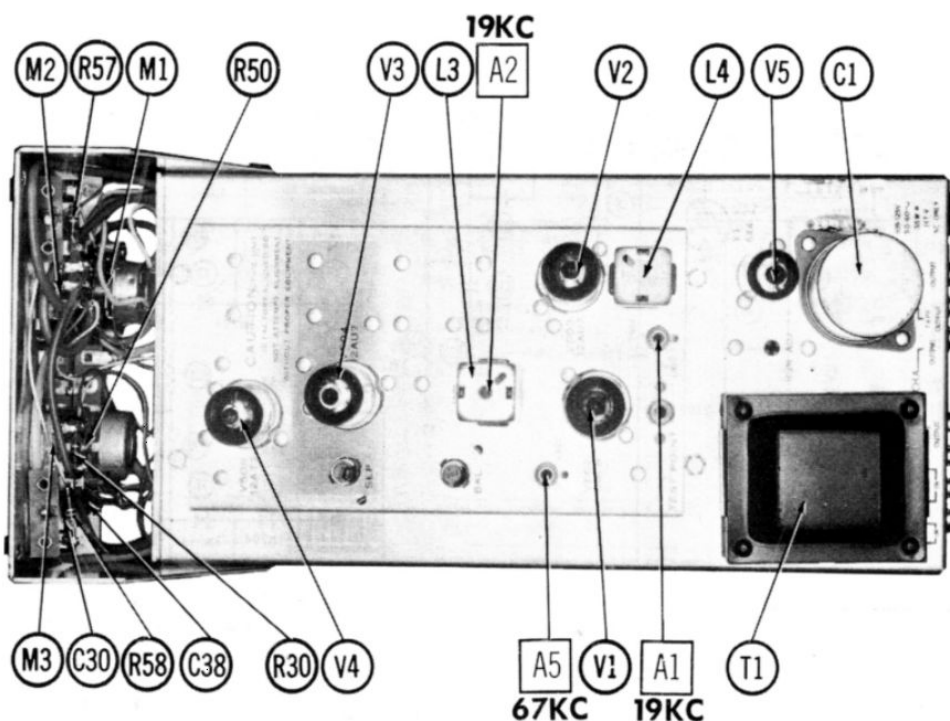

H. H. Scott 335 (LM-35 Kit)

Alignment Data

Use only enough generator output to provide a usable indication.

Suggested alignment tools

A1, A5 GENERAL CEMENT #8282, 8606, 9302
WALSCO #2543, 2544, 2588
A2, A3, A4 GENERAL CEMENT #5097, 8727
WALSCO #2515

MULTIPLEX ADAPTER ALIGNMENT USING FM STEREO GENERATOR AND AUDIO OSCILLATOR

	SIGNAL GENERATOR	CONNECT SCOPE	ADJUST	REMARKS
1.	19KC to MPX Input	Vert. Input to pin 2 of V1B, low side to chassis.	A1	Adjust for maximum.
2.	"	Vert. Input to pin 7 of V2A, low side to chassis.	A2, A3,	"
3.	"	Vert. Input to point A low side to chassis.	A4	"
4.	67KC to MPX Input	Vert. Input to point B low side to chassis.	A5	Adjust for MINIMUM.