
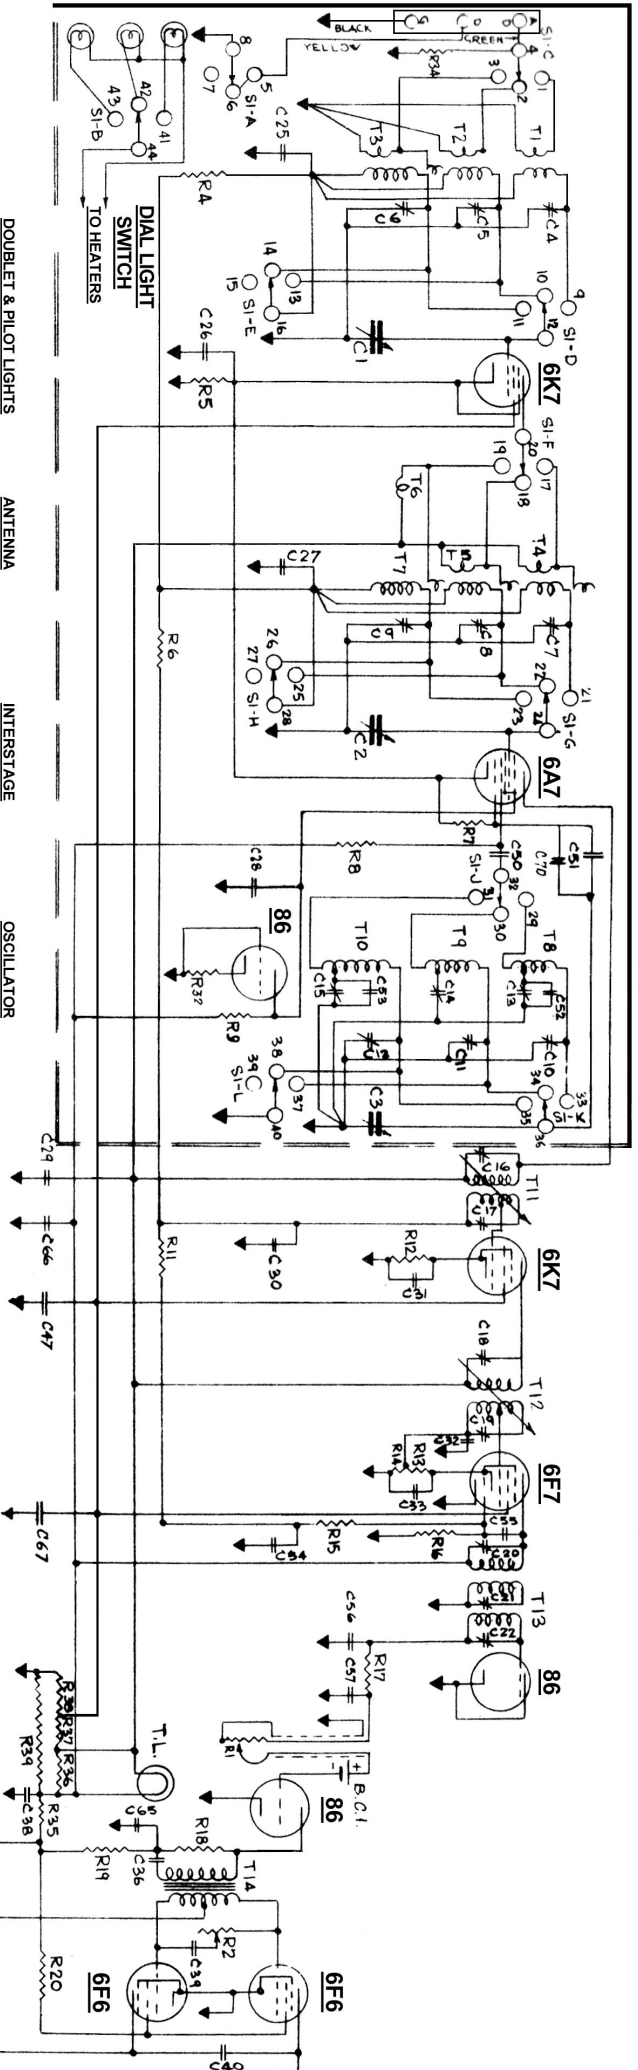


RESISTORS			CONDENSERS			CONDENSERS			TRANSFORMERS			Tubular		
Item #	Resistance	Part #	Item #	Capacitance	Part #	Item #	Capacitance	Part #	Item #	Description	Part #	0.05	0.1	0.05
Variable			Variable	Alr										
R1	1,000,000 Ohm	L.C.13402	C1	450 mmf. Gang	Def. 13521	C63	30 mf. Wet	35012	C25	0.1	mf.	200 V.	38102	
R2	10,000,000 Ohm	T.C.13400	C2	450 mmf. Gang	R.& M.	C64	30 mf. Wet	13014	C26	0.1	mf.	200 V.	38106	
Graphite			C3	450 mmf. Gang		C65	2 mf. Dry)		C27	0.05	mf.	200 V.	38102	
R4	100,000 Ohm	40531	Variable Mica			C66	4 mf. Dry)	13085	C28	0.1	mf.	200 V.	38106	
R5	150 Ohm	33313	C4	S.W. Ant. Pad.)		C67	4 mf. Dry)		C29	0.1	mf.	400 V.	38121	
R6	100,000 Ohm	40531	C5	P.C. Ant. Pad.)	5353	C70	Neutralizing Capacity		C30	0.05	mf.	200 V.	38102	
R7	50,000 Ohm	33301	C6	B.C. Ant. Pad.)					C31	0.1	mf.	200 V.	38106	
R8	20,000 Ohm	40542	C7	S.W. Int. P. Pad.)					C32	0.05	mf.	200 V.	38102	
R9	20,000 Ohm	40546	C8	P.C. Int. P. Pad.)	5353				C33	0.1	mf.	200 V.	38106	
R11	500,000 Ohm	33303	C9	B.C. Int. P. Pad.)					C34	0.05	mf.	200 V.	38102	
R12	400 Ohm	33310	C10	S.W. Osc. Pad.)					C35	0.25	mf.	200 V.	38107	
R13	400 Ohm	33310	C11	P.C. Osc. Pad.)	5353				C36	0.25	mf.	200 V.	38107	
R14	1,000 Ohm	33315	C12	B.C. Osc. Pad.)					C37	0.25	mf.	200 V.	38107	
R15	500,000 Ohm	33303	C13	S.W. Osc. S. Pad.)	5287				C38	0.005	mf.	600 V.	38110	
R16	500,000 Ohm	33303	C14	P.C. Osc. S. Pad.)	4670				C39	0.005	mf.	800 V.	11977	
R17	50,000 Ohm	33301	C15	B.C. Osc. S. Pad.					C40	0.0015	mf.	800 V.	38108	
R18	50,000 Ohm	33301	C16	1st I. F. Pad.)	4639				C41	0.5	mf.	200 V.	38106	
R19	50,000 Ohm	33301	C17	1st I. F. Pad.)					C42	0.1	mf.	200 V.	38108	
R20	750 Ohm	40545	C18	2nd I. F. Pad.)	4639				C43	0.5	mf.	200 V.	38108	
R21	50,000 Ohm	33301	C19	2nd I. F. Pad.)					C44	0.5	mf.	200 V.	38108	
R22	50,000 Ohm	33301	C20	3rd I. F. Pad.)	4639				C45	0.5	mf.	200 V.	38108	
R23	2,000 Ohm	33319	C21	3rd I. F. Pad.)					C46	0.5	mf.	200 V.	38108	
R24	10,000 Ohm	33301	C22	3rd I. F. Pad.	12404				C47	0.5	mf.	200 V.	38108	
Wire Round									C48	0.5	mf.	200 V.	38108	
R35	1,180 Ohm)								C49	0.5	mf.	200 V.	38108	
R36	3,600 Ohm)	Card Ohm							C50	200	mmf.		37905	
R37	10,000 Ohm)	13554							C51	100	mmf.		37906	
R38	10,000 Ohm)								C52	1500	mmf.		34122	
R39	80,000 Ohm)								C53	200	mmf.		37908	
									C54	50	mmf.		37904	
									C55	200	mmf.		37902	
									C56	100	mmf.		37906	
									C57	100	mmf.		37906	

Parts List for Rogers Model 11/11 (Chassis 6R1131)

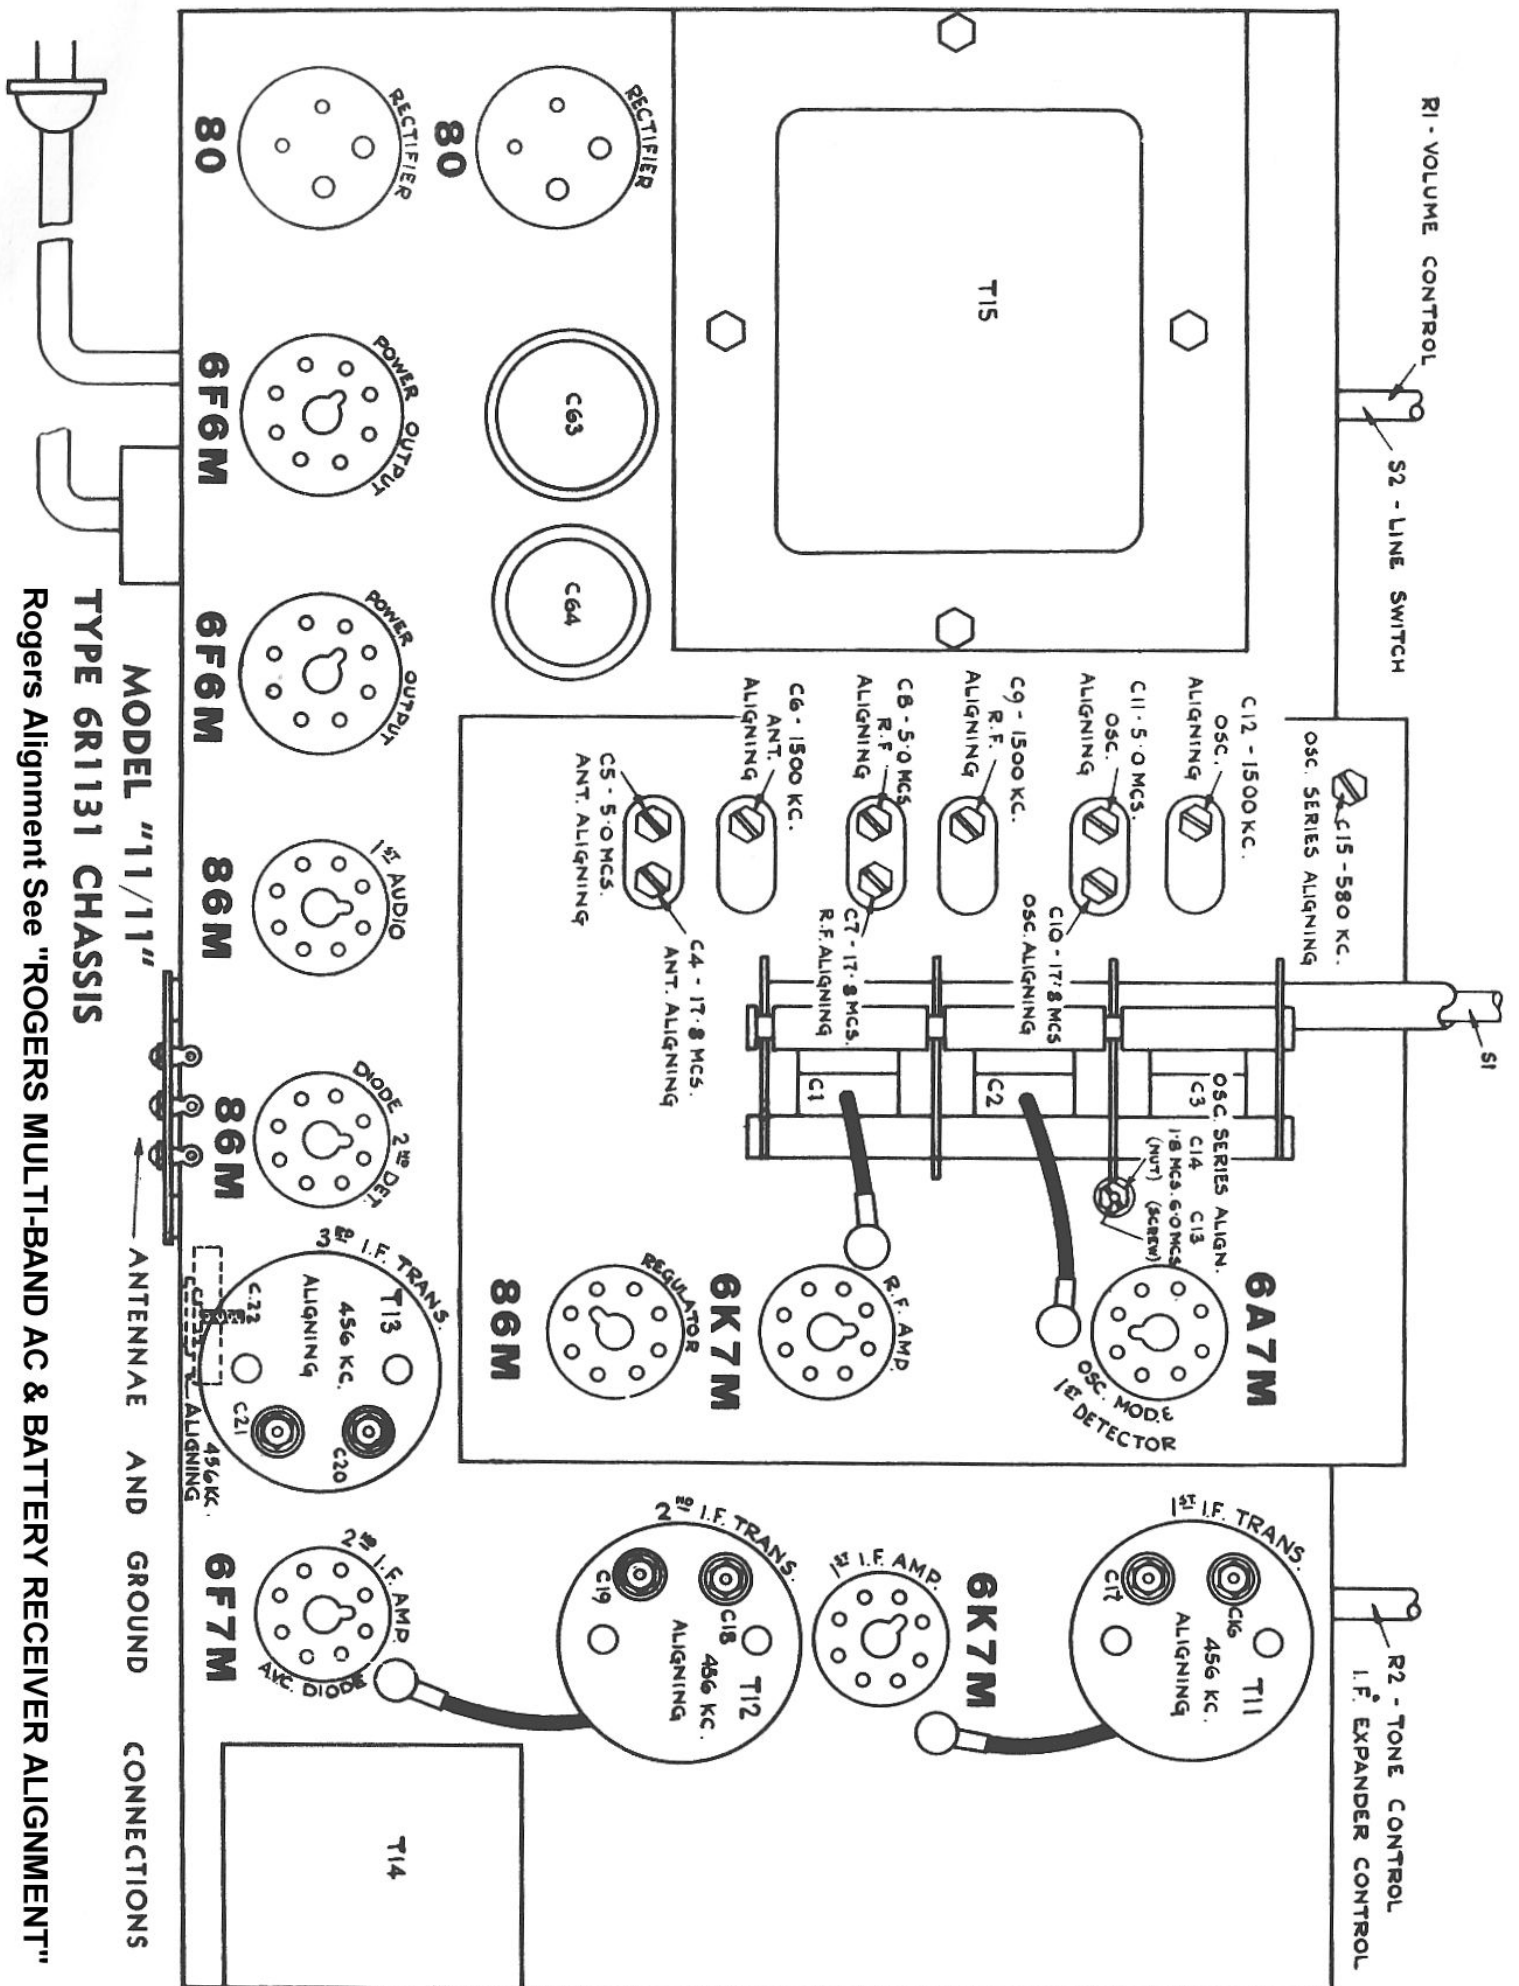

MODEL "11/11"
TYPE 6R1131 CHASSIS
 Rogers Alignment See "ROGERS MULTI-BAND AC & BATTERY RECEIVER ALIGNMENT"